The same function, three ways of computing it
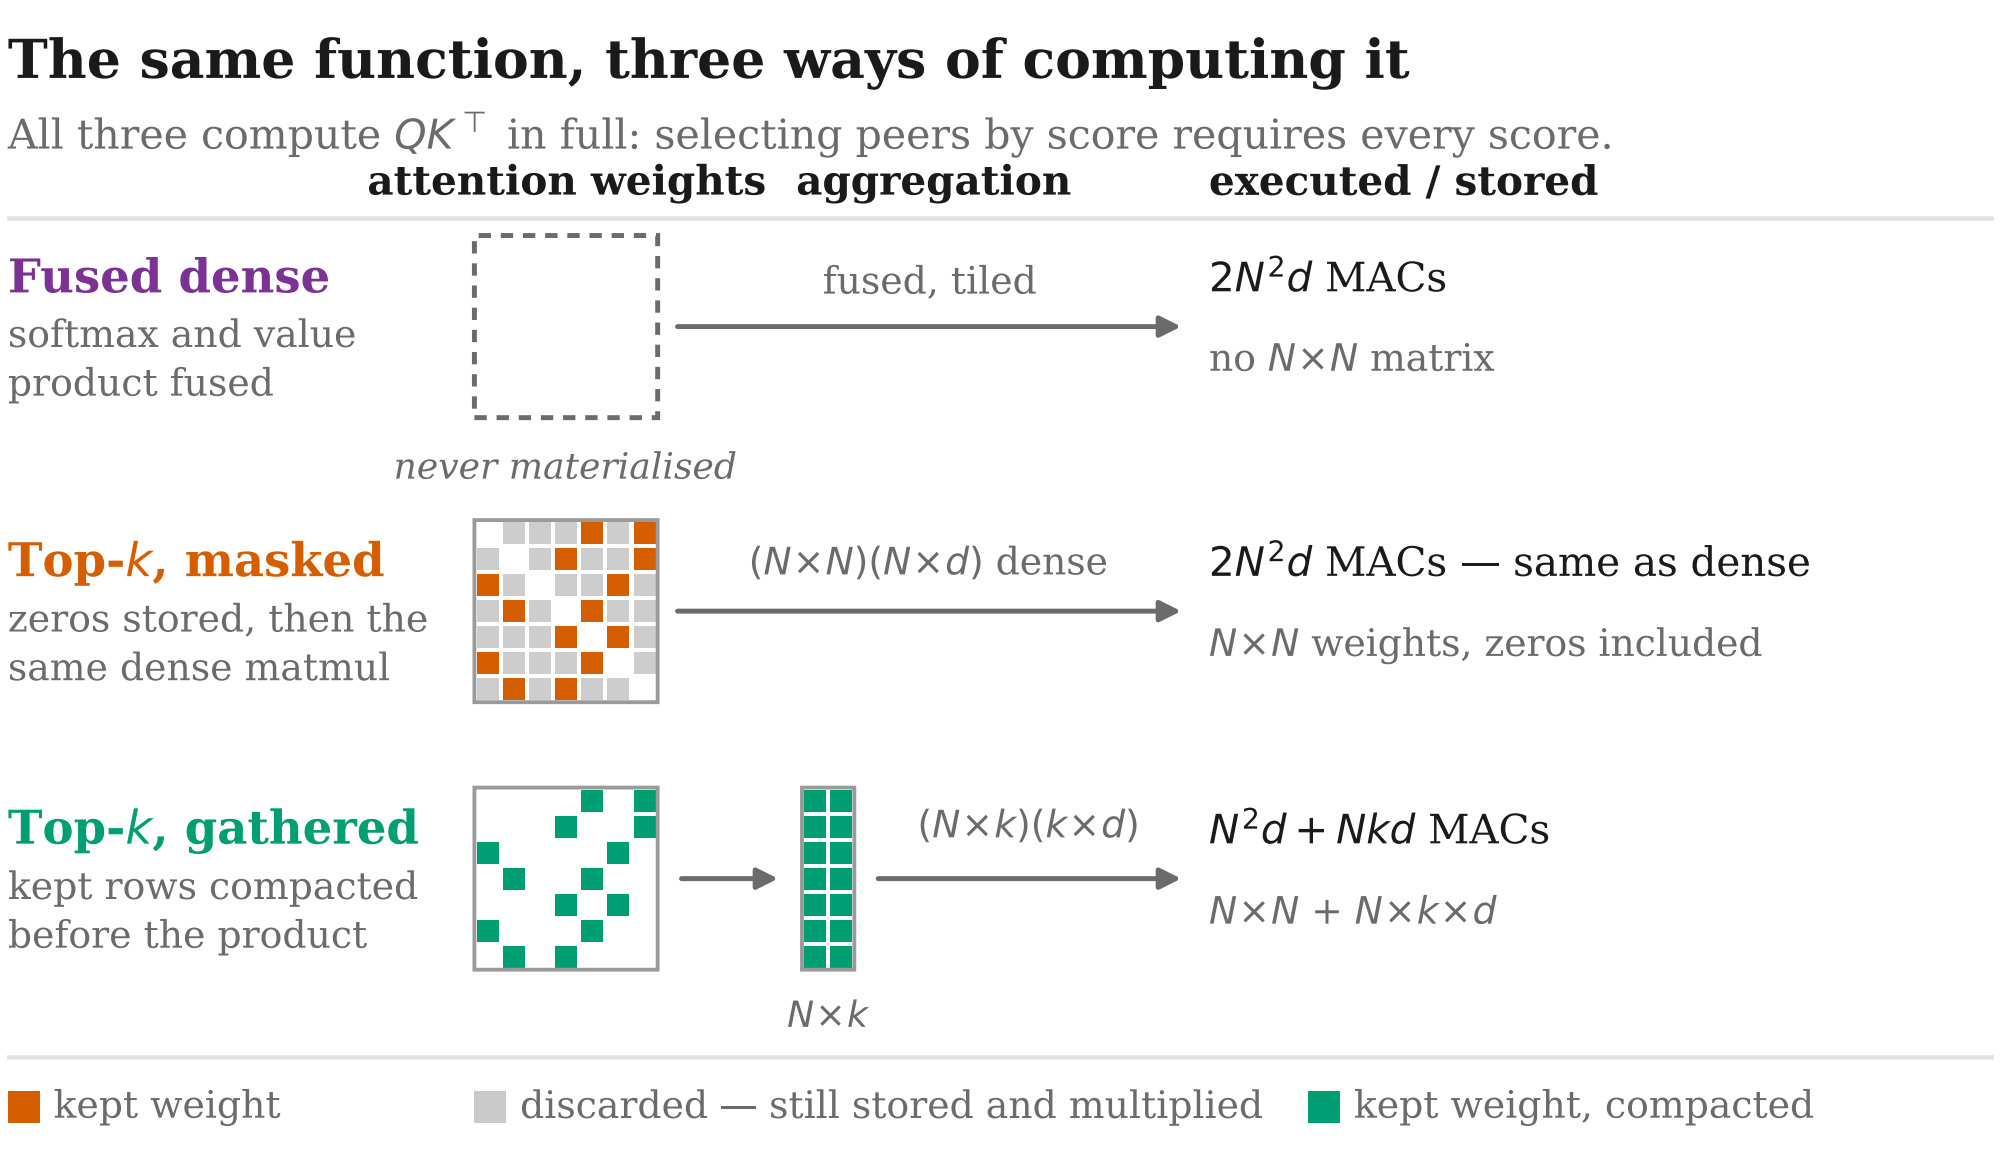
All three compute $QK^\top$ in full: selecting peers by score requires every score.