

## IOS Command Line Interface

```
%LINK-5-CHANGED: Interface Serial0/1/0, changed  
state to up
```

```
%LINEPROTO-5-UPDOWN: Line protocol on Interface  
Serial0/1/0, changed state to up
```

```
Router(config-if)#exit
```

```
Router(config)#router rip
```

```
Router(config-router)#net 10.0.0.0
```

```
Router(config-router)#net 192.168.1.0
```

```
Router(config-router)#
```

```
Router(config-router)#ex
```

```
Router(config)#ex
```


```
Router#
```

```
%SYS-5-CONFIG_I: Configured from console by  
console
```

```
Router#
```

Copy

Paste

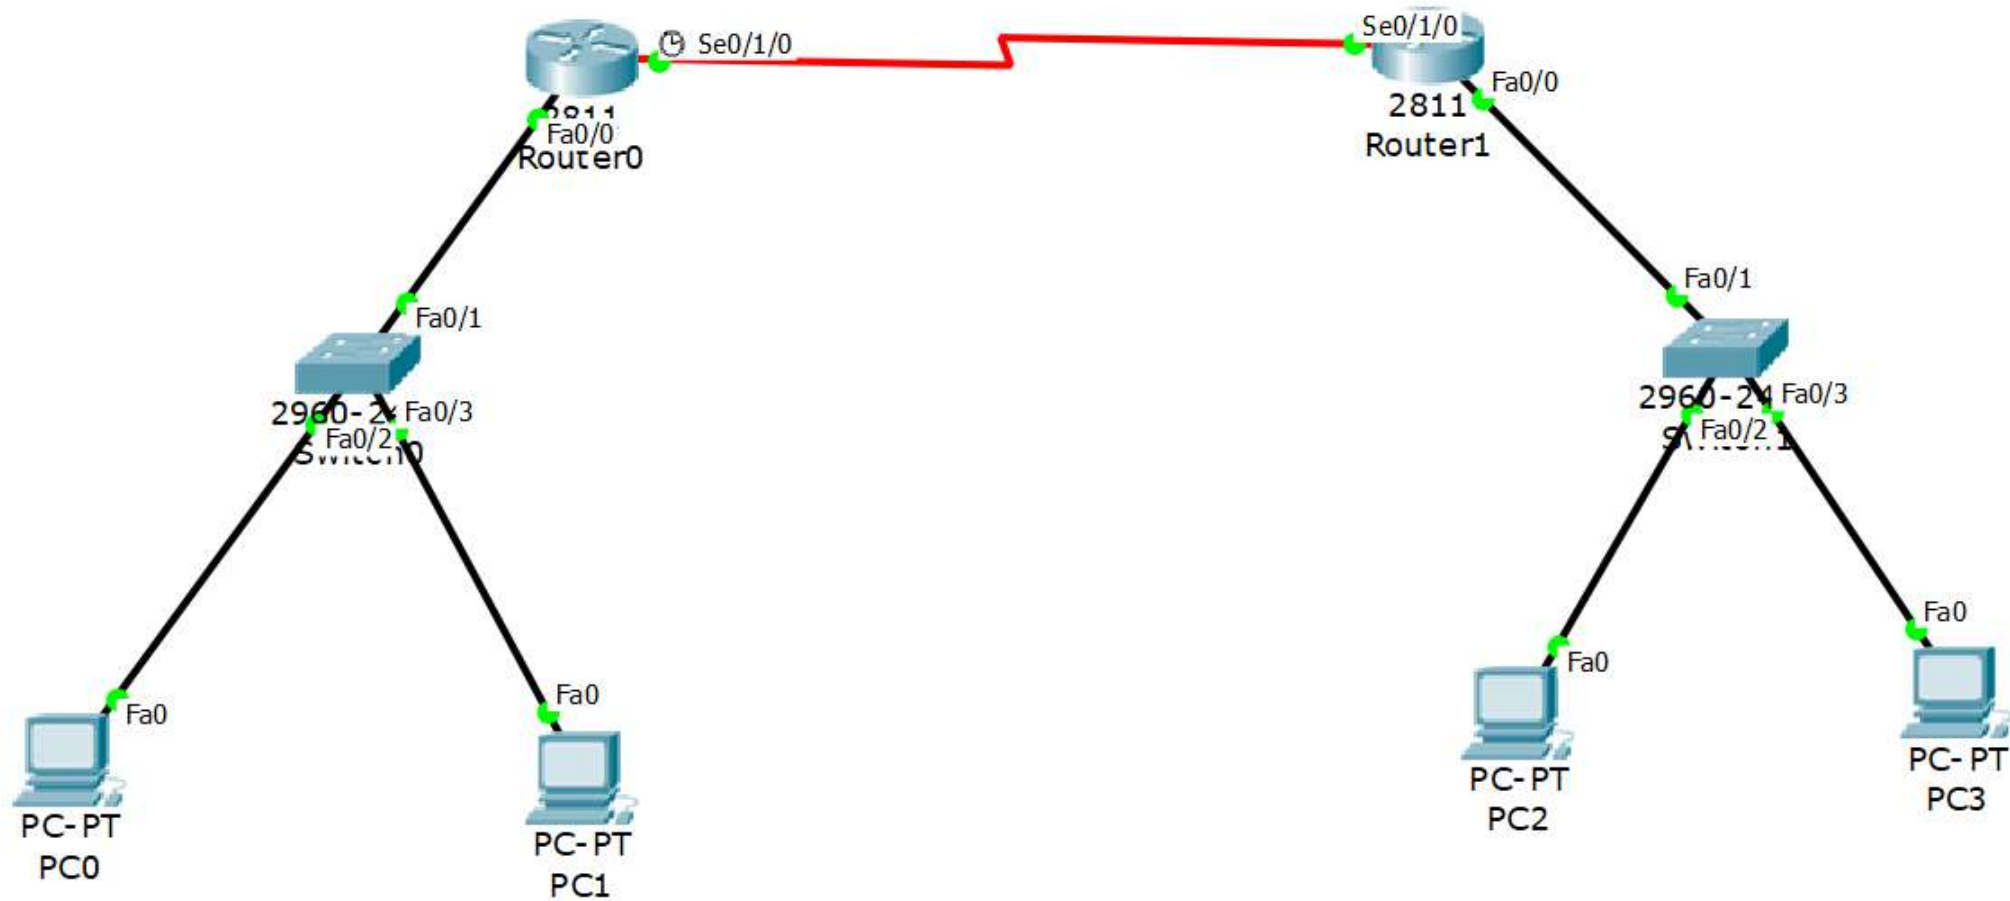

Realtime

Scenario 0

New

Delete

Toggle PDU List Window

Fire	Last Status	Source	Destination	Type	Color	Time(s)	Period	Num	Edit	Delete
Success...		PC3	PC0	IC...		0.000	N	0	(e...	(delete)
Success...		PC2	PC1	IC...		0.000	N	1	(e...	(delete)

## IOS Command Line Interface

```
changed state to up
```

```
%LINEPROTO-5-UPDOWN: Line protocol on Interface  
FastEthernet0/0, changed state to up
```

```
Router(config-if)#
```

```
Router(config-if)#
```

```
Router(config-if)#router rip
```

```
Router(config-router)#net 11.0.0.0
```

```
Router(config-router)#net 192.168.1.0
```

```
Router(config-router)#
```

```
Router(config-router)#
```

```
Router(config-router)#ex
```

```
Router(config)#ex
```

```
Router#
```

```
%SYS-5-CONFIG_I: Configured from console by  
console
```

Copy

Paste