



INSTITUTO SUPERIOR TÉCNICO

ISR

REPORT

USERS AND TASKS ANALYSIS MILESTONE

Participatory User Tests Meeting & Notes

Author:
Francisco Maria
CALISTO

Coordinator:
Jacinto NASCIMENTO

Co-Coordinator:
Daniel GONÇALVES

20/02/2017

1 Abstract

The task analysis methods discussed in this report from Human-Computer Interaction (HCI) in order to development and design of an user interface for automatic detection, segmentation and classification from breast cancer, as well as, textual data notations and information visualisation. The user interface features a triple focus, considering (a) people, (b) tasks, and (c) the environment. Integrating various task-modeling approaches requires vehicles for making design user interface explicit, for which an User-Centered Design (UCD) [1] formalism will be suggested. UCD consists of a method which is a broad term to describe design processes in which end-users influence how a design takes shape. It is both a broad philosophy and variety of methods.

This report will prepare us to better understand what is the best approach as an user and task analysis in a clinical environment. This way we will have a vision of how we should test our interface and how to get the best feedback from clinicians.

2 Introduction

The main message of this report is to show how task analysis methods from HCI can be combined with UCD methods, for the purpose of constructing a complete task model that serves as a descriptive and analytic tool in designing complex clinical technology. The methods from HCI and UCD are first of all applied to collect information about the task domain, about problems, and about possible conflicting situations and activities. In order to model a complex task domain for the purpose of designing supporting technology, a research of modelling concepts is needed that enables researchers to represent the most relevant results of the information collection for subsequent design decisions. A combination of concepts and techniques as advocated here is rather uncommon in current design methods, and, hence, needs to be based on an analysis of differences between approaches and on the needs of design as a generic activity aiming at serving end-users of information technology.

As a researcher, we have been told countless times that user feedback is an important key to understand the user goals and tasks to achieve. The benefits of testing a product with users are obviously positive and conclusive. While this kind of information provide good advice on how the test is done, they often lack explanations on how a testing process fits inside a team and how to make sense of this feedback.

For this phase we have prepared a script test that will help us understanding the tasks and will be our guide so that the test is always unanimous even if we take a more open and not strict approach to the script.

3 Interactive Design

- How many users we need?

When working on the research and development of a new user interface, we need to iterate with several test sessions to check our development choices. Each of this sessions consist in testing the user with 3 individual clinic testers (until this date). What we have experienced is that we do not actually need a huge set of people, like 10 testers, to identify an issue. With 3 tests, we can already see what are recurring problems with almost a 75% of usability problems found, which corroborates Nielsen's graph [6] (Figure 2).

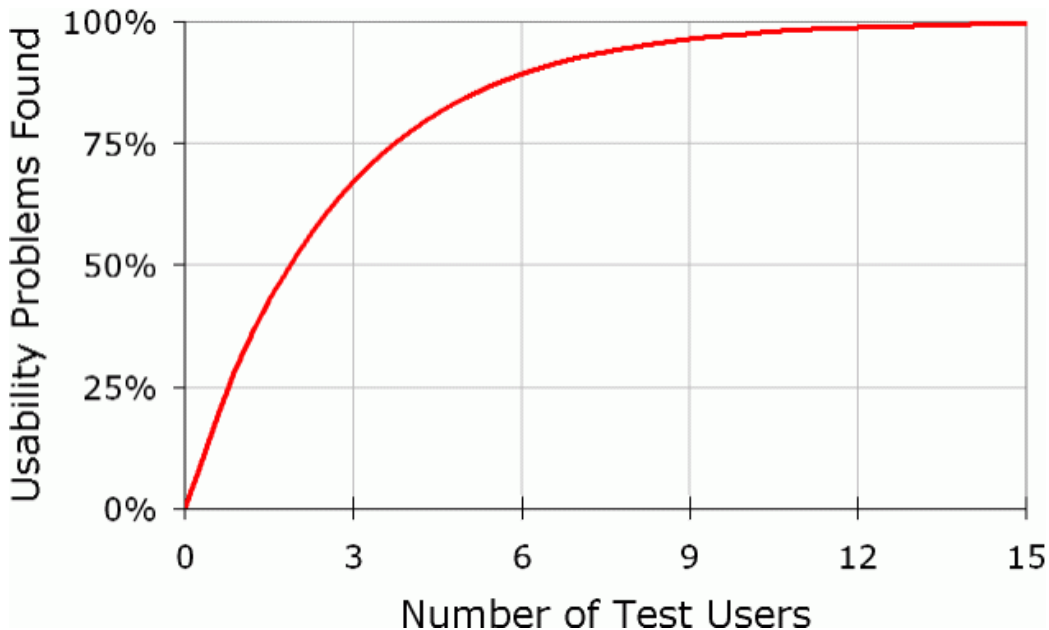


Figure 2: User Tests

We usually met the users on their office since they have the material diagnostic with them and to observe the behaviour on their environment. We give them our machines to show the prototypes or just have an open interview to make some questions about the goals and the tasks to be concluded. It is important that each time we prepare a new user test session, we meet to define the learning goals, i.e. assumptions that need to be verified or might be proven wrong. For instance, when observing the clinic on their behaviour we understood the less usage of the keyboard against a very used mouse features.

4 Learning Goals

The learning goals are:

- Understand how to annotate breast mass on our prototype;
- Understand how to annotate breast calcification on our prototype;
- Understand how to undo some annotation;
- Understand how to redo some action on the prototype;
- Understand how to erase some annotation on the prototype;

5 Phase Validation

- What needs to be validate on this phase?

6 Interviews vs Surveys

- Does it make sense to mix from Interviews and Surveys?

7 The Script

Before the users test, the research writes a script that will serve as a roadmap and guideline that can be shared with all research team who lead this project. It is a way to have consistent and comparable results.

This script consists in:

- A reminder of the learning goals.
- A check-list of the set-up elements that should be available for the test.
- A clear and objective task: the job the clinician has to complete. It generally implies achieving smaller tasks related to the learning goals.
- A few demographic questions to ask at the end.

On this research phase we will strict the interaction with the user as a beginning phase to record and obtain a new preliminary information about the user needs, goals and tasks. However we already tested some prototypes with Dra. Cristina Ribeiro da Fonseca and Dra. Clara Aleluia, it is still possible and valuable to restart the all process.

8 The Meeting

The meeting was held at 5:00 pm on February 23, 2017 at SAMS Hospital in Lisbon. Its purpose was to draw some conclusions from important tasks, usability and even functionalities (eg ask if BIRAD will make sense for each image).

The conversation began with the doctor informing me that I had bought a new book on tomography and that this would help in the problem domain, as well as helping our Professor Daniel Simões Lopes in his research work. Here we can realize that in fact Doutoura Cristina is motivated to help this and other scientific works. The book integrates mammography and ultrasound with tomosynthesis. Then there are mammograms and sonographies as examples where later both are compared with the own tomosintese, being this the first book that leaves on tomosintese.

The question was promptly asked about the functionality of BIRAD in all diganostic images, to which the author clearly said that it does not make any sense and that the solution will be to dispose of this functionality at the end of the diagnosis as a whole. This is because in case we are analyzing a craniocaudal we need to have a half-oblique to be able to classify the set of incidences.

TODO: Description of Hardware and Software used ...

After this first dialog we then proceed to the user tests, starting with the first High-Fi Prototype following the scripts described in the previous section. She was then asked by the doctor to pass the lapis over the breast making a circumferential loading from the right side of the mouse to demonstrate what actions the interface offers to manipulate the image. It was immediately warned that the interface was at a very primitive stage so that there is no disinterest about the prototype. We start then as if from zero the user tests to the interface. Initially the doctor had difficulty understanding the interaction mechanisms of the 2011 MacBook Air.

The first task was to make a note of the mass that was in the breast. The doctor did not understand at first how she began to scratch in the image the circumference derived from not being accustomed to tinkering with MacBooks and macOS system. You were instructed to press the MacBook mouse as an informational note to aid in learning while using your MacBook. Here the doctor understands how the menu options that appear when clicking on the right side appear. The first thing the doctor asked was the advantage of having multiple colors. And it began by trying to understand what each

of the functions does, having arrived correctly at the solution and giving the right answers. In the beginning the doctor went to get a "Black Pen" but only later realized the need to have to load on the left side of the mouse to draw the lines. After that I had a failed attempt to use the "Paint" program as an example to try to exemplify the interaction, but later seeing the difficulties that the doctor was experiencing when using the macbook told him that to draw would have to keep pressing with the left side. Then the doctor understood the mechanics of the system and learned that pressing and dragging the finger will then draw the circle. However he did not realize that by default a selected color already comes and can start scratching right away. This way the first thing you did for the task was to load with the right side of the mouse and select the black color. Even so, I had to be the one to exemplify it. After this I can do it without any problem and had a very quick learning of how the interface works. The doctor's accuracy was not at all the best, but this is derived from never having used these hardware. Soon after was asked to do "Undo" so the doctor in seconds accomplish the task almost immediately. Then he was asked to do "Redo", "Erase" and "Text Annotation". In relation to the "Erase" functionality, the doctor was informed that the line manipulation symbol ("hand") will have to appear in order to activate the option to eliminate the line. This task was quickly acquired.

In relation to the general opinion of the doctor, she found the interface easy to learn and very intuitive. After this, it was asked if he prefers to have the functionality of the image manipulation options loaded with the right side of the mouse or if he prefers to have a sidebar with the same always visivities. The answer was to have the sidebar in order to better show what options we have. This is because there are more clicks, it is more annoying for the user completely covering the overall image of the image on the diagnostic image, being nothing practical.

The doctor took the opportunity to ask why she had so many colors of "pen" and realized immediately that it was for the reason of having several lesions, such as, Multicentric, where we have several foci of the same quadrante; Multifocal, multiple outbreaks in more than one quadrant; And finally, Unifocal, a quadrant, an injury. The doctor has done an exaggeration of "pens" and advised to only use 3 "pens". It then suggests removing the black "pen".

Again the doctor argued the usability of the interface saying that it was quite fun to manipulate the image. Which shows motivation in doing so.

All this comes from having annotations with various colors which allows a variety of annotation in the images.

Finally the doctor asked that more features would be placed by what were explained the ones that were in the right menu and some more.

9 Paper

9.1 Motivation

9.2 Solving A Problem

9.3 The Paper Solution

9.4 Where To Publish The Paper?

9.5 Clinical Conferences and Journals Research

10 Tasks

- Find the ways how to detect false positives.

11 Questions

The following questions were made to the clinicians:

- Ask the question about having the BIRAD in each diagnosis image?
- Is it better on the High-Fi Prototype to have the right-click with all option, just the right menu with the options or both?
- Is it useful to have the colours annotation option?

12 Conclusions

13 Acknowledgements

This report will help our research project in cooperation between ISR [3] and INESC-ID [2] both are associate institutes of Instituto Superior Técnico [4], Universidade de Lisboa [5]. Throughout this challenging journey we had the untiring and patient support from our family and friends.

We would like to give a special thanks to Dr. Cristina Ribeiro da Fonseca and Dr. Clara Aleluia who have cooperated with us tirelessly, thus making a major contribution to the national research and development of innovation in Portuguese clinical Information Systems.

We also want to thanks Bruno Cardoso, Rodrigo Lourenço, Bruno Oliveira, Tomás Pinho, Lídia Freitas, Bruno Dias, João Miranda, Prof. Dr. Jacinto Nascimento, Prof. Dr. Daniel Gonçalves, Ana Beatriz Alves, Francisco Silveira, Joana Teixeira, Daniel Da Costa, Filipe Fernandes, Inês França Martins, Luís Ribeiro Gomes and Ricardo Cruz for helping, supporting and reviewing our work.

References

- [1] Chadia Abras, Diane Maloney-Krichmar, and Jenny Preece. “User-centered design”. In: *Bainbridge, W. Encyclopedia of Human-Computer Interaction. Thousand Oaks: Sage Publications* 37.4 (2004), pp. 445–456.
- [2] *INESC-ID*. URL: <http://www.inesc-id.pt/>.
- [3] *ISR*. URL: <http://welcome.isr.tecnico.ulisboa.pt/>.
- [4] *IST*. URL: <https://tecnico.ulisboa.pt/en/>.
- [5] *Universidade de Lisboa*. URL: <http://www.ulisboa.pt/en/>.
- [6] *Why You Only Need to Test with 5 Users*. URL: <https://www.nngroup.com/articles/why-you-only-need-to-test-with-5-users/>.