

Course:
Creating Web Pages with HTML5 and CSS3

Module 4. **Animation in CSS3**

Task 1

Implement an HTML page with a progress bar.

When the page opens, this progress bar must infinitely move from left to right.

Example of the result:



Task 2


Implement an HTML page with an animated icon.

When the page loads, a black and white icon is displayed. If hovered, it slowly (within 5 seconds) becomes larger and colored. If you move the pointer away, it abruptly returns to its initial state.



To access materials, open this PDF file in [Adobe Acrobat Reader](#).

Example of the initial state:

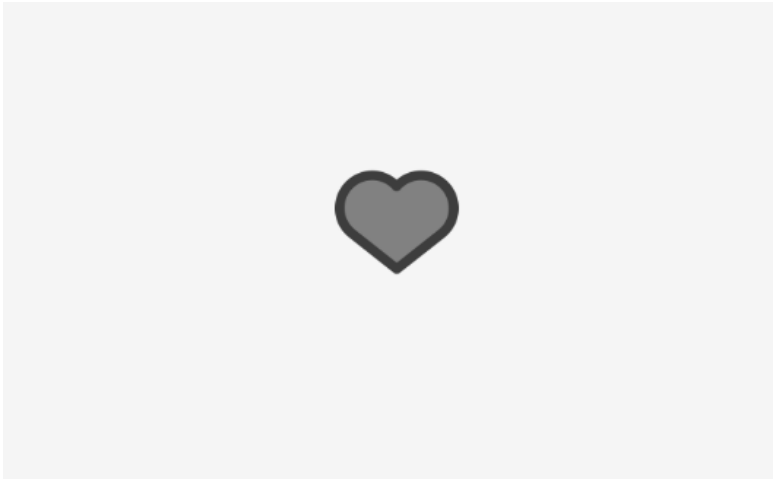

Example of the icon being hovered after the animation is over:



The required icon is attached to this PDF file.*


Task 3

Implement an HTML page with pop-up icons.

Requirements:

- the caption **Hello, my site!** displays on the page immediately (no animation required);
- the icons appear from the bottom and go to their places; it takes 2 seconds for each of them to do this;
- the icons appear one after another, 0.5 seconds apart;
- the icons begin to appear at the page load, and after the animation is over, they remain in place.

Example of the final result:

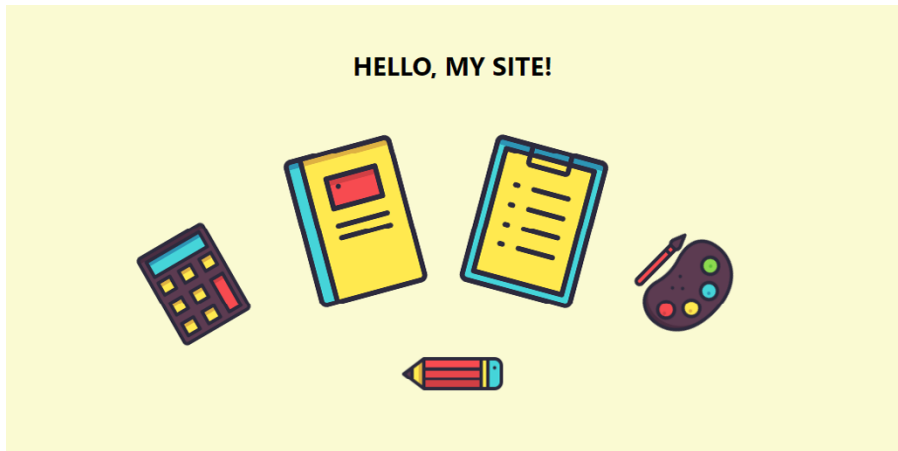

The required icons are attached to this PDF file.*