



# Predicting New York City Housing Prices

Matthew Kwee  
Aug. 2021



# Introduction

## Motivation:

Real-estate prices in New York City have changed significantly during the COVID-19 pandemic, and Menage LLC, a real-estate brokerage firm, needs a new model for predicting housing prices.

## Objectives:

Accurately predict housing prices in New York City using sold house listings.

## Goals:

Present analysis understandably and logically.



# Methodology

## Data:

My data was gathered from [realtor.com](https://www.realtor.com) using a web-crawler that first catalogued webpages to scrape, then scraped those webpages.

## Tools utilized:

Selenium, Pandas, Google Maps Geocoding API, NumPy, Scikit-Learn, Matplotlib, Seaborn


## Metrics:

When it comes to predicting housing prices, maximizing the regression model's  $r^2$  value will be the most important objective.



## Features


What do you want to know about a house that you might purchase?			
Numerical:		Categorical:	
Square Footage	#Bedrooms	Location  Property Type	
#Bathrooms	Lot Size		
Year Built			



**PROPERTY VALUE**


## Initial observations: Correlation

Before I began to construct a model, I used Seaborn to create a correlation heatmap of all continuous features.

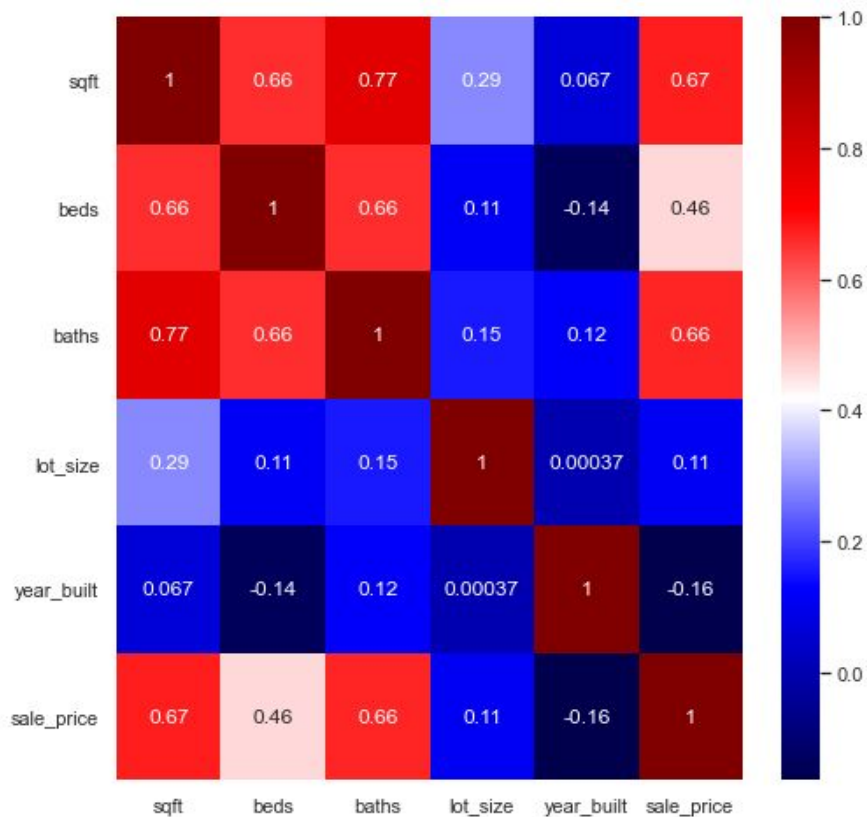

## Initial observations: Correlation

Before I began to construct a model, I used Seaborn to create a correlation heatmap of all continuous features.

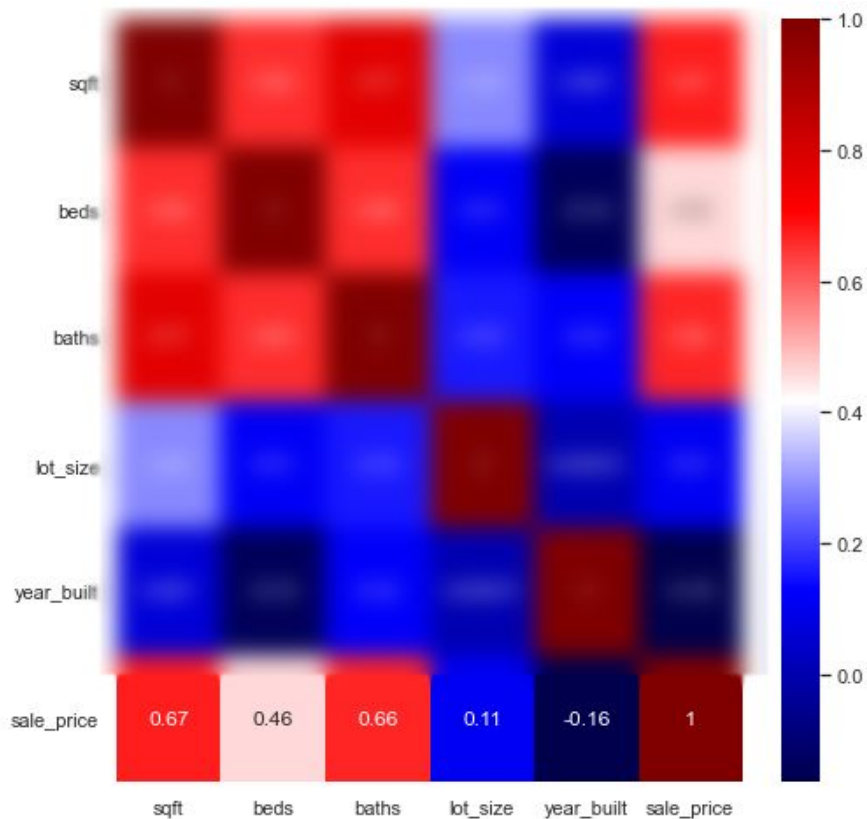



# Modelling

After converting the categorical variables into binary dummy variables, I ran Linear, Lasso, Ridge, and Elastic Net Regressions on the data.


I settled on Linear because the model's  $r^2$  value for the training set was not significantly higher than that of the test set.

# Regression Results

The image shows the linear regression model's prediction for each property value and the actual value of the property.

If a datapoint is above the red line, the model's predicted price for that property was higher than the property's actual sale price, and vice versa.

The model's  $r^2$  value was 0.8071 for the entire data set.

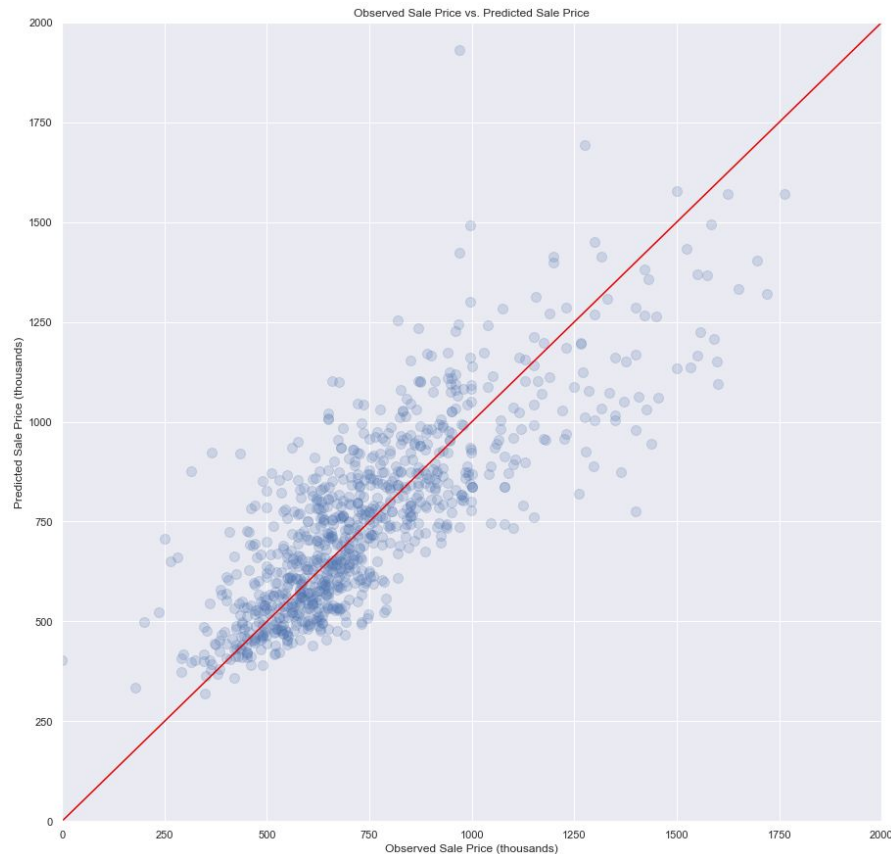





# The Model

I packaged my model into a function which can be used [here](#).

The rest of the code can be found here.

```
In [3]: 1 print(predict_house_price(1120,4,1,940,1920,'Single Family Home','Bronx'))
        2 print('\n')
        3 print(predict_house_price(1120,4,1,940,1920,'Single Family Home','Brooklyn'))
        4 print('\n')
        5 print(predict_house_price(1120,4,1,940,1920,'Single Family Home','Manhattan'))
        6 print('\n')
        7 print(predict_house_price(1120,4,1,940,1920,'Single Family Home','Queens'))
        8 print('\n')
        9 print(predict_house_price(1120,4,1,940,1920,'Single Family Home','Staten Island'))
```

```
Input: 1120 sqft, 4 bedrooms, 1 bathrooms, 940 lot size, built in 1920, property type Single Family Home, located in Bronx, NYC
Predicted price:
313959.99818827584
```

```
Input: 1120 sqft, 4 bedrooms, 1 bathrooms, 940 lot size, built in 1920, property type Single Family Home, located in Brooklyn, NYC
Predicted price:
724390.4628279372
```

```
Input: 1120 sqft, 4 bedrooms, 1 bathrooms, 940 lot size, built in 1920, property type Single Family Home, located in Manhattan, NYC
Predicted price:
4327579.285491296
```

```
Input: 1120 sqft, 4 bedrooms, 1 bathrooms, 940 lot size, built in 1920, property type Single Family Home, located in Queens, NYC
Predicted price:
624339.0820422402
```

```
Input: 1120 sqft, 4 bedrooms, 1 bathrooms, 940 lot size, built in 1920, property type Single Family Home, located in Staten Island, NYC
Predicted price:
392359.94366843114
```



## Additional Metrics (for nerds like me)

For the training set,  $r^2$  was 0.8067.

For the test set,  $r^2$  was 0.8081.


The RMSE was \$254350.

The coefficient of variance ( $\text{RMSE} \div \text{mean property price}$ ) was 32.08%.

## Future Work

I had planned to include the neighborhood a property was located in as part of my regression, but decided against doing so due to the lack of datapoints.

The next logical step would be to acquire enough sold listings from real-estate websites to use 'neighborhood' as a categorical variable in my model.

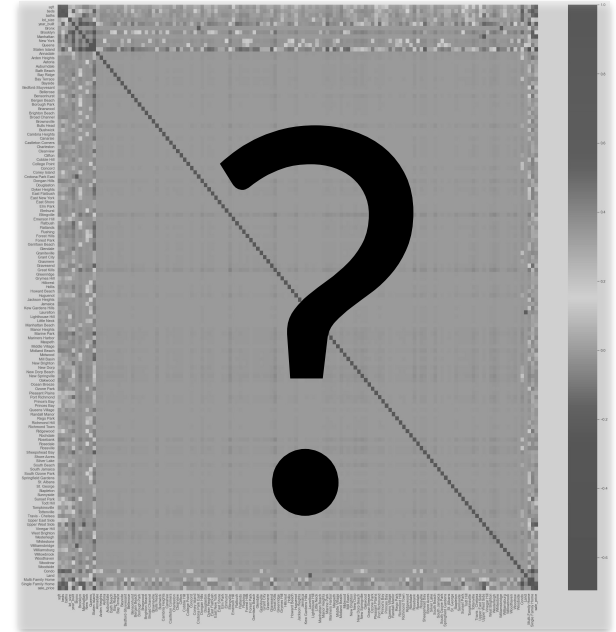



# Appendix

That red arrow on slide 6: <https://www.freeiconspng.com/uploads/red-arrow-down-png-17.png>