AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

1.Create an EC2 Windows Instance in AWS

Maha Keshav P

CSE-Artificial Intelligence & Machine Learning,

Sri Eshwar College of Engineering,

Coimbatore.

Objective

EC2 (Elastic Compute Cloud) is a core service provided by Amazon Web Services (AWS) that enables users to rent virtual servers in the cloud to run applications, store data, or handle computational workloads.

An EC2 Windows instance is a virtual machine running the Microsoft Windows operating system on Amazon Web Services (AWS) EC2 (Elastic Compute Cloud). This allows you to run Windows-based applications, manage Windows Server configurations, and use various Microsoft software (like SQL Server, IIS, etc.) in the cloud without having to manage physical hardware.

Use Cases for EC2 Windows Instances:

- Web and Application Hosting: Run IIS web servers or other Windows-based web applications in the cloud.
- Database Servers: Host SQL Server databases with EC2 Windows instances, using RDS or EC2 for more control.
- Remote Desktop Applications: Set up RDS (Remote Desktop Services) for remote access to Windows desktops in the cloud.
- Development and Testing: Create development environments with Windows OS to test .NET or other Windows-based applications.

Used Services in AWS:



Amazon EC2

Topology

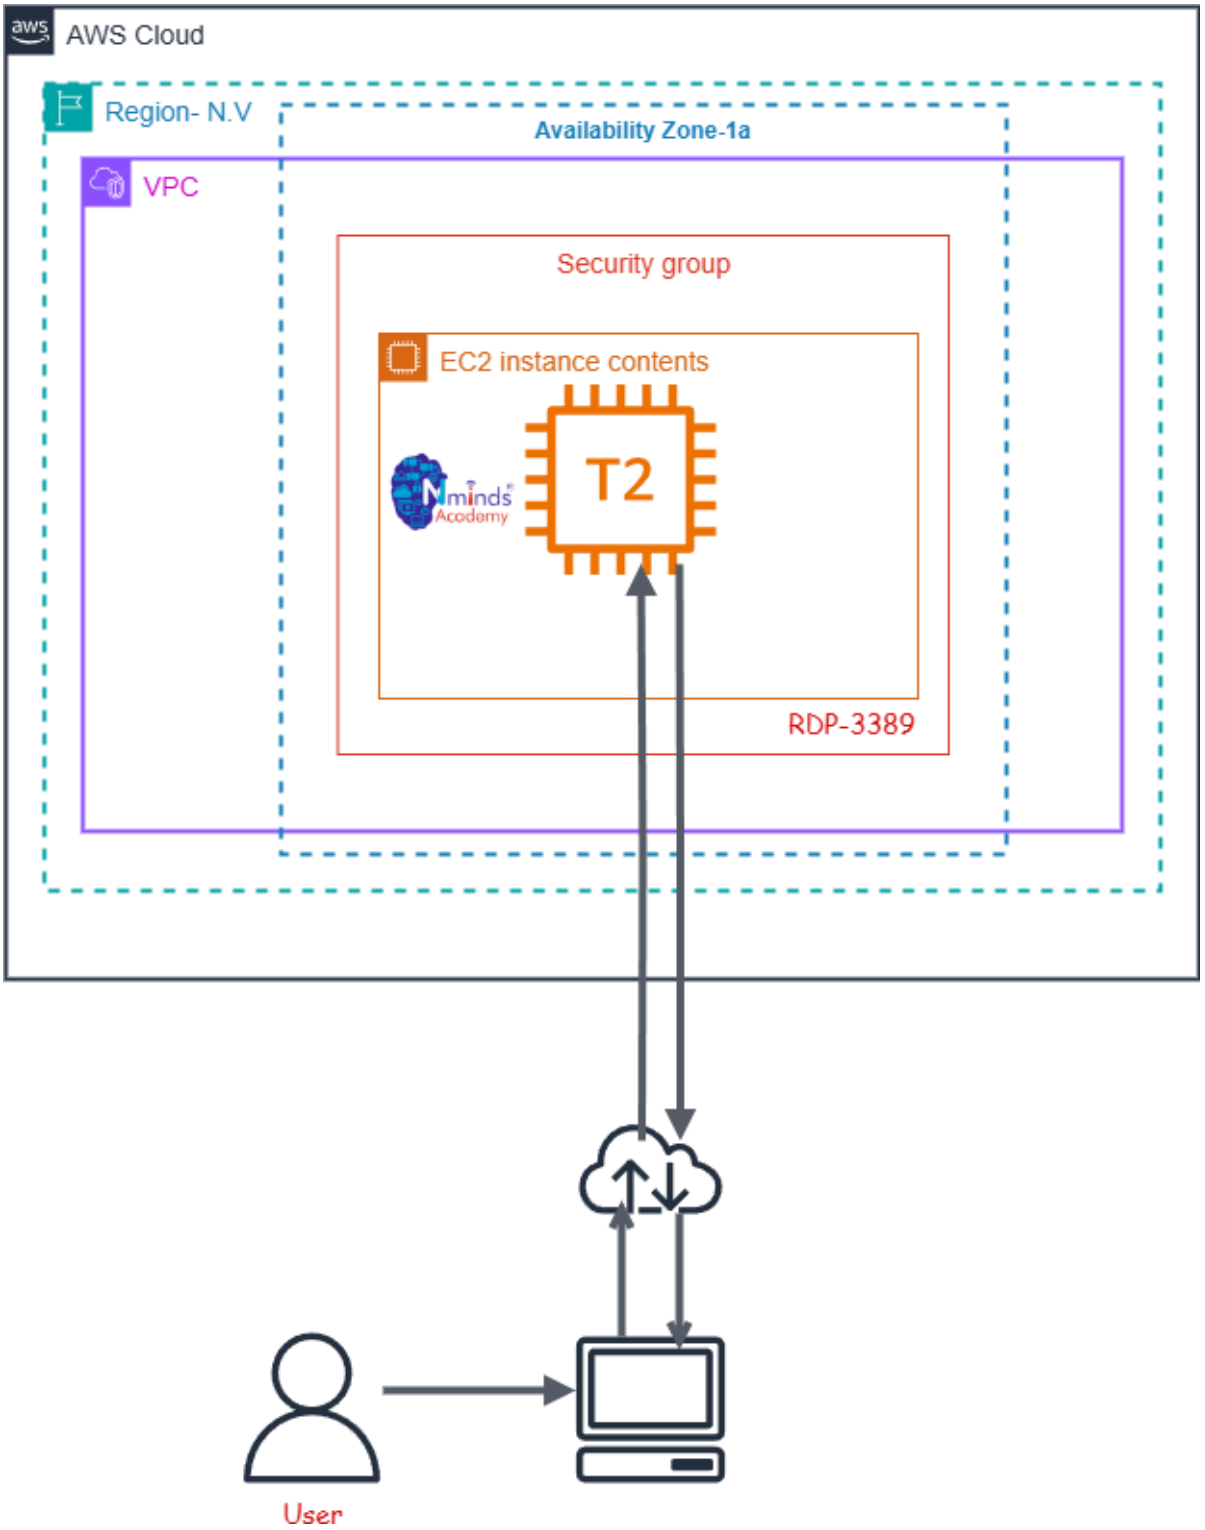
AWS Cloud
Region- N.V
Availability Zone-1a
VPC
Security group
EC2 instance contents
T2
RDP-3389
User

Execution Tasks:

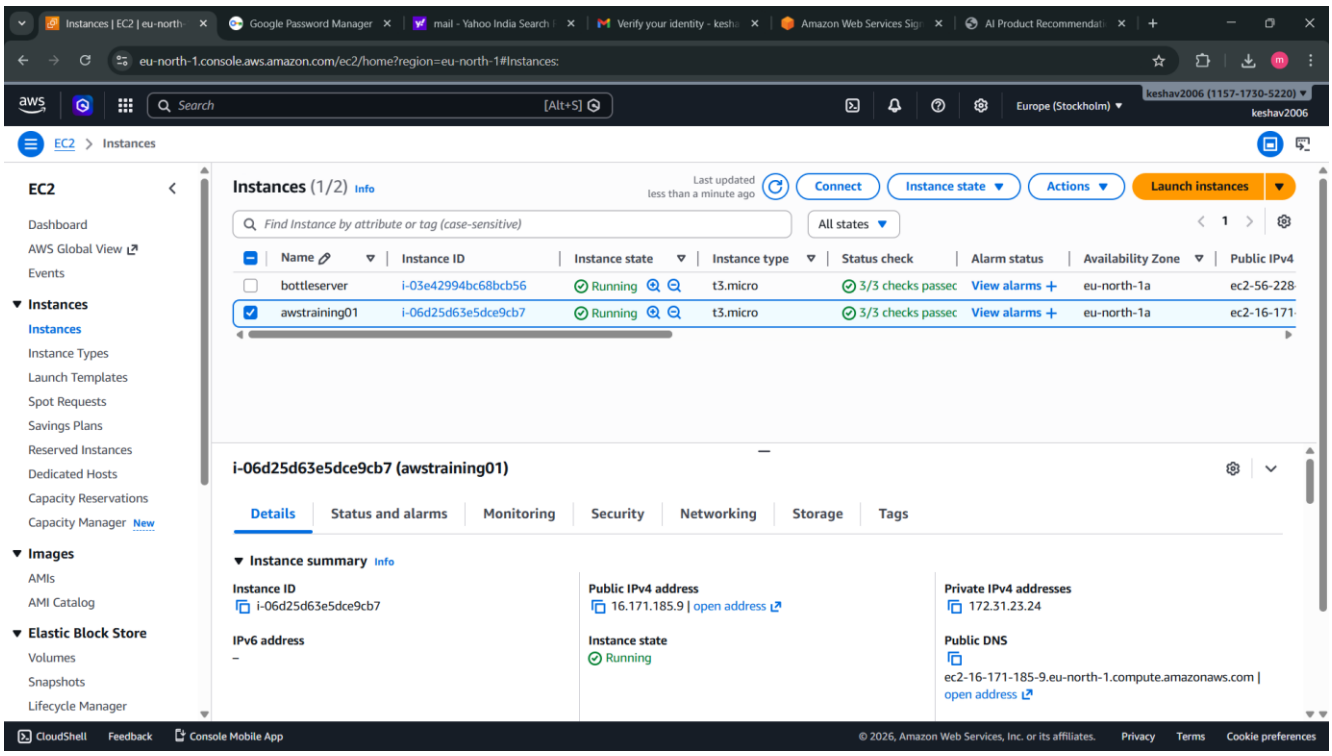

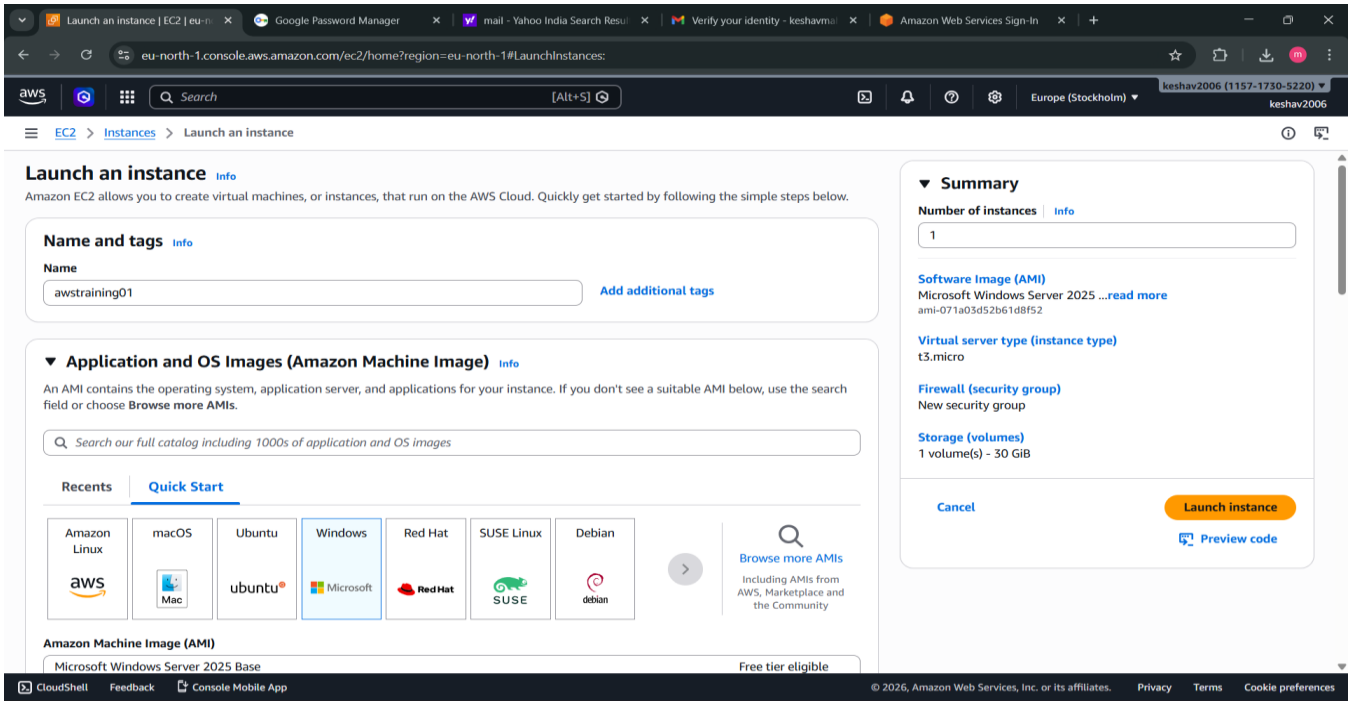

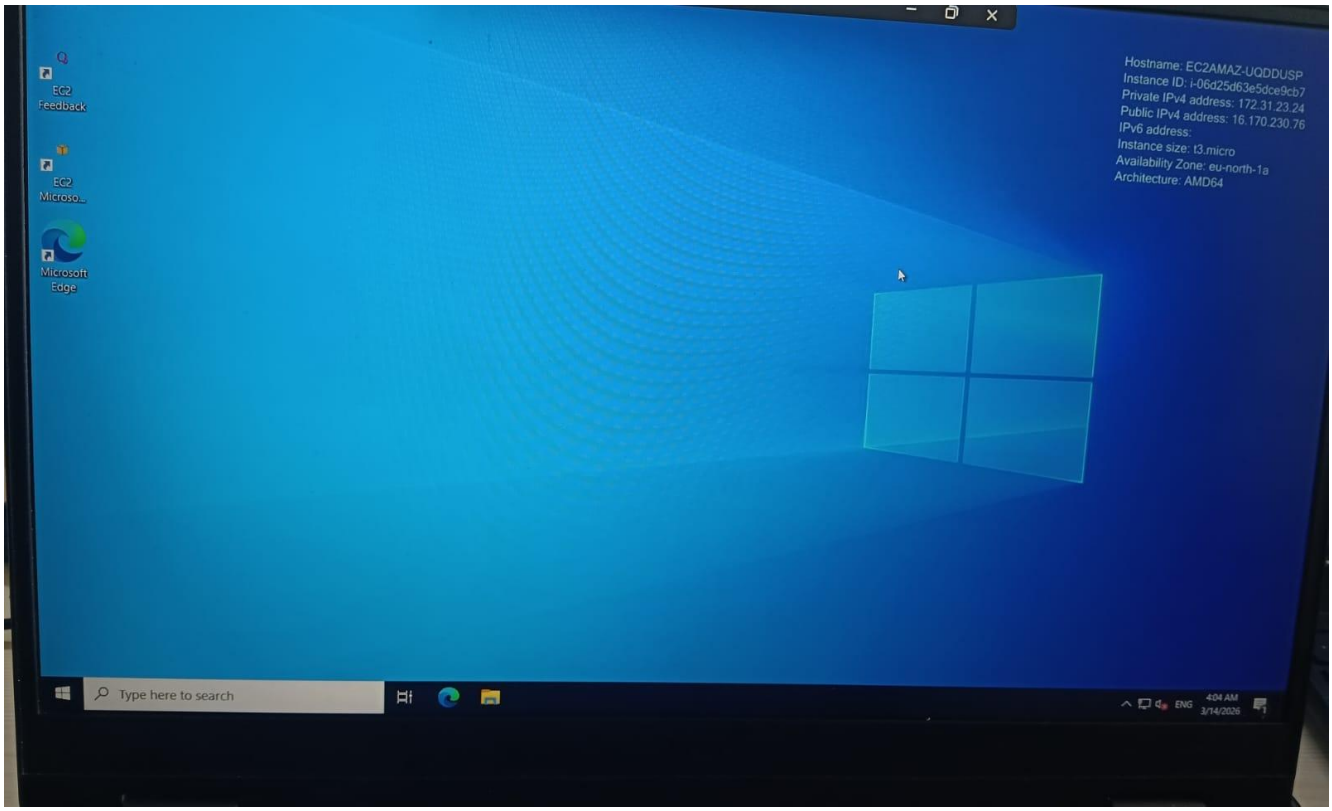
EC2 Feedback
EC2 Microso...
Microsoft Edge
Hostname: EC2AMAZ-UQDDUSP
Instance ID: i-06d25d63e5dce9cb7
Private IPv4 address: 172.31.23.24
Public IPv4 address: 16.170.230.76
IPv6 address:
Instance size: t3.micro
Availability Zone: eu-north-1a
Architecture: AMD64
Type here to search
ENG
4:04 AM
3/14/2026

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification Training

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

2. Configure IIS Webserver on Windows Server in AWS

Maha Keshav P

CSE-Artificial Intelligence & Machine Learning,

Sri Eshwar College of Engineering,

Coimbatore.

Objective

An EC2 Windows instance is a virtual machine running the Microsoft Windows operating system on Amazon Web Services (AWS) EC2 (Elastic Compute Cloud). This allows you to run Windows-based applications, manage Windows Server configurations, and use various Microsoft software (like SQL Server, IIS, etc.) in the cloud without having to manage physical hardware.

IIS (Internet Information Services) is a web server software created by Microsoft for hosting websites and web applications on Windows Server operating systems. It provides a platform for building, deploying, and managing web-based applications. IIS supports multiple protocols, including HTTP, HTTPS, FTP, and more, and is tightly integrated with the Windows OS.

Common Use Cases of IIS:

1. Hosting Websites: IIS is often used by businesses and developers to host websites and web applications, particularly those built with ASP.NET.
2. Web Applications: For applications that require robust back-end support, IIS provides features like application pooling and security for web services (e.g., SOAP or RESTful APIs).
3. Secure File Sharing: IIS can be configured as an FTP server to securely share files between different locations.
4. Application Hosting in Enterprises: Many enterprise applications built on Microsoft technologies rely on IIS for deployment, such as SharePoint, Exchange Server, or Dynamics CRM.
5. API Hosting: IIS is commonly used to host APIs (e.g., RESTful services) built with .NET or other technologies.

Used Services in AWS

Used Services in Windows Server

Amazon EC2

IIS- Internet Information Services

Topology

How to Configure the IIS web server in Windows Server with AWS EC2

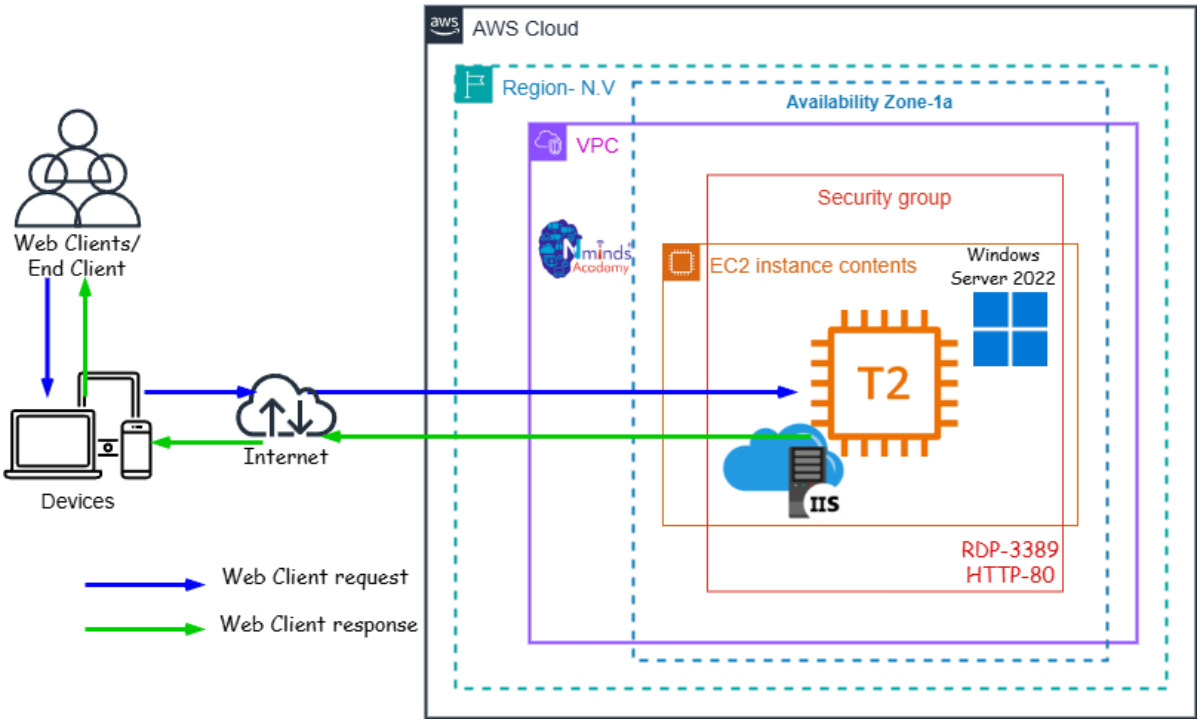

Execution Tasks:

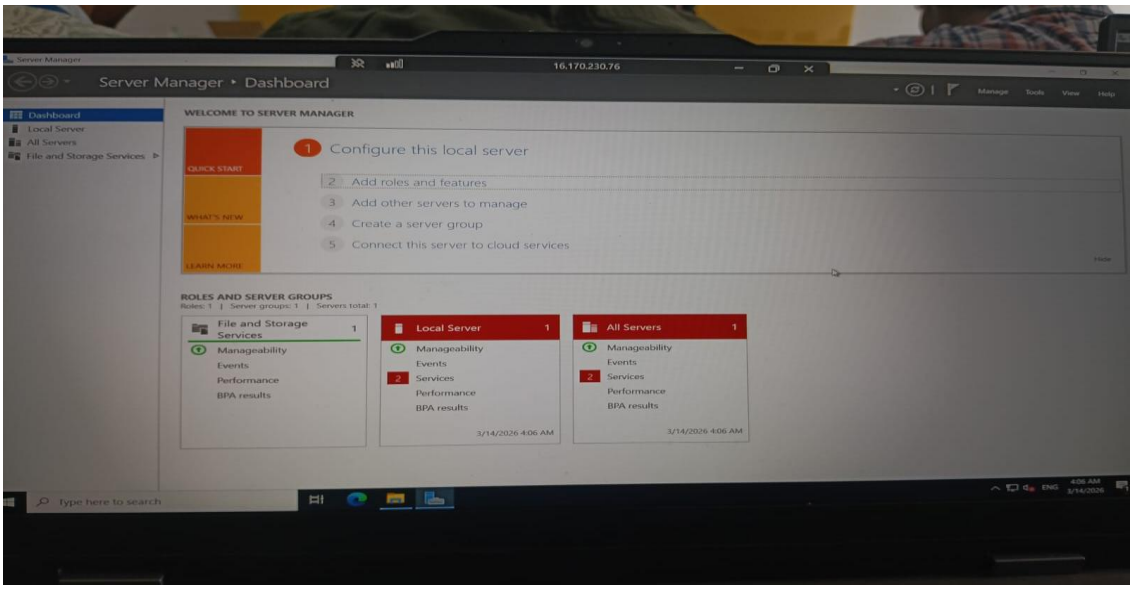

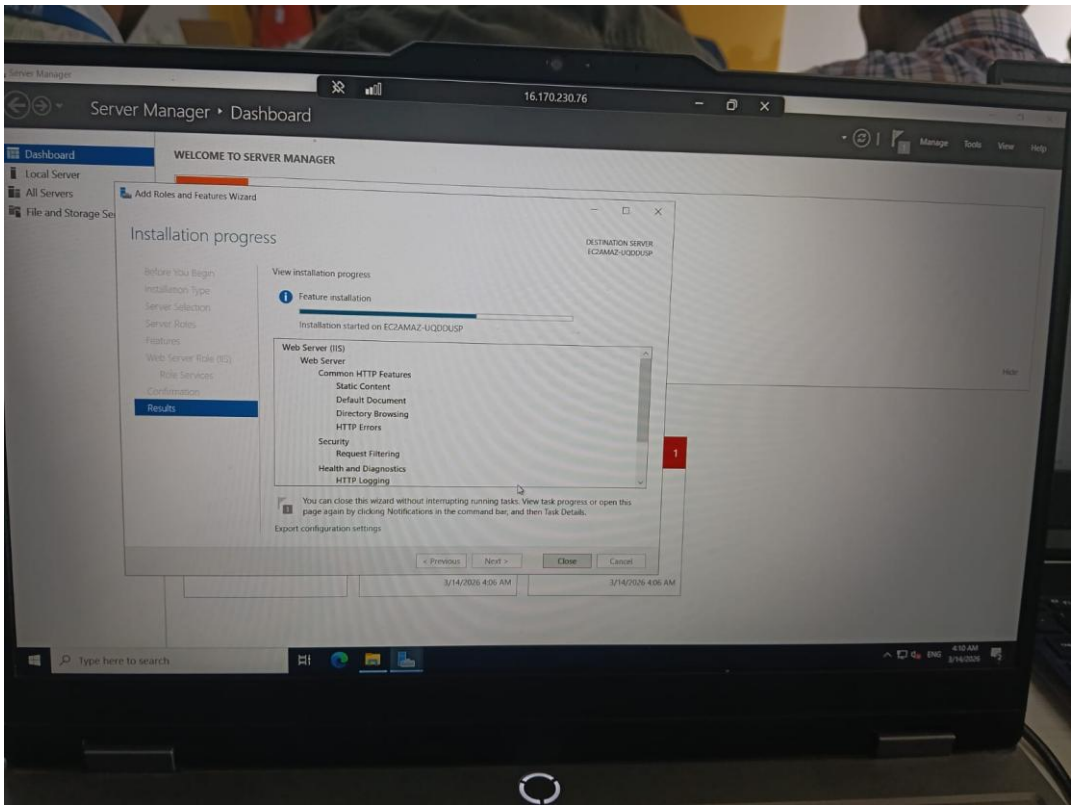

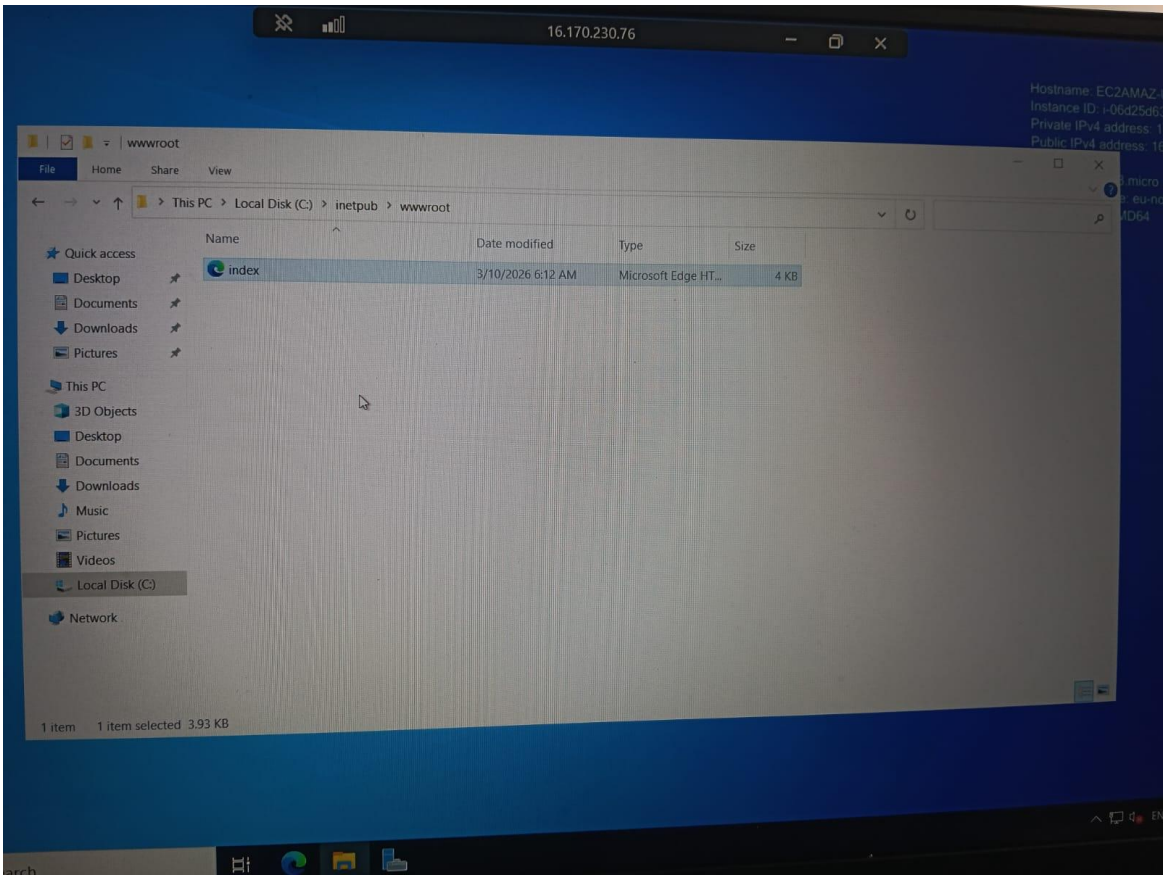
16.170.230.76
wwwroot
File
Home
Share
View
This PC > Local Disk (C:) > inetpub > wwwroot
Quick access
Desktop
Documents
Downloads
Pictures
This PC
3D Objects
Desktop
Documents
Downloads
Music
Pictures
Videos
Local Disk (C:)
Network
Name
Date modified
Type
Size
index
3/10/2026 6:12 AM
Microsoft Edge HT...
4 KB
1 item
1 item selected 3.93 KB

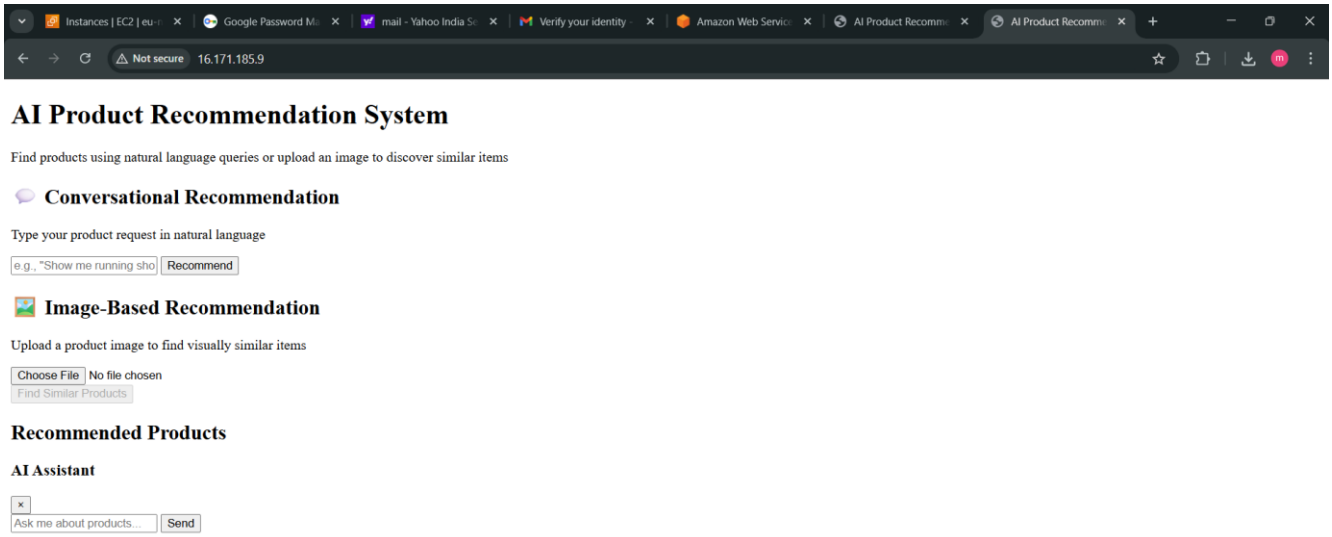
Not secure
16.171.185.9
AI Product Recommendation System
Find products using natural language queries or upload an image to discover similar items
Conversational Recommendation
Type your product request in natural language
e.g., "Show me running sho
Recommend
Image-Based Recommendation
Upload a product image to find visually similar items
Choose File
No file chosen
Find Similar Products
Recommended Products
AI Assistant
×
Ask me about products...
Send

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

3. Configure Elastic IP Address to Windows Web Server in AWS

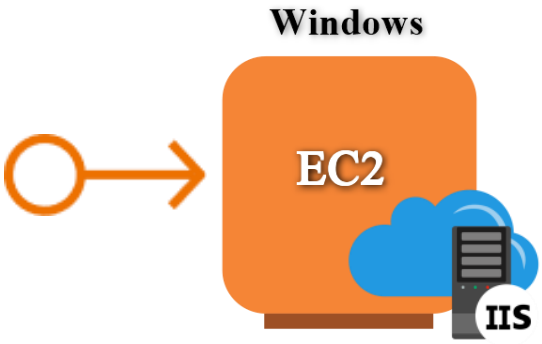

Maha Keshav P

CSE-Artificial Intelligence & Machine Learning,

Sri Eshwar College of Engineering,

Coimbatore.

Objective

An Elastic IP (EIP) in AWS is a static, public IP address designed for dynamic cloud computing. It is associated with your AWS account and can be quickly associated or disassociated with any EC2 instance in your account. This feature is particularly useful when you need to maintain a consistent IP address for your resources, even when you stop and start EC2 instances.

Common Use Cases for Elastic IP:

1. Highly Available Applications:
    - If you're running a service that requires high availability, you can use Elastic IPs to quickly reassign a static IP to a new instance if your primary instance fails, ensuring minimal downtime.
2. Web Servers:
    - If you host a website and need to ensure the IP address remains the same even if the underlying EC2 instance is restarted, an Elastic IP helps maintain this consistency.
3. Disaster Recovery:
    - Elastic IPs are useful for disaster recovery scenarios. If one instance goes down, you can quickly associate the EIP with a backup instance to ensure services are still accessible.

Best Practices:

- Use Elastic IPs only when necessary: Since they come with associated costs when unused, it's a good practice to release EIPs that are no longer required.
- Move IPs during instance failure: Instead of keeping an EIP permanently attached, use it as a failover method, reassociating it to a new instance when needed.
- Monitor EIP Usage: Periodically review your usage to ensure you're not paying for unnecessary Elastic IP addresses.

Topology

How to Configure the Elastic IP Address to Windows Web Server with AWS EC2

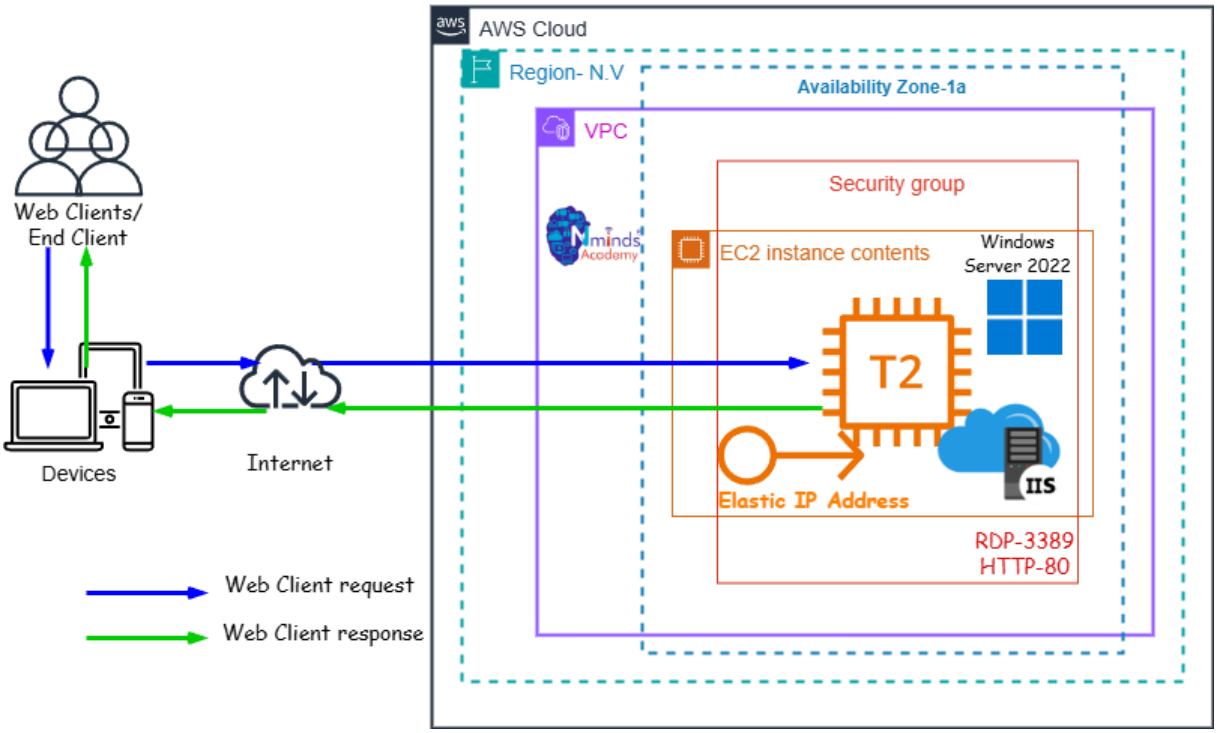

Used Services in AWS

Used Services in Windows Server



Amazon EC2

IIS- Internet Information Services

Amazon Elastic IP Address

Execution Tasks:

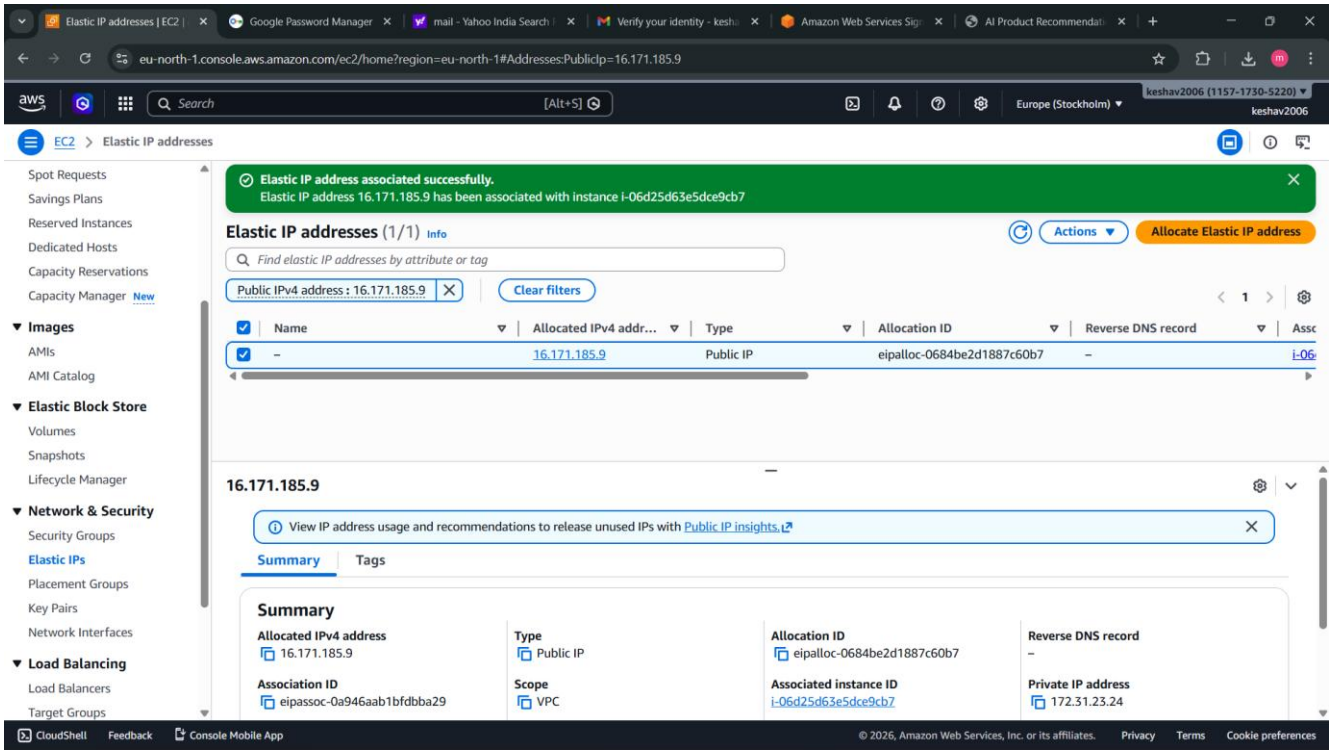

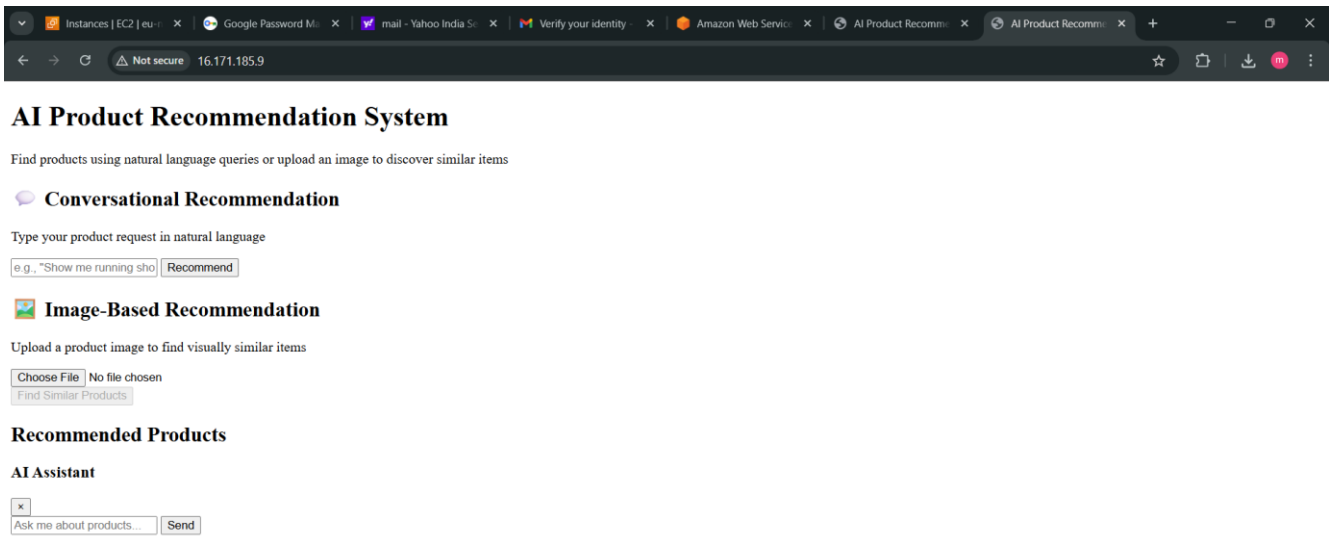

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

4. Create an EC2 Linux Instance in AWS

Maha Keshav P

CSE-Artificial Intelligence & Machine Learning,

Sri Eshwar College of Engineering,

Coimbatore.

Objective

EC2 (Elastic Compute Cloud) is a core service provided by Amazon Web Services (AWS) that enables users to rent virtual servers in the cloud to run applications, store data, or handle computational workloads.

An EC2 Linux instance is a virtual machine running the Linux operating system on Amazon Web Services (AWS) EC2 (Elastic Compute Cloud). This allows you to run Windows-based applications, manage Windows Server configurations, and use various Microsoft software (like SQL Server, Apache,FileServer etc.) in the cloud without having to manage physical hardware.

Use Cases for EC2 Linux Instances:

- Web and Application Hosting: Run Apache web servers or other Linux-based web applications in the cloud.
- Database Servers: Host SQL Server databases with EC2 Linux instances, using SSH or EC2 for more control.
- Remote Desktop Applications: Set up SSH (Remote Desktop Services) for remote access to Linux desktops in the cloud.
- Development and Testing: Create development environments with linux OS to test php,MySql or other Linux-based applications.

Used Services in AWS



Amazon EC2

Topology

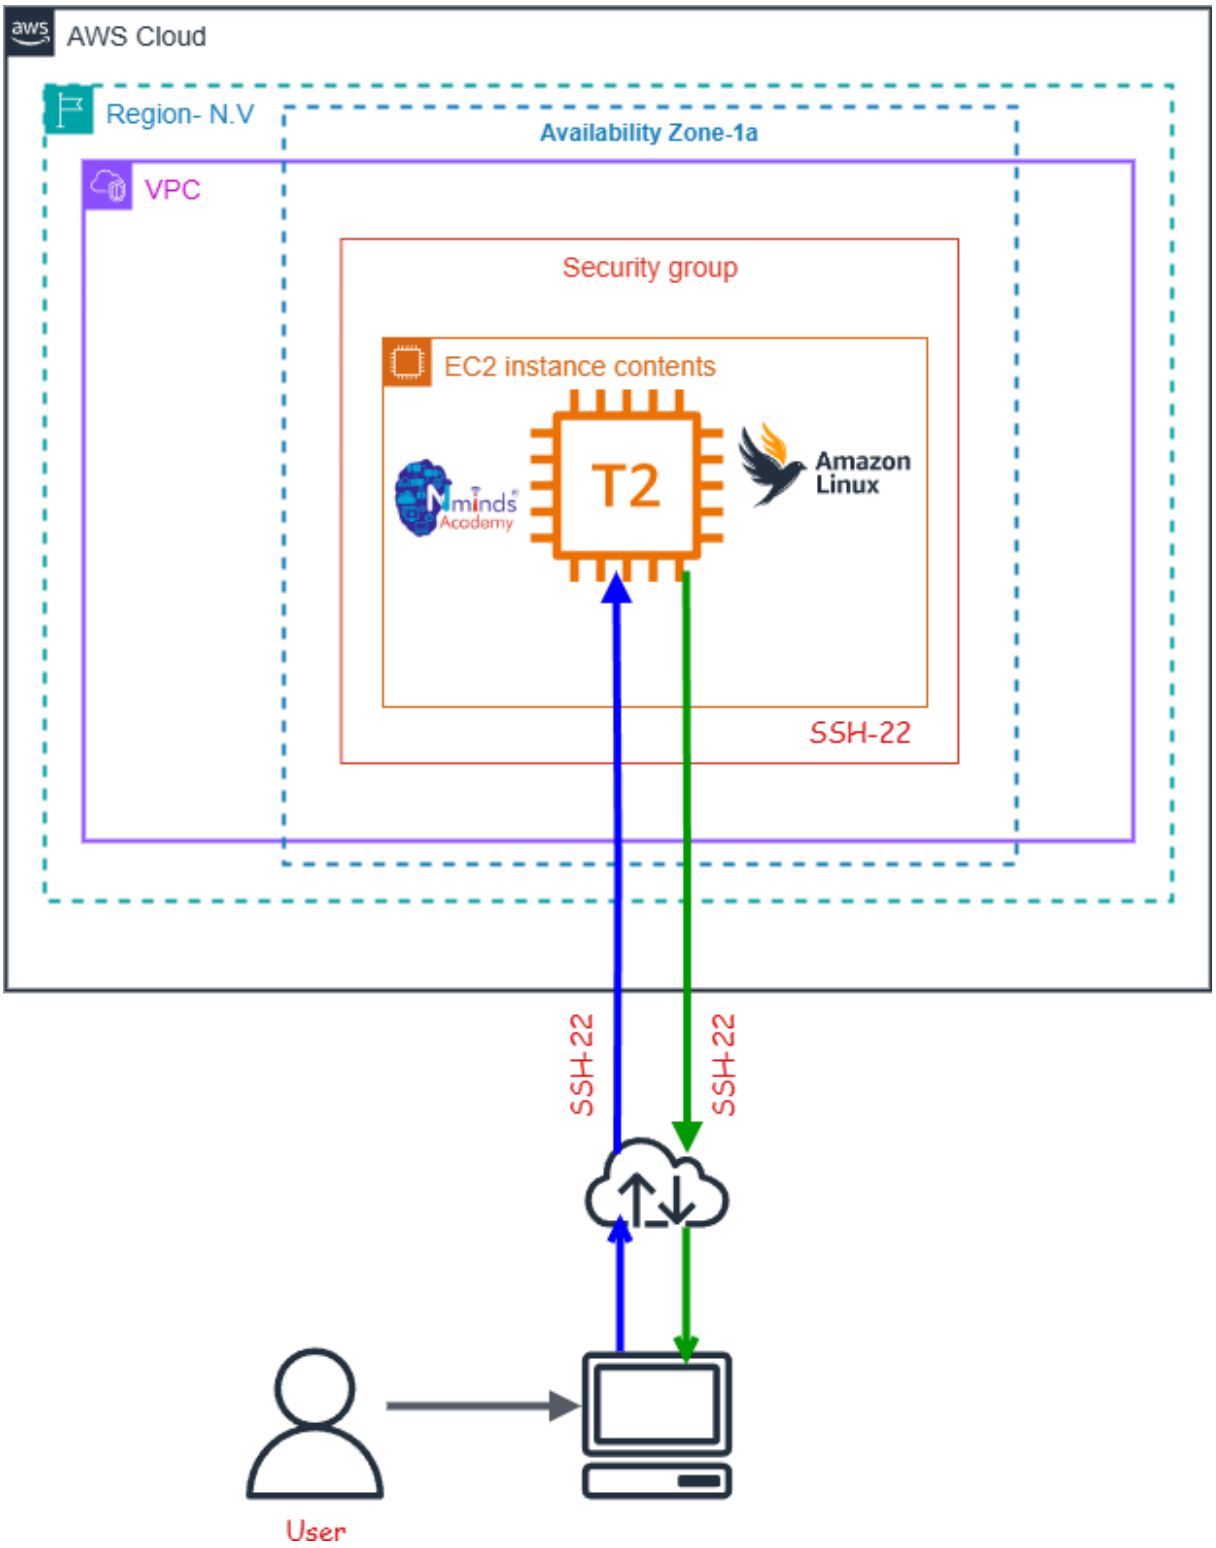

Execution Tasks:

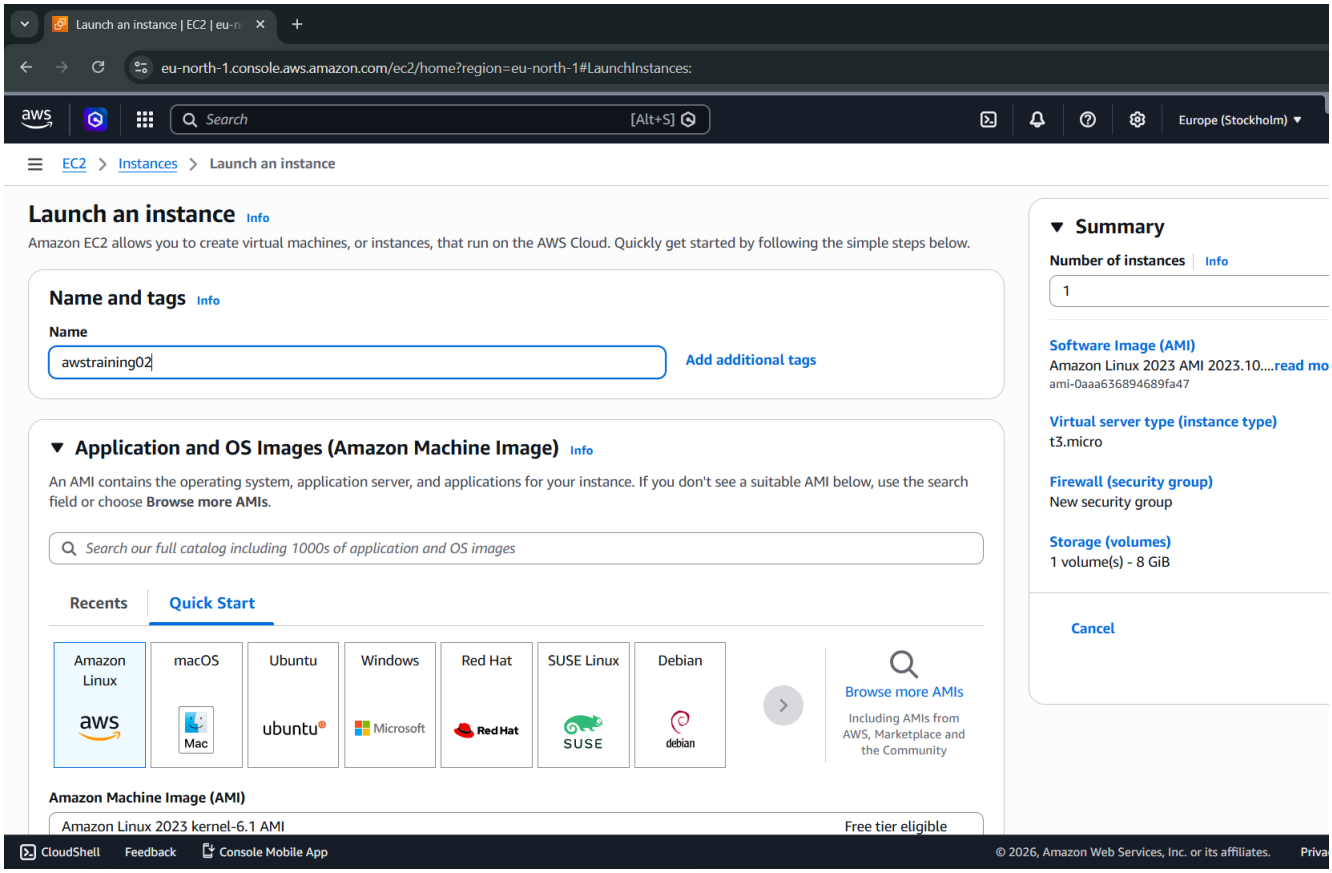
Launch an instance | EC2 | eu-n
eu-north-1.console.aws.amazon.com/ec2/home?region=eu-north-1#LaunchInstances:
aws
Search
[Alt+S]
Europe (Stockholm)
EC2 > Instances > Launch an instance
Launch an instance Info
Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.
Name and tags Info
Name
awstraining02
Add additional tags
Application and OS Images (Amazon Machine Image) Info
An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose Browse more AMIs.
Search our full catalog including 1000s of application and OS images
Recents
Quick Start
Amazon Linux
macOS
Ubuntu
Windows
Red Hat
SUSE Linux
Debian
Browse more AMIs
Including AMIs from AWS, Marketplace and the Community
Amazon Machine Image (AMI)
Amazon Linux 2023 kernel-6.1 AMI
Free tier eligible
Summary
Number of instances Info
1
Software Image (AMI)
Amazon Linux 2023 AMI 2023.10....read mo
ami-0aaa636894689fa47
Virtual server type (instance type)
t3.micro
Firewall (security group)
New security group
Storage (volumes)
1 volume(s) - 8 GiB
Cancel
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

5. Configure Apache Web Server on Linux Instance in AWS

Maha Keshav P

CSE-Artificial Intelligence & Machine Learning,

Sri Eshwar College of Engineering,

Coimbatore.

Objective

EC2 (Elastic Compute Cloud) is a core service provided by Amazon Web Services (AWS) that enables users to rent virtual servers in the cloud to run applications, store data, or handle computational workloads.

An EC2 Linux instance is a virtual machine running the Linux operating system on Amazon Web Services (AWS) EC2 (Elastic Compute Cloud). This allows you to run Windows-based applications, manage Windows Server configurations, and use various Microsoft software (like SQL Server, Apache,FileServer etc.) in the cloud without having to manage physical hardware.

Use Cases for EC2 Linux Instances:

- Web and Application Hosting: Run Apache web servers or other Linux-based web applications in the cloud.
- Database Servers: Host SQL Server databases with EC2 Linux instances, using SSH or EC2 for more control.
- Remote Desktop Applications: Set up SSH (Remote Desktop Services) for remote access to Linux desktops in the cloud.
- Development and Testing: Create development environments with linux OS to test php,MySql or other Linux-based applications.

Used Services in AWS

Amazon EC2

Used Services in Linux Server

Apache Webserver

Topology

How to Configure the Apache web server in Linux Server with AWS EC2

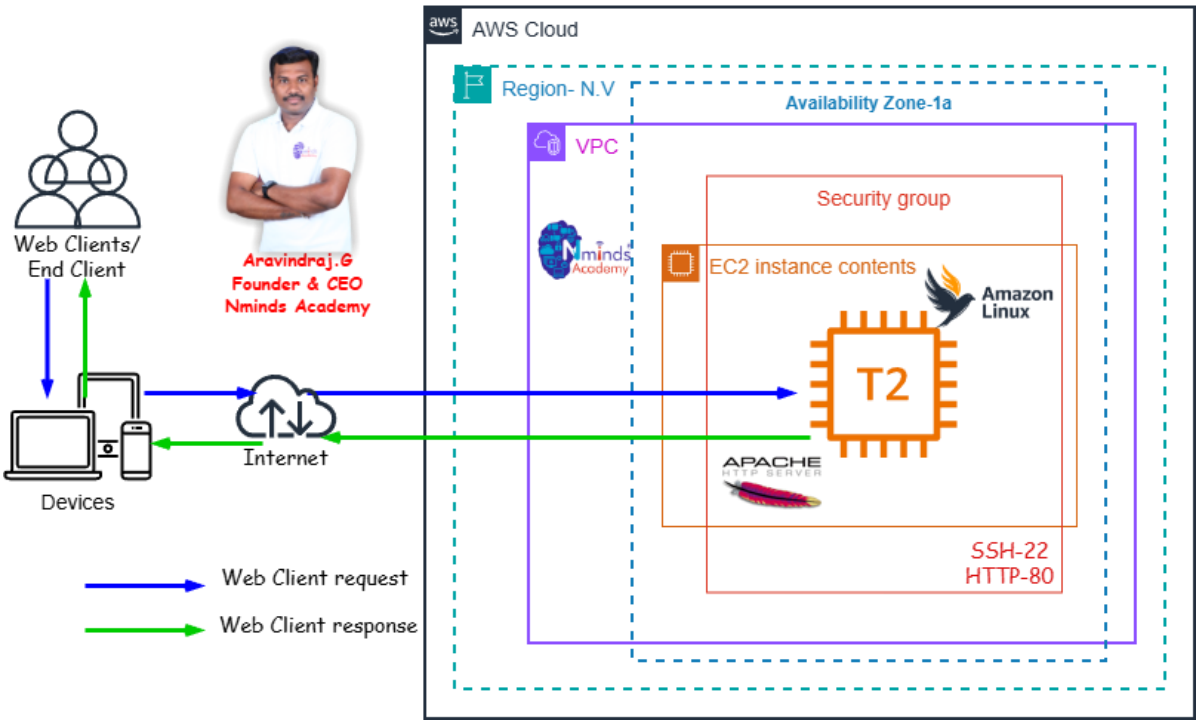

Execution Tasks:

```
root@ip-172-31-26-138:~
================================================================================================================
 Package                         Architecture       Version                                Repository          Size
================================================================================================================
Installing:
 httpd                           x86_64             2.4.66-1.amzn2023.0.1                  amazonlinux          47 k
Installing dependencies:
 apr                             x86_64             1.7.5-1.amzn2023.0.4                   amazonlinux         129 k
 apr-util                        x86_64             1.6.3-1.amzn2023.0.2                   amazonlinux          97 k
 apr-util-lmdb                   x86_64             1.6.3-1.amzn2023.0.2                   amazonlinux          13 k
 generic-logos-httpd             noarch             18.0.0-12.amzn2023.0.3                 amazonlinux          19 k
 httpd-core                      x86_64             2.4.66-1.amzn2023.0.1                  amazonlinux         1.4 M
 httpd-filesystem                noarch             2.4.66-1.amzn2023.0.1                  amazonlinux          13 k
 httpd-tools                     x86_64             2.4.66-1.amzn2023.0.1                  amazonlinux          81 k
 libbrotli                       x86_64             1.0.9-4.amzn2023.0.2                   amazonlinux         315 k
 mailcap                         noarch             2.1.49-3.amzn2023.0.3                  amazonlinux          33 k
Installing weak dependencies:
 apr-util-openssl                x86_64             1.6.3-1.amzn2023.0.2                   amazonlinux          15 k
 mod_http2                       x86_64             2.0.27-1.amzn2023.0.3                  amazonlinux         166 k
 mod_lua                         x86_64             2.4.66-1.amzn2023.0.1                  amazonlinux          60 k

Transaction Summary
================================================================================================================
Install  13 Packages

Total download size: 2.4 M
Installed size: 6.9 M
Downloading Packages:
(1/13): apr-util-lmdb-1.6.3-1.amzn2023.0.2.x86_64.rpm                          361 kB/s |  13 kB     00:00
(2/13): apr-1.7.5-1.amzn2023.0.4.x86_64.rpm                                    3.2 MB/s | 129 kB     00:00
(3/13): apr-util-1.6.3-1.amzn2023.0.2.x86_64.rpm                               2.2 MB/s |  97 kB     00:00
```

```
ec2-user@ip-172-31-26-138:~
Microsoft Windows [Version 10.0.26200.7922]
(c) Microsoft Corporation. All rights reserved.

C:\Users\Admin>cd downloads

C:\Users\Admin\Downloads>ssh -i awstraining01.pem ec2-user@13.60.73.136
The authenticity of host '13.60.73.136 (13.60.73.136)' can't be established.
ED25519 key fingerprint is SHA256:sE9ZDPfzJZHSyPI0oXr/XLoSDAX11QY85I8LQO9PRjA.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '13.60.73.136' (ED25519) to the list of known hosts.
   ,     #_
   ~\_  ####_        Amazon Linux 2023
  ~~  \_#####\
  ~~     \###|
  ~~       \#/ ___   https://aws.amazon.com/linux/amazon-linux-2023
   ~~       V~' '->
    ~~~         /
      ~~._.   _/
         _/ _/
       _/m/'
[ec2-user@ip-172-31-26-138 ~]$
```

```
root@ip-172-31-26-138:~

Complete!
[root@ip-172-31-26-138 ~]# systemctl status httpd
○ httpd.service - The Apache HTTP Server
     Loaded: loaded (/usr/lib/systemd/system/httpd.service; disabled; preset: disabled)
     Active: inactive (dead)
       Docs: man:httpd.service(8)
[root@ip-172-31-26-138 ~]# syatemctl start httpd
-bash: syatemctl: command not found
[root@ip-172-31-26-138 ~]# systemctl start httpd
[root@ip-172-31-26-138 ~]# systemctl status httpd
● httpd.service - The Apache HTTP Server
     Loaded: loaded (/usr/lib/systemd/system/httpd.service; disabled; preset: disabled)
     Active: active (running) since Sat 2026-03-14 04:30:48 UTC; 21s ago
       Docs: man:httpd.service(8)
   Main PID: 25478 (httpd)
     Status: "Total requests: 0; Idle/Busy workers 100/0;Requests/sec: 0; Bytes served/sec:   0 B/sec"
      Tasks: 177 (limit: 1067)
     Memory: 13.4M
        CPU: 80ms
     CGroup: /system.slice/httpd.service
             ├─25478 /usr/sbin/httpd -DFOREGROUND
             ├─25479 /usr/sbin/httpd -DFOREGROUND
             ├─25480 /usr/sbin/httpd -DFOREGROUND
             ├─25481 /usr/sbin/httpd -DFOREGROUND
             └─25486 /usr/sbin/httpd -DFOREGROUND

Mar 14 04:30:48 ip-172-31-26-138.eu-north-1.compute.internal systemd[1]: Starting httpd.service - The Apache HTTP Serve
Mar 14 04:30:48 ip-172-31-26-138.eu-north-1.compute.internal systemd[1]: Started httpd.service - The Apache HTTP Server.
Mar 14 04:30:48 ip-172-31-26-138.eu-north-1.compute.internal httpd[25478]: Server configured, listening on: port 80
```

Instances | EC2 | eu-north-1 | It works! Apache httpd

Not secure 13.60.73.136

It works!

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

6. Configure Elastic IP Address to Windows Web Server in AWS

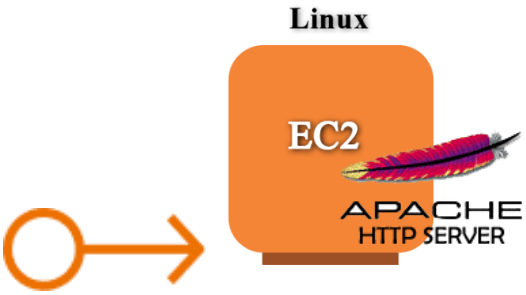

Maha Keshav P

CSE-Artificial Intelligence & Machine Learning,

Sri Eshwar College of Engineering,

Coimbatore

Objective

An Elastic IP (EIP) in AWS is a static, public IP address designed for dynamic cloud computing. It is associated with your AWS account and can be quickly associated or disassociated with any EC2 instance in your account. This feature is particularly useful when you need to maintain a consistent IP address for your resources, even when you stop and start EC2 instances.

Common Use Cases for Elastic IP:

1. Highly Available Applications:
    - If you're running a service that requires high availability, you can use Elastic IPs to quickly reassign a static IP to a new instance if your primary instance fails, ensuring minimal downtime.
2. Web Servers:
    - If you host a website and need to ensure the IP address remains the same even if the underlying EC2 instance is restarted, an Elastic IP helps maintain this consistency.
3. Disaster Recovery:
    - Elastic IPs are useful for disaster recovery scenarios. If one instance goes down, you can quickly associate the EIP with a backup instance to ensure services are still accessible.

Best Practices:

- Use Elastic IPs only when necessary: Since they come with associated costs when unused, it's a good practice to release EIPs that are no longer required.
- Move IPs during instance failure: Instead of keeping an EIP permanently attached, use it as a failover method, reassociating it to a new instance when needed.
- Monitor EIP Usage: Periodically review your usage to ensure you're not paying for unnecessary Elastic IP addresses.

Topology

How to Configure the Elastic IP Address to Linux Web Server with AWS EC2

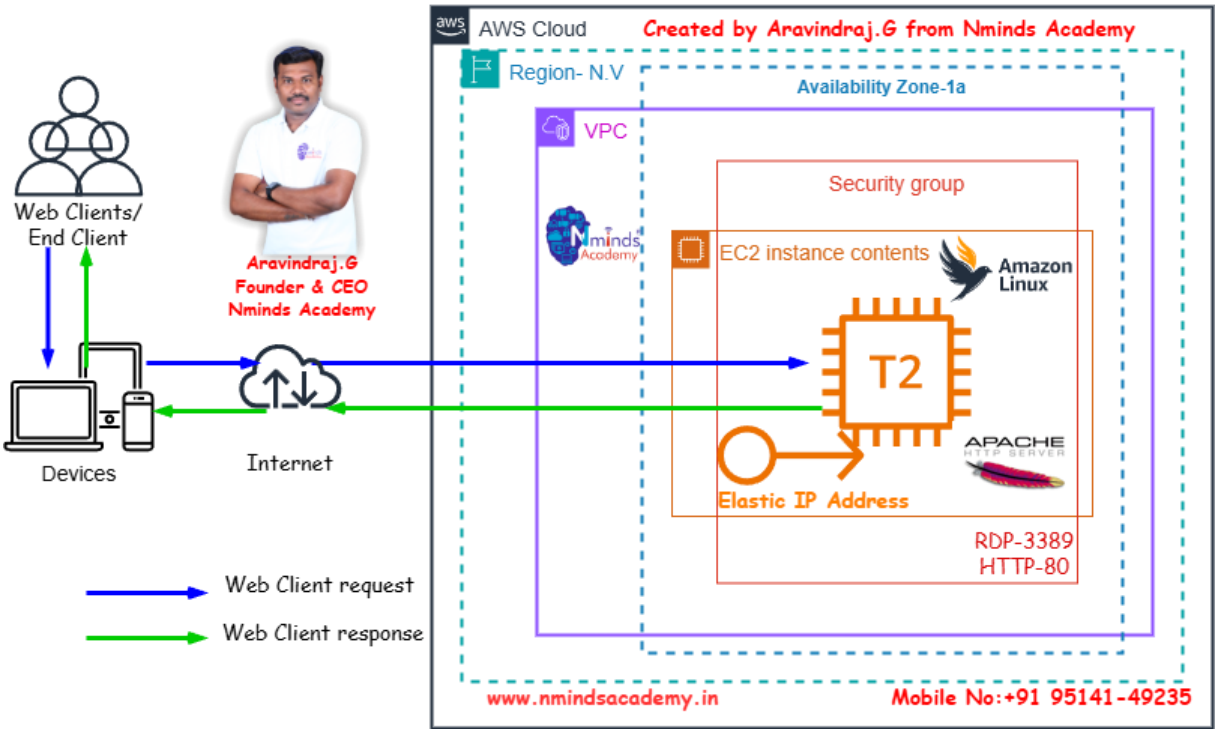

Used Services in AWS

Used Services in Windows Server

Amazon EC2

APACHE HTTP SERVER

Apache Webserver

Amazon Elastic IP Address

Execution Tasks:

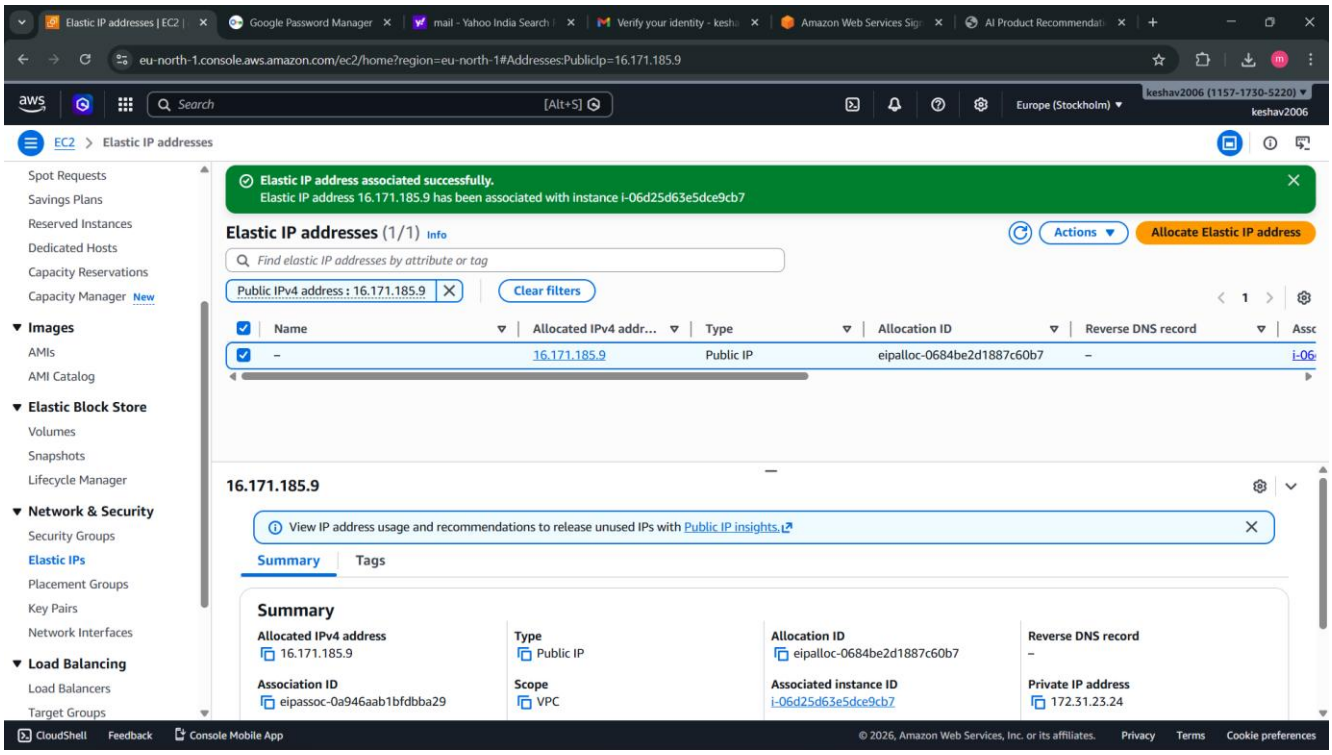

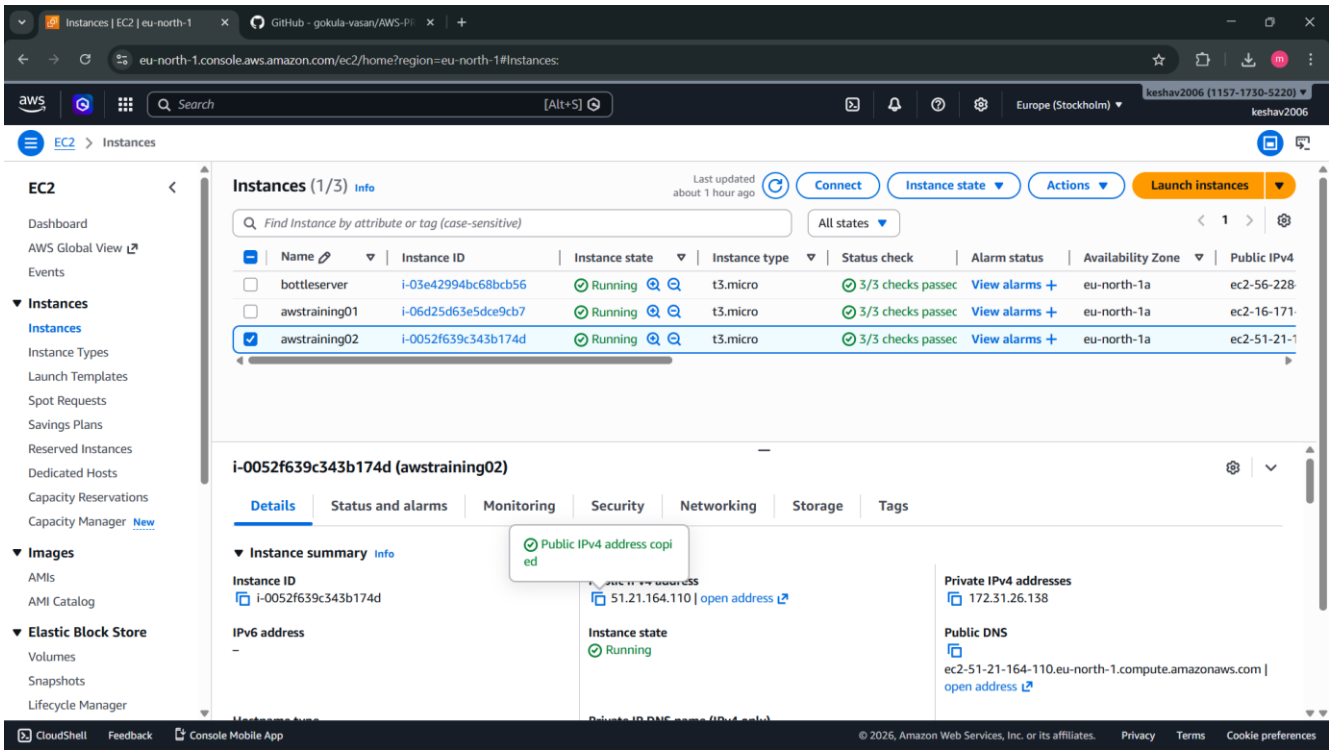

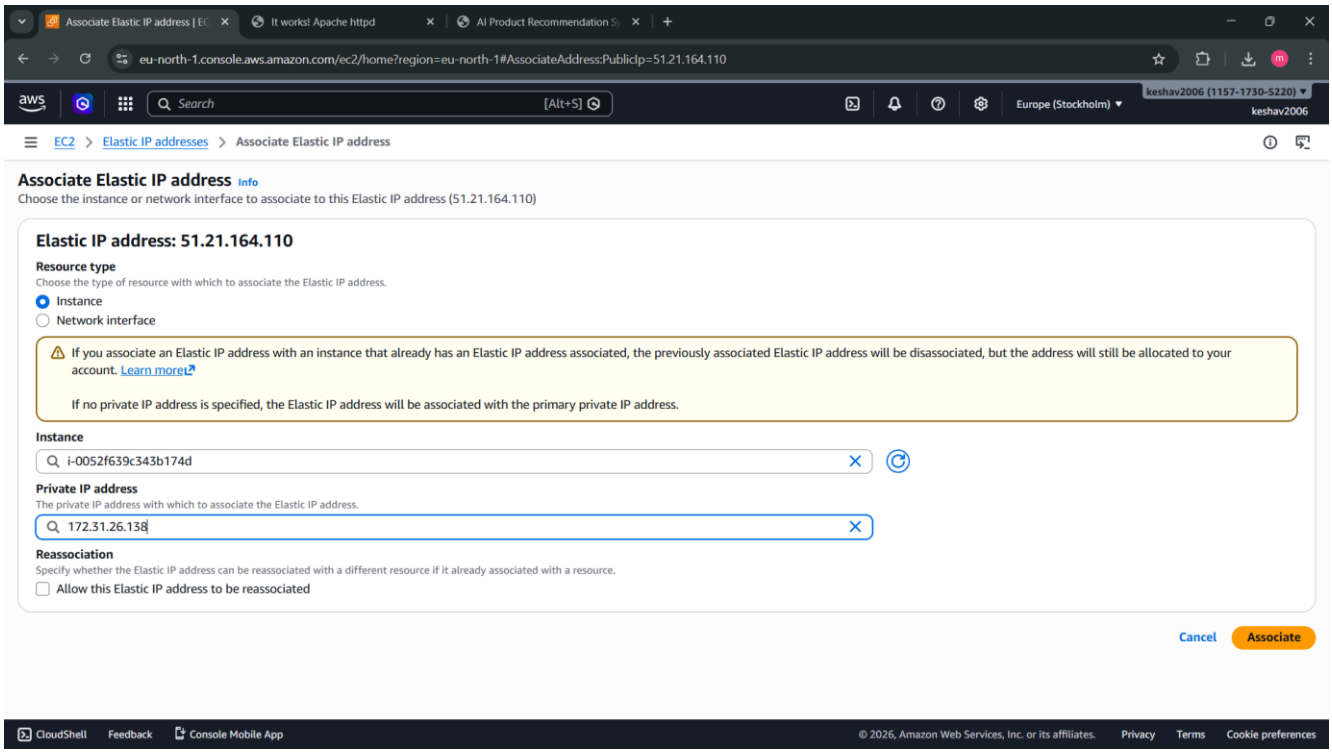
Associate Elastic IP address | EC
It works! Apache httpd
AI Product Recommendation Sy
eu-north-1.console.aws.amazon.com/ec2/home?region=eu-north-1#AssociateAddress:PublicIp=51.21.164.110
Search
[Alt+S]
Europe (Stockholm)
keshav2006 (1157-1730-5220)
keshav2006
EC2 > Elastic IP addresses > Associate Elastic IP address
Associate Elastic IP address Info
Choose the instance or network interface to associate to this Elastic IP address (51.21.164.110)
Elastic IP address: 51.21.164.110
Resource type
Choose the type of resource with which to associate the Elastic IP address.
Instance
Network interface
If you associate an Elastic IP address with an instance that already has an Elastic IP address associated, the previously associated Elastic IP address will be disassociated, but the address will still be allocated to your account. Learn more
If no private IP address is specified, the Elastic IP address will be associated with the primary private IP address.
Instance
i-0052f639c343b174d
Private IP address
The private IP address with which to associate the Elastic IP address.
172.31.26.138
Reassociation
Specify whether the Elastic IP address can be reassociated with a different resource if it already associated with a resource.
Allow this Elastic IP address to be reassociated
Cancel
Associate
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

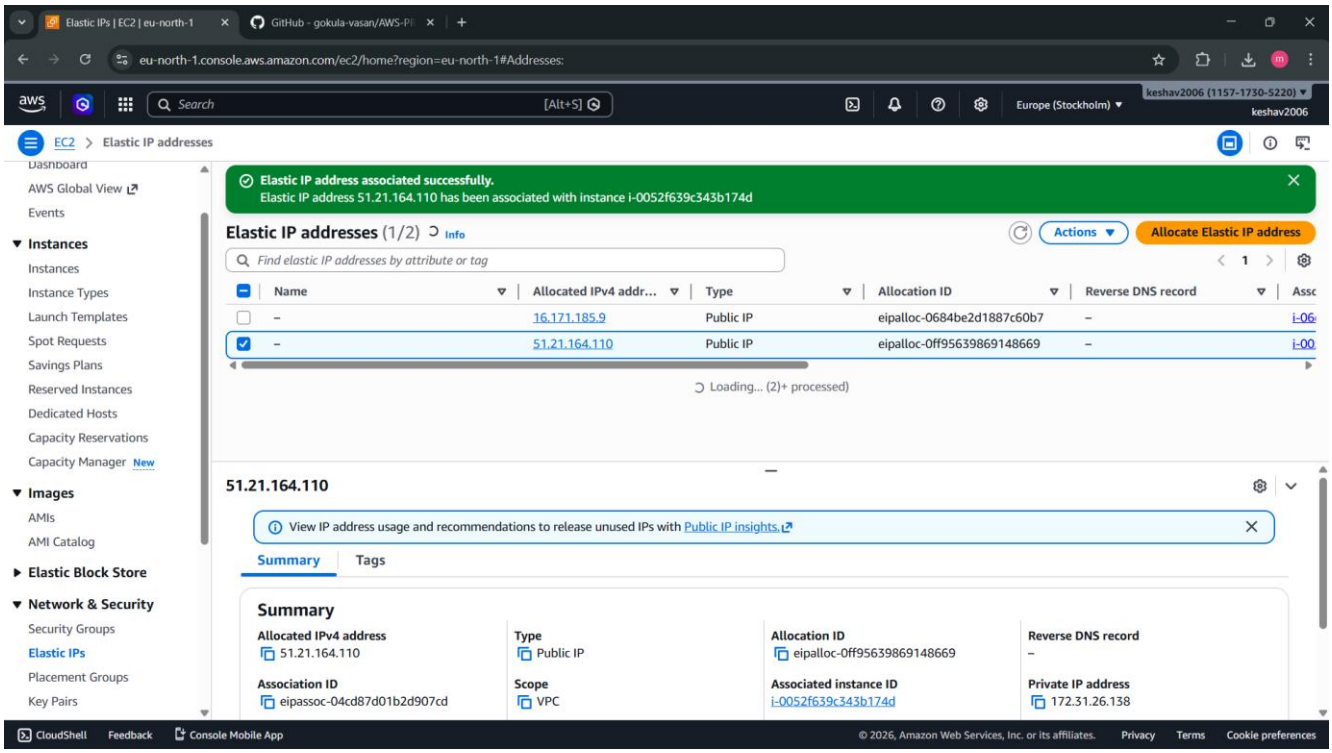
Elastic IPs | EC2 | eu-north-1
GitHub - gokula-vasan/AWS-PI
eu-north-1.console.aws.amazon.com/ec2/home?region=eu-north-1#Addresses:
Search
[Alt+S]
Europe (Stockholm)
keshav2006 (1157-1730-5220)
keshav2006
EC2 > Elastic IP addresses
Dashboard
AWS Global View
Events
Instances
Instances
Instance Types
Launch Templates
Spot Requests
Savings Plans
Reserved Instances
Dedicated Hosts
Capacity Reservations
Capacity Manager New
Images
AMIs
AMI Catalog
Elastic Block Store
Network & Security
Security Groups
Elastic IPs
Placement Groups
Key Pairs
Elastic IP address associated successfully.
Elastic IP address 51.21.164.110 has been associated with instance i-0052f639c343b174d
Elastic IP addresses (1/2) Info
Actions
Allocate Elastic IP address
Find elastic IP addresses by attribute or tag
Name
Allocated IPv4 addr...
Type
Allocation ID
Reverse DNS record
Public IP
eipalloc-0684be2d1887c60b7
16.171.185.9
Public IP
eipalloc-0ff95639869148669
51.21.164.110
Loading... (2)+ processed)
51.21.164.110
View IP address usage and recommendations to release unused IPs with Public IP insights.
Summary
Tags
Summary
Allocated IPv4 address
51.21.164.110
Type
Public IP
Allocation ID
eipalloc-0ff95639869148669
Reverse DNS record
Association ID
eipassoc-04cd87d01b2d907cd
Scope
VPC
Associated instance ID
i-0052f639c343b174d
Private IP address
172.31.26.138
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

7.Configure SFTP to Linux Web Server in AWS

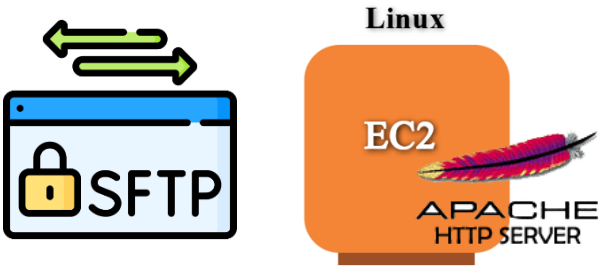

Maha Keshav P

CSE-Artificial Intelligence & Machine Learning,

Sri Eshwar College of Engineering,

Coimbatore.

Objective

EC2 (Elastic Compute Cloud) is a core service provided by Amazon Web Services (AWS) that enables users to rent virtual servers in the cloud to run applications, store data, or handle computational workloads.

Use Cases for EC2 Linux Instances:

- Web and Application Hosting: Run Apache web servers or other Linux-based web applications in the cloud.
- Database Servers: Host SQL Server databases with EC2 Linux instances, using SSH or EC2 for more control.
- Remote Desktop Applications: Set up SSH (Remote Desktop Services) for remote access to Linux desktops in the cloud.
- Development and Testing: Create development environments with linux OS to test php,MySql or other Linux-based applications.

SFTP- Secure File Transfer Protocol

SFTP (Secure File Transfer Protocol) is a secure network protocol that allows users to transfer files over a secure, encrypted connection. It is a more secure alternative to FTP (File Transfer Protocol) and is commonly used to upload, download, and manage files on remote servers.

Here are the key uses and advantages of SFTP:

1. File Transfer: SFTP allows secure transfer of files between a local and a remote computer over a network. It ensures that the data is encrypted during transmission, protecting it from eavesdropping or tampering.
2. File Management: Besides transferring files, SFTP also allows users to perform file management tasks such as renaming, deleting, and moving files on the remote server.
3. Secure Authentication: SFTP uses SSH (Secure Shell) for authentication, which provides a stronger level of security compared to FTP's traditional username/password system. It often supports public key authentication, adding an extra layer of security.
4. Encryption: The main advantage of SFTP over FTP is encryption. All data sent over SFTP is encrypted, ensuring that sensitive information (like passwords and files) is protected during transmission.

5. Firewall-Friendly: SFTP operates over a single port (usually port 22), making it easier to use behind firewalls and NAT (Network Address Translation) devices compared to FTP, which uses multiple ports.

Topology

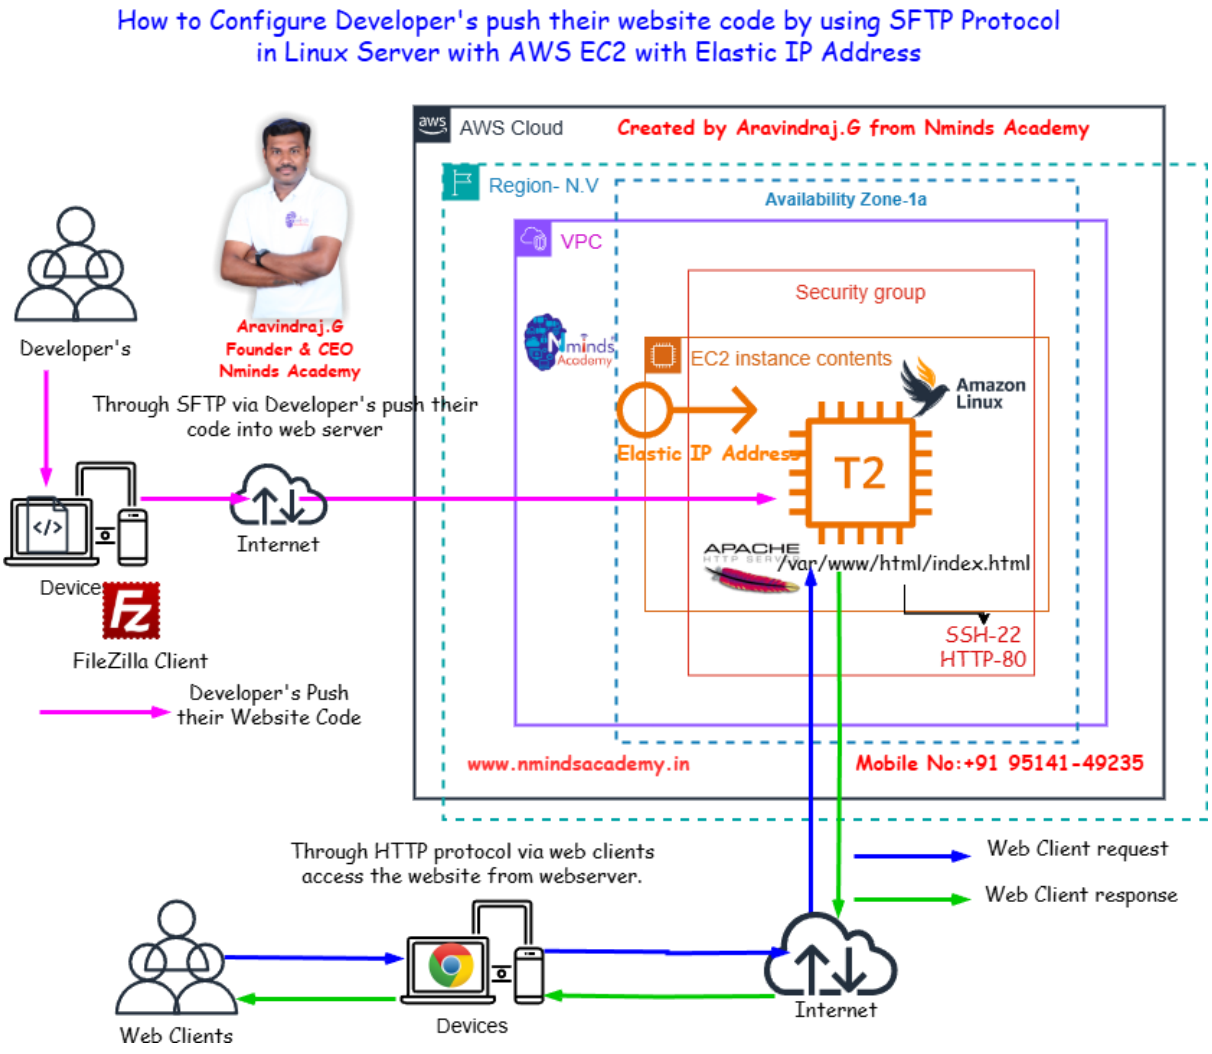

Used Services in AWS

Used Services in Windows Server

Amazon EC2

APACHE HTTP SERVER

Apache Webserver

Amazon Elastic IP Address



Execution Tasks:

```
root@ip-172-31-26-138:~
#       $OpenBSD: sshd_config,v 1.104 2021/07/02 05:11:21 dtucker Exp $

# This is the sshd server system-wide configuration file.  See
# sshd_config(5) for more information.

# This sshd was compiled with PATH=/usr/local/bin:/usr/bin:/usr/local/sbin:/usr/sbin

# The strategy used for options in the default sshd_config shipped with
# OpenSSH is to specify options with their default value where
# possible, but leave them commented.  Uncommented options override the
# default value.

# To modify the system-wide sshd configuration, create a  *.conf  file under
#  /etc/ssh/sshd_config.d/  which will be automatically included below
Include /etc/ssh/sshd_config.d/*.conf

# If you want to change the port on a SELinux system, you have to tell
# SELinux about this change.
# semanage port -a -t ssh_port_t -p tcp #PORTNUMBER
#
#Port 22
#AddressFamily any
#ListenAddress 0.0.0.0
#ListenAddress ::

#HostKey /etc/ssh/ssh_host_rsa_key
#HostKey /etc/ssh/ssh_host_ecdsa_key
#HostKey /etc/ssh/ssh_host_ed25519_key

"/etc/ssh/sshd_config" 133L, 3854B                                    1,1           Top
```
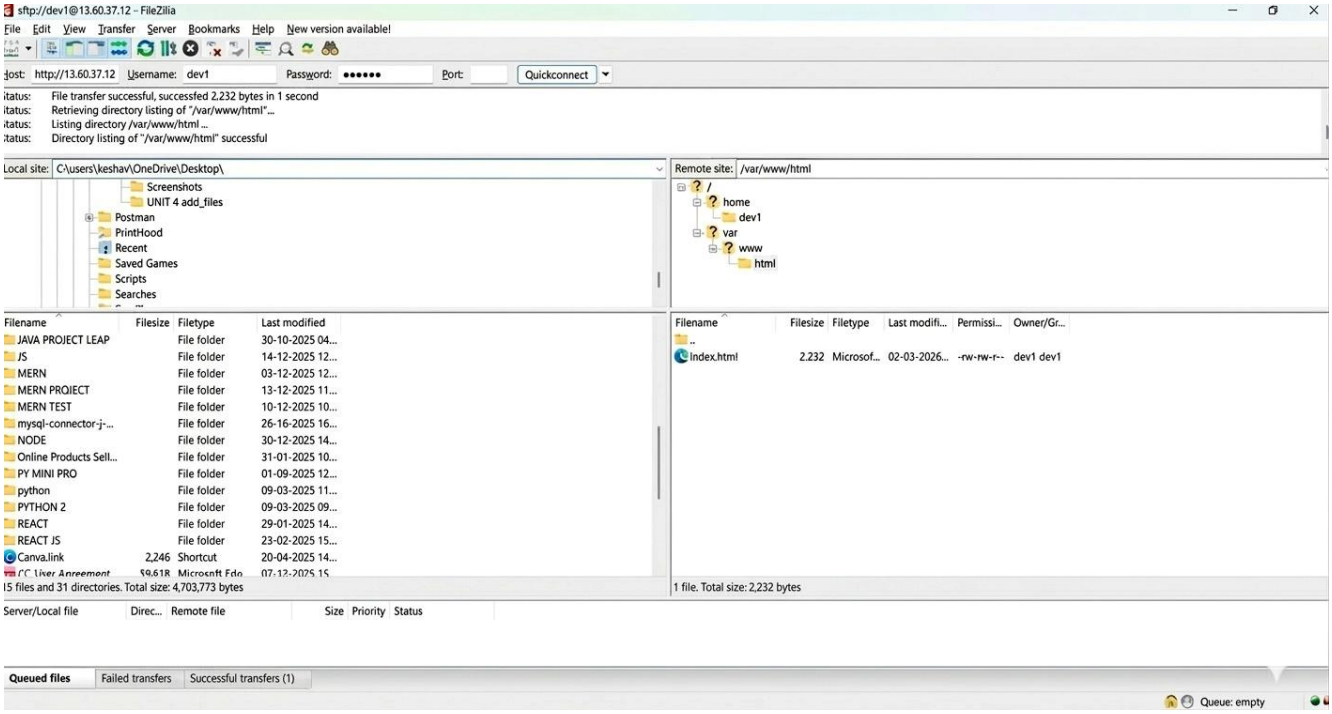
```
ec2-instance-connect:x:993:
stapusr:x:156:
stapsys:x:157:
stapdev:x:158:
stapunpriv:x:159:stapunpriv
rpcuser:x:29:
tcpdump:x:72:
screen:x:84:
ec2-user:x:1000:
apache:x:48:
dev1deeps:x:1001:
dev2maha:x:1002:
secondbench:x:1003:dev1deeps,dev2maha
[root@ip-172-31-26-138 ~]# passwd root
Changing password for user root.
New password:
Retype new password:
passwd: all authentication tokens updated successfully.
[root@ip-172-31-26-138 ~]# passwd ec2-user
Changing password for user ec2-user.
New password:
Retype new password:
passwd: all authentication tokens updated successfully.
[root@ip-172-31-26-138 ~]# passwd dev1deeps
Changing password for user dev1deeps.
New password:
Retype new password:
passwd: all authentication tokens updated successfully.
[root@ip-172-31-26-138 ~]# passwd dev2maha
Changing password for user dev2maha.
```