

香港中文大學(深圳)
The Chinese University of Hong Kong, Shenzhen

HighEr-Resolution Network for Image Demosaicing and Enhancing

Kangfu Mei¹, Juncheng Li², Jiajie Zhang³, Haoyu Wu¹, Jie Li¹, Rui Huang¹⁴

¹ The Chinese University of Hong Kong, Shenzhen, ² East China Normal University

³Kuaishou Technology, ⁴Shenzhen Institute of Artificial Intelligence and Robotics for Society



Problem and Contribution

Goal: Learn to restore RGB images generated by DSLR from unprocessed-RAW images generated by smartphones (AIM2019 RAW to RGB Challenge).




Key Contributions:

- We propose a HighEr-Resolution Network (HERN), which can fully learning local and global information in high-resolution image patches.
- We propose a progressive training method to solve the instability issue and accelerate model convergence.
- Our HERN won second place on track 1 (Fidelity) and won first place on track 2 (Perceptual) in the AIM2019 RAW to RGB Mapping Challenge.

Method

Network Architecture: The proposed HERN is a dual-path network, which consists of a global information path and a local information path.

- The global Information Path in green is based on RCAN but without attention unit. Besides, the autoencoder mechanism is used before the input features and after output features to enlarge the receptive field as well as reduce computational complexity.
- The Local Information Path in yellow is based on MSRN. It aims to extract local information such as textures and edges that destroyed in the encoder downsampling of the global information path.
- Further, a Pyramid Full-Image Encoder that extracts high-level characteristics in fix-resolution (192*192 px) is used to regularize local artifacts, which may be caused by resolution un-consistent.

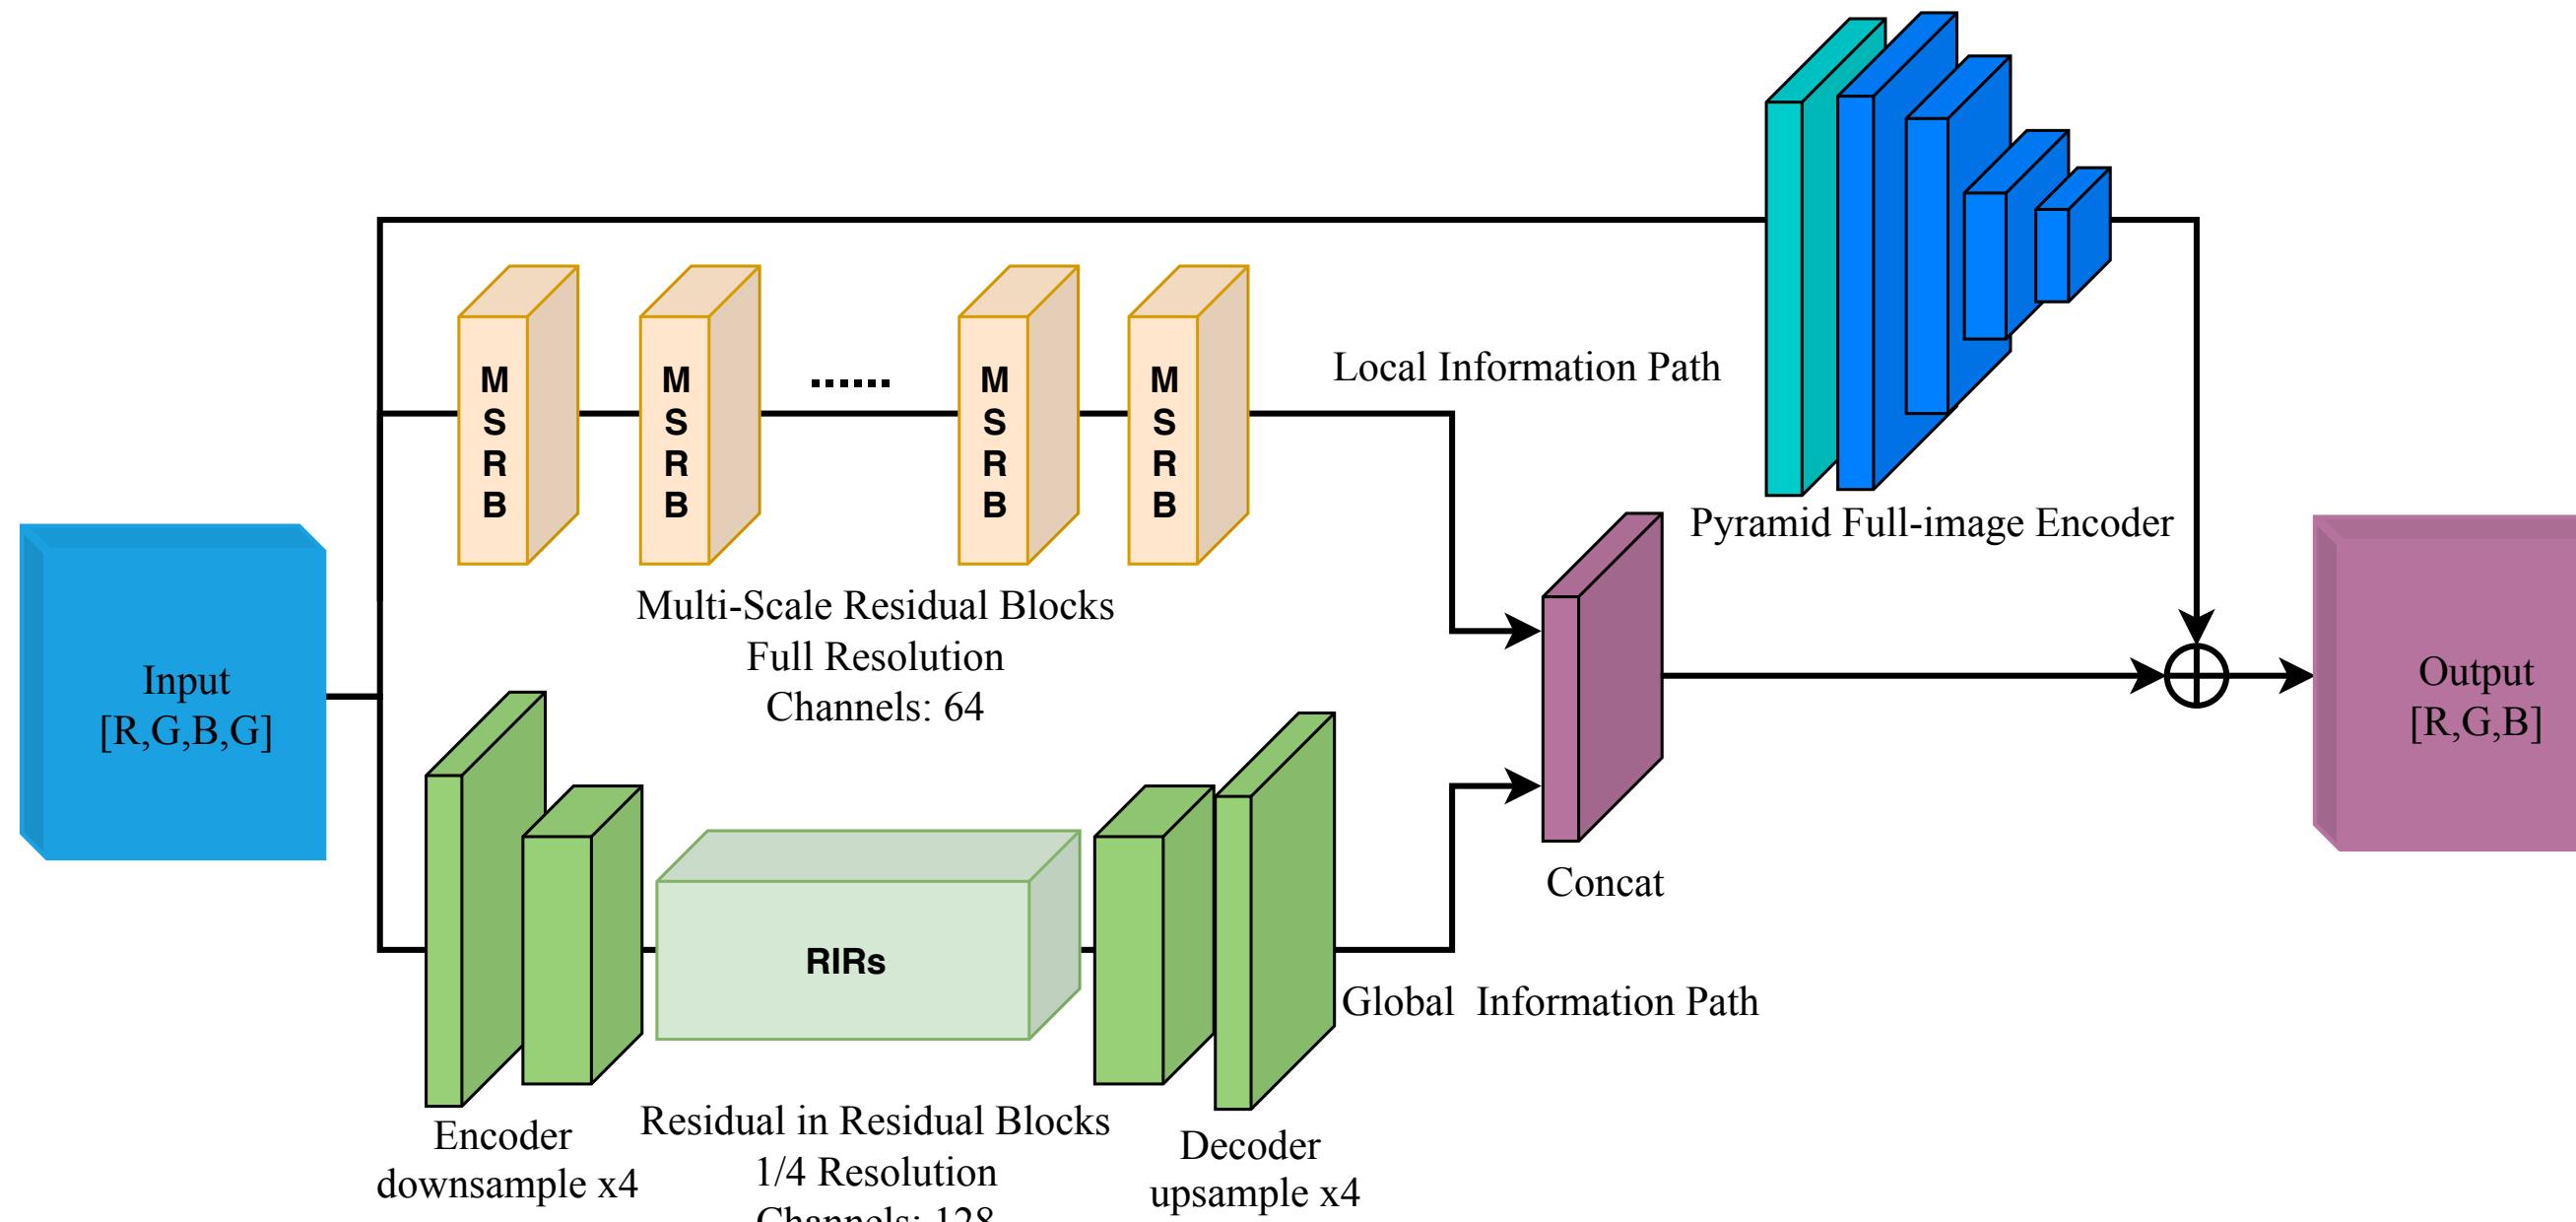


Loss function:

$$\mathcal{L}_1(\theta) = \frac{1}{N} \sum_{n=1}^N |\Phi(x_i; \theta) - y_i|, \quad (1)$$


where Φ is the network function and θ represents the learnable parameters, N is the batch size, and x_i, y_i are the patch pairs of RAW image and RGB image.

Experiments & Results

Provided Datasets for Training: The provided datasets ZRR for training contains 89000 train image patches of size 224x224 pixels. Some samples is visualized at below:

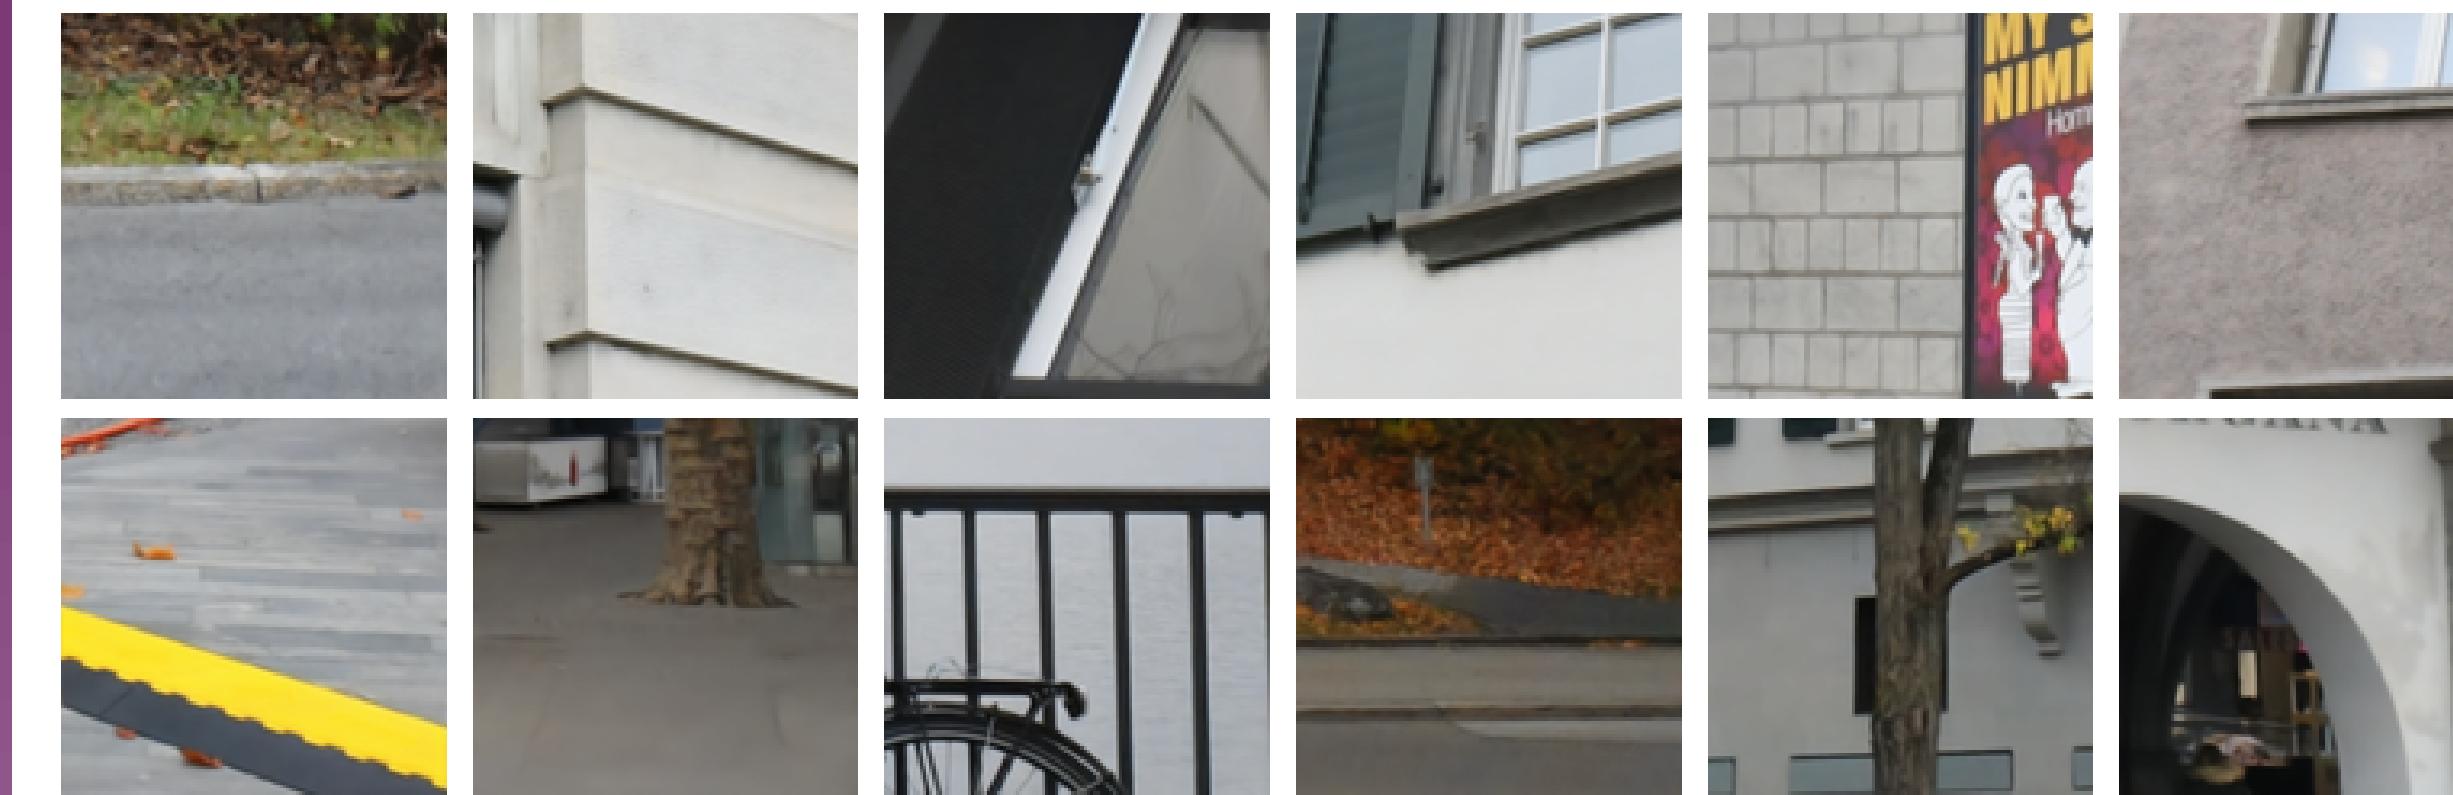

GPU Memory Usage in Differen Resolution: The GPU memory usage will increases when the resolution of image patches increase. Therefore, it is unrealistic to train state-of-the-art methods on one GPU card with image patches of 224 * 224 pixels

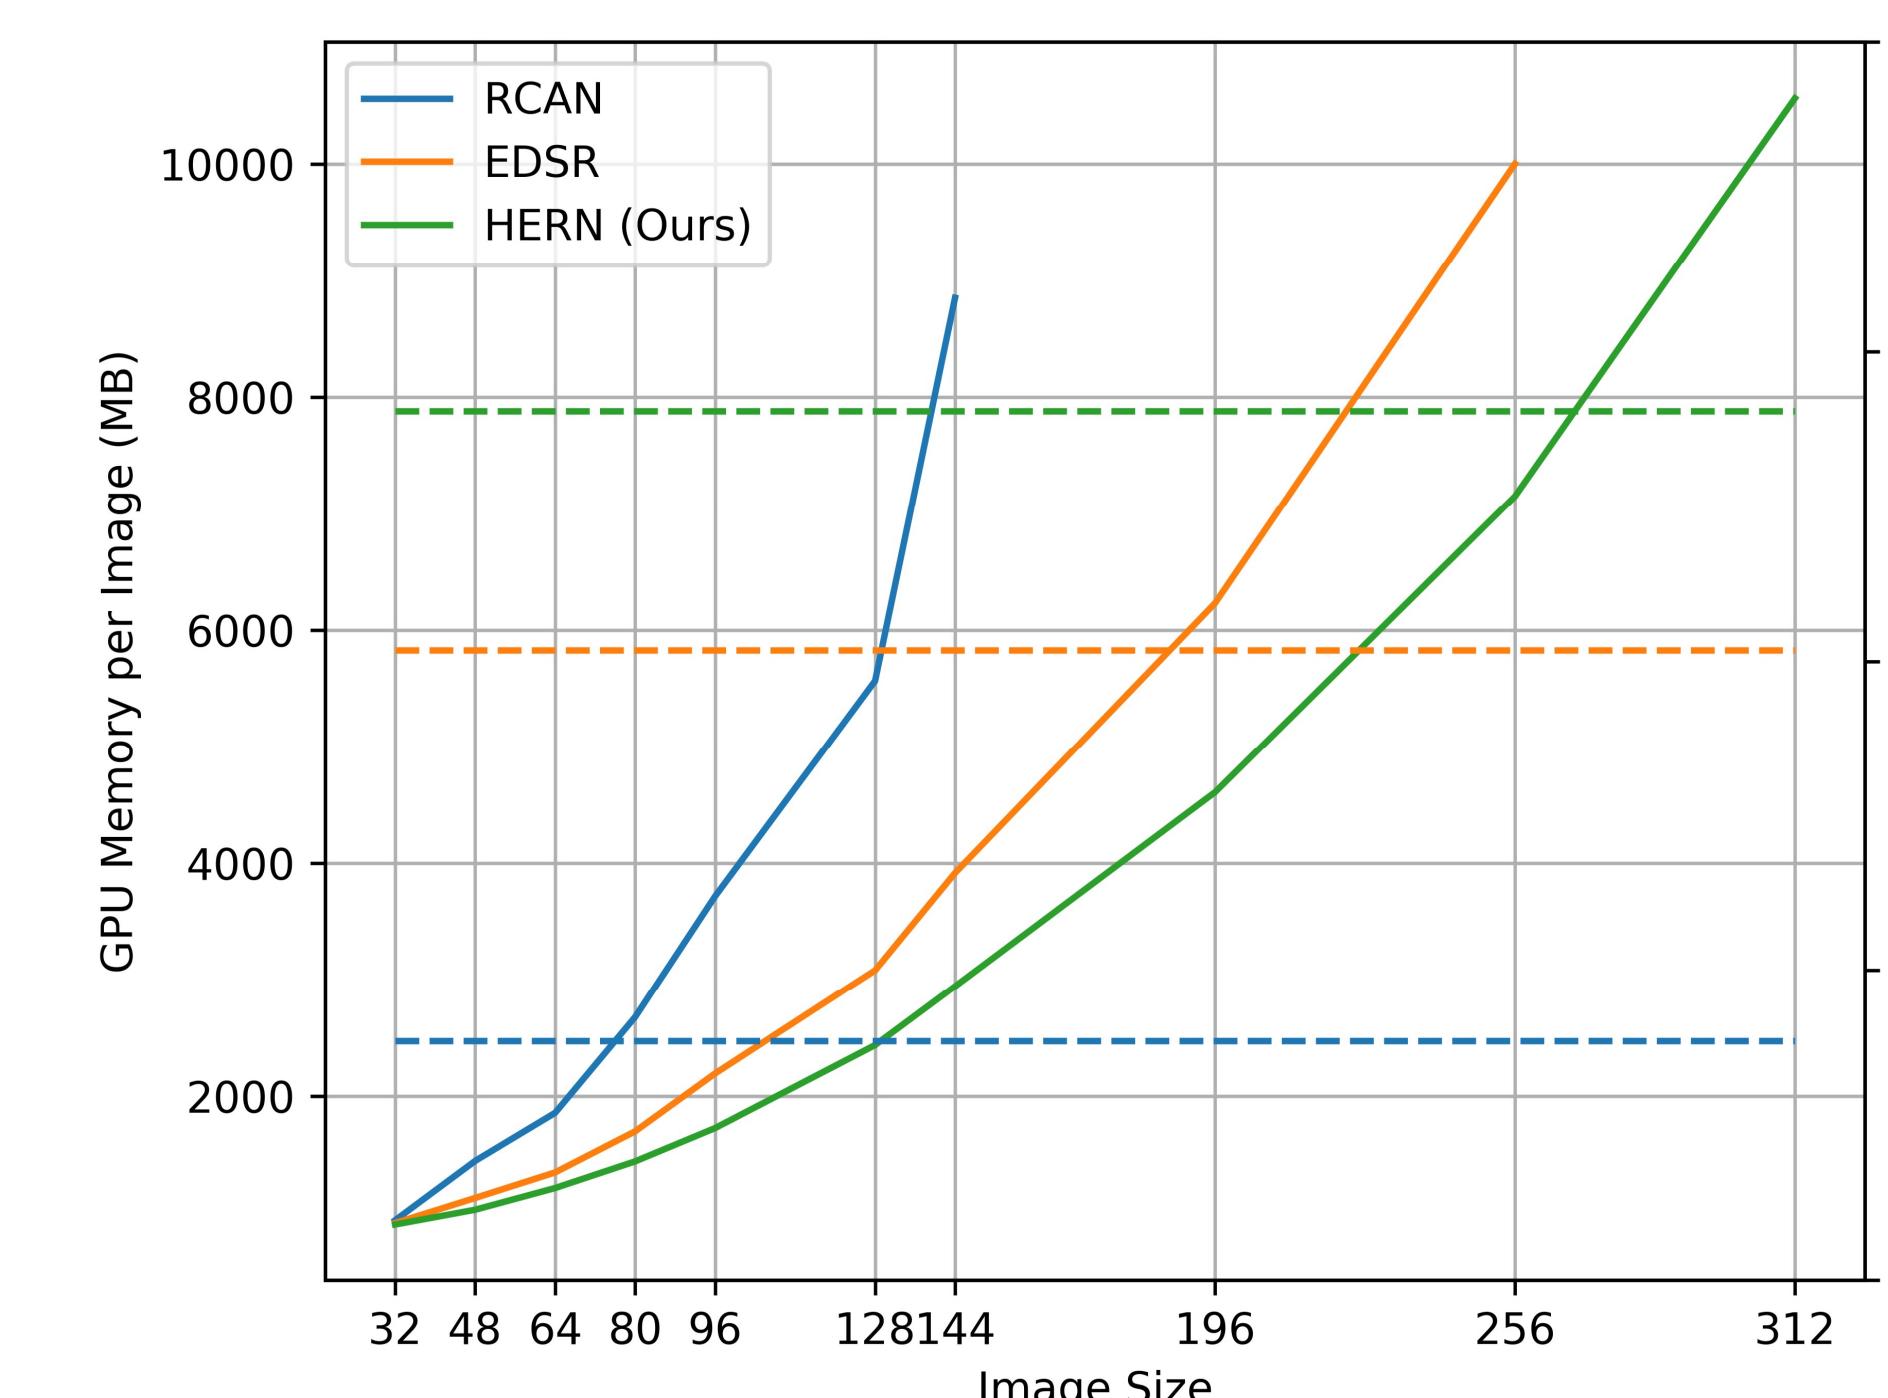

Visual Comparison of Reconstructed Images Trained Using Different Input Patch Sizes



Abalation Study on Using Different Ensemble Strategy During Testing

Epoch	Self-Ensemble	Epoch-Ensemble	PSNR (dB) / SSIM
#113			23.105 / 0.810
#113	✓		23.201 / 0.818
#115			23.162 / 0.811
#115	✓		23.254 / 0.818
#113 & #115	✓	✓	23.304 / 0.818

Scan the QR-Code:
Github & Preprint & Contact Us

