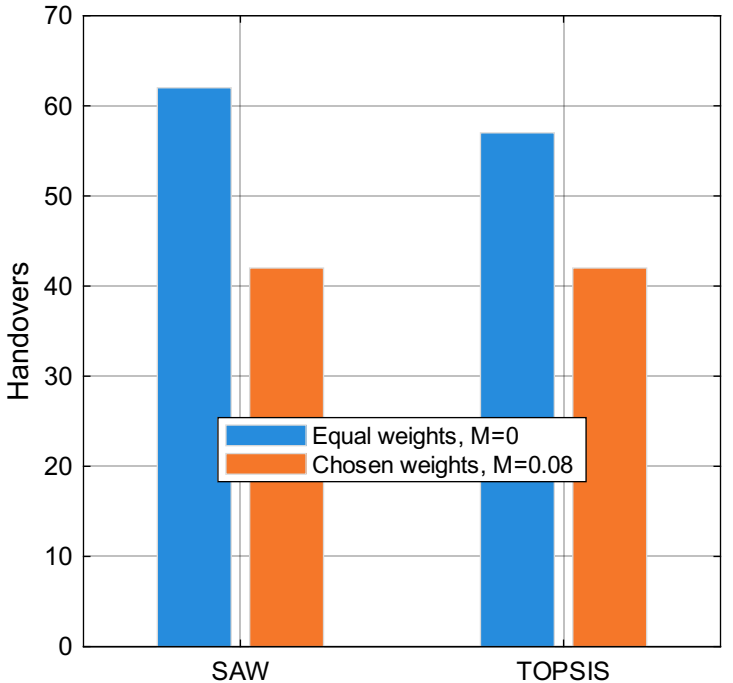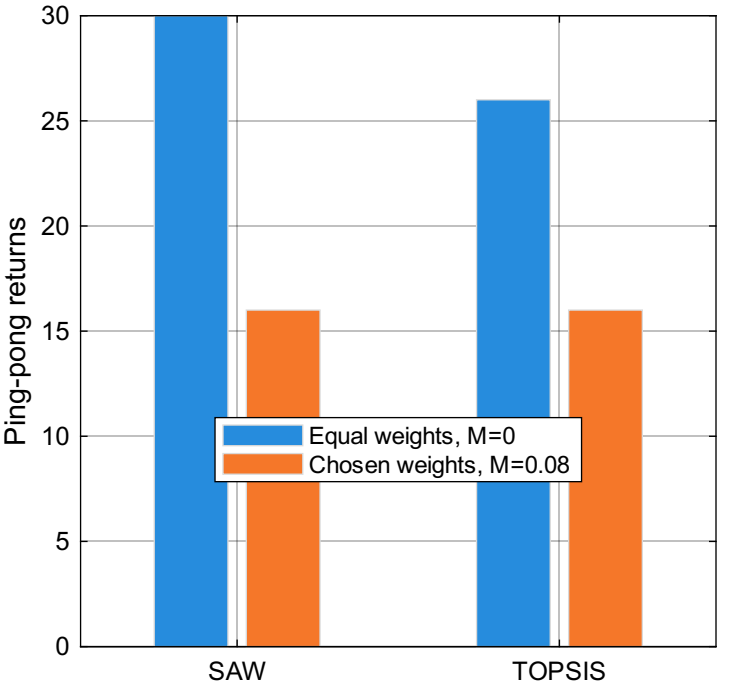Baseline versus investigator-selected configuration