

Installing the H2O package manually on Windows

If the `install.packages("h2o")` code does not work, then follow the steps below to manually install the package.

Step 1:

Check your version of R: Run `version` in your RStudio console. Look for the version number:

```
> version

platform      x86_64-w64-mingw32
arch           x86_64
os             mingw32
crt            ucrt
system        x86_64, mingw32
status
major          4
minor          4.1
year           2024
month          06
day            14
svn rev        86737
language       R
version.string  R version 4.4.1 (2024-06-14 ucrt)
nickname       Race for Your Life
```

Step 2:

Check if Rtools is installed on your PC: look under [Control Panel](#) → [Programs](#) → [Uninstall a program](#). Look for Rtools and the version. It must match up with your R version (e.g. Rtools 4.4 for the above screenshot). If the version is not correct or it is not installed, then download the correct version here: <https://cran.r-project.org/bin/windows/Rtools/>. Select the version that matches your R, then download the installer:

Installing Rtools45

Rtools is only needed for installation of R packages from source (those that need compilation of C/C++ or Fortran code) or building R from source. R can be installed from the R binary installer and by default will install binary versions of CRAN packages, which does not require Rtools45.

Moreover, online build services are available to check and build R packages for Windows, for which again one does not need to install Rtools45 locally. The [Winbuilder](#) check service uses identical setup as the CRAN incoming packages checks and has already all CRAN and Bioconductor packages pre-installed.

Rtools45 may be installed from the [Rtools45 installer](#) or [64-bit ARM Rtools45 installer](#). It is recommended to use the defaults, including the default installation location of `C:\rtools45`.

Once that is installed, go to the next step.

Step 3:

Download the H2O package file here: <https://cran.r-project.org/web/packages/h2o/index.html>. Scroll down for downloads and download the `h2o_3.44.0.3.tar.gz` file anywhere on your PC:

Downloads:

Package source: [h2o_3.44.0.3.tar.gz](#)


Windows binaries: r-devel: [h2o_3.44.0.3.zip](#), r-r

macOS binaries: r-release (arm64): [h2o_3.44.0](#)

Old sources: [h2o archive](#)

Step 4:

In RStudio, go to *Tools* at the top and select *Install packages*. Then change the option of where to install from to *Package Archive File* as per below.

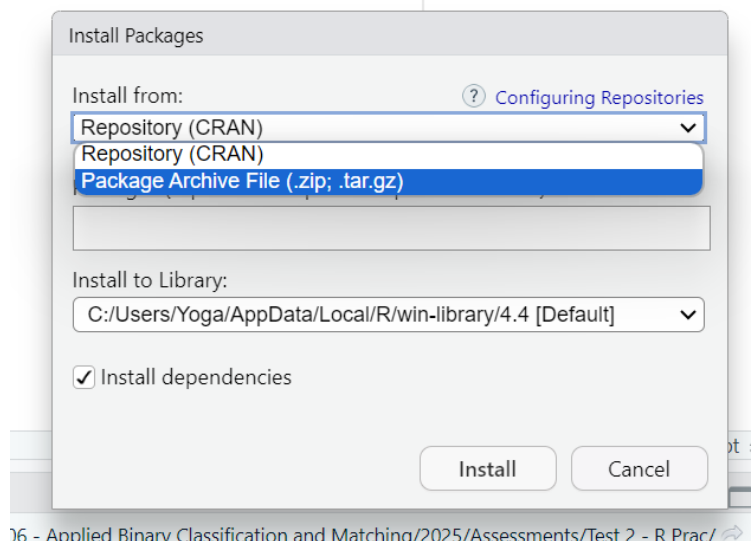

Now direct your laptop to the *tar.gz* file that was downloaded in step 3. Click install. It will take a few minutes. Once installed successfully, you may proceed with loading the package:

```
library(h2o)
```

Then specify which version of Java to use:

```
sys.setenv(JAVA_HOME = "C:\\Program Files\\Java\\jdk-24")
```

Then initiate the cluster.

```
h2o.init()
```

There may be warnings but they can be ignored. You should be good to go now.

NB: If the above does not work for R version 4.5, then uninstall that version of R (only R not RStudio) and install the older version: <https://cran.r-project.org/bin/windows/base/old/> (select version 4.4.3 and also download Rtools 4.4.).