

Regularization

Welcome to the second assignment of this week. Deep Learning models have so much flexibility and capacity that **overfitting can be a serious problem**, if the training dataset is not big enough. Sure it does well on the training set, but the learned network **doesn't generalize to new examples** that it has never seen!

You will learn to: Use regularization in your deep learning models.

Let's get started!

Important Note on Submission to the AutoGrader

Before submitting your assignment to the AutoGrader, please make sure you are not doing the following:

1. You have not added any *extra* `print` statement(s) in the assignment.
2. You have not added any *extra* code cell(s) in the assignment.
3. You have not changed any of the function parameters.
4. You are not using any global variables inside your graded exercises. Unless specifically instructed to do so, please refrain from it and use the local variables instead.
5. You are not changing the assignment code where it is not required, like creating *extra* variables.

If you do any of the following, you will get something like, `Grader not found` (or similarly unexpected) error upon submitting your assignment. Before asking for help/debugging the errors in your assignment, check for these first. If this is the case, and you don't remember the changes you have made, you can get a fresh copy of the assignment by following these [instructions \(https://www.coursera.org/learn/deep-neural-network/supplement/QWEnZ/h-ow-to-refresh-your-workspace\)](https://www.coursera.org/learn/deep-neural-network/supplement/QWEnZ/h-ow-to-refresh-your-workspace).

Table of Contents

- [1 - Packages](#)
- [2 - Problem Statement](#)
- [3 - Loading the Dataset](#)
- [4 - Non-Regularized Model](#)
- [5 - L2 Regularization](#)
 - [Exercise 1 - compute_cost_with_regularization](#)
 - [Exercise 2 - backward_propagation_with_regularization](#)
- [6 - Dropout](#)
 - [6.1 - Forward Propagation with Dropout](#)
 - [Exercise 3 - forward_propagation_with_dropout](#)
 - [6.2 - Backward Propagation with Dropout](#)
 - [Exercise 4 - backward_propagation_with_dropout](#)
- [7 - Conclusions](#)

1 - Packages

```
In [1]: # import packages
import numpy as np
import matplotlib.pyplot as plt
import sklearn
import sklearn.datasets
import scipy.io
from reg_utils import sigmoid, relu, plot_decision_boundary, initialize_parameters, load_2D_dataset, predict_dec
from reg_utils import compute_cost, predict, forward_propagation, backward_propagation, update_parameters
from testCases import *
from public_tests import *

%matplotlib inline
plt.rcParams['figure.figsize'] = (7.0, 4.0) # set default size of plots
plt.rcParams['image.interpolation'] = 'nearest'
plt.rcParams['image.cmap'] = 'gray'

%load_ext autoreload
%autoreload 2
```

2 - Problem Statement

You have just been hired as an AI expert by the French Football Corporation. They would like you to recommend positions where France's goal keeper should kick the ball so that the French team's players can then hit it with their head.

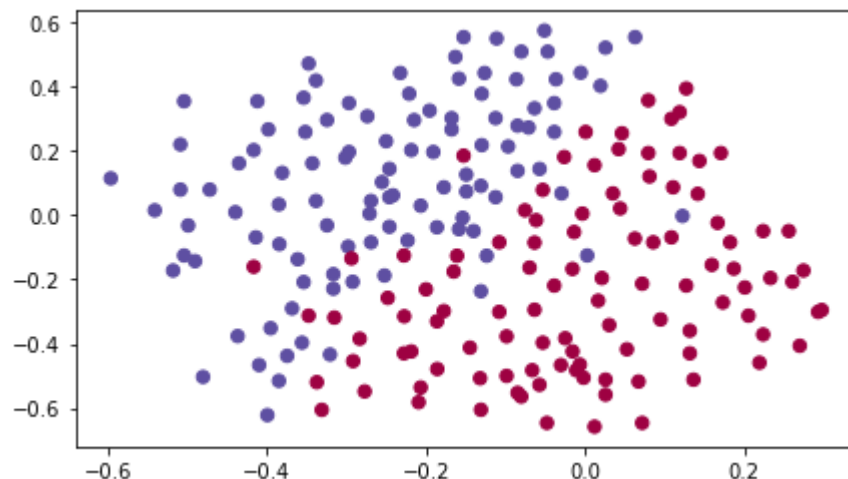


Figure 1: Football field. The goal keeper kicks the ball in the air, the players of each team are fighting to hit the ball with their head

They give you the following 2D dataset from France's past 10 games.

3 - Loading the Dataset

```
In [2]: train_X, train_Y, test_X, test_Y = load_2D_dataset()
```



Each dot corresponds to a position on the football field where a football player has hit the ball with his/her head after the French goal keeper has shot the ball from the left side of the football field.

- If the dot is blue, it means the French player managed to hit the ball with his/her head
- If the dot is red, it means the other team's player hit the ball with their head

Your goal: Use a deep learning model to find the positions on the field where the goalkeeper should kick the ball.

Analysis of the dataset: This dataset is a little noisy, but it looks like a diagonal line separating the upper left half (blue) from the lower right half (red) would work well.

You will first try a non-regularized model. Then you'll learn how to regularize it and decide which model you will choose to solve the French Football Corporation's problem.

4 - Non-Regularized Model

You will use the following neural network (already implemented for you below). This model can be used:

- in *regularization mode* -- by setting the `lambd` input to a non-zero value. We use "`lambd`" instead of "`lambda`" because "`lambda`" is a reserved keyword in Python.
- in *dropout mode* -- by setting the `keep_prob` to a value less than one

You will first try the model without any regularization. Then, you will implement:

- *L2 regularization* -- functions: "`compute_cost_with_regularization()`" and "`backward_propagation_with_regularization()`"
- *Dropout* -- functions: "`forward_propagation_with_dropout()`" and "`backward_propagation_with_dropout()`"

In each part, you will run this model with the correct inputs so that it calls the functions you've implemented. Take a look at the code below to familiarize yourself with the model.

```
In [3]: def model(X, Y, learning_rate = 0.3, num_iterations = 30000, print_cost = True
, lambd = 0, keep_prob = 1):
    """
    Implements a three-layer neural network: LINEAR->RELU->LINEAR->RELU->LINEAR->SIGMOID.

    Arguments:
    X -- input data, of shape (input size, number of examples)
    Y -- true "label" vector (1 for blue dot / 0 for red dot), of shape (output size, number of examples)
    learning_rate -- learning rate of the optimization
    num_iterations -- number of iterations of the optimization loop
    print_cost -- If True, print the cost every 10000 iterations
    lambd -- regularization hyperparameter, scalar
    keep_prob - probability of keeping a neuron active during drop-out, scalar.

    Returns:
    parameters -- parameters learned by the model. They can then be used to predict.
    """

    grads = {}
    costs = [] # to keep track of the cost
    m = X.shape[1] # number of examples
    layers_dims = [X.shape[0], 20, 3, 1]

    # Initialize parameters dictionary.
    parameters = initialize_parameters(layers_dims)

    # Loop (gradient descent)

    for i in range(0, num_iterations):

        # Forward propagation: LINEAR -> RELU -> LINEAR -> RELU -> LINEAR -> SIGMOID.
        if keep_prob == 1:
            a3, cache = forward_propagation(X, parameters)
        elif keep_prob < 1:
            a3, cache = forward_propagation_with_dropout(X, parameters, keep_prob)

        # Cost function
        if lambd == 0:
            cost = compute_cost(a3, Y)
        else:
            cost = compute_cost_with_regularization(a3, Y, parameters, lambd)

        # Backward propagation.
        assert (lambd == 0 or keep_prob == 1) # it is possible to use both L2 regularization and dropout,
                                                # but this assignment will only explore one at a time
        if lambd == 0 and keep_prob == 1:
            grads = backward_propagation(X, Y, cache)
        elif lambd != 0:
```

```

d)         grads = backward_propagation_with_regularization(X, Y, cache, lamb
elif keep_prob < 1:
    grads = backward_propagation_with_dropout(X, Y, cache, keep_prob)

# Update parameters.
parameters = update_parameters(parameters, grads, learning_rate)

# Print the Loss every 10000 iterations
if print_cost and i % 10000 == 0:
    print("Cost after iteration {}: {}".format(i, cost))
if print_cost and i % 1000 == 0:
    costs.append(cost)

# plot the cost
plt.plot(costs)
plt.ylabel('cost')
plt.xlabel('iterations (x1,000)')
plt.title("Learning rate =" + str(learning_rate))
plt.show()

return parameters

```


Let's train the model without any regularization, and observe the accuracy on the train/test sets.

```
In [4]: parameters = model(train_X, train_Y)
print ("On the training set:")
predictions_train = predict(train_X, train_Y, parameters)
print ("On the test set:")
predictions_test = predict(test_X, test_Y, parameters)
```

Cost after iteration 0: 0.6557412523481002

Cost after iteration 10000: 0.16329987525724204

Cost after iteration 20000: 0.13851642423234922

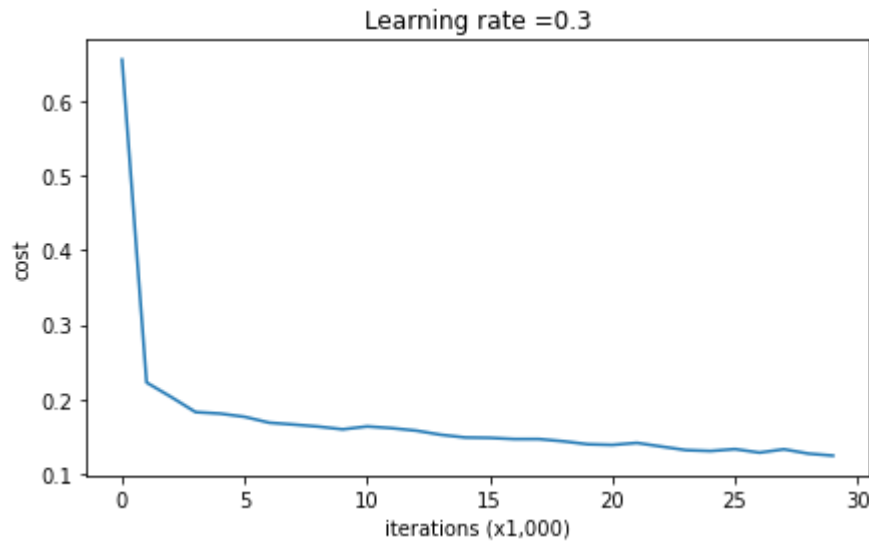

On the training set:


Accuracy: 0.9478672985781991

On the test set:

Accuracy: 0.915

The train accuracy is 94.8% while the test accuracy is 91.5%. This is the **baseline model** (you will observe the impact of regularization on this model). Run the following code to plot the decision boundary of your model.

```
In [5]: plt.title("Model without regularization")
axes = plt.gca()
axes.set_xlim([-0.75,0.40])
axes.set_ylim([-0.75,0.65])
plot_decision_boundary(lambda x: predict_dec(parameters, x.T), train_X, train_Y)
```

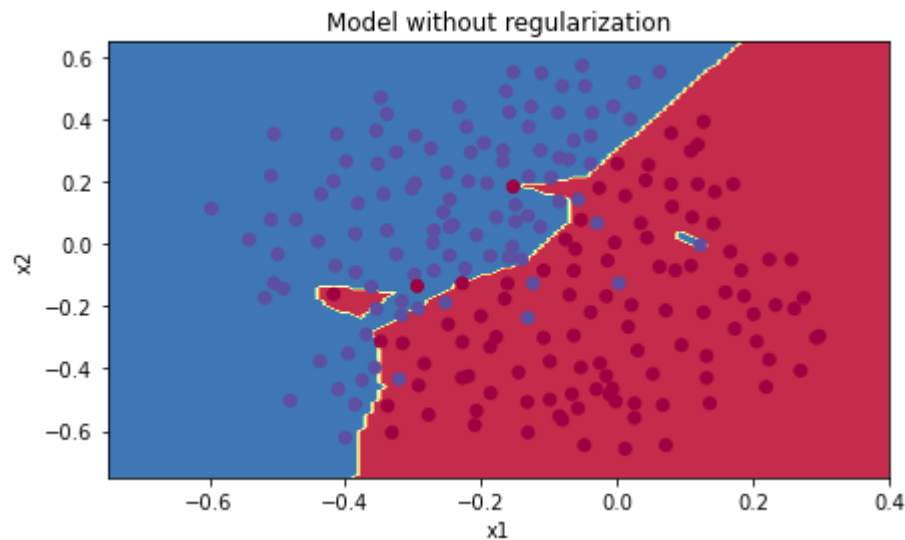

The non-regularized model is obviously overfitting the training set. It is fitting the noisy points! Lets now look at two techniques to reduce overfitting.

5 - L2 Regularization

The standard way to avoid overfitting is called **L2 regularization**. It consists of appropriately modifying your cost function, from:

$$J = -\frac{1}{m} \sum_{i=1}^m \left(y^{(i)} \log(a^{[L](i)}) + (1 - y^{(i)}) \log(1 - a^{[L](i)}) \right) \quad (1)$$

To:

$$J_{\text{regularized}} = \underbrace{-\frac{1}{m} \sum_{i=1}^m \left(y^{(i)} \log(a^{[L](i)}) + (1 - y^{(i)}) \log(1 - a^{[L](i)}) \right)}_{\text{cross-entropy cost}} + \underbrace{\frac{1}{m} \frac{\lambda}{2} \sum_l \sum_k \sum_j W_{k,j}^{[l]2}}_{\text{L2 regularization cost}} \quad (2)$$

Let's modify your cost and observe the consequences.

Exercise 1 - compute_cost_with_regularization

Implement `compute_cost_with_regularization()` which computes the cost given by formula (2). To calculate $\sum_k \sum_j W_{k,j}^{[l]2}$, use :

```
np.sum(np.square(Wl))
```

Note that you have to do this for $W^{[1]}$, $W^{[2]}$ and $W^{[3]}$, then sum the three terms and multiply by $\frac{1}{m} \frac{\lambda}{2}$.

```
In [6]: # GRADED FUNCTION: compute_cost_with_regularization

def compute_cost_with_regularization(A3, Y, parameters, lambd):
    """
    Implement the cost function with L2 regularization. See formula (2) above.

    Arguments:
    A3 -- post-activation, output of forward propagation, of shape (output size, number of examples)
    Y -- "true" labels vector, of shape (output size, number of examples)
    parameters -- python dictionary containing parameters of the model

    Returns:
    cost - value of the regularized loss function (formula (2))
    """
    m = Y.shape[1]
    W1 = parameters["W1"]
    W2 = parameters["W2"]
    W3 = parameters["W3"]

    cross_entropy_cost = compute_cost(A3, Y) # This gives you the cross-entropy part of the cost

    # (~ 1 lines of code)
    # L2_regularization_cost =
    # YOUR CODE STARTS HERE
    L2_regularization_cost = 1/m*lambd/2 * ( np.sum(np.square(W1)) + np.sum(np.square(W2)) + np.sum(np.square(W3)) )

    # YOUR CODE ENDS HERE

    cost = cross_entropy_cost + L2_regularization_cost

    return cost
```

```
In [7]: A3, t_Y, parameters = compute_cost_with_regularization_test_case()
cost = compute_cost_with_regularization(A3, t_Y, parameters, lambd=0.1)
print("cost = " + str(cost))

compute_cost_with_regularization_test(compute_cost_with_regularization)

cost = 1.7864859451590758
All tests passed.
```

Of course, because you changed the cost, you have to change backward propagation as well! All the gradients have to be computed with respect to this new cost.

Exercise 2 - backward_propagation_with_regularization

Implement the changes needed in backward propagation to take into account regularization. The changes only concern $dW1$, $dW2$ and $dW3$. For each, you have to add the regularization term's gradient (

$$\frac{d}{dW} \left(\frac{1}{2} \frac{\lambda}{m} W^2 \right) = \frac{\lambda}{m} W.$$

```

In [8]: # GRADED FUNCTION: backward_propagation_with_regularization

def backward_propagation_with_regularization(X, Y, cache, lambd):
    """
    Implements the backward propagation of our baseline model to which we added an L2 regularization.

    Arguments:
    X -- input dataset, of shape (input size, number of examples)
    Y -- "true" labels vector, of shape (output size, number of examples)
    cache -- cache output from forward_propagation()
    lambd -- regularization hyperparameter, scalar

    Returns:
    gradients -- A dictionary with the gradients with respect to each parameter, activation and pre-activation variables
    """

    m = X.shape[1]
    (Z1, A1, W1, b1, Z2, A2, W2, b2, Z3, A3, W3, b3) = cache

    dZ3 = A3 - Y
    # (~ 1 lines of code)
    # dw3 = 1./m * np.dot(dZ3, A2.T) + None
    # YOUR CODE STARTS Lambd/n*W3
    dw3 = 1./m * np.dot(dZ3, A2.T) + lambd/m*W3

    # YOUR CODE ENDS HERE
    db3 = 1. / m * np.sum(dZ3, axis=1, keepdims=True)

    dA2 = np.dot(W3.T, dZ3)
    dZ2 = np.multiply(dA2, np.int64(A2 > 0))
    # (~ 1 lines of code)
    # dw2 = 1./m * np.dot(dZ2, A1.T) + None
    # YOUR CODE STARTS HERE
    dw2 = 1./m * np.dot(dZ2, A1.T) + lambd/m*W2

    # YOUR CODE ENDS HERE
    db2 = 1. / m * np.sum(dZ2, axis=1, keepdims=True)

    dA1 = np.dot(W2.T, dZ2)
    dZ1 = np.multiply(dA1, np.int64(A1 > 0))
    # (~ 1 lines of code)
    # dw1 = 1./m * np.dot(dZ1, X.T) + None
    # YOUR CODE STARTS HERE
    dw1 = 1./m * np.dot(dZ1, X.T) + lambd/m*W1

    # YOUR CODE ENDS HERE
    db1 = 1. / m * np.sum(dZ1, axis=1, keepdims=True)

    gradients = {"dZ3": dZ3, "dW3": dw3, "db3": db3, "dA2": dA2,
                  "dZ2": dZ2, "dW2": dw2, "db2": db2, "dA1": dA1,
                  "dZ1": dZ1, "dW1": dw1, "db1": db1}

    return gradients

```

```
In [9]: t_X, t_Y, cache = backward_propagation_with_regularization_test_case()

grads = backward_propagation_with_regularization(t_X, t_Y, cache, lambd = 0.7)
print ("dW1 = \n"+ str(grads["dW1"]))
print ("dW2 = \n"+ str(grads["dW2"]))
print ("dW3 = \n"+ str(grads["dW3"]))
backward_propagation_with_regularization_test(backward_propagation_with_regularization)

dW1 =
[[-0.25604646  0.12298827 -0.28297129]
 [-0.17706303  0.34536094 -0.4410571 ]]
dW2 =
[[ 0.79276486  0.85133918]
 [-0.0957219  -0.01720463]
 [-0.13100772 -0.03750433]]
dW3 =
[[-1.77691347 -0.11832879 -0.09397446]]
All tests passed.
```

Let's now run the model with L2 regularization ($\lambda = 0.7$). The `model()` function will call:


- `compute_cost_with_regularization` instead of `compute_cost`
- `backward_propagation_with_regularization` instead of `backward_propagation`

```
In [10]: parameters = model(train_X, train_Y, lambd = 0.7)
print ("On the train set:")
predictions_train = predict(train_X, train_Y, parameters)
print ("On the test set:")
predictions_test = predict(test_X, test_Y, parameters)
```

Cost after iteration 0: 0.6974484493131264

Cost after iteration 10000: 0.2684918873282238

Cost after iteration 20000: 0.26809163371273004

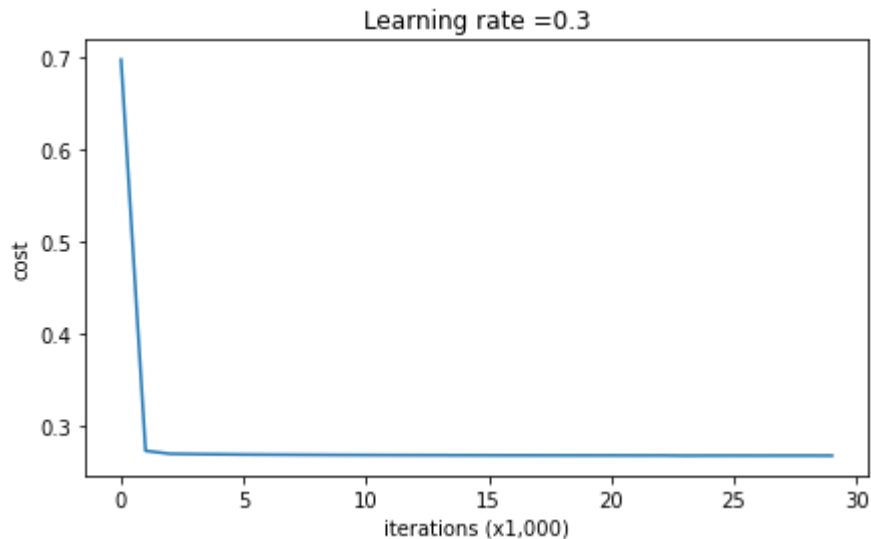

On the train set:

Accuracy: 0.9383886255924171


On the test set:

Accuracy: 0.93

Congrats, the test set accuracy increased to 93%. You have saved the French football team!

You are not overfitting the training data anymore. Let's plot the decision boundary.

```
In [11]: plt.title("Model with L2-regularization")
axes = plt.gca()
axes.set_xlim([-0.75,0.40])
axes.set_ylim([-0.75,0.65])
plot_decision_boundary(lambda x: predict_dec(parameters, x.T), train_X, train_Y)
```

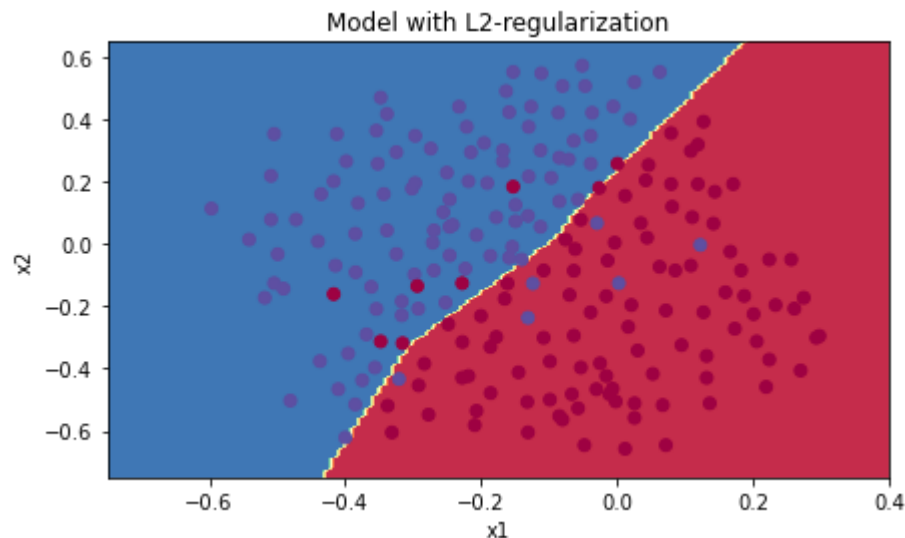

Observations:

- The value of λ is a hyperparameter that you can tune using a dev set.
- L2 regularization makes your decision boundary smoother. If λ is too large, it is also possible to "oversmooth", resulting in a model with high bias.

What is L2-regularization actually doing?:

L2-regularization relies on the assumption that a model with small weights is simpler than a model with large weights. Thus, by penalizing the square values of the weights in the cost function you drive all the weights to smaller values. It becomes too costly for the cost to have large weights! This leads to a smoother model in which the output changes more slowly as the input changes.

What you should remember: the implications of L2-regularization on:

- The cost computation:
 - A regularization term is added to the cost.
- The backpropagation function:
 - There are extra terms in the gradients with respect to weight matrices.
- Weights end up smaller ("weight decay"):
 - Weights are pushed to smaller values.

6 - Dropout

Finally, **dropout** is a widely used regularization technique that is specific to deep learning. **It randomly shuts down some neurons in each iteration.** Watch these two videos to see what this means!

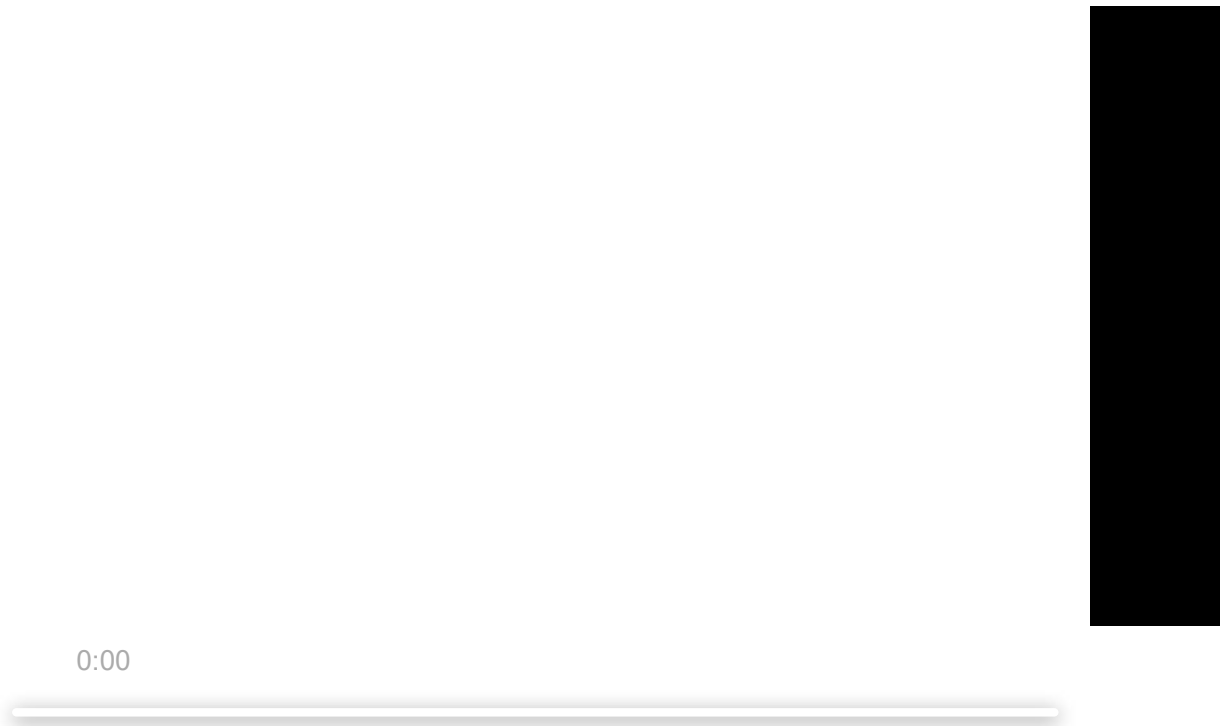


Figure 2 : Drop-out on the second hidden layer.

At each iteration, you shut down (= set to zero) each neuron of a layer with probability $1 - keep_prob$ or keep it with probability $keep_prob$ (50% here). The dropped neurons don't contribute to the training in both the forward and backward propagations of the iteration.



Figure 3: Drop-out on the first and third hidden layers.

1^{st} layer: we shut down on average 40% of the neurons. 3^{rd} layer: we shut down on average 20% of the neurons.

When you shut some neurons down, you actually modify your model. The idea behind drop-out is that at each iteration, you train a different model that uses only a subset of your neurons. With dropout, your neurons thus become less sensitive to the activation of one other specific neuron, because that other neuron might be shut down at any time.

6.1 - Forward Propagation with Dropout

Exercise 3 - forward_propagation_with_dropout

Implement the forward propagation with dropout. You are using a 3 layer neural network, and will add dropout to the first and second hidden layers. We will not apply dropout to the input layer or output layer.

Instructions: You would like to shut down some neurons in the first and second layers. To do that, you are going to carry out 4 Steps:

1. In lecture, we discussed creating a variable $d^{[1]}$ with the same shape as $a^{[1]}$ using `np.random.rand()` to randomly get numbers between 0 and 1. Here, you will use a vectorized implementation, so create a random matrix $D^{[1]} = [d^{1} d^{[1](2)} \dots d^{[1](m)}]$ of the same dimension as $A^{[1]}$.
2. Set each entry of $D^{[1]}$ to be 1 with probability (`keep_prob`), and 0 otherwise.

Hint: Let's say that `keep_prob = 0.8`, which means that we want to keep about 80% of the neurons and drop out about 20% of them. We want to generate a vector that has 1's and 0's, where about 80% of them are 1 and about 20% are 0. This python statement:


```
X = (X < keep_prob).astype(int)
```

is conceptually the same as this if-else statement (for the simple case of a one-dimensional array) :

```
for i,v in enumerate(x):
    if v < keep_prob:
        x[i] = 1
    else: # v >= keep_prob
        x[i] = 0
```

Note that the `X = (X < keep_prob).astype(int)` works with multi-dimensional arrays, and the resulting output preserves the dimensions of the input array.

Also note that without using `.astype(int)`, the result is an array of booleans `True` and `False`, which Python automatically converts to 1 and 0 if we multiply it with numbers. (However, it's better practice to convert data into the data type that we intend, so try using `.astype(int)`.)

1. Set $A^{[1]}$ to $A^{[1]} * D^{[1]}$. (You are shutting down some neurons). You can think of $D^{[1]}$ as a mask, so that when it is multiplied with another matrix, it shuts down some of the values.
2. Divide $A^{[1]}$ by `keep_prob`. By doing this you are assuring that the result of the cost will still have the same expected value as without drop-out. (This technique is also called inverted dropout.)

```

In [12]: # GRADED FUNCTION: forward_propagation_with_dropout

def forward_propagation_with_dropout(X, parameters, keep_prob = 0.5):
    """
    Implements the forward propagation: LINEAR -> RELU + DROPOUT -> LINEAR ->
    RELU + DROPOUT -> LINEAR -> SIGMOID.

    Arguments:
    X -- input dataset, of shape (2, number of examples)
    parameters -- python dictionary containing your parameters "W1", "b1", "W
    2", "b2", "W3", "b3":
        W1 -- weight matrix of shape (20, 2)
        b1 -- bias vector of shape (20, 1)
        W2 -- weight matrix of shape (3, 20)
        b2 -- bias vector of shape (3, 1)
        W3 -- weight matrix of shape (1, 3)
        b3 -- bias vector of shape (1, 1)
    keep_prob - probability of keeping a neuron active during drop-out, scalar

    Returns:
    A3 -- last activation value, output of the forward propagation, of shape
    (1,1)
    cache -- tuple, information stored for computing the backward propagation
    """

```

```

np.random.seed(1)

# retrieve parameters
W1 = parameters["W1"]
b1 = parameters["b1"]
W2 = parameters["W2"]
b2 = parameters["b2"]
W3 = parameters["W3"]
b3 = parameters["b3"]

# LINEAR -> RELU -> LINEAR -> RELU -> LINEAR -> SIGMOID
Z1 = np.dot(W1, X) + b1
A1 = relu(Z1)
#(≈ 4 lines of code)           # Steps 1-4 below correspond to the Steps 1-4
described above.
# D1 =                               # Step 1: initialize matrix
ix D1 = np.random.rand(..., ...)
# D1 =                               # Step 2: convert entries
of D1 to 0 or 1 (using keep_prob as the threshold)
# A1 =                               # Step 3: shut down some
neurons of A1
# A1 =                               # Step 4: scale the value
of neurons that haven't been shut down
# YOUR CODE STARTS HERE
D1 = np.random.rand(A1.shape[0], A1.shape[1])
D1 = (D1 < keep_prob).astype(int)
A1 = A1*D1
A1 = A1/keep_prob

# YOUR CODE ENDS HERE
Z2 = np.dot(W2, A1) + b2
A2 = relu(Z2)
#(≈ 4 lines of code)
# D2 =                               # Step 1: initialize matrix
ix D2 = np.random.rand(..., ...)
# D2 =                               # Step 2: convert entries
of D2 to 0 or 1 (using keep_prob as the threshold)
# A2 =                               # Step 3: shut down some
neurons of A2
# A2 =                               # Step 4: scale the value
of neurons that haven't been shut down
# YOUR CODE STARTS HERE
D2 = np.random.rand(A2.shape[0], A2.shape[1])
D2 = (D2 < keep_prob).astype(int)
A2 = A2*D2
A2 = A2/keep_prob

# YOUR CODE ENDS HERE
Z3 = np.dot(W3, A2) + b3
A3 = sigmoid(Z3)

cache = (Z1, D1, A1, W1, b1, Z2, D2, A2, W2, b2, Z3, A3, W3, b3)

return A3, cache

```

```
In [13]: t_X, parameters = forward_propagation_with_dropout_test_case()

A3, cache = forward_propagation_with_dropout(t_X, parameters, keep_prob=0.7)
print ("A3 = " + str(A3))

forward_propagation_with_dropout_test(forward_propagation_with_dropout)

A3 = [[0.36974721 0.00305176 0.04565099 0.49683389 0.36974721]]
All tests passed.
```

6.2 - Backward Propagation with Dropout

Exercise 4 - backward_propagation_with_dropout

Implement the backward propagation with dropout. As before, you are training a 3 layer network. Add dropout to the first and second hidden layers, using the masks $D^{[1]}$ and $D^{[2]}$ stored in the cache.

Instruction: Backpropagation with dropout is actually quite easy. You will have to carry out 2 Steps:

1. You had previously shut down some neurons during forward propagation, by applying a mask $D^{[1]}$ to A^1 . In backpropagation, you will have to shut down the same neurons, by reapplying the same mask $D^{[1]}$ to dA^1 .
2. During forward propagation, you had divided A^1 by $keep_prob$. In backpropagation, you'll therefore have to divide dA^1 by $keep_prob$ again (the calculus interpretation is that if $A^{[1]}$ is scaled by $keep_prob$, then its derivative $dA^{[1]}$ is also scaled by the same $keep_prob$).

```
In [16]: # GRADED FUNCTION: backward_propagation_with_dropout

def backward_propagation_with_dropout(X, Y, cache, keep_prob):
    """
    Implements the backward propagation of our baseline model to which we added dropout.

    Arguments:
    X -- input dataset, of shape (2, number of examples)
    Y -- "true" labels vector, of shape (output size, number of examples)
    cache -- cache output from forward_propagation_with_dropout()
    keep_prob - probability of keeping a neuron active during drop-out, scalar

    Returns:
    gradients -- A dictionary with the gradients with respect to each parameter, activation and pre-activation variables
    """

    m = X.shape[1]
    (Z1, D1, A1, W1, b1, Z2, D2, A2, W2, b2, Z3, A3, W3, b3) = cache

    dZ3 = A3 - Y
    dW3 = 1./m * np.dot(dZ3, A2.T)
    db3 = 1./m * np.sum(dZ3, axis=1, keepdims=True)
```

```

dA2 = np.dot(W3.T, dZ3)
#(≈ 2 lines of code)
# dA2 = # Step 1: Apply mask D2 to shut down the same neuro
ns as during the forward propagation
# dA2 = # Step 2: Scale the value of neurons that haven't b
een shut down
# YOUR CODE STARTS HERE
dA2 = dA2 * D2
dA2 = dA2/keep_prob

# YOUR CODE ENDS HERE
dZ2 = np.multiply(dA2, np.int64(A2 > 0))
dW2 = 1./m * np.dot(dZ2, A1.T)
db2 = 1./m * np.sum(dZ2, axis=1, keepdims=True)

dA1 = np.dot(W2.T, dZ2)
#(≈ 2 lines of code)
# dA1 = # Step 1: Apply mask D1 to shut down the same neuro
ns as during the forward propagation
# dA1 = # Step 2: Scale the value of neurons that haven't b
een shut down
# YOUR CODE STARTS HERE
dA1 = dA1 * D1
dA1 = dA1/keep_prob

# YOUR CODE ENDS HERE
dZ1 = np.multiply(dA1, np.int64(A1 > 0))
dW1 = 1./m * np.dot(dZ1, X.T)
db1 = 1./m * np.sum(dZ1, axis=1, keepdims=True)

gradients = {"dZ3": dZ3, "dW3": dW3, "db3": db3, "dA2": dA2,
             "dZ2": dZ2, "dW2": dW2, "db2": db2, "dA1": dA1,
             "dZ1": dZ1, "dW1": dW1, "db1": db1}

return gradients

```

```

In [17]: t_X, t_Y, cache = backward_propagation_with_dropout_test_case()

gradients = backward_propagation_with_dropout(t_X, t_Y, cache, keep_prob=0.8)

print ("dA1 = \n" + str(gradients["dA1"]))
print ("dA2 = \n" + str(gradients["dA2"]))

backward_propagation_with_dropout_test(backward_propagation_with_dropout)

dA1 =
[[ 0.36544439  0.          -0.00188233  0.          -0.17408748]
 [ 0.65515713  0.          -0.00337459  0.          -0.          ]]
dA2 =
[[ 0.58180856  0.          -0.00299679  0.          -0.27715731]
 [ 0.          0.53159854 -0.          0.53159854 -0.34089673]
 [ 0.          0.          -0.00292733  0.          -0.          ]]
All tests passed.

```


Let's now run the model with dropout ($\text{keep_prob} = 0.86$). It means at every iteration you shut down each neurons of layer 1 and 2 with 14% probability. The function `model()` will now call:

- `forward_propagation_with_dropout` instead of `forward_propagation` .
- `backward_propagation_with_dropout` instead of `backward_propagation` .

```
In [18]: parameters = model(train_X, train_Y, keep_prob = 0.86, learning_rate = 0.3)

print ("On the train set:")
predictions_train = predict(train_X, train_Y, parameters)
print ("On the test set:")
predictions_test = predict(test_X, test_Y, parameters)
```

Cost after iteration 0: 0.6543912405149825
 Cost after iteration 10000: 0.0610169865749056
 Cost after iteration 20000: 0.060582435798513114

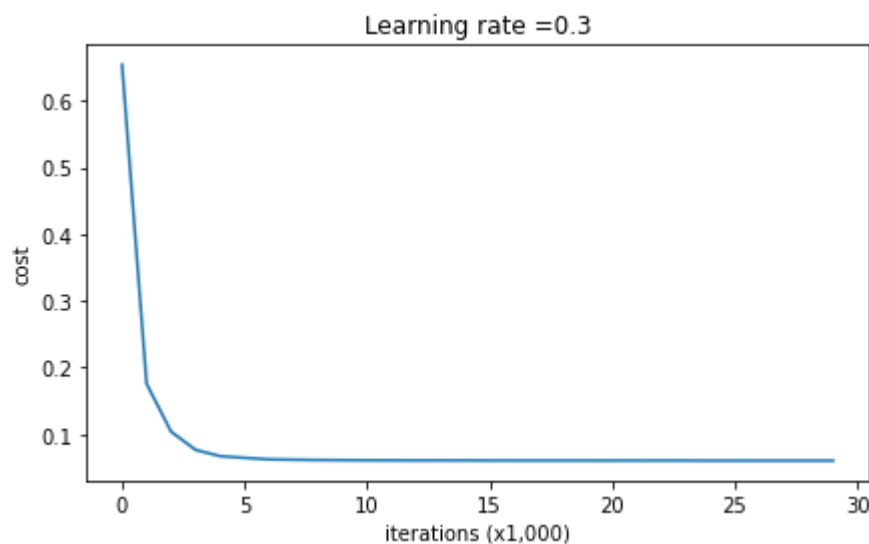


On the train set:
 Accuracy: 0.9289099526066351
 On the test set:
 Accuracy: 0.95

Dropout works great! The test accuracy has increased again (to 95%)! Your model is not overfitting the training set and does a great job on the test set. The French football team will be forever grateful to you!

Run the code below to plot the decision boundary.

```
In [19]: plt.title("Model with dropout")
axes = plt.gca()
axes.set_xlim([-0.75,0.40])
axes.set_ylim([-0.75,0.65])
plot_decision_boundary(lambda x: predict_dec(parameters, x.T), train_X, train_Y)
```

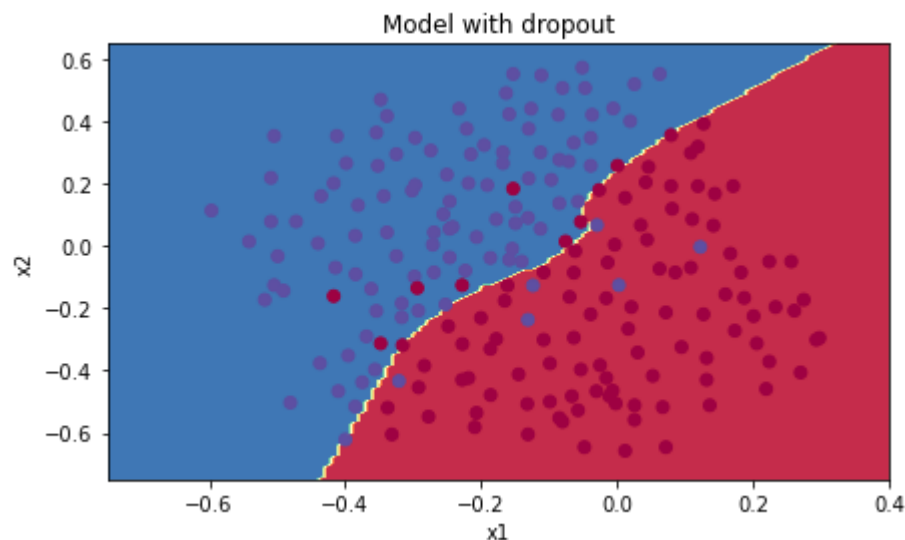

Note:

- A **common mistake** when using dropout is to use it both in training and testing. You should use dropout (randomly eliminate nodes) only in training.
- Deep learning frameworks like [tensorflow](https://www.tensorflow.org/api_docs/python/tf/nn/dropout) (https://www.tensorflow.org/api_docs/python/tf/nn/dropout), [PaddlePaddle](http://doc.paddlepaddle.org/release_doc/0.9.0/doc/ui/api/trainer_config_helpers/attrs.html) (http://doc.paddlepaddle.org/release_doc/0.9.0/doc/ui/api/trainer_config_helpers/attrs.html), [keras](https://keras.io/layers/core/#dropout) (<https://keras.io/layers/core/#dropout>) or [caffe](http://caffe.berkeleyvision.org/tutorial/layers/dropout.html) (<http://caffe.berkeleyvision.org/tutorial/layers/dropout.html>) come with a dropout layer implementation. Don't stress - you will soon learn some of these frameworks.

What you should remember about dropout:

- Dropout is a regularization technique.
- You only use dropout during training. Don't use dropout (randomly eliminate nodes) during test time.
- Apply dropout both during forward and backward propagation.
- During training time, divide each dropout layer by `keep_prob` to keep the same expected value for the activations. For example, if `keep_prob` is 0.5, then we will on average shut down half the nodes, so the output will be scaled by 0.5 since only the remaining half are contributing to the solution. Dividing by 0.5 is equivalent to multiplying by 2. Hence, the output now has the same expected value. You can check that this works even when `keep_prob` is other values than 0.5.

7 - Conclusions

Here are the results of our three models:

model	train accuracy	test accuracy
3-layer NN without regularization	95%	91.5%
3-layer NN with L2-regularization	94%	93%
3-layer NN with dropout	93%	95%

Note that regularization hurts training set performance! This is because it limits the ability of the network to overfit to the training set. But since it ultimately gives better test accuracy, it is helping your system.

Congratulations for finishing this assignment! And also for revolutionizing French football. :-)

What we want you to remember from this notebook:

- Regularization will help you reduce overfitting.
- Regularization will drive your weights to lower values.
- L2 regularization and Dropout are two very effective regularization techniques.