	Spécifications Fonctionnelles	
bouygues TELECOM	**STBL - Subscriptions Offers**	DPPS V2.2 10/11/2026

DATA PROTECTION

This document is classified at "CONFIDENTIAL".

Consequently:

Its distribution must be strictly limited to recipients who have an operational need, as listed on the cover page.
The distribution of this document in paper or electronic form is subject to specific rules outlined in the classification procedure and protection of information.
Its communication to third parties is subject to the prior signature of a confidentiality agreement.
This document should be stored in a locked cabinet or equivalent strong when it is not used.
The availability of this document on a shared server or a collection of documents on the intranet is subject to the establishment of an individualized management of access rights and protection by a strong password encryption and its.
The impressions of this document should be retrieved immediately.
The extracts of this document should keep the same classification markings.
All obsolete copies of this document must be destroyed using a shredder.

VERSIONS HISTORY

INDICE	DATE	LIST OF MODIFICIATIONS	WRITING	VERIF.	APPRO.
1.0	27/07/2023	Document creation	S.BEN HADHRIA	A.CARBILLET	
1.1	20/09/2023	Updating field names and cardinality	S.BEN HADHRIA	A.CARBILLET	
1.2	18/10/2023	Adapting the display of promotional offers	S.BEN HADHRIA	A.CARBILLET	
1.3	20/03/2024	Partners Offer	S.BEN HADHRIA	A.CARBILLET	
1.4	21/03/2024	Partner API	S.BEN HADHRIA	A.CARBILLET	
1.5	30/05/2024	New API version v2 to use to get unmanaged offers	S.BEN HADHRIA	A.CARBILLET	
1.6	07/06/2024	New API version v2 to manage partner API lot 2	S.BEN HADHRIA	A.CARBILLET	
1.7	16/07/2024	Details of finalActivationLink field	S.BEN HADHRIA	A.CARBILLET	
1.8	25/07/2024	nPVR offers	S.BEN HADHRIA	A.CARBILLET	
1.9	02/10/2024	Alignment 24.1 Removal of two fields: LongTitle/LongDescription Addition of a new field: shortName	S.BEN HADHRIA	A.CARBILLET	
1.10	03/12/2024	Search OUT OF SCOPE FOR THE MOMENT	S.BEN HADHRIA	A.CARBILLET	
1.11	09/12/2024	Update of query parameters for getList for ATV	S.BEN HADHRIA	A.CARBILLET	
1.12	09/12/2024	Using commercial.subscriptionStatus to determine the entitlement status of an offer	S.BEN HADHRIA	A.CARBILLET	
2.0	12/09/2025	Customer Journey Adaptation After Subscription	S.BEN HADHRIA	A.CARBILLET	
2.1	06/10/2026	Update triggers for call GET offers	M.BOUZID	A.CARBILLET	
2.2	10/11/2026	Working version initialized from v2.1 for content review			

DOCUMENT ESTABLISHED UNDER THE RESPONSIBILITY OF SIGNING

WRITING	VERIFICATION	APPROVAL
Nom : S.BEN HADHRIA Visa : Date : 27/07/2023	Nom : A.CARBILLET Visa : Date :	Nom : Visa : Date :

Table of contents

1. Références **3**

2. Purpose of the document **4**

3. Service overview **5**

3.1. Architecture and responsibilities 5

3.1.1. Global architecture 5

3.2. Offer lifecycle 5

4. Offer retrieval and data model **7**

4.1. Shared DALI request headers 7

4.2. Retrieve the offer list 7

4.2.1. Triggers 7

4.2.2. Principle of offer recovery 7

4.2.3. API to get offers 8

4.2.4. Display metadata and illustrative examples 20

5. User journeys **23**

5.1. Accessing a highlighted offer 23

5.2. Find an offer using a specific search (out of scope for the moment) 23

5.3. Retrieve all eligible offers (subscriptions menu) 24

5.4. Retrieve subscribed offers 24

5.5. Recovery of offers associated with an unsubscribed channel 24

5.6. Recovery of offers associated with a CUP shop 25

5.7. Subscription to an offer 26

5.7.1. Subscription process for an offer associated with a live channel and a CUP asset 26

5.8. Partner application activation 28

5.8.1. Activation status and partner journey 28

5.8.2. Fluid and non-fluid offers 30

5.9. Customer journey adaptation after subscription 32

5.10. Unsubscription of an offer 33

1 Références

Ref	Document Name	Link
[ref 1]	Swagger	lien
[ref 2]	LLD Live & SCUP	lien
[ref 3]	SAG Live & SCUP	lien

2 Purpose of the document

Reorganization draft for review. This copy changes the document structure and section references; functional rules remain unchanged. Open clarification notes are retained. Screen and UI illustrations are examples only.

Cadre de relecture de la v2.2. La v2.1 constitue la référence fonctionnelle validée. Le périmètre couvre tous les équipements et tous les types d'offres ; la recherche reste hors périmètre. Les mentions « À clarifier / valider » ci-dessous identifient des précisions à apporter, sans modifier ni invalider les règles existantes. La vérification des contrats API sera réalisée lorsque le Swagger sera disponible.

Nature de cette spécification. Ce document décrit le service d'offres : ses données, ses contrats d'interface, ses règles de traitement et ses résultats fonctionnels. Il ne prescrit pas la présentation des écrans. Les maquettes, captures et illustrations d'écrans sont fournies à titre d'exemple uniquement ; l'interface peut évoluer indépendamment tant que le contrat et le comportement du service sont respectés.

This document specifies the offer service for linear assets, CUP and SVOD. It describes how devices retrieve offer data, access the associated metadata, and request subscription or unsubscription through DALI.

It also specifies how subscription information is retrieved from multimedia asset data through DALI. The service contract and functional behavior are normative; screen layouts and UI illustrations elsewhere in this document are examples only.


3 Service overview

The offer service allows devices to retrieve subscribed and unsubscribed offers through DALI and to request subscriptions or unsubscriptions.

3.1 Architecture and responsibilities

3.1.1 Global architecture

Devices access the offer service through APIM, which forwards their requests to DALI. DALI retrieves offer data from SI BYTEL, offer metadata from KL, and app offer information from AIBO, then returns the response through APIM.

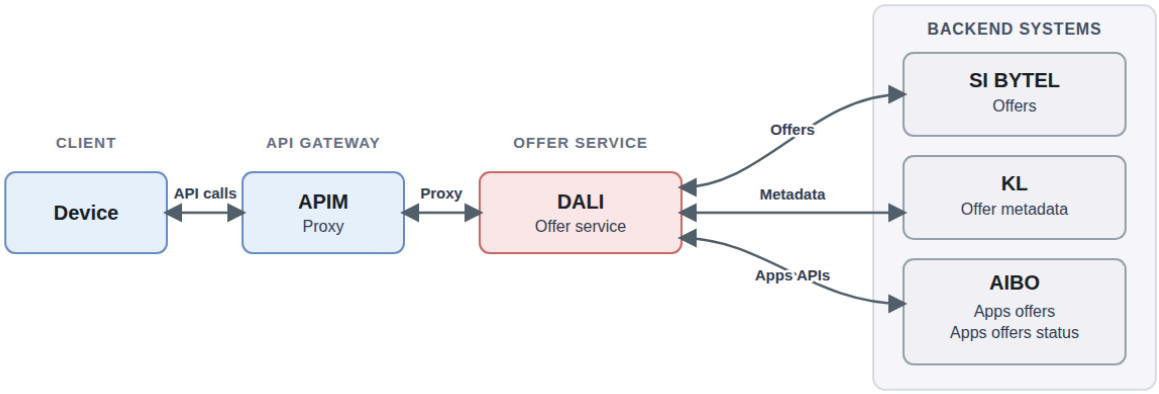


Devices rely on DALI for offer retrieval and subscription actions. DALI retrieves offers from the information system, enriches them with KL metadata, and returns the response; devices do not aggregate KL data or call the information system's subscription APIs directly.

3.2 Offer lifecycle

An offer lifecycle uses three independent dimensions:

- `entitlementState` indicates whether the offer is entitled (`ENTITLED`) or not (`NOT_ENTITLED`).
- `commercial.subscriptionStatus` describes the subscription or cancellation process and drives the transition state shown to the user.
- `commercial.partner.status` describes partner-account activation when the offer requires it.

These dimensions can coexist without meaning the same thing. For example, the shared Disney+ response has `DEACTIVATING`, `ENTITLED`, and `CREATED` at the same time. DALI action links determine which subscription API action is available; process or partner status does not replace those links.

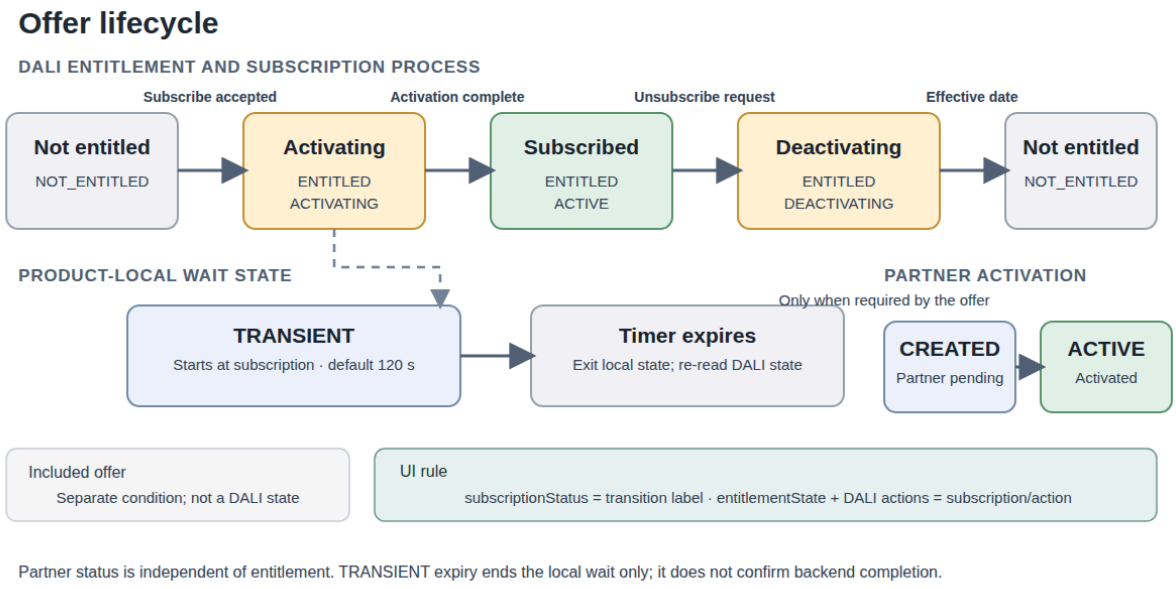

After a subscription starts, the device enters the local `TRANSIENT` state for 120 seconds by default. Timer expiry ends only that local wait; it does not confirm backend completion. Once the timer expires, the product uses the current DALI state:

- `ACTIVATING` with `ENTITLED`: show subscription management instead of “Subscribe”; offer unsubscription only if DALI provides the `unsubscribe` action.
- `DEACTIVATING` with `ENTITLED`: show “Résiliation en cours” and do not issue another unsubscription request.
- `partner.status=CREATED` with `ENTITLED`: show both partner activation and subscription management. Hide the activation prompt when `partner.status=ACTIVE`.

Included offers are separate from this DALI offer lifecycle and are not returned by the nPFS offer API.

4 Offer retrieval and data model

4.1 Shared DALI request headers

The main headers passed in the requests:

Parameter	Value	Comment
`Authorization`	"Bearer " + $ATK	Added by PFSProxy
`x-kaltura-secret`	$KS	Added by PFSProxy (OPTION)
`x-request-id`	$requestId	Randomly generated for each request (RFC4122)
`x-version`	2	Static, DALI API version
`X-User-Agent`	$UA	Added by PFSProxy
`x-message-id`	Unique for each interaction between ST (it can be used to manage anti-replay on power supplies for example)	-
`x-source`	Name of the sender of the request	-
`Accept`	"application/json;charset=UTF-8"	N/A
`Content-Type`	"application/json;charset=UTF-8"	Only when a body is sent (POST/PUT)

Note: * The absence of the headers is not blocking but these headers are required for the good operability / maintainability of the service exposed on the DSI side


4.2 Retrieve the offer list

4.2.1 Triggers

- App or STB startup.
- Update every 6 hours with a random value between -2 hours and +2 hours.
- Access to the "My Subscriptions" menu.
- If an entitlement inconsistency is detected when zapping.
- If PDS is modified (GET lineup return 200OK).

4.2.2 Principle of offer recovery

> **À clarifier / valider - CLAR-OFF-003 : pagination, ETag et cache.** Formuler explicitement la stratégie retenue par équipement : récupération complète ou paginée, utilisation de `If-None-Match`, traitement de `200` et `304`, mise à jour des données locales et rafraîchissement forcé après souscription. Distinguer les règles applicables des explications historiques, notamment la phrase barrée dans les paramètres d'en-tête.

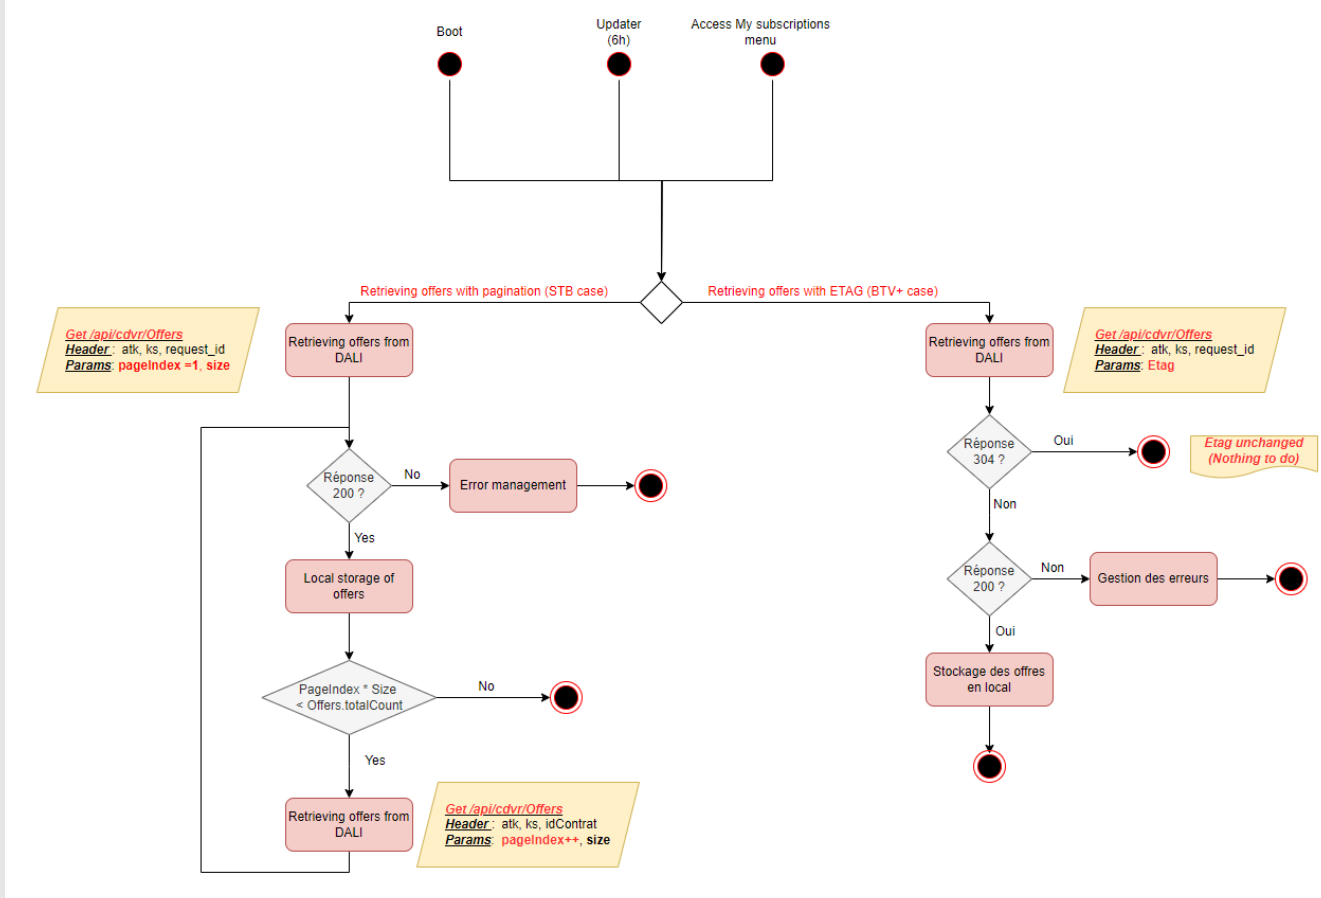

- Pagination Branch :
  - The pagination branch involves the device sending a request to DALI with the page number and desired page size to retrieve offer metadata.
  - However, since « Basic » offers are not included in the offer retrieval response, which constitutes a significant amount of data to construct the entire set of offers, it is suggested to retrieve all pages with a single request and apply metadata verification based on the ETAG.
- Etag Branch :
  - The ETAG branch entails the device querying DALI using the ETAG as information.
  - The ETAG is updated in the offer database with every 200 response following the offer retrieval request :
    - For the first offer retrieval call :
      - ETAG = ""
      - DALI retrieves the user's offers and calculates the ETAG based on offer metadata, then sends the list of offers to the device with the new ETAG (HTTP 200 response) see section 4.2.4 .
      - The device updates the old ETAG with the newly received one in the DALI response header.
    - For subsequent offer retrieval calls,:
      - ETAG = "xxxx"
      - DALI retrieves the user's offers again, calculates the new ETAG, and then compares the two ETAGs (the one received in the request and the newly calculated one):
        - If they are different:
          - DALI sends the list of offers with the new ETAG in the response header, and the device updates the ETAG in its database
        - If they are identical:
          - DALI responds with HTTP 304 to indicate to the device that there is no change in comparison to the local offer metadata, and no further processing is required

4.2.3 API to get offers

1. API specification (swagger link)

```
GET /api/offers
```

(le path de l'api est défini dans le swagger)

Header parameters :

Param	Type	Description
See 4.1		
`If-None-Match`	string	The use of ETAG is recommended when pagination is not applied to retrieve offers. ~~However, in our situation, with STB, it is essential to note that we paginate the offer list response, so the use of ETAG does not apply.~~

Query parameters :

Param	Type	Description
`category`	String Enum: "BOUQUET" "APPLICATION" "SERVICE" "MULTIOFFER" "APPLICATION_NON_MANAGE "	STB : category="BOUQUET", "APPLICATION", "SERVICE", "MULTIOFFER", "APPLICATION_NON_MANAGE " ATV : category="BOUQUET", "SERVICE", Other device category="BOUQUET", "APPLICATION", "SERVICE", "MULTIOFFER"
`entitlementState`	String Enum: "ENTITLED" "NOT_ENTITLED"	In this use case, omit this field to retrieve both subscribed and unsubscribed offers. The DALI v2 interface also requires it to be omitted when requesting `UNMANAGED_APPLICATION` offers.
`page`	integer	Page index
`size`	integer	Page size

Response success :

- ***RESPONSE HEADERS***

> **ETAG** : string
> Entity tag for current customer records list , Returned Only if pagination not used

- ***RESPONSE Body***
  - **data** : Array
  - **totalElements** : Integer
    - total number of items on offer (subscribed and not subscribed)
  - **totalPages : Integer**
    - total pages
  - **currentPage** :Integer
    - index of current page

NOTE:

- Code 200 or 0 (PFSProxy), with no error nor empty body. Attribute "data" is a list of offer objects,

> and attribute storage gives related data. All data are listed in SAG. The following ones are stored. See below.

- ***Code 304, current data in DB is used.***

Common objects for each offer type

> **À clarifier / valider - CLAR-OFF-004 : dictionnaire de données et catégories.** Vérifier avec le Swagger les chemins JSON exacts, leur casse, les espaces présents dans certains chemins, les types et les valeurs d'énumération. Exemples à rapprocher du contrat : `commercial.commercialType` déclaré `Integer` avec la valeur `OPTION`, `commercial.name` déclaré `Integer`, et la correspondance entre `APPLICATION_NON_MANAGE` dans les paramètres et `UNMANAGED_APPLICATION` dans les types d'offres. Les valeurs existantes sont conservées en attendant cette vérification.

Key in JSONbody.data	Type	M/O	Use
`internalId`	`String`	M	Kaltura unique identifier for DB and actions.
`id`	`String`	M	The id used to enable Dali to make the connection between the SI Offer id and KL offer id used for DB and actions

Key in JSONbody.data	Type	M/O	Use
category	String	M	Offer Type Used for display.
images	Array	O	Used for display.
images[].id	String	M	Used for display.
images[].allowResize	boolean	M	Used for display.
Images[].type	String	M	Used for display.
Images[].height	Integer	O	
Images[].width	Integer	O	Used for display.
Images[].aspectRatio	Double	M	Used for display.
.images[]. url	String	M	Used for display.
catalogStartDateTime	Integer 64	O	Used for display.
longDescription	String	~~O~~	~~Used for display.~~ (Not used)
shortDescription	string	O	Used for display.
shortTitle	string	O	Offer name are used for display.
shortName	String	O	Managed by Axis , it is used to set up Tabs in the EPG with all the channels of the offers, and the name of the Tab is the Shortname of the offer
longTitle	string	~~O~~	~~Description, used for display~~ (Not used)
options []	Array	O	A table of options contains the list of rights that the user will have when subscribed to the offer.
options.entitledOptions[]	Array	M	Options list
options.entitledOptions[].name	String	M	An options table The name of the option, such as in the case of nPVR, is equal to quota{nb_hours}.
options.entitledOptions[].status	Boolean	O	This field is optional and will contain the user's rights status for the option (true: the user has rights to the option. False: the user does not have rights).
options.entitledOptions[].value	String	O	This field is optional and will contain the value of the option, such as the number of hours for the nPVR offer. Note: Either the "value" field or the "status" field will be filled in a block entitled "entitledOptions".
options [].type	String	M	Indicates the type of option such as "nPVR" or "PassPub". Since PassPub has been discontinued, only the "nPVR" type will be available as of today
entitlementState	String	O	used to differentiate between a subscribed and unsubscribed offer and to select the type of image for the S or NS offer ... Not be use for unmanaged_application
genre[]	Array of strings	O	Used for display.
editorialWeight	string	O	Used for display (Sort offers)
Links	Object (HATEOAS)	O	Object that describes URLs actions linked to the offer. Particularly used to make an action subscribe or cancel to an offer Each LINK name is the action, and LINK.href is the URL. Not to be used for unmanaged application offers
Actions	Object (HATEOAS)	O	Object that describes URLs actions on the offer. Used to make subscribe, unsubscribe and to filter actions. Each ACTION name is the action, and ACTION.href is the URL. Example: to subscribe to this offer, call up the URL address in the actions.subscribe object Not to be used for unmanaged application offers

« BOUQUET » type

Datamodel specific to the « BOUQUET » type

Key in JSONbody.data	Type	M/O	Use
Commercial	Object	M	Comercial metadata
commercial.id	String	M	Unique commercial identifier used for subscribe or unsubscribe actions
commercial. subscriptionStatus	String	M	Used to now if the offer is Active, Desactive, Activating or unspecified In our case, to circumvent the DSI issues with the propagation of subscription information across various platforms (KL, etc.), we can consider the offer as subscribed as soon as we have the "Activating" status. This will allow us to update the user journey and display the "Manage my subscriptions" button instead of the "Subscribe" button.
commercial.commercialType	Integer	M	Offer type from a commercial point of view Known values: OPTION, ... Used for display.
commercial.name	Integer	O	Commercial wording of an offer
commercial .originalAmount	float	M	Offer price before promotion. Used for display.
commercial.finalAmount	float	M	Used to be compared with originalAmount, and then for display in function of the result (See UI Part). Offer price with promotion Used for display. Used for the rules to promotion display (Ex: finalAmount+"euros")
Commercial.promotions	Array	O	Object describe the promotion
commercial.promotions[i]. price	Integer 64	M	Object describes the promotions applied to the offer, used for display
commercial.promotions[i].order	Integer	O	Order of application of discounts when there are several promotions on offer. Used to determinate the promotion applied to the offer and display
commercial.promotions[i].applyTill	Integer 64	O	Used for display.
commercial.promotions[i].expirationDate	Integer 64	O	Used for display
commercial.promotions[i]. duration	Object	O	Used for display.
commercial.promotions[i]. duration. durationType	String	O	Duration Unit (Day, month, Year), used for display • one_time : The discount stays attached to the subscription till it is applied on an invoice once. It is removed after that from the subscription. • forever : The discount is attached to the subscription and applied on the invoices till it is explicitly removed. • limited_period : The discount is attached to the subscription and applied on the invoices for a limited duration. This duration starts from the point it is applied to an invoice for the first time and expires after a period specified by period and period_unit
commercial.promotions[i]. duration. period	Integer	O	Duration period, min=1 The duration of time for which the discount is attached to the subscription, in period_units. Applicable only when duration_type is limited_period used for display
commercial.promotions[i]. duration. periodUnit	String	O	The unit of time for period. Applicable only when duration_type is limited_period. Possible values are : day -- A period of 24 hours. month -- A period of 1 calendar month. year -- A period of 1 calendar year (maybe used to display the period of the promotion)

Key in JSONbody.data	Type	M/O	Use
Commercial. promotionalDescription	String	O	Used for display (not used to day)
Commercial.startDate	Int64	O	Not used
Commercial.endDate	In64	O	Used for Display
parentalRating	Integer	M	Display or not the offer
trailerNonSubscribedOffers[]	Array of Strings	O	Link to the baker channel Used for display when we zap in the live channel
replayShop	Object	M	Used to display the scup row
replayShop.total	Integer	M	Total of cup shop used for display
replayShop. items	Array	O	List of cup shop used for display
replayShop. Items[i].id	String	M	Cup shop kl collection id, not used at to day
replayShop. Items[i].name	String	M	Cup shop kl collection id, not used at to day
replayShop. Items[i].providerId	String	M	Used for display (retrieves the scup shop thumbnail from axis)
replayShop. Items[i].channels	Array	M	List of channels associated to this CUP shop, used for display. Note: this list of channels will be set by DALI in the live shop object. To display the row scup, you only need the channel lcn.
replayShop. Items[i].channels[j].id	String	M	Channel id, not used at the day
replayShop. Items[i].channels[j].name	String	M	Channel name, not used at the day
replayShop. Items[i].channels[j].lcn	String	Integer	Lcn used for display
svodShop	Object	O	Used to display the svod row
svodShop.total	Integer	M	Total of vod shop used for display
svodShop. items	Array	O	List of vod shop used for display
svodShop. Items[i].id	String	M	vod shop kl collection id, not used at to day
svodShop. Items[i].name	String	M	vod shop kl collection id, not used at to day
svodShop. Items[i].providerId	String	M	Used for display (retrieves the svod shop thumbnail from axis)
liveShop	Object	O	Used to display the live shop row row
liveShop.total	Integer	M	Total of channels used for display
liveShop. items	Array	O	List of channels used for display
liveShop. Items[i].id	String	M	Linear asset id used to get channel thumbnail from the pds
liveShop. Items[i].name	String	M	Linear asset id, not used
liveShop. Items[i].lcn	Integer	O	Linear asset lcn, used for display
liveShop. Items[i].collections	Array	M	The collection in which the linear asset is associated the idea is to know if the channel is associated with a scupshop or not

Key in JSONbody.data	Type	M/O	Use
`liveShop. Items[i].collections [j].id`	`String`	M	Collection KL id not used
`liveShop. Items[i].collections [j].type`	`String`	M	Collection KL type (CUP_SHOP, VOD_SHOP or LIVE_SHOP), not used
`liveShop. Items[i].collections [j].name`	`string`	M	Collection KL name, not used

BOUQUET display metadata and examples

1. Several offers associated to the channel (Offer with promotion)




v

2. Several offers associated to the channel (Offer without promotion)




3. Unsubscribed offer info page with promotion

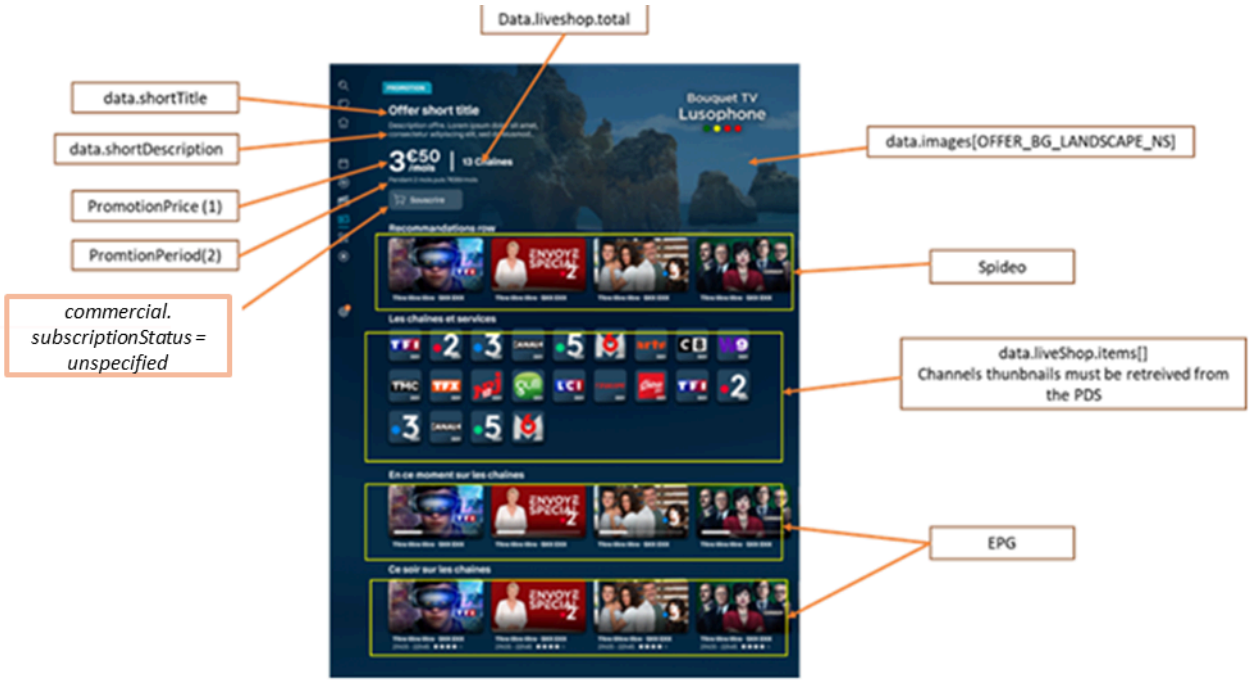

See section (a) for more details for promotionPrice and PromotionPeriod

a. Unsubscribed offer info page without promotion

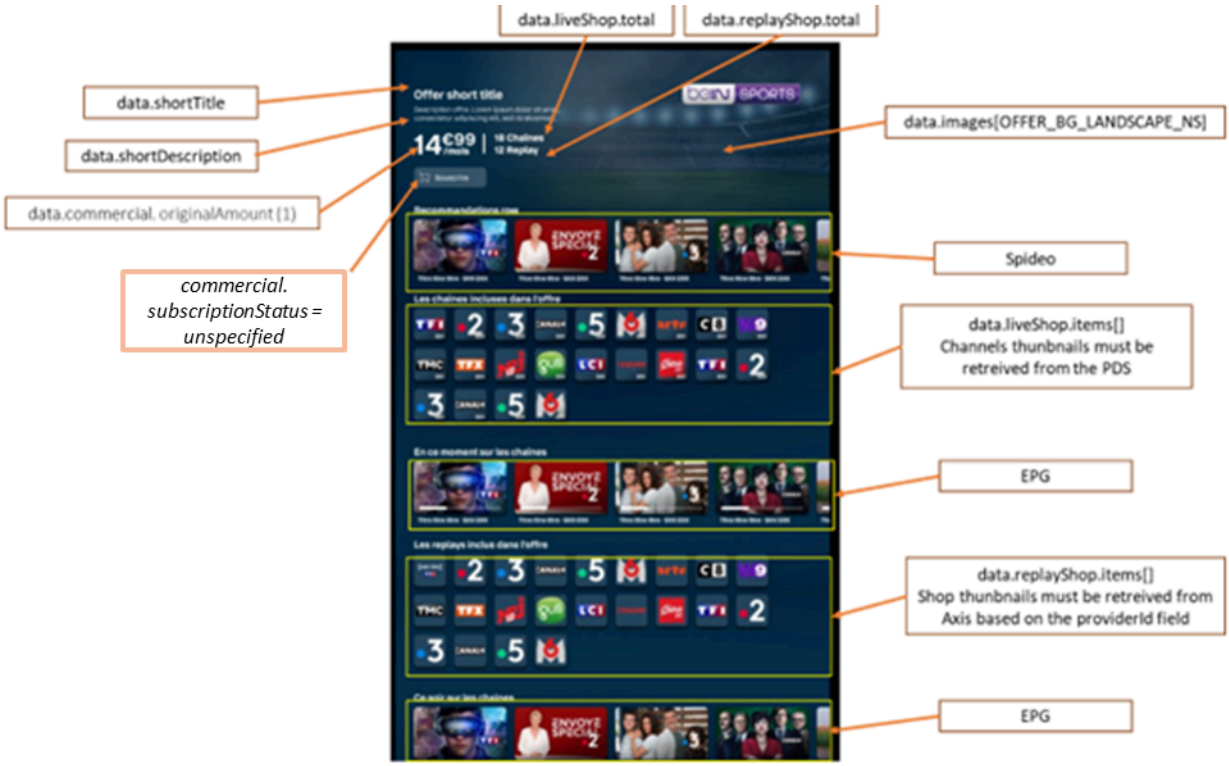

d. subscribed offer info page



« APPLICATION » type (partner offers D+, DORCEL,...)

Datamodel specific to the « APPLICATION » type

Key in JSONbody.data	Type	M/O	Use
commercial	Object	M	Comercial metadata
commercial.id	String	M	Unique commercial identifier used for subscribe or unsubscribe actions
commercial. subscriptionStatus	String	M	Used to now if the offer is Active, Desactivating, Activating or unspecified
commercial.Partner	Object	O	It contains the activation status of the partner offer.
commercial.Partner. id	string	O	Identifier of the partner
commercial.Partner. status	String	M	Status of the account creation in partner side , possible values : ACTIVE, CANCELED, CREATED, INACTIVE, NON-EXISTENT, UNSUBSCRIBED
commercial.commerci alType	Integer	M	Offer type from a commercial point of view Known values: OPTION, BONUS, "OFFERED_SERVICE" "PARTNER_SERVICE". NOT used.
commercial.name	Integer	O	Commercial wording of an offer
commercial .originalAmount	float	M	Offer price before promotion. Used for display.
commercial.finalAmo unt	float	M	Used to be compared with originalAmount, and then for display in function of the result (See UI Part). Offer price with promotion Used for display. Used for the rules to promotion display (Ex: finalAmount+"euros")
Commercial.promotio ns	Array	O	Object describe the promotion

Key in JSONbody.data	Type	M/O	Use
commercial.promotions[i]. price	Integer 64	M	Object describes the promotions applied to the offer, used for display
commercial.promotions[i].order	Integer	O	Order of application of discounts when there are several promotions on offer. Used to determinate the promotion applied to the offer and display
commercial.promotions[i].applyTill	Integer 64	O	Used for display.
commercial.promotions[i].expirationDate	Integer 64	O	Used for display
commercial.promotions[i]. duration	Object	O	Used for display.
commercial.promotions[i]. duration. durationType	String	O	Duration Unit (Day, month, Year), used for display • one_time : The discount stays attached to the subscription till it is applied on an invoice once. It is removed after that from the subscription. • forever : The discount is attached to the subscription and applied on the invoices till it is explicitly removed. • limited_period : The discount is attached to the subscription and applied on the invoices for a limited duration. This duration starts from the point it is applied to an invoice for the first time and expires after a period specified by period and period_unit
commercial.promotions[i]. duration. period	Integer	O	Duration period, min=1 The duration of time for which the discount is attached to the subscription, in period_units. Applicable only when duration_type is limited_period used for display
commercial.promotions[i]. duration. periodUnit	String	O	The unit of time for period. Applicable only when duration_type is limited_period. Possible values are : day -- A period of 24 hours. month -- A period of 1 calendar month. year -- A period of 1 calendar year (maybe used to display the period of the promotion)
Commercial. promotionalDescription	String	O	Used for display (not used to day)
Commercial.startDate	Int64	O	Not used
Commercial.endDate	In64	O	Used for Display
partnerOfferUrl	String	O	Used for display
partnerOfferApk	String	O	Used for display
parentalRating	Integer	M	Display or not the offer
trailerNonSubscribedOffers[]	Array of Strings	O	Link to the baker channel Used for display when we zap in the live channel
relatedBoutique	String	O	Contains the id of the collection associated with the application, not used by FE
subscriptionType	Int	O	'Subscription type used' is used to determine the type of offer - fluid, non-fluid, etc.
activationLink	String	O	The deeplink or QR Code contains the path to activate the account on the app . The QR Code and the deep link are computed by DALI, and the device should use them as such.
finalActivationLink	String	O	Activation Link to be called by devices Computed by DALI The QR Code and the deep link are computed by DALI, and the device should use them as such. The finalActivationLink will only be provided in the response from DALI following a subscription. Therefore, this field should be saved once in the offer database and should not be updated after a get or list call, as the finalActivationLink will not be included in the return of these APIs

Key in JSONbody.data	Type	M/O	Use
infoPageTemplate	Int	O	Not used for the moment. The info page template will be shared with axis
hide	Boolean	O	This is used for technical offers that should not be displayed.

« UNMANAGED_APPLICATION » type (Canal+)

Datamodel specific to the « UNMANAGED_APPLICATION » type

Key in JSONbody.data	Type	M/O	Use
partnerOfferUrl	String	O	Used for display
partnerOfferApk	String	O	Used for display
parentalRating	Integer	M	Display or not the offer
trailerNonSubscribedOffers[]	Array of Strings	O	Link to the baker channel Used for display when we zap in the live channel
relatedBoutique	String	O	Contains the id of the collection associated with the application, not used by FE
hide	Boolean	O	This is used for technical offers that should not be displayed.

This offer is only eligible for the STB device and is not listed in the offers defined on the DSI side. Therefore, it is necissary to specify the categories of offers supported by the device in the request for obtaining the list of subscribed and unsubscribed offers.

For example, if the device wants to retrieve Canal offers in the list of subscribable offers, it must add the category=UNMANAGED_APPLICATION query parameter to the request.

For other devices that do not support Canal applications and applications not managed by the DSI, the category UNMANAGED_APPLICATION should not be added to the request.

This type of offer can only be subscribed to from the partner app, such as Canal+.

Datamodel specific to the « SERVICE » type

Key in JSONbody.data	Type	M/O	Use
commercial	Object	M	Comercial metadata
commercial.id	String	M	Unique commercial identifier used for subscribe or unsubscribe actions
commercial.subscriptionStatus	String	M	Used to now if the offer is Active, Desactive, Activating or unspecified
commercial.commercialType	Integer	M	Offer type from a commercial point of view Known values: OPTION, ... Used for display.
commercial.name	Integer	O	Commercial wording of an offer
commercial.originalAmount	float	M	Offer price before promotion. Used for display.
commercial.finalAmount	float	M	Used to be compared with originalAmount, and then for display in function of the result (See UI Part). Offer price with promotion Used for display. Used for the rules to promotion display (Ex: finalAmount+"euros")
Commercial.promotions	Array	O	Object describe the promotion
commercial.promotions[i]. price	Integer 64	M	Object describes the promotions applied to the offer, used for display
commercial.promotions[i].order	Integer	O	Order of application of discounts when there are several promotions on offer. Used to determinate the promotion applied to the offer and display

Key in JSONbody.data	Type	M/O	Use
commercial.promotions[i].applyTill	Integer 64	O	Used for display.
commercial.promotions[i].expirationDate	Integer 64	O	Used for display
commercial.promotions[i]. duration	Object	O	Used for display.
commercial.promotions[i]. duration. durationType	String	O	Duration Unit (Day, month, Year), used for display • one_time : The discount stays attached to the subscription till it is applied on an invoice once. It is removed after that from the subscription. • forever : The discount is attached to the subscription and applied on the invoices till it is explicitly removed. • limited_period : The discount is attached to the subscription and applied on the invoices for a limited duration. This duration starts from the point it is applied to an invoice for the first time and expires after a period specified by period and period_unit
commercial.promotions[i]. duration. period	Integer	O	Duration period, min=1 The duration of time for which the discount is attached to the subscription, in period_units. Applicable only when duration_type is limited_period used for display
commercial.promotions[i]. duration. periodUnit	String	O	The unit of time for period. Applicable only when duration_type is limited_period. Possible values are : day -- A period of 24 hours. month -- A period of 1 calendar month. year -- A period of 1 calendar year (maybe used to display the period of the promotion)
Commercial. promotionalDescription	String	O	Used for display (not used to day)
Commercial.startDate	Int64	O	Not used
Commercial.endDate	In64	O	Used for Display
relatedBoutique	String	O	Contains the id of the collection associated with the application, not used by FE

nPVR offer

As indicated in paragraph 4.1.3.1, there will be a table of option objects through which we can determine the type of the service offer is nPVR or not unsing the metadata "options[].type" = "nPVR".

Following the retrieval of an "nPVR" offer via the get and list APIs exposed by DALI, the structure of the option field is as follows:

Field	*type*	*M/O*	*Value*
data.options []	Array	O	-
data.options.entitledOptions[]	Array	M	-
data.options.entitledOptions[].name	String	M	quota{nb_hours}
data.options.entitledOptions[].status	Boolean	O	NULL
data.options.entitledOptions[].value	String	O	{nb_hours}
data.options [].type	String	M	"nPVR"

This object must be stored in the local offer database to be utilized by the UI according to marketing needs. Through the metadata returned by DALI following the "list" API call, we can distinguish:

- The type of offer, whether nPVR or not, via options[].type
- The subscription status via data.entitlementState
- The quota of the nPVR offer via data.options.entitledOptions[].value

Datamodel specific to the « MULTIOFFER » type

Key in JSONbody.data	Type	M/O	Use
commercial	Object	M	Comercial metadata
commercial.id	String	M	Unique commercial identifier used for subscribe or unsubscribe actions

Key in JSONbody.data	Type	M/O	Use
commercial. subscriptionStatus	String	M	Used to now if the offer is Active, Desactive, Activating or unspecified
commercial.commercialType	Integer	M	Offer type from a commercial point of view Known values: OPTION, ... Used for display.
commercial.name	Integer	O	Commercial wording of an offer
commercial .originalAmount	float	M	Offer price before promotion. Used for display.
commercial.finalAmount	float	M	Used to be compared with originalAmount, and then for display in function of the result (See UI Part). Offer price with promotion Used for display. Used for the rules to promotion display (Ex: finalAmount+"euros")
Commercial.promotions	Array	O	Object describe the promotion
commercial.promotions[i]. price	Integer 64	M	Object describes the promotions applied to the offer, used for display
commercial.promotions[i].order	Integer	O	Order of application of discounts when there are several promotions on offer. Used to determinate the promotion applied to the offer and display
commercial.promotions[i].applyTill	Integer 64	O	Used for display.
commercial.promotions[i].expirationDate	Integer 64	O	Used for display
commercial.promotions[i]. duration	Object	O	Used for display.
commercial.promotions[i]. duration. durationType	String	O	Duration Unit (Day, month, Year), used for display • one_time : The discount stays attached to the subscription till it is applied on an invoice once. It is removed after that from the subscription. • forever : The discount is attached to the subscription and applied on the invoices till it is explicitly removed. • limited_period : The discount is attached to the subscription and applied on the invoices for a limited duration. This duration starts from the point it is applied to an invoice for the first time and expires after a period specified by period and period_unit
commercial.promotions[i]. duration. period	Integer	O	Duration period, min=1 The duration of time for which the discount is attached to the subscription, in period_units. Applicable only when duration_type is limited_period used for display
commercial.promotions[i]. duration. periodUnit	String	O	The unit of time for period. Applicable only when duration_type is limited_period. Possible values are : day -- A period of 24 hours. month -- A period of 1 calendar month. year -- A period of 1 calendar year (maybe used to display the period of the promotion)
Commercial. promotionalDescription	String	O	Used for display (not used to day)
Commercial.startDate	Int64	O	Not used
Commercial.endDate	In64	O	Used for Display
relatedBoutique	String	O	Contains the id of the collection associated with the application, not used by FE
parentalRating	Integer	M	Display or not the offer

Response Error :

PFSPxyCode	HTTPCode	JSON.error	Cause	Action to do
1(1)	401	Invalid Token	Token is invalid	Authentication process relaunched.
[2-11]	N/A	N/A	PFSProxy Internal Error	Just log error, but App goes on.
400	400	Bad Request	Bad Request	Just log error, but App goes on.
404	404	Not Found	Not Found	Just log error, but App goes on.
405	405	Method Not Allowed	Method Not Allowed	Just log error, but App goes on.
429	429	Too many requests	Too many requests	Just log error, but App goes on.
500	500	Internal server error	Internal server error	Just log error, but App goes on.
502	502	External server error	External server error	Just log error, but App goes on.
503	503	Internal server error	Internal server error	Just log error, but App goes on.
Other not HTTP	N/A	N/A	All	Just log error, but App goes on.
Other from APIM: See REF []				

- If data already exists in App, no error displayed, current data in DB is used.
- Notice (1): PfsProxy errorCode 1 means "non authenticate" but must be compared to PfsProxy codes enumeration. Example: errorCode == PfsProxy.NON_AUTHENTICATE.
-

4.2.4 Display metadata and illustrative examples

> **Principe confirmé - CLAR-OFF-008 : UI illustrative, service normatif.** Les maquettes, captures et exemples d'écrans de ce document sont illustratifs et ne constituent pas des exigences de présentation. L'interface peut évoluer indépendamment ; cette spécification porte sur les données et le comportement du service. Les règles de prix et de promotion décrites ici restent pertinentes dans la mesure où elles définissent les données ou résultats du service. À clarifier avec le Swagger : les chemins `commercial.promotion` utilisés dans les formules par rapport au modèle `commercial.promotions[]`, et la sémantique de `limited_period`, `one_time` et `forever`. Ne pas déduire de ces illustrations une mise en page ou un parcours écran obligatoire.

4. Several offers associated to the channel (Offer with promotion)



1. **PromotionPrice :**

If data.commercial.originalAmount != data.commercial.finalAmount
Then

PromotionPrice = data.commercial.finalAmount + "€" + "/mois"
end IF

2. **PromotionPeriod :**

if data.commercial.originalAmount != data.commercial.finalAmount
then
if data.commercial.promotion.duration.durationType = "limited_period"
then


> PeriodPromotion = "pendant" + data.commercial.promotion.duration.period +
> data.commercial.promotion.duration.periodUnit + "puis" + data.commercial.originalAmount + "€\mois"

Endif
// other duration_type values (one_time and forever) are not yet taken into account
end IF

5. Several offers associated to the channel (Offer without promotion)




6. Unsubscribed offer info page with promotion

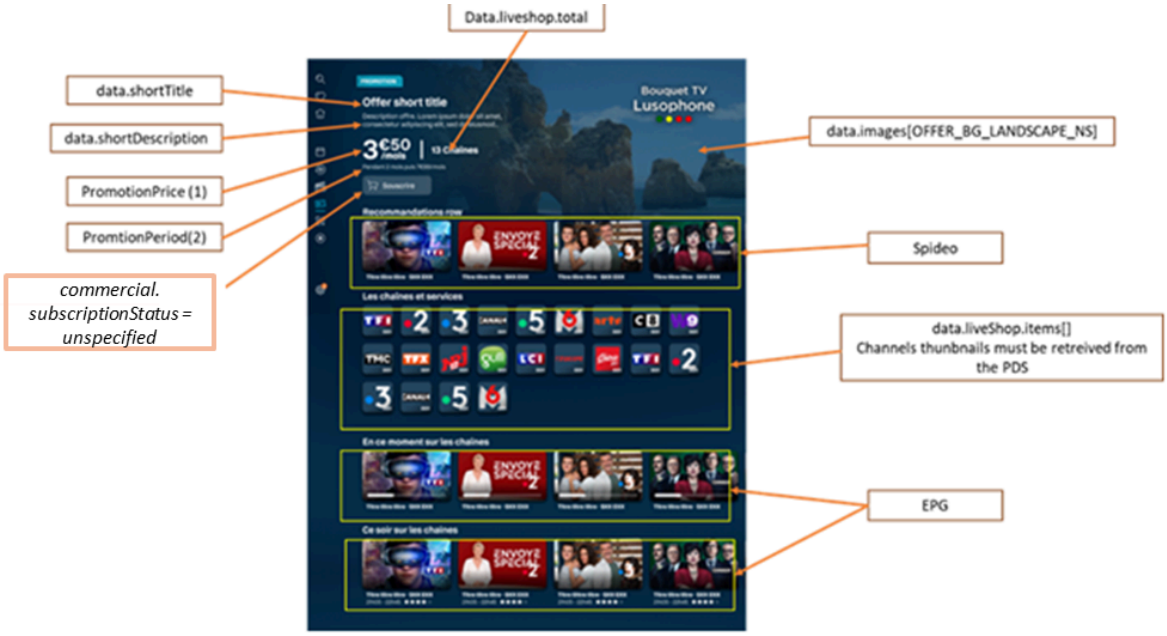

See section (a) for more details for promotionPrice and PromotionPeriod

b. Unsubscribed offer info page without promotion

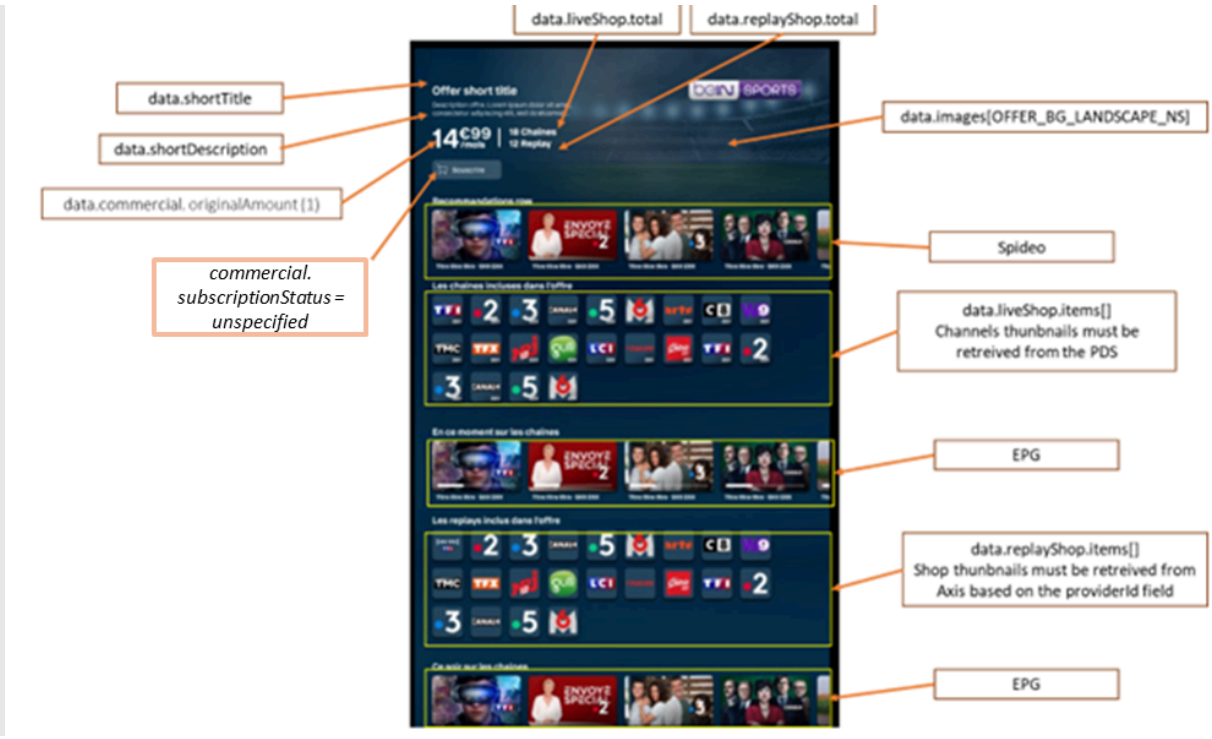


e. subscribed offer info page




5 User journeys

5.1 Accessing a highlighted offer

a. Access to an offer from the Home menu:

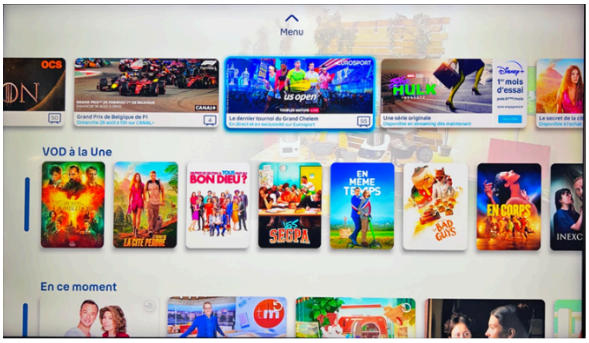

Home Page

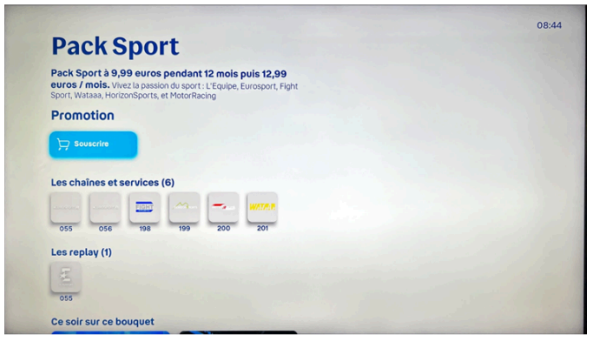

Détails Offre

b. Solution :

> Retrieving metadata of the featured offer from the local database.

c. Raisons :

- Axis does not distinguish between offers eligible and not eligible to the user.
- If we retrieve offer metadata from KL, there is a risk of displaying offers not eligible to the user.
- We rely on locally stored offers, and if the offer does not exist in the database (not eligible), we do not display it.


5.2 Find an offer using a specific search (out of scope for the moment)

a. Scenario (Accessing an offer through a search):

Recherche dans Bouquet TV



Détails Offre

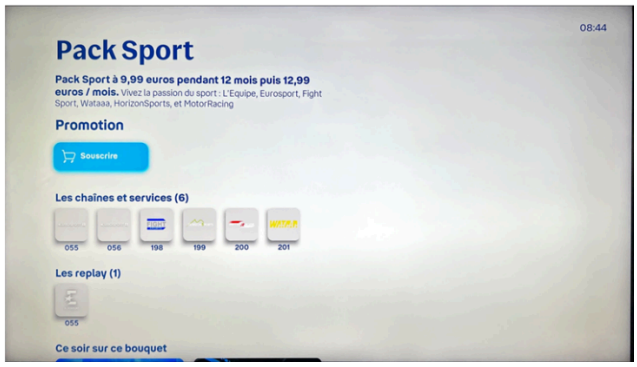

b. Solution :


> Search and retrieve offer metadata locally.

c. Raisons :

- KL does not distinguish between offers eligible and not eligible to the user after a Ksql search.
- The search must be done locally to avoid the risk of displaying offers not eligible to the user.

5.3 Retrieve all eligible offers (subscriptions menu)

a. Scenario (Accessing an offer from the "My Subscriptions" menu):

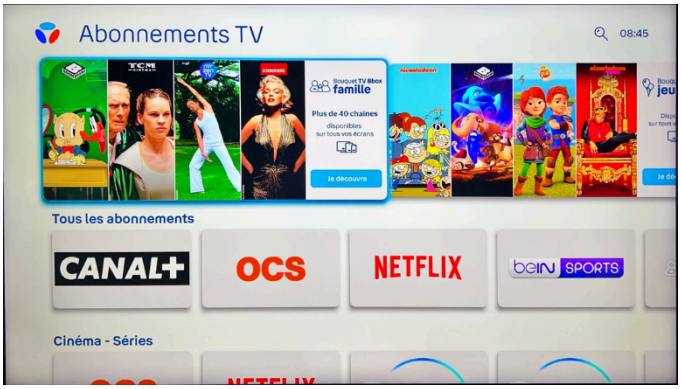

d. Solution :


> Retrieve offers as described in section section 4.2

5.4 Retrieve subscribed offers

a. Scenario (Displaying subscribed offers in the "My Subscriptions" menu):



Offre souscrites

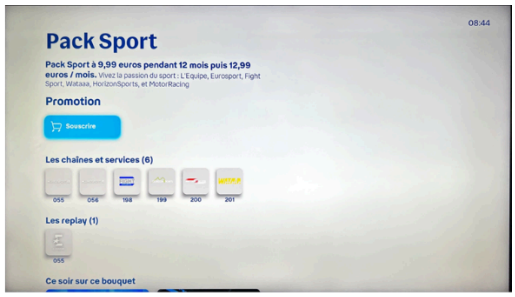

Détails de l'offre

b. Solution :

> Retrieve offer metadata locally.

c. Raisons :

- The list of subscribed offers is accessible from the "My Subscriptions" menu.
- We are synchronized with the actual status of subscribed offers when entering the "My Subscriptions" menu.

5.5 Recovery of offers associated with an unsubscribed channel

Scenario (Show offers associated with a chain) :



- This screen will be displayed:
  - In the case of OTT:
    - If the response from the "GetPlaybackContext" phoenix api is NotEntitled and the user does not have rights to this channel.
  - In the case of IPTV:
    - If the VMX client response is "NoRigth" and the user does not have rights to this channel.



- We need to retrieve the list of offers associated with the channel from the offer objects loaded in the UI.
- All offer metadata associated with the chain will be retrieved from the local offer DB.



- In this screen, we use the information already stored locally in the database.

5.6 Recovery of offers associated with a CUP shop

Scenario (Show offers associated with a CUP shop)



Boutique CUP

When the user selects a CUP shop :

- If several assets are associated with this store, the info sheet for each asset must be displayed (Playback will be launched when the user selects an asset).
- If only one asset is associated with this store, the asset info sheet must be displayed with a view button.



Popup Non-subscribed user

the user selects an asset to play or presses the view button:

- The "getPlaybackContext" api will be launched to retrieve playback rights:
  - If the user has the right to play the asset, playback will start automatically.
  - If the user doesn't have playback rights, a popup will be displayed asking him to subscribe.




Details of the subscription offer

- If the user presses the "Find out how to benefit from this video" button, we can use the metadata and details of offers available locally (iso Live).

5.7 Subscription to an offer

5.7.1 Subscription process for an offer associated with a live channel and a CUP asset

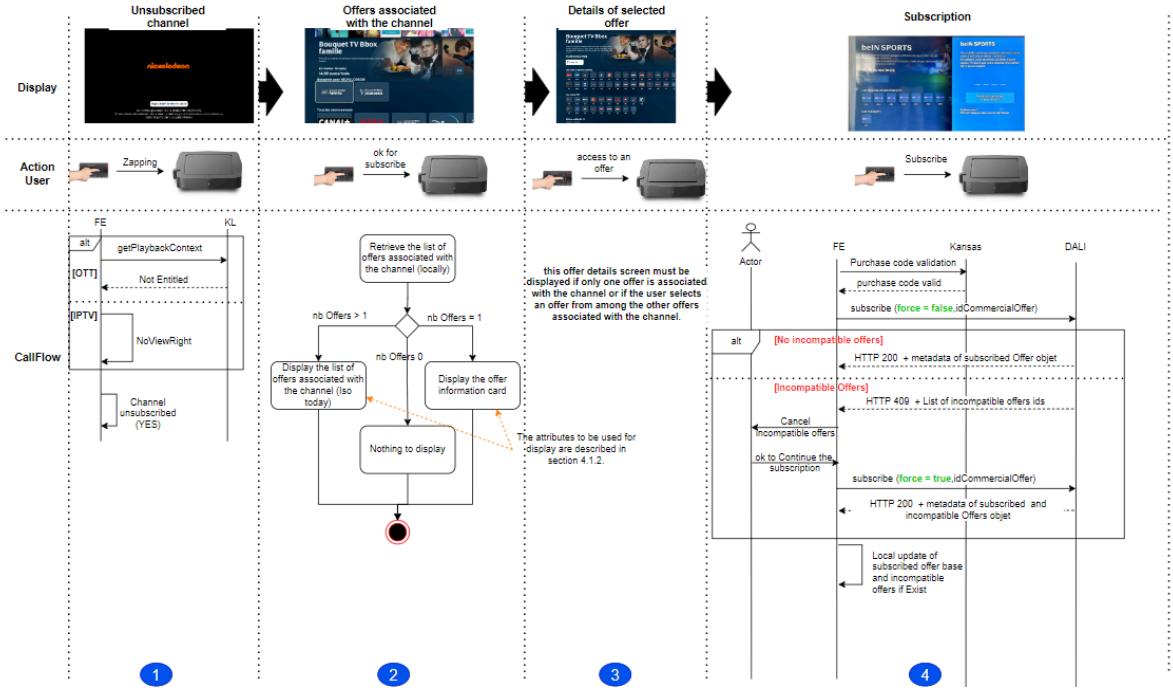

Step 1 : User zaps to an unsubscribed channel
Step 2 : The user presses the subscribe button.
In this step, we must :

> o Retrieve the list of offers associated with the channel locally:

- If the number of offers > 1
  - We display the list of offers (as we do today)
- If the number of offers = 1
  - The info sheet for the offer associated with the channel must be displayed.
- If number of offers = 0
  - Display subscription menu

NOTE :

a. A single Offer associated with the channel:

Display of offer details is based on locally stored offer metadata. (The metadata to be displayed are iso today)
The Information to be displayed is described in section 4.2.4 :

b. Several Offers associated with the channel

> When the user focuses on one of the Offers, the following is displayed:

- Offer name
- Offer description + promotion description
- Offer image
- Number and thumbnails of channels associated with the offer
- Price
- Number of replay shop

> o Display information retrieval is based on locally stored offer metadata (iso to day)
> o If the user selects one of the offers, the information described in a) is displayed.

Step 3 :

- If only one offer is associated with the channel
  - This step does not exist
- Else, if several offers are associated with the channel
  - We need to display the detailed info card for the offer selected by the user.

Step 4 :

The user presses the subscribe button and enters his purchase code

- The purchase code must be managed (validated, created, ...with the Kansas platform (iso today).
  - If the purchase code is valid :
    - The device must request DALI to launch the subscription action (The subscription API is available in the HAETOS link in the actions.subscribe offer metadata) with the parameter force = false allowing DALI to check the incompatibility of the offer and return to the device the list of incompatible offers if they exist. The device must request DALI to retrieve the (Details and full API path are in the swagger.) :

```
POST /api/offers/subscribe
```

Header :

Parameter	Value	Comment
See 4.1		
`x-purchase-code`	$PurchaseCode	Purchase-code filled by the user

Query parameters :

Param	*Type*	*Description*
`idCommercialOffer`	String	Offer ID DSI
`force`	Boolean	Force the subscription without incompatibility offers verfication Should be **false** for this use case

a. **If the offer is not incompatible with other offers :**

Success Response :

- `http code 200`
- The Subscribed offer object This objet is decribed in section 4.2.2 (**JSONbody.data Array**)

Error Response :

PFSPxyCode	HTTPCode	JSON.error	Cause	Action to do
1(1)	401	Invalid Token	Token is invalid	Authentication process relaunched.
[2-11]	N/A	N/A	PFSProxy Internal Error	Just log error, but App goes on.
400	400	Bad Request	Bad Request	Just log error, but App goes on.
404	404	Not Found	Not Found	Just log error, but App goes on.
405	405	Method Not Allowed	Method Not Allowed	Just log error, but App goes on.
409	409	Conflict	Incompatible offers found	Asks the user to confirm cancellation of compatible offers
429	429	Too many requests	Too many requests	Just log error, but App goes on.
500	500	Internal server error	Internal server error	Just log error, but App goes on.
502	502	External server error	External server error	Just log error, but App goes on.
503	503	Internal server error	Internal server error	Just log error, but App goes on.

PFSPxyCode	HTTPCode	JSON.error	Cause	Action to do
Other not HTTP	N/A	N/A	All	Just log error, but App goes on.
Other from APIM: See REF []				

b. **If the offer is incompatible with other offers :**

> **À clarifier / valider - CLAR-OFF-009 : incompatibilités et réponse 409.** Le DPI v2 confirme le cas `409` / `Incompatible offer`, mais ne précise pas suffisamment la structure du corps. Aligner la description « list of string » avec l'exemple d'objet contenant `additionalInfo.incompatibleOffers`, après vérification du contrat. Confirmer le libellé de l'action « cancellation of compatible offers » par rapport aux offres incompatibles du parcours, et expliciter l'enchaînement confirmation utilisateur / `force=true` ainsi que le traitement d'une erreur lors de cette seconde requête. Aucun comportement n'est corrigé par supposition.

> *Success Response :*

- `http code 409`
- Body : list of string Incompatible offers list

> Exemple :

```
{
  "error": "Incompatible offer",
  "errorDescription": "The offer is incompatible with one of the subscribed offers",
  "errorSource": "CLIENT",
  "additionalInfo": {
    "incompatibleOffers": [
      "offerId1",
      "offerId2",
      "offerId3"
    ]
  }
}
```

1. The device must ask the user to accept the cancellation of incompatible offers before subscribing to the offer.
2. If the user confirms subscription to the offer, then the device must request DALI with the api described in (a) (with **force = true**).
3. The device receives the metadata of the newly subscribed offer and incompatible offers if exist. In this scenario, the device should update its local database directly without the need for a second call to update the list of offers. (the response structure is defined in the swagger ref[1])

> NOTE : The ETAG does not need to be updated at this stage. We'll have to wait for the next updater to update it.

5.8 Partner application activation


5.8.1 Activation status and partner journey

> **À clarifier / valider - CLAR-OFF-005 : disponibilité du lien d'activation.** Les sources divergent sur le moment où `finalActivationLink` est fourni : le parcours produit indique qu'il est retourné après souscription et conservé localement, tandis que le DPI v2 décrit aussi sa construction lors du formatage des réponses Get/List pour certains cas ; le JSON partagé en contient dans une réponse List. Confirmer le contrat courant avec Swagger. Expliciter le comportement produit en cas d'absence du lien, de redémarrage ou d'expiration, sans reconstruire le lien côté équipement ni changer le parcours validé.

> **What changes compared to the legacy version:**
> There is no specific AIBO API to determine the activation status, instead one must call the DALI getOffer API with the commercial offer ID to obtain the activation status. The activation status is found in the commercial object returned by DALI in the Partner object.

Call flow :

> Note: With each entry to display the information of an offer, we must apply this call flow.

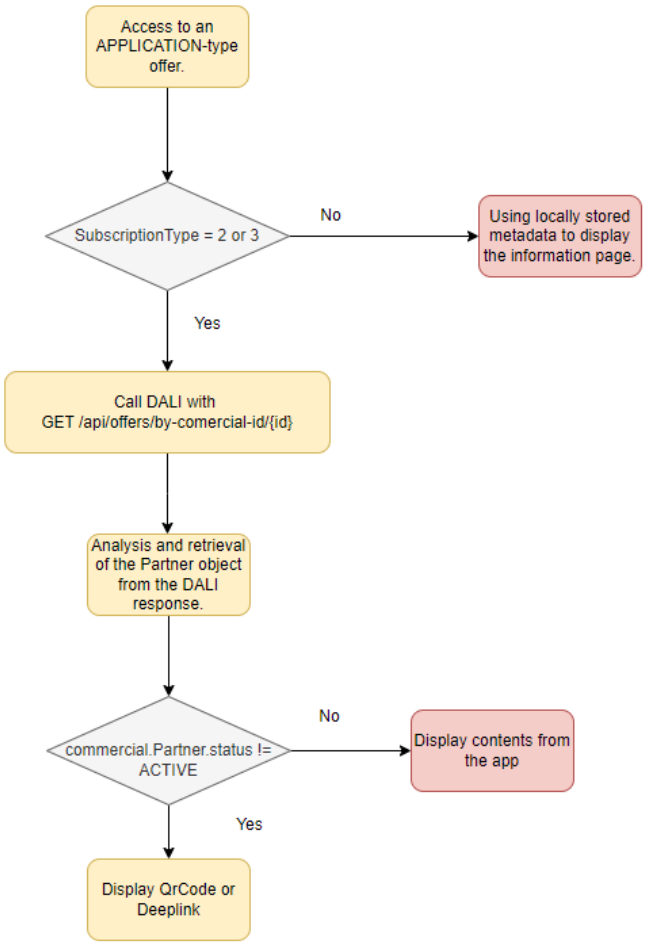

- If the user accesses an APPLICATION-type offer
  - We must check the subscription type data.subscriptionType.
    - If data.subscriptionType=2 or 3, then we must know the activation status of the offer:
      - To determine the activation status of an offer, it is necessary to call DALI with the "get" API for the offers by specifying the ID of the relevant offer.
        - The response to this request will contain a "commercial.Partner" object, which will indicate the activation status to adjust the user journey accordingly - field described in the table above:
          - If the commercial.Partner.status is different from 'ACTIVE', then the QRCode (data.subscriptionType=2 as Disney+) or application thumbnail/deeplink that redirects to the account creation page (data.subscriptionType=3 as DORCEL) must be displayed.
            - The QR Code or the deep link is sent by DALI in the metadata : finalActivationLink
          - ACTIVE status: The "Your service to activate" row (which contains the QRCode or deeplink for account creation) must be hidden in the offer information sheet.

> **DALI API**

2. API specification (swagger link)

```
GET /api/offers/by-commercial-id/{commercialId}
```

> **À clarifier / valider - CLAR-OFF-006 : réponse de la consultation unitaire.** Le DPI v2 décrit une réponse de type liste d'objets `OfferItem` pour le Get par identifiant commercial, tandis que la description actuelle présente une enveloppe `data` avec `totalElements`, `totalPages` et `currentPage`. Vérifier avec le Swagger la forme exacte de la réponse, sa cardinalité et le chemin du statut partenaire ; ne pas déduire la forme à partir du seul document DPI.

(le path de l'api est défini dans le swagger)

Header parameters :

Param	*Type*	*Description*
See 4.1		

Response success :

- ***RESPONSE Body***
  - **data** : Array Data contains the entire table defined in (a).
  - **totalElements** : Integer
    - total number of items on offer (subscribed and not subscribed)
  - **totalPages : Integer**
    - total pages
  - **currentPage** :Integer
    - index of current page

NOTE:

- Code 200 or 0 (PFSProxy), with no error nor empty body. Attribute "data" is a list of offer objects,

> and attribute storage gives related data. All data are listed in SAG. The following ones are stored. See below.


Subscribe/unsubscribe :

> There is no impact on the devices for managing the subscription and cancellation of partner offers. The same request and principle as for bouquet offers is applied for subscription and cancellation. DALI chooses which subscription API to call based on the type of offer - fluid or non-fluid.

5.8.2 Fluid and non-fluid offers


> **À clarifier / valider - CLAR-OFF-007 : activation des offres partenaires.** Les exemples produit validés associent `subscriptionType=2` à Disney+ / QR code et `subscriptionType=3` à Dorcel / application ou lien partenaire. Le DPI v2 contient des descriptions contradictoires de ces types et de la construction de `finalActivationLink` ; confirmer le dictionnaire courant avec Swagger sans remplacer les exemples validés par supposition. Rendre explicite la matrice statut commercial / `entitlementState` / statut partenaire / actions UI, notamment pour le type `3` non activé auquel une nouvelle souscription est proposée. Préciser la portée de la limite d'un appel toutes les 5 secondes et le comportement à l'expiration du lien valable une heure.

- Non-fluid offer (as Disney+)

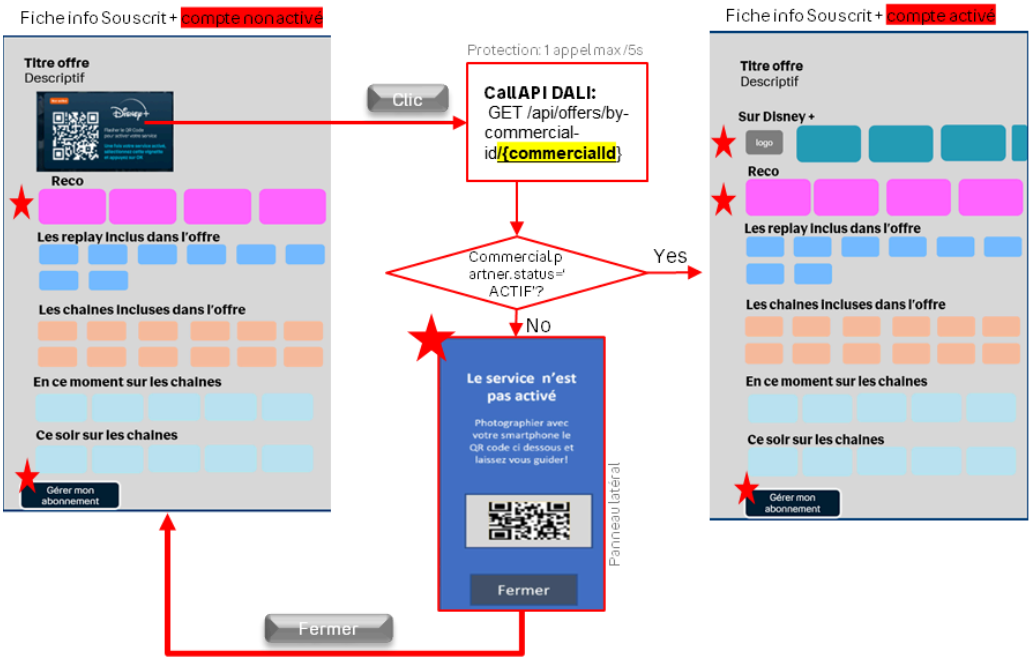

> After subscribing to the (Disney+) offer (with subscriptionType=2) through the Bytel UI, the subscription status returned by the SI via DALI will be active and the data.entitlmentStatus = ENTITLED, even though the account may not be activated. In this situation, we need to check the account activation status to adjust the journey correctly.
>
> The user has the option to click on the QR Code as described in the schema. In this case, we should call the DALI get API to obtain the account activation status. We maintain the same protection as the legacy with 1 get call per 5 seconds.

- fluid offer (as DORCEL)

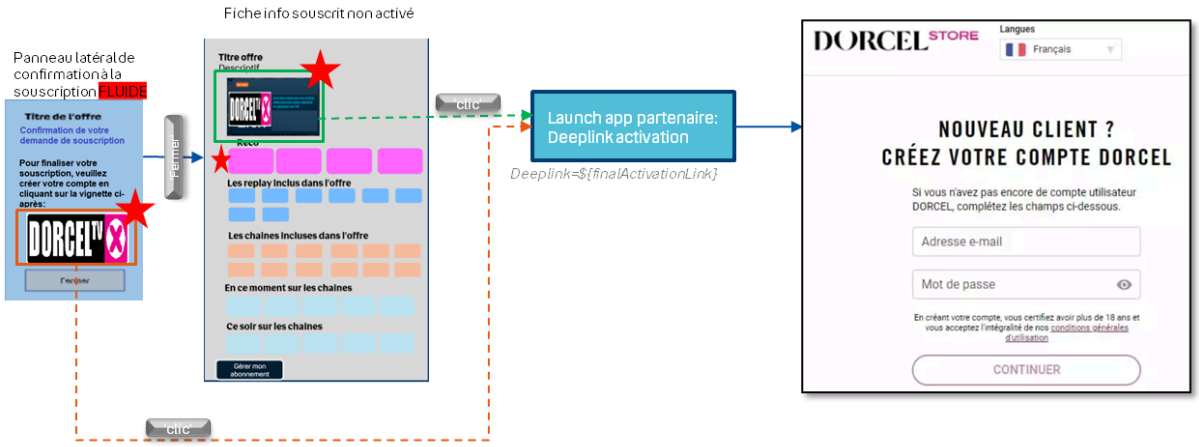

> After a user subscribes to this type of offer (data.subscriptionType = 3), such as the DORCEL offer, the user must activate their account via the deep link provided in the UI (the deep link is defined in data.finalActivationLink). This deep link remains valid for one hour, and the subscription status remains DEACTIVATING with data.entitlementStatus = NOT_ENTITLED until the user activates their account.
>
> To simplify the management of this type of offer on the device side without taking into account the deep link's validity period, we should rely on the user's subscription status:

- If data.subscriptionType=3 and commercial.partner.status != ACTIVE, then we offer the user to subscribe to the offer even if they have been subscribed for less than an hour.

5.9 Customer journey adaptation after subscription

> **À clarifier / valider - CLAR-OFF-010 : compléments au cycle local de TRANSIENT.** La gestion locale de cet état, son démarrage à la souscription et sa sortie à l'expiration des 120 secondes sont confirmés et décrits ci-dessous. Restent à préciser la clé de configuration effective, le comportement après un redémarrage pendant la temporisation et le traitement d'un échec de rafraîchissement ou de droits toujours non propagés après l'expiration. Ces cas ne remettent pas en cause la sortie de `TRANSIENT` à l'échéance.

a. Objective

Subscription rights propagation to channels may take several minutes. This enhancement aims to improve the user experience during this delay, until rights are fully propagated from DSI to KL.

b. Current Behavior

After subscribing, if a user attempts playback of a newly subscribed channel before rights propagation:

- A subscription proposal screen is displayed.



- The "Souscrire" button remains visible in the offer info sheet.



- On STB, entitlement retrieval is triggered 30 seconds after subscription via the KL entitlement API.

c. Changes Introduced

1. Transient Subscription Status
   - `TRANSIENT` is a temporary state managed locally by the product (Device), between *not subscribed* and *subscribed*, while the subscription is being processed on the DSI side.
   - This local waiting state is distinct from the commercial and entitlement statuses received from DALI; it is managed by the product rather than obtained from the API response.
   - The subscription starts the local waiting timer. Its default duration is 120 seconds; the existing configurable-duration requirement is retained (configuration key example: `default.offers.config.cooldown_in_seconds`).
   - The product enters `TRANSIENT` when this timer starts and remains in this state until the timer expires. With the default configuration, the product exits `TRANSIENT` after 120 seconds.
   - Timer expiry ends the local waiting state; it does not, by itself, confirm that DSI processing or entitlement propagation has completed.
   - Ensures a single reference point for subscription status checks.

2. Playback Behavior During TRANSIENT

> If the channel belongs to an offer in TRANSIENT state and playback fails:

- IPTV: returns NORIGHT.
- OTT Live: getPlaybackContext returns NOT_ENTITLED.
- System behavior:
  • Remove the "OK pour souscrire" button.
  • Display updated message:
    - New: " Votre abonnement est en cours d'activation. Nous vous invitons à patienter quelques minute"
    - Replaces: " Vous n'êtes pas abonné à la chaîne XXX.

> Si vous venez de souscrire, votre abonnement est peut-être en cours d'activation.
> Merci de patienter quelques minutes. "
> 

3. Offer Info Sheet Update During TRANSIENT
   • Replace "Souscrire" button text with "Souscription en cours".
4. Entitlement Retrieval

> Adjust entitlement retrieval timer.
> After 120 seconds, fetch entitlements for all channels:
>
> ```
> POST {{PhoenixURL}}asset/action/list
> ```
>
> Example:
>
> ```
> {
>   "apiVersion": "{{apiVersion}}",
>   "ks": "{{kaltura_ks}}",
>   "filter": {
>     "objectType": "KalturaSearchAssetFilter",
>     "kSql": "(and entitled_assets='entitledSubscriptions' asset_type={{Linear_Asset}})"
>   },
>   "responseProfile": {
>     "objectType": "KalturaOnDemandResponseProfile",
>     "retrievedProperties": "id"
>   },
>   "pager": {
>     "pageSize": 500,
>     "pageIndex": 1
>   }
> }
> ```

5. Offer List Refresh


> Update offers via DALI list API.

- For this use case:
  - Do not validate ETag.
  - Force list refresh.

5.10 Unsubscription of an offer

> **À clarifier / valider - CLAR-OFF-011 : erreurs et cohérence locale après action.** Compléter la lecture des actions déjà validées dans les tableaux d'erreurs par les conséquences UI et les données locales conservées en cas d'indisponibilité, de réponse vide ou de résultat de souscription/résiliation incertain. Préciser les conditions de relance et leur articulation avec le rafraîchissement différé de l'ETag. Ce point concerne les deux parcours ; il n'ajoute pas de politique de reprise non validée.

Call Flow :

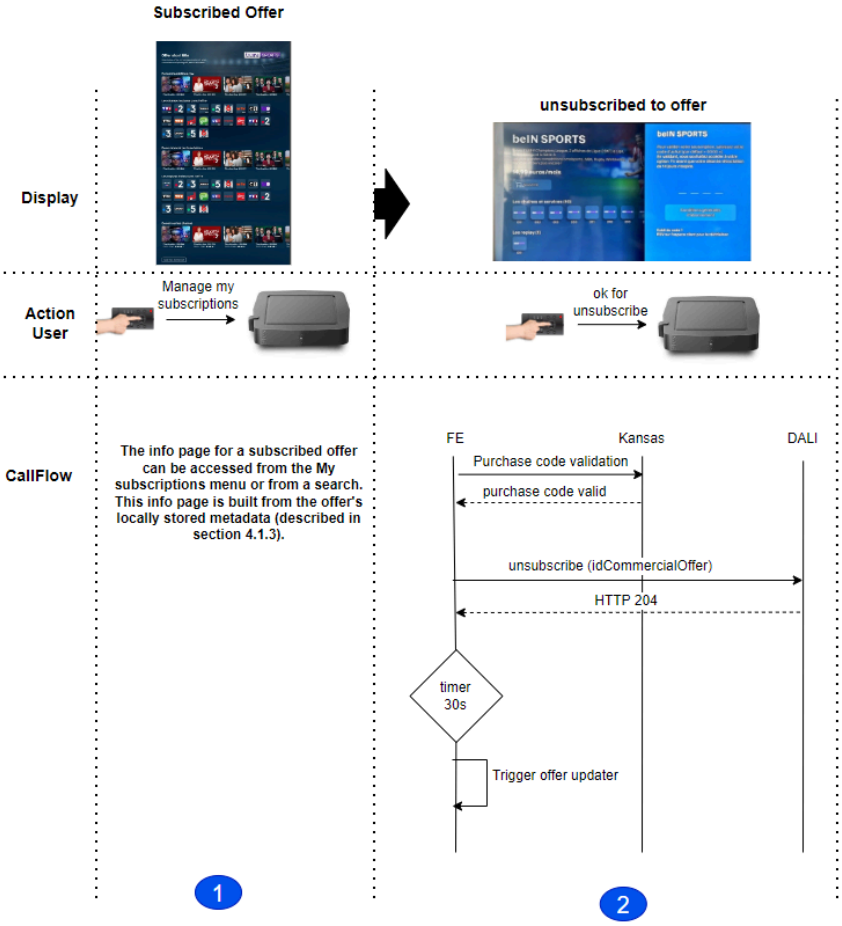

Step 1 : Accessing the information page of a subscribed offer can be done either through the "My Subscriptions" menu , through a search, or through HIGHLIGHTED featured subscribed offers. The construction of this sheet relies on the locally loaded metadata, as described in section 4.2.4

Step 2 :

i. The user presses the unsubscribe button and enters his purchase code
- The purchase code must be validated with the Kansas platform (iso today)
  - If the purchase code is valid
    - The device must request DALI to unsubscribe to the offer(The unsubscription API is available in the HAETOS link in the actions.unsubscribe offer metadata): (Details and full API path are in the swagger.) :

```
POST /api/offers/unsubscribe
```

Header :

Parameter	Value	Comment
See 4.1		
`x-purchase-code`	$PurchaseCode	Purchase-code filled by the user

Query parameters :

Param	*Type*	*Description*
`idCommercialOffer`	String	Offer ID DSI

Success Response :

- `http code 200`
- unsubscribed offer metadata (metadata of offers impacted by this action)

- Metadata of the unsubscribed offer :
  - The device should update its local database for this unsubscribed offer y without the need for a second call to update the list of offers. (the response structure is defined in the swagger ref[1])

> NOTE : The ETAG does not need to be updated at this stage. We'll have to wait for the next updater to update it.

Error Response :

PFSPxyCode	HTTPCode	JSON.error	Cause	Action to do
1(1)	401	Invalid Token	Token is invalid	Authentication process relaunched.
[2-11]	N/A	N/A	PFSProxy Internal Error	Just log error, but App goes on.
400	400	Bad Request	Bad Request	Just log error, but App goes on.
404	404	Not Found	Not Found	Just log error, but App goes on.
405	405	Method Not Allowed	Method Not Allowed	Just log error, but App goes on.
429	429	Too many requests	Too many requests	Just log error, but App goes on.
500	500	Internal server error	Internal server error	Just log error, but App goes on.
502	502	External server error	External server error	Just log error, but App goes on.
503	503	Internal server error	Internal server error	Just log error, but App goes on.
Other not HTTP	N/A	N/A	All	Just log error, but App goes on.
Other from APIM: See REF []				