
API V2

- 0 Diagram Files
- 1 COMMON ACTIVITIES
  - 1.1 MapCommercialOfferItemToOfferItem
    - 1.1.1 Inputs
    - 1.1.2 Outputs
    - 1.1.3 Treatment
      - 1.1.3.3 Mapping Additional fields
  - 1.2 AggregationOffersDetailsV2WithCache
    - 1.2.0 Flow Diagram
    - 1.2.1 Inputs
    - 1.2.2 Outputs
    - 6.6.3 Treatment
  - 1.3 UpdateOfferItemBaseV2ListWithCache
    - 1.3.1 Inputs
    - 1.3.2 Outputs
    - 1.3.3 Treatment
- 2 COMMON OBJECTS API
  - 2.1 Offer API Model V2
    - 2.1.1 OfferItem
      - 2.1.1.1 OfferItemBase
      - 2.1.1.2 BouquetOfferItem
      - 7.3.1.3 ApplicationOfferItem
      - 7.3.1.4 ServiceOfferItem
      - 7.3.1.5 MultiOfferItem
      - 7.3.1.3 UnmanagedApplicationOfferItem
    - 7.3.2 CommercialOffer
      - 7.3.2.1 CommercialOfferBase
      - 7.3.2.2 CommercialOfferUnSubscribe ⟹ subscriptionStatus == UNSPECIFIED
      - 7.3.2.3 CommercialOfferSubscribe ⟹ subscriptionStatus != UNSPECIFIED
    - 7.3.3 Options
    - 7.3.4 AllOfferItems
    - 7.3.5 Links
      - 7.3.5.1 GetLink
      - 7.3.5.2 PostLink
- 9 PROCESS DESCRIPTION V2
  - 9.1 Common API Definition
    - 9.1.1 Request Headers
  - 9.2 GET
    - 9.2.1 Operation : Get Offer
      - 9.2.1.1 API Request
        - 9.2.1.1.1 Headers
        - 9.2.1.1.2 Query Parameters
      - 9.2.1.2 API Response
      - 9.2.1.3 Activity Diagram
      - 9.2.1.4 Validate Data Request
        - 9.2.1.4.1 Input
        - 9.2.1.4.2 Output
        - 9.2.1.4.3 Treatment
      - 9.2.1.6 Format Response
        - 9.2.1.6.1 Input
        - 9.2.1.6.2 Output
        - 9.2.1.6.3 Treatment
    - 9.2.2 Operation : List
      - 9.2.2.1 API Request
        - 9.2.2.1.1 Headers
        - 9.2.2.1.2 Query Parameters
      - 9.2.2.2 API Response
        - 9.2.2.2.1 Response headers
        - 9.2.2.2.2 Response Schema
      - 9.2.2.3 Activity Diagram
      - 9.2.2.4 Validate Data Request
        - 9.2.2.4.1 Input

        - 9.2.2.4.2 Output
        - 9.2.2.4.3 Treatment
      - 9.2.2.7 Format Response
        - 9.2.2.7.1 Input
        - 9.2.2.7.2 Output
        - 9.2.2.7.3 Treatment
    - 9.2.3 Operation : Check Offer
      - 9.2.2.1 API Request
        - 9.2.2.1.1 Headers
        - 9.2.2.1.2 Query Parameters
      - 9.2.3.2 API Response
        - 8.2.4.1.3 Treatment
- 9.3 POST
  - 9.3.1 Operation : Subscribe Offer
    - 9.3.1.1 API Request
      - 9.3.1.1.1 Header
      - 9.3.1.1.2 Query Parameters
    - 9.3.1.2 API Response
    - 9.3.1.3 Activity Diagram
    - 9.3.1.4 Validate Data Request
      - 9.3.1.4.1 Input
      - 9.3.1.4.2 Output
      - 9.3.1.4.3 Treatment
    - 9.3.1.5 Format Response
      - 9.3.1.5.1 Input
      - 9.3.1.5.2 Output
      - 9.3.1.5.3 Treatment
- 9.4 DELETE
  - 9.4.1 Operation : Unsubscribe Offer
    - 9.4.1.1 API Request
      - 9.5.1.1.1 Header
      - 9.4.1.1.2 Query Parameters
    - 9.4.1.2 API Response
    - 9.4.1.3 Activity Diagram
    - 9.4.1.4 Validate Data Request
      - 9.4.1.4.1 Input
      - 9.4.1.4.2 Output
      - 9.4.1.4.3 Treatment
    - 9.4.1.5 Format Response
      - 9.4.1.5.1 Input
      - 9.4.1.5.2 Output
      - 9.4.1.5.3 Treatment

0 Diagram Files

Diagram Name	Version	Files
call Flow API GET OFFER		
call Flow API LIST OFFER	3	 LIST_OFFERS_V3.vsdx 27 sept. 2024, 02:41 PM
call Flow API UNSUBSCRIBE OFFER	2	 UNSUBSCRIBE... V2.vsdx 27 sept. 2024, 02:41 PM
call Flow API SUBSCRIBE OFFER	7.1	

		SUBSCRIBE_O... .1.vsdx 10 oct. 2024, 01:16 PM
Call Flow Aggregation Offers Detail With Cache		

1 COMMON ACTIVITIES

1.1 MapCommercialOfferItemToOfferItem

1.1.1 Inputs

Parameter	Type	Description	Constraints
CommercialOffer	**Object**	Commercial offer	MANDATORY

1.1.2 Outputs

Parameter	Type	Description	Constraints
oOfferItem	**Object OfferItem**	Offer aggregation for devices	OPTIONAL

1.1.3 Treatment

See mapping Table

Parameter	Mapping Object CommercialOffer	Traitment
id	OffreAdditionnelle.idOffre	
subscriptionStatus	if offer from DSI.offres-additionnelles-souscriptibles, subscriptionStatus = "UNSPECIFIED" else, subscriptionStatus = OffreAdditionnelle.statut	"ACTIVE" ⇒ "ACTIVE" "EN_COURS_RESILIATION" ⇒ "DEACTIVATING" "EN_COURS_SOUSCRIPTION" ⇒ "ACTIVATING"
commercialType	OffreAdditionnelle.typeOffre	"BONUS" ⇒ "BONUS" "OPTION" ⇒ "OPTION" "SERVICE_OFFERT" ⇒ "OFFERED_SERVICE" "SERVICE_PARTENAIRE" ⇒ "PARTNER_SERVICE"
name	OffreAdditionnelle.libelleCommercial	
originalAmount	OffreAdditionnelle.montantTTC	
customPriceLabel	CustomLabelConfig(matchByDeviceType contenu dans headers.x-user-agent).customPriceLabel	
finalAmount	OffreAdditionnelle.montantPayeTTC	
promotions	OffreAdditionnelle.remises	
promotions.price	OffreAdditionnelle.remises.montantTTC	
promotions.customPromoLabel	If OffreAdditionnelle.montantPayeTTC != null && OffreAdditionnelle.montantPaye != null && OffreAdditionnelle.montantTTC > OffreAdditionnelle.montantPayeTTC && OffreAdditionnelle.remises != null ou vide && OffreAdditionnelle.remise.duree.duree =! null CustomLabelConfig(matchByDeviceType contenu dans headers.x-user-agent).customPromoLabel EndIf	


promotions.order	OffreAdditionnelle.remises.ordre	
promotions.applyTill		
promotions.expirationDate	OffreAdditionnelle.remises.dateFin	
promotions.duration	OffreAdditionnelle.remises.duree.duree	
promotions.duration.durationType	'limited_period'	
promotions.duration.period	OffreAdditionnelle.remises.duree.duree	
promotions.duration.periodUnit	OffreAdditionnelle.remises.duree.uniteeDuree	
promotionalDescription	OffreAdditionnelle.libellePromotionnel	
startDate	OffreAdditionnelle.dateDebut	
endDate	OffreAdditionnelle.dateFin	
partner	OffreAdditionnelle.infoPartenaire object Not present if offer from DSI.offres-additionnelles-souscriptibles	
partner.id	OffreAdditionnelle.infoPartenaire.idPartenaire	
partner.status	OffreAdditionnelle.infoPartenaire.statutPartenaire	"ACTIVE" ⇒ "ACTIVE" ANNULEE ⇒ "CANCELED" CREEE ⇒ "CREATED" INACTIVE ⇒ "INACTIVE" INEXISTANTE ⇒ "NON-EXISTENT" RESILIEE ⇒ "UNSUBSCRIBED"

1.1.3.3 Mapping Additional fields

Parameter	Mapping Object offerItem	Traitment
finalActivationLink	~~if ApplicationOfferItem.subscriptionType=2,~~ ~~finalActivationLink = QRCODE_ACTIVATION_LINK + ApplicationOfferItem.commercialOffer.id~~ ~~endif~~ See Subscribe, Get, List Format Response	

1.2 AggregationOffersDetailsV2WithCache

1.2.0 Flow Diagram

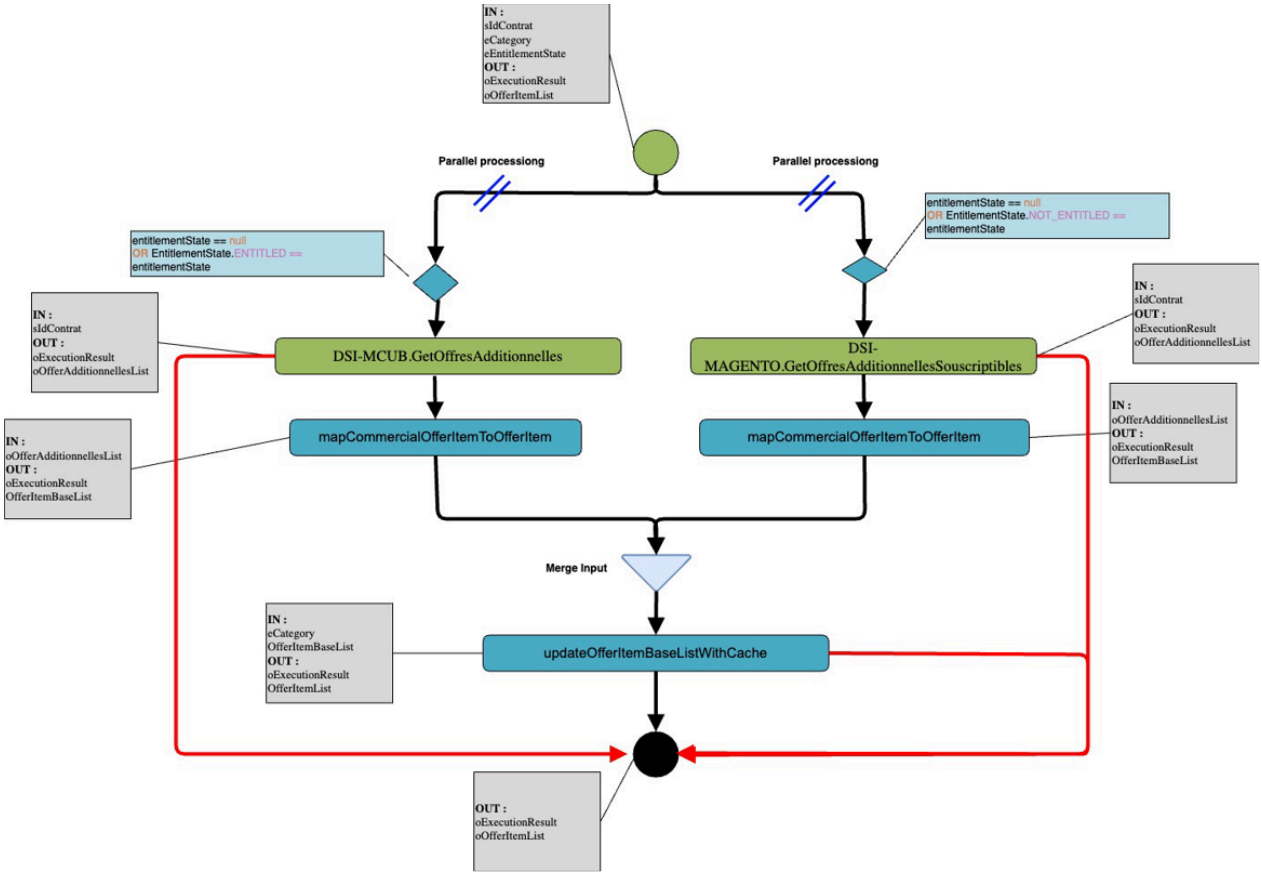

1.2.1 Inputs

Parameter	Type	Description	Constraints
ksBeDali	objet	Kaltura secret of BE DALI	MANDATORY
`idContrat`	String		MANDATORY
category	OfferItemCategory		OPTIONAL
entitlementState	EntitlementState		OPTIONAL

1.2.2 Outputs

Parameter	Type	Description	Constraints
oExecutionResult	ExecutionResult	Represents the execution state of an operation.	MANDATORY
oOfferItemList	List<OfferItemBase>		OPTIONAL

6.6.3 Treatment

```
List<OfferItemBase> oOfferItemList = new ArrayList<>();

if (entitlementState == null || EntitlementState.NOT_ENTITLED == entitlementState)
  {oResultatExecution,oResponse} = dsiMagentoConnector.getOffresSouscriptibles(idContrat)
   if oResultatExecution.resultat == NOK
```

```
     throw DPPSExeception(oResultatExecution)
    else
      for oOffresAdditionnelle in  oResponse.getOffresAdditionnelles()
       if isNotEmpty(offreAdditionnelle.getServicesTv())
          oOfferItemList.add(mapCommercialOfferItemToOfferItem(offreAdditionnelle))
       endIf
      endFor
   endIf

endIf

if (entitlementState == null || EntitlementState.NOT_ENTITLED == entitlementState) {
{oResultatExecution,oResponse} = dsiMcubeConnector.getOffresAdditionnelles(idContrat)
if oResultatExecution.resultat == NOK
   throw DPPSExeception(oResultatExecution)
else
   for oOffresAdditionnelle in oResponse.getOffresAdditionnelles()
      if isNotEmpty(offreAdditionnelle.getServicesTv())
         oOfferItemList.add(mapCommercialOfferItemToOfferItem(offreAdditionnelle))
      endIf
endFor

 offerItemBaseList = updateOfferItemV2ListWithCache(offerItemBaseList, category);


return offerItemBaseList;
```

1.3 UpdateOfferItemBaseV2ListWithCache

1.3.1 Inputs

Parameter	Type	Description	Constraints
category	**OfferItemCategory**		OPTIONAL
oOfferItemV2List	**List<OfferItemBase>**		MANDATORY

1.3.2 Outputs

Parameter	Type	Description	Constraints
oExecutionResult	**ExecutionResult**	**Represents the execution state of an operation.**	MANDATORY
oOfferItemV2List	**List<OfferItemBase>**		OPTIONAL

1.3.3 Treatment

```
List<OfferItemBase> resultOfferItemBaseList = new ArrayList<>();
Map<Pair<String, EntitlementState>, OfferItemBase> offerItemsMissingFromCache ;
```

```
for offerItemBase in offerItemBaseList

 CacheOfferItemBaseV2 offerItemBaseFromCacheV2 = offerCache.getOfferItemBaseFromCacheV2(offerItemBase.getId());


if (offerItemBaseFromCache == null) {
     offerItemsMissingFromCache.add(SimpleEntry<>(Pair.of(offerItemBase.getId(),
offerItemBase.getEntitlementState()),offerItemBase));
}

OfferItemBase fromOfferItemCache = merge data of (offerItemBase,offerItemBaseFromCache);

if (offerItemCategoryFilter == null || offerItemCategoryFilter.equals(fromOfferItemCache.getCategory())) {
    resultOfferItemBaseList.add(fromOfferItemCache);
}
return null;

enFor


//Manage FallBack Offer no exist in hazelcast cache
List<String> serviceTVsNotInCache = extract key of map offerItemsMissingFromCache
if (!serviceTVsNotInCache.isEmpty()) {

  PDSData pdsData = kalturaService.getPDSDataFromCache();
offerCacheService.queryAndAddToCacheV2(serviceTVsNotInCache, pdsData);
}

forEach offerItemBase in offerItemsMissingFromCache

  CacheOfferItemBaseV2 offerItemBaseFromCacheV2 =
offerCacheService.getOfferItemBaseFromCacheV2(offerItemBase.getId());

if (offerItemBaseFromCache != null) {
    OfferItemBase fromOfferItemCache = merge data of (offerItemBase, offerItemBaseFromCacheV2);
if (offerItemCategoryFilter == null || offerItemCategoryFilter.equals(fromOfferItemCache.getCategory())) {
resultOfferItemBaseList.add(fromOfferItemCache);
    }
  }
endFor


return resultOfferItemBaseList;
```

2 COMMON OBJECTS API

2.1 Offer API Model V2

2.1.1 OfferItem

2.1.1.1 OfferItemBase

Parameter	Type	Cardinality	Description
internalId	String	M	Offer Id on PFS Shapira
id	String	M	Offer identifier, known from commercial and Shapira PFS (ie tv_service)

category	String/Enum	M	DPPS category for Offer Values : BOUQUET APPLICATION SERVICE MULTIOFFER UNMANAGED_APPLICATION
images	Array Of Object Image	O	Table of images associated with the offer : logo offer, editorial image of the offer for a customer subscribed to the offer, editorial image of the offer for a customer not subscribed to the offer. Présent même si vide
id	String	M	Image ID
type	String	M	Image type name **à traiter gestion unicité du type dans la liste retournée, une règle de gestion declaration**
allowResize	Boolean	M	Resize allowed ? Value True
height	Int	O	Image height
width	Int	O	Image width
aspectRatio	Double	M	Image aspect ratio
url	String	M	Image URL
shortDescription	String	O	Short description offer
editorialWeight	Int	O	Default position of the offer relative to the others in the TV interface (increasing order and valid for both SMVOffers and PartnerOffers files)
catalogStartDateTime	Long	O	Subscription date
shortTitle	String	M	Offer name in Shapira Can be different from commercial name offer
shortName	String	O	Short Name
genres	Array of String	O	Genres in the offer
options	Array of object Option	O	Table of offer options
links	OfferItemModelLinks	O	OfferItem Links HATEOAS • self: Always available
self	GetLink	O	Get this offer informations Only present for offers with category BOUQUET or APPLICATION or SERVICE or MULTIOFFER
actions	OfferItemModelActionsLinks	O	OfferItem Actions HATEOAS • unsubscribe: Available only for ENTITLED offerItems • subscribe : Available only for NOT_ENTITLED offerItems

				Can only be present for offers with category BOUQUET or APPLICATION or SERVICE or MULTIOFFER
	unsubscribe	PostLink	O	Unsubscribe to the offer Present only if entitlementState == ENTITLED
	subscribe	Postlink	O	Subscribe to the offer Present only if entitlementState == NOT_ENTITLED

2.1.1.2 BouquetOfferItem

Extends OfferItemBase, the field must be set with value **"BOUQUET"**.

Parameter				Type	Cardinality	Description
entitlementState				String/Enum	M	Allowed values : ENTITLED NOT_ENTITLED
parentalRating				String	M	CSA level of the offer. Possible values : CSA1, CSA2, CSA3, CSA4, CSA5
trailerNonSubcribedOffer				String	O	Video stream link for a non-subscribed customer
commercial				CommercialOffer Object	M	Commercial Informations about offer
replayShop				Object	M	Replay Shop Object
	total			Int	M	Total of Replay Shops
	items			Array Object ReplayShopItem	O	List of Replay Shops Présent même si vide
		id		String	M	Shop id
		providerId		String	M	Trigram unique shop Identifier
		name		String	M	Shop name
		channels		Array Of Object LiveShopBucketItemBase	M	List of all channels in the shop
			id	String	M	Channel id
			name	String	M	Channel name
			lcn	Int	O	Channel number
svodShop				Object	M	sVod Shop Object
	total			Int	M	Total of sVod Shops
	items			Array of Object SvodShopItem	O	List of sVod Shops Présent même si vide
		id		string	M	Shop id
		providerId		String	M	Trigram unique shop Identifier
		name		String	M	Shop name

liveShop			Object	M	Aggregation of all linear channels providing from cup shop or live shop
	total		Int	M	Total of Linear Channels
	items		Array of Object LiveShopBucketItem **extends** LiveShopBucketItemBase	O	List of Linear Channels Présent même si vide
		id	string	M	Linear Channel id
		lcn	Int	O	Channel number
		name	String	M	Channel name
		collections	Array Object CollectionBase	M	List of all the shops the channel is included in
			id	String	M	Shop id
			type	String/Enum	M	Shop type Possible values : CUP_SHOP, VOD_SHOP, LIVE_SHOP
			name	String	M	Shop name

7.3.1.3 ApplicationOfferItem

Extends OfferItemBase, the field must be set with value **"APPLICATION"**.

Parameter	Type	Cardinality	Description
entitlementState	String/Enum	M	Allowed values : ENTITLED NOT_ENTITLED
commercial	CommercialOffer Object	M	Commercial Informations about offer
parentalRating	String	M	CSA level of the offer. Possible values : CSA1, CSA2, CSA3, CSA4, CSA5
partnerOfferUrl	String	O	Partner's application url
partnerOfferApk	String	O	Partner's application package name
trailerNonSubcribedOffer	String	O	Video stream link for a non-subscribed customer
relatedBoutique	String	O	Link between a collection and the offer
subscriptionType	Double	O	Type of subscription for application offer 1 : Partner offer without account creation 2 : Partner offer with fluent account creation 3 : Partner offer with non-fluent account creation
finalActivationLink	String	O	Activation Link to be called by devices Computed by DALI
activationLink	String	O	Shapira activation link

infoPageTemplate	Double	O	
hide	Boolean	O	

7.3.1.4 ServiceOfferItem

Extends CacheOfferItemBase, the field must be set with value **"SERVICE"**.

Parameter	Type	Cardinality	Description
entitlementState	String/Enum	M	Allowed values : ENTITLED NOT_ENTITLED
commercial	CommercialOffer Object	M	Commercial Informations about offer
relatedBoutique	String	O	Link between a collection and the offer

7.3.1.5 MultiOfferItem

Extends CacheOfferItemBase, the field must be set with value **"MULTIOFFER"**.

Parameter	Type	Cardinality	Description
entitlementState	String/Enum	M	Allowed values : ENTITLED NOT_ENTITLED
commercial	CommercialOffer Object	M	Commercial Informations about offer
parentalRating	String	M	CSA level of the offer. Possible values : CSA1, CSA2, CSA3, CSA4, CSA5
relatedBoutique	String	O	Link between a collection and the offer

7.3.1.3 UnmanagedApplicationOfferItem

Extends OfferItemBase, the field must be set with value **"UNMANAGED_APPLICATION"**.

Parameter	Type	Cardinality	Description
parentalRating	String	M	CSA level of the offer. Possible values : CSA1, CSA2, CSA3, CSA4, CSA5
partnerOfferUrl	String	O	Partner's application url
partnerOfferApk	String	O	Partner's application package name
trailerNonSubcribedOffer	String	O	Video stream link for a non-subscribed customer
relatedBoutique	String	O	Link between a collection and the offer
hide	Boolean	O	

7.3.2 CommercialOffer

7.3.2.1 CommercialOfferBase

Parameter	Type	Cardinality	Description
id	String	M	Commercial offer id
subscriptionStatus	String	M	Status of the subscription, one of the following : • ACTIVE • ACTIVATING • DEACTIVATING • UNSPECIFIED
commercialType	String/Enum	M	Commercial type : • BONUS • OPTION • OFFERED_SERVICE • PARTNER_SERVICE
name	String	O	Commercial name
originalAmount	Float	O	The amount of the original transaction (before the Promotion discount).
customPriceLabel	String	O	Price label Calculated by DALI
finalAmount	Float	O	The final amount, after the Promotion discount has been applied. You should use this sum to charge the card.
promotions[]	Array of promotion Object	O	List of discounts on the offer
price	Float	M	Amount of discount applicable for a specific Promotion (includes decimal).
customPromoLabel	String	O	Promotion label Calculated by DALI
order	Integer	O	The order to apply multiple discounts
applyTill	Long	O	Duration the discount is still active
expirationDate	Long	O	Discount expiration date
duration	Object PromotionDuration	O	Discount duration
durationType	String/Enum	O	Default value = forever Specifies the time duration for which this discount is attached to the subscription. Possible values are : one_time ⇒ The discount stays attached to the subscription till it is applied on an invoice once. It is removed after that from the subscription. forever ⇒ The discount is attached to the subscription and applied on the invoices till it is explicitly removed. limited_period ⇒ The discount is attached to the subscription and applied on the invoices for a limited duration. This duration starts from the point it is applied to an invoice for the first time and expires after a period specified by period and period_unit

		period	Integer	O	min=1 The duration of time for which the discount is attached to the subscription, in period_units. Applicable only when duration_type is limited_period.
		periodUnit	String/enum	M	The unit of time for period. Applicable only when duration_type is limited_period. Possible values are : day – A period of 24 hours. month – A period of 1 calendar month. year – A period of 1 calendar year.

7.3.2.2 CommercialOfferUnSubscribe ⇒ subscriptionStatus == UNSPECIFIED

Parameter	Type	Cardinality	Description
promotionalDescription	String	O	Promotional Description

7.3.2.3 CommercialOfferSubscribe ⇒ subscriptionStatus != UNSPECIFIED

Parameter		Type	Cardinality	Description
startDate		Long	O	Start date
endDate		Long	O	End date
partner		Partner Object	O	Informations about the partner. Should be only present for ApplicationOfferItem objects
	id	String	O	
	status	String	M	Possible values : ACTIVE, CANCELED, CREATED, INACTIVE, NON-EXISTENT, UNSUBSCRIBED

7.3.3 Options

Parameter		Type	Cardinality	Description
entitledOptions		Array of EntitledOptions	M	List of entitled options
	name	String	M	Option Name
	status	Boolean	O	Option status
	value	String	O	Option value
type		String	M	Type of option

7.3.4 AllOfferItems

Parameter	Type	Cardinality	Description
data	Array of Objects OfferItem	O	List of offers

totalElements	Integer	M	Number of elements in data array
totalPages	Integer	M	Total number of pages returned
currentPage	Integer	M	Number of the page returned
links	object OfferItemLinks	O	Links
first	object GetLink	O	First page of results
self	object GetLink	M	Current page of results
next	object GetLink	O	Next page of results
last	object GetLink	O	Last page of results
offer	object GetLink	M	Get all offers for this contract

7.3.5 Links

7.3.5.1 GetLink

Parameter	Type	Cardinality	Description
href	String	O	href
endpoint	String	O	Endpoint
type	String	O	Type Default : "GET"

7.3.5.2 PostLink

Parameter	Type	Cardinality	Description
href	String	O	href
endpoint	String	O	Endpoint
type	String	O	Type Default : "POST"

9 PROCESS DESCRIPTION V2

9.1 Common API Definition

9.1.1 Request Headers

Parameter	Type	Description	Constraints
x-kaltura-api-version	**String**	Kaltura API Version Number	MANDATORY
x-Dpps-Trace-idcontracts	**String**	Contract Id of the user Filled by APIM	MANDATORY
x-Dpps-Trace-pfsnocompte	**String**	Id of the user	MANDATORY
x-version	**String**	DALI Offer API Version Number	OPTIONAL
x-request-id	**String**	Request identifier on the IS (unique identifier generated during the call to each resource if not present at the input and provided to each service called synchronousl	

x-source	**String**	Name of the sender of the request	
x-message-id	**String**	Unique for each interaction between ST (it can be used to manage anti-replay on power supplies for example)	

9.2 GET

9.2.1 Operation : Get Offer

Gets an offer for a user :

- by commercialId

9.2.1.1 API Request

9.2.1.1.1 Headers

Input	Description	Constraints
x-dsi-atk-basic	Access ToKen DSI Filled by APIM	MANDATORY


9.2.1.1.2 Query Parameters

Input	Description	Constraints
commercialId	Commercial Offer Id	MANDATORY

9.2.1.2 API Response

HTTP Code	Description	Schema
200	**OK**	List of **BouquetOfferItem, ApplicationOfferItem, ServiceOfferItem, MultiOfferItem**
400	**Bad Request (with error** `=` Bad Request**)**	**ApiError**
401	**INVALID_TOKEN :** Invalid Token	**ApiError**
404	**Not Found** **Possible** `resultMessage` **values:** - `CUSTOMER_NOT_FOUND :` Customer Not Found	**ApiError**
405	**Method Not Allowed**	**ApiError**
500	**Internal error (with error** `INTERNAL_SERVER_ERROR :` Internal Server Error**)**	**ApiError**
502	**External error (with error** `EXTERNAL_SERVER_ERROR :` External Server Error**)**	**ApiError**

9.2.1.3 Activity Diagram

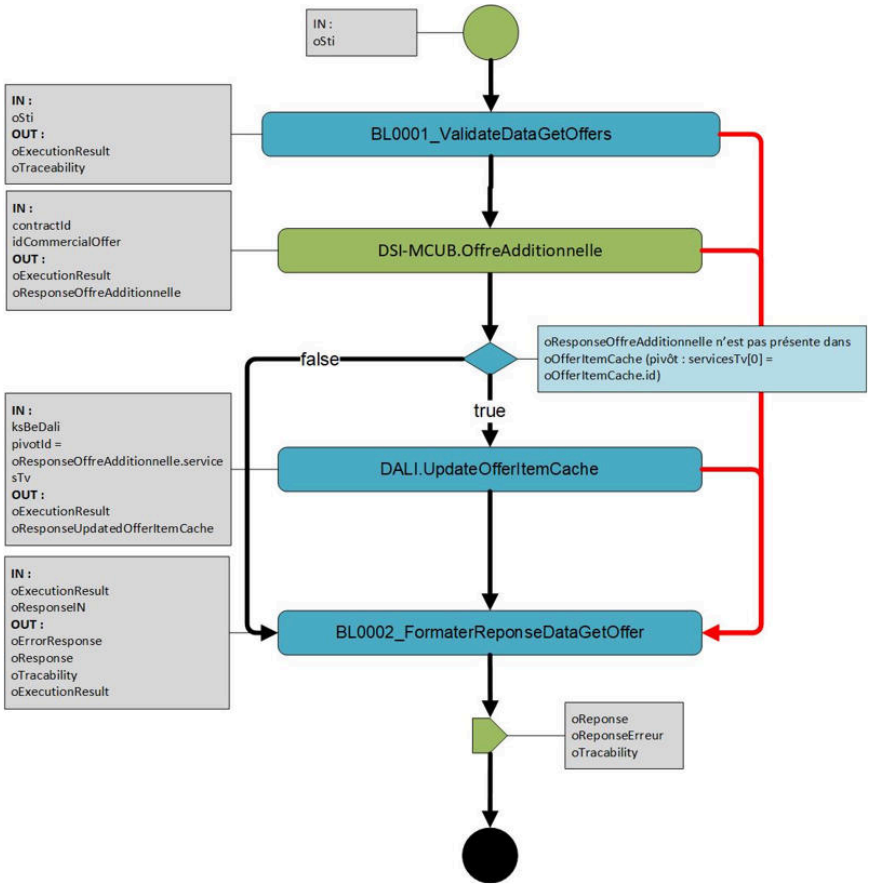

9.2.1.4 Validate Data Request

9.2.1.4.1 Input

Parameters	Type	Description	Constraints
oRequest	Object	Abstract and technical object grouping all the informations provided in input service	`trueRedMANDATORY`

9.2.1.4.2 Output

Parameter	Type	Description	Constraints
oExecutionResult	ExecutionResult	Represents the operation execution state	MANDATORY

9.2.1.4.3 Treatment

```
Perform surface checks using document [R1]
if (The interface specification not respected)
    Return Error and Exit processing : NOK/CAT-3/BAD_REQUEST/The label must specify the name of the field in error as well as an indication of the er
End
```

9.2.1.6 Format Response

9.2.1.6.1 Input

Parameter	Type	Description	Constraints
oResponseIN	Object	Abstract and technical object grouping all the information provided in input service	CONDITIONAL MANDATORY : **When oExecutionResultIN.status = KO**

oExecutionResult IN	ExecutionResult	Represents the operation execution state	MANDATORY

9.2.1.6.2 Output

Parameter	Type	Description	Constraints
oExecutionResult	ExecutionResult	Represents the operation execution state	MANDATORY

9.2.1.6.3 Treatment

```
If oExecutionResult.status == KO
    return error
Else
    if oCommercialOfferItem != null AND oCommercialOfferItem.commercialType is not included in COMMERCIAL_TYPES_BLACKLIST
        oOfferItem = MapCommercialOfferItemToOfferItem(oCommercialOfferItem)

        if oOfferItem.category == APPLICATION and oOfferItem.subscriptionType == 2 // Application partenaire non fluide avec création de compte
            if oOfferItem.entitledmentState ==  ENTITLED && oOfferItem.activationLink != null
                oOfferItem.finalActivationLink = oOfferItem.activationLink + oCommercialOfferItem.id
            endif
        endif

        oResponse.add(oOfferItem)
    endif
Endif
```

9.2.2 Operation : List

Gets all offers for a user. The list of obtained offers can by filtered by :

- offer item category
- entitlementState
- paging

9.2.2.1 API Request

9.2.2.1.1 Headers

Input	Description	Constraints
x-dsi-atk-basic	Access ToKen DSI Filled by APIM	MANDATORY
If-None-Match		OPTIONAL

9.2.2.1.2 Query Parameters

Input	Description	Constraints
categories	Array of String - Offer item categories Possible values : BOUQUET APPLICATION SERVICE MULTIOFFER UNMANAGED_APPLICATION	OPTIONAL
entitlementState	Entitlement state Possible values : ENTITLED NOT_ENTITLED	OPTIONAL **Must be null when** • **queryParams** `categori`

		`es is not set.` • **queryParams** `categories` contains `UNMANAGED_APPLICATION.`

9.2.2.2 API Response


9.2.2.2.1 Response headers

Name	Description	Constraints
ETag	String Entity tag for current customer records list. Returned Only if pagination not used and HTTP Code == 200 or 304	OPTIONAL

9.2.2.2.2 Response Schema

HTTP Code	Description	Schema
200	**OK**	List of Objects **AllOfferItem**
304	**Not Modified**	
400	**Bad Request (with error** `=` Bad Request**)**	**ApiError**
401	**INVALID_TOKEN :** Invalid Token	**ApiError**
404	**Not Found** **Possible** `resultMessage` **values:** - `CUSTOMER_NOT_FOUND :` Customer Not Found	**ApiError**
405	**Method Not Allowed**	**ApiError**
500	**Internal error (with error** `INTERNAL_SERVER_ERROR :` Internal Server Error**)**	**ApiError**
502	**External error (with error** `EXTERNAL_SERVER_ERROR :` External Server Error**)**	**ApiError**

9.2.2.3 Activity Diagram

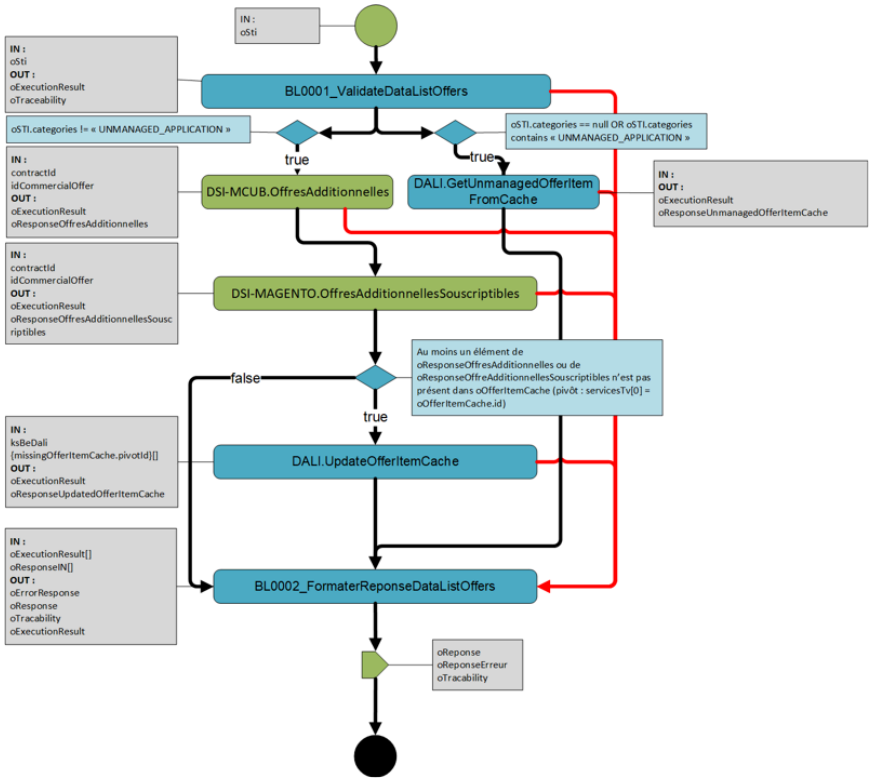

9.2.2.4 Validate Data Request

9.2.2.4.1 Input

Parameter	Type	Description	Constraints
oRequest	Object	Abstract and technical object grouping all the informations provided in input service	`trueRedMANDATORY`

9.2.2.4.2 Output

Parameter	Type	Description	Constraints
oExecutionResult	ExecutionResult	Represents the operation execution state	MANDATORY

9.2.2.4.3 Treatment

```
Perform surface checks using document [R1]
if (The interface specification not respected)
    Return Error and Exit processing : NOK/CAT-3/BAD_REQUEST/The label must specify the name of the field in error as well as an indication of the er
End

If (categories null or categories contains 'UNMANAGED_APPLICATION') AND entitlementState != null
    Return Error and Exit processing : NOK/CAT-3/BAD_REQUEST/EntitlementState is not consistant with unmanaged applications
End
```

9.2.2.7 Format Response

9.2.2.7.1 Input

Parameter	Type	Description	Constraints
oResponseIN	objet	Abstract and technical object grouping all the information provided in input service	CONDITIONAL MANDATORY : **When oExecutionResultIN.status = KO**

oExecutionResult IN	ExecutionResult	Represents the operation execution state	MANDATORY

9.2.2.7.2 Output

Parameter	Type	Description	Constraints
oExecutionResult	ExecutionResult	Represents the operation execution state	MANDATORY

9.2.2.7.3 Treatment

```
If oExecutionResult.status == KO
    return error
Else
    If categories != 'UNMANAGED_APPLICATION'
        Foreach oCommercialOfferItem in oResponseOffresAdditionnelles
            if oCommercialOfferItem.commercialType is not included in COMMERCIAL_TYPES_BLACKLIST
                oOfferItem = MapCommercialOfferItemToOfferItem(oCommercialOfferItem)

                if oOfferItem.category == APPLICATION and oOfferItem.subscriptionType == 2 // Application partenaire non fluide avec création de com
                    if oOfferItem.entitledmentState == ENTITLED && oOfferItem.activationLink != null
                        oOfferItem.finalActivationLink = oOfferItem.activationLink + oCommercialOfferItem.id
                    endif
                endif

                oResponse.add(oOfferItem)
            endif
        EndFor
    Endif

    If categories == null OR categories contains 'UNMANAGED_APPLICATION'
        Add CacheUnmanagedApplicationOfferItem[] objects from cache
    EndIf

    ETag.compute(oResponse)

    If oSTI.If-None-Match != null and ETag == oSTI.If-None-Match
        return 304 Not Modified
    EndIf
Endif
```

9.2.3 Operation : Check Offer

Check If offer

9.2.2.1 API Request

9.2.2.1.1 Headers

Input	Description	Constraints
x-dsi-atk-basic	Access ToKen DSI Filled by APIM	MANDATORY
x-kaltura-secret	Header containing Kaltura Secret	MANDATORY
If-None-Match		OPTIONAL
`X-Dpps-Trace-idcontracts`		MANDATORY
`x-Dpps-Trace-pfsnocompte`		OPTIONAL

9.2.2.1.2 Query Parameters

Input	Description	Constraints
categories	Array of String - Offer item categories Possible values : BOUQUET APPLICATION	OPTIONAL

	SERVICE MULTIOFFER UNMANAGED_APPLICATION	
entitlementState	Entitlement state Possible values : ENTITLED NOT_ENTITLED	

9.2.3.2 API Response

HTTP Code	Description	Schema
204	**OK**	
304	**OK**	Etag
400	**Bad Request (with error** `=` Bad Request**)**	**ApiError**
405	**Method Not Allowed**	**ApiError**
500	**Internal error (with error** `INTERNAL_SERVER_ERROR :` Internal Server Error**)**	**ApiError**
503	**Internal error (with error** `INTERNAL_SERVER_ERROR :` Internal Server Error**)**	**ApiError**
502	**External error (with error** `EXTERNAL_SERVER_ERROR :` External Server Error**)**	**ApiError**

8.2.4.1.3 Treatment

Contenu non pris en charge

if categories is empty

categories = oConfiguration.app.defaultCategories

endIf

oOfferEtagsThrottlingApiDsi = **HazelCast.OfferEtagsThrottlingApiDsiCache [{X-Dpps-Trace-idcontracts }-{x-etag-api-offers-list}]**

oThrottlingApiDsiContext = queryAndUpSertToOfferMetadataThrottlingApiDsiCachCache(idContract, ks, categories)

if oThrottlingApiDsiContext != null

if oCacheOfferCustomerValidity[**{X-Dpps-Trace-idcontracts }-{x-etag-api-offers-list}**].managedOffer.**equals**(**oThrottlingApiDsiContext.managedOffer**) || ((catagories.contain(UNMANAGED_APPLICATION) && oCacheOfferCustomerValidity[**{X-Dpps-Trace-idcontracts }-{x-etag-api-offers-list}**].unmanagedOffer.**equals**(**oThrottlingApiDsiContext.unmanagedOffer**))

return 304 with header ETag

endIf

endIf

Return 210

9.3 POST

9.3.1 Operation : Subscribe Offer

The purpose of this operation is to request the subscription or activation of a commercial offer from the DSI.
The objective is to restore the subscribed offer and its characteristics in the DALI return.

Limit cases :

- In the event that the offer is already subscribed on the DSI side, DALI responds http code 200 with the subscribed offer and its characteristics returned

9.3.1.1 API Request

9.3.1.1.1 Header

Input	Description	Constraints
x-dsi-atk-moderate	Access ToKen DSI Filled by APIM	MANDATORY
x-Dpps-Trace-idcontracts	Contract Id Filled by APIM	MANDATORY
x-Dpps-Trace-pfsnocompte	Client Id Filled by APIM	MANDATORY

9.3.1.1.2 Query Parameters


Input	Type	Description	Constraints
force	Boolean	Force Call check Compatibility Offer	Default Value False
idCommercialOffer	String	idCommercialOffer	MANDATORY

9.3.1.2 API Response

HTTP Code	Description	Schema
200	**OK**	Object **AllOfferItem**
400	**Bad Request** Possible error values : - Bad Request - Invalid Offer	**ApiError**
401	**Invalid Token** Possible error value : Invalid Token	**ApiError**
403	**Forbidden** Possible error values : - Customer Suspended - Unable Purchase Free - Unable Purchase Offer Purchased	**ApiError**
404	**Not Found** Possible error values : - Customer Not Found - Purchase Failed - Offer Not Found	**ApiError**
405	**Method Not Allowed** Possible error value : Method Not Allowed	**ApiError**
409	**Conflict**	**ApiError**

	Possible error value : Incompatible offer	
500	**Internal Server Error** Possible error value : Internal Server Error	**ApiError**
502	**External Server Error** Possible error value : External Server Error	**ApiError**

9.3.1.3 Activity Diagram

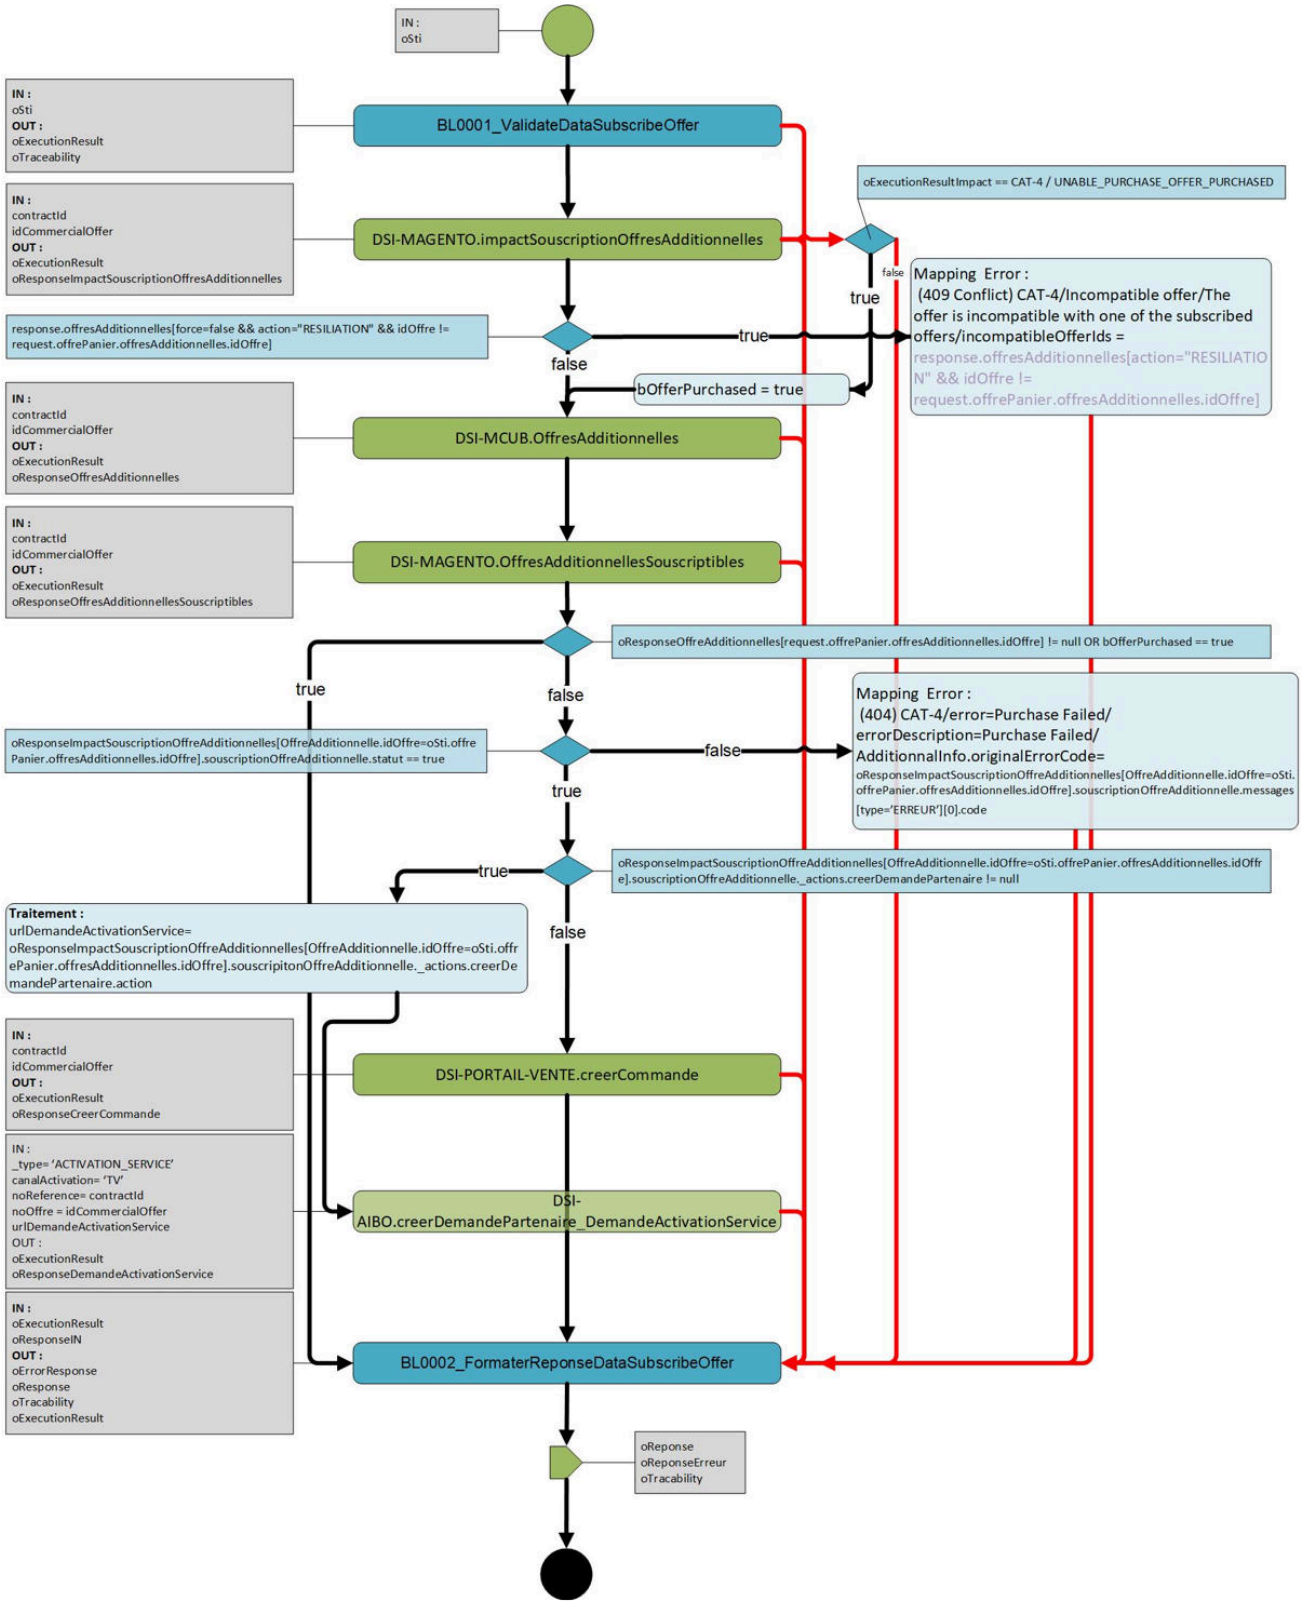

9.3.1.4 Validate Data Request

9.3.1.4.1 Input

Parameter	Type	Description	Constraints
oRequest	Object	Abstract and technical object grouping all the informations provided in input service	`trueRedMANDATORY`

9.3.1.4.2 Output

Parameter	Type	Description	Constraints
oExecutionResult	ExecutionResult	Represents the operation execution state	MANDATORY

9.3.1.4.3 Treatment

```
Perform surface checks using document [R1]
if (The interface specification not respected)
    Return Error and Exit processing : NOK/CAT-3/BAD_REQUEST/The label must specify the name of the field in error as well as an indication of the er
End
```

9.3.1.5 Format Response

9.3.1.5.1 Input

Parameter	Type	Description	Constraints
oResponseIN	objet	Abstract and technical object grouping all the information provided in input service	CONDITIONAL MANDATORY : **When oExecutionResultIN.status = KO**
oExecutionResultIN	Execution Result	Represents the operation execution state	MANDATORY

9.3.1.5.2 Output

Parameter	Type	Description	Constraints
oExecutionResult	ExecutionResult	Represents the operation execution state	MANDATORY

9.3.1.5.3 Treatment

```
if oExecutionResultIN.status == KO
    return error
else
    return 200 OK + object oSubscribedOffer + objects oImpactedOffers

    if oResponseOffreAdditionnelles[request.offrePanier.offresAdditionnelles.idOffre] != null
        oSubscribedOffer = oResponseOffreAdditionnelles[request.offrePanier.offresAdditionnelles.idOffre]
        oSubscribedOffer.commercial.commercialType = translate(oResponseImpactSouscriptionOffresAdditionnelles.impactOffresAdditionnelles.offresAddi
        if oSubscribedOffer.category == APPLICATION and subscriptionType == 3       // Application partenaire fluide avec création de compte
            if oResponseImpactSouscriptionOffresAdditionnelles[idOffre == request.offrePanier.offresAdditionnelles.idOffre] != null && oSubscribedOf
                oSubscribedOffer.finalActivationLink = oSubscribedOffer.activationLink + oResponseImpactSouscriptionOffresAdditionnelles[idOffre ==
            endif
        elseif oSubscribedOffer.category == APPLICATION and subscriptionType == 2       // Application partenaire non fluide avec création de compte
            if oResponseImpactSouscriptionOffresAdditionnelles[idOffre == request.offrePanier.offresAdditionnelles.idOffre] != null && oSubscribedOf
                oSubscribedOffer.finalActivationLink = oSubscribedOffer.activationLink + request.offrePanier.offresAdditionnelles.idOffre
            endif
        endif

    else
        oSubscribedOffer = oResponseOffreAdditionnellesSouscriptibles[request.offrePanier.offresAdditionnelles.idOffre]
        oSubscribedOffer.commercial.commercialType = translate(oResponseImpactSouscriptionOffresAdditionnelles.impactOffresAdditionnelles.offresAddi
        oSubscribedOffer.entitlementState = 'ENTITLED'
        oSubscriberOffer.commercial.subscriptionStatus = 'ACTIVATING'
        if oResponseCreerCommande != null
            oSubscriberOffer.commercial.startDate = convertToDate(oResponseCreerCommande.offresAdditionnelles.dateEffet)
        else
            oSubscriberOffer.commercial.startDate = null
        endif
        oSubscriberOffer.promotionalDescription = null
        if oSubscribedOffer.category == APPLICATION and subscriptionType == 3       // Application partenaire fluide avec création de compte
            if oResponseImpactSouscriptionOffresAdditionnelles[idOffre == request.offrePanier.offresAdditionnelles.idOffre] != null && oSubscribedOf
                oSubscribedOffer.finalActivationLink = oSubscribedOffer.activationLink + oResponseImpactSouscriptionOffresAdditionnelles[idOffre ==
            endif
            oSubscribedOffer.commercial.partner.status = 'CREATED'
        elseif oSubscribedOffer.category == APPLICATION and subscriptionType == 2       // Application partenaire non fluide avec création de compte
            if oResponseImpactSouscriptionOffresAdditionnelles[idOffre == request.offrePanier.offresAdditionnelles.idOffre] != null && oSubscribedOf
                oSubscribedOffer.finalActivationLink = oSubscribedOffer.activationLink + request.offrePanier.offresAdditionnelles.idOffre
            endif
            oSubscribedOffer.commercial.partner.status = 'CREATED'
        endif
    endif

    oImpactedOffers = list<oResponseImpactSouscriptionOffresAdditionnelles[action="RESILIATION" && idOffre != request.offrePanier.offresAdditionnell
    foreach oImpactedOffer de oImpactedOffers
        oImpactedOffer.entitlementState = 'NOT_ENTITLED'
        oSubscriberOffer.commercial.subscriptionStatus = 'UNSPECIFIED'
        oSubscriberOffer.commercial.startDate = null
```

```
        oSubscriberOffer.commercial.endDate = null
    end foreach

endif
```

9.4 DELETE

9.4.1 Operation : Unsubscribe Offer

The purpose of this operation is to request the unsubscription of a commercial offer from the DSI.
The objective is to restore the unsubscribed offer and its characteristics in the DALI return.

Limit cases :

- In the event that the offer is already deleted on the DSI side, DALI responds http code 200 with the canceled offer and its characteristics returned
- In the event that the offer is already being deleted on the DSI side, DALI responds http code 200 with the canceled offer and its characteristics returned
- In case the offer cannot be canceled, DALI responds http code 403 Cancellation Not Allowed

9.4.1.1 API Request

9.5.1.1.1 Header

Input	Description	Constraints
x-dsi-atk-moderate	Access ToKen DSI Filled by APIM	MANDATORY
x-Dpps-Trace-idcontracts	Contract Id Filled by APIM	MANDATORY
x-Dpps-Trace-pfsnocompte	Client Id Filled by APIM	MANDATORY

9.4.1.1.2 Query Parameters


Input	type	Description	Constraints
idOffer	String	Not used at the moment	CONDITIONAL **Mandatory : When idCommercialOffer is null or empty**
idCommercialOffer	String		CONDITIONAL **Mandatory : When idOffer is null or empty**

9.4.1.2 API Response

HTTP Code	Description	Schema
200	**OK**	List of Objects **OfferItem**
400	**Bad Request (with error** `= Bad Request`**)**	**ApiError**
401	**INVALID_TOKEN :** Invalid Token **- INVALID_TOKEN : Token Expired**	**ApiError**
403	**Forbidden** **Possible** `resultMessage` **values :** **CANCELLATION_NOT_ALLOWED** : Cancellation Not Allowed	**ApiError**
404	**Not Found** **Possible** `resultMessage` **values:** - `CUSTOMER_NOT_FOUND :` Customer Not Found	**ApiError**

	- **CANCELLATION_FAILED** : Cancellation Not Allowed **with additionalInfo have keys originalErrorCode, originalErrorReason**	
500	**Internal error (with error** `INTERNAL_SERVER_ERROR` : Internal Server Error**)**	**ApiError**

9.4.1.3 Activity Diagram

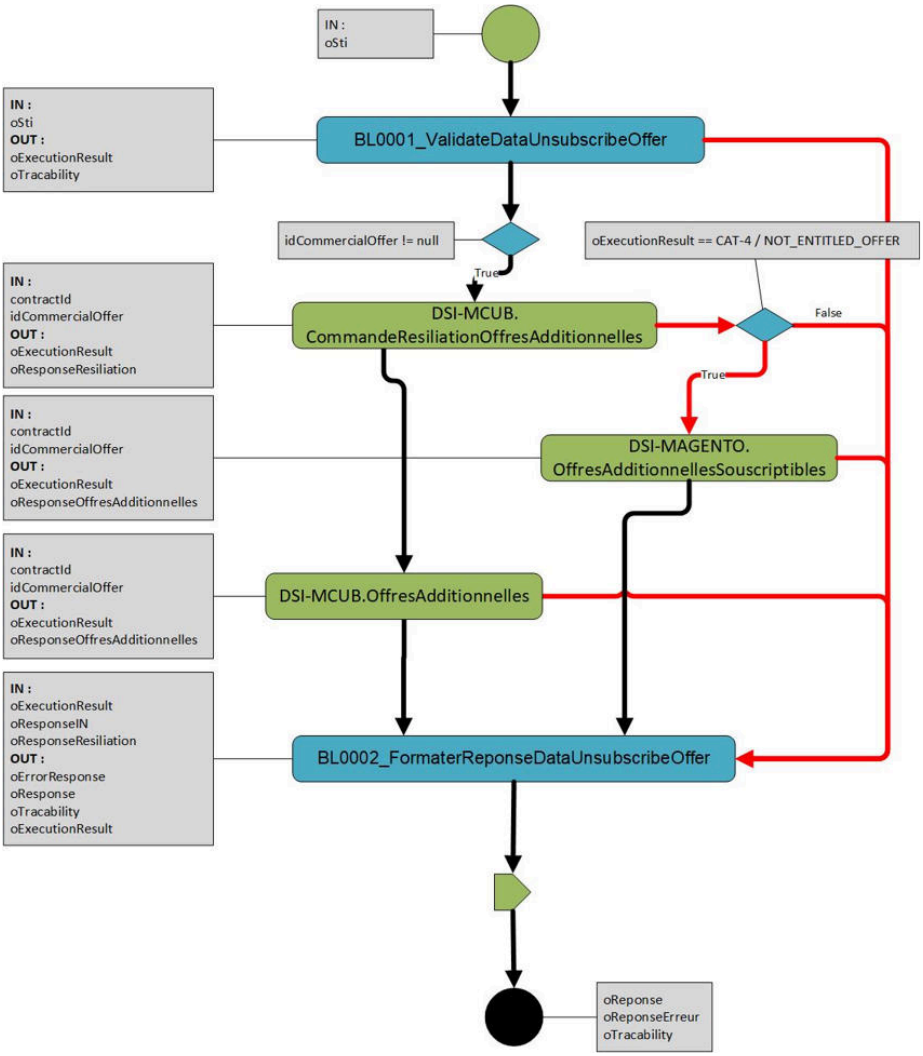

9.4.1.4 Validate Data Request

9.4.1.4.1 Input

Parameters	Type	Description	Constraints
oRequest	object	Abstract and technical object grouping all the informations provided in input service	`trueRedMANDATORY`

9.4.1.4.2 Output

Parameter	Type	Description	Constraints
oExecutionResult	ExecutionResult	Represents the operation execution state	MANDATORY

9.4.1.4.3 Treatment

```
1 Perform surface checks using document [R1]
```

```
if (The interface specification not respected)
    Return Error and Exit processing : NOK/CAT-3/BAD_REQUEST/The label must specify the name of the field in error as well as an indication of the er
End
```

9.4.1.5 Format Response

DSI limitation : after a subscription or unsubscription return, there is a delay of update for offers. Although, we cannot call synchronously DSI to get offers updated status.

Temporary behaviour while waiting for the project to implement Firebase DSI notifications :

DALI has to build itself an oUnsubscribedOffer object from :

- enrichment by GET
- unsubscription return

9.4.1.5.1 Input

Parameter	Type	Description	Constraints
oResponseIN	objet	Abstract and technical object grouping all the information provided in input service	CONDITIONAL MANDATORY : **When oExecutionResultIN.status = KO**
oResponseResiliation	objet	Abstract and technical object grouping all the datas from unsubscription return	OPTIONAL
oExecutionResultIN	ExecutionResult	Represents the operation execution state	MANDATORY

9.4.1.5.2 Output

Parameter	Type	Description	Constraints
oExecutionResult	ExecutionResult	Represents the operation execution state	MANDATORY

9.4.1.5.3 Treatment

```
if oExecutionResultIN.status == KO
    return error
else
    return 200 OK + object oUnsubscribedOffer

    oUnsubscribedOffer = oResponseIN
    if oResponseResiliation != null
        oUnsubscribedOffer.entitlementState = 'ENTITLED'
        oUnsubscribedOffer.commercial.subscriptionStatus = 'DEACTIVATING'
        oUnsubscribedOffer.commercial.endDate = oResponseResiliation.commande.dateResiliationEcheance
    endif
endif
```