

SIMATS ENGINEERING

ASSESSMENT TOOL 1

COURSE NAME: Database Management Systems
COURSE CODE: CSA05

COURSE OUTCOME COVERED

CO2: *Apply the relational model, relational algebra, SQL query structures, and views to solve database querying and data manipulation problems. (BL3, BL6)*

Activity Tool : Analytical Problem Solving (High)
Assessment Tool Weightage: 35%

Dr

QUESTIONS			Total Marks: 50
Q.No	Question	Bloom's Level	Marks
1	Apply relational algebra operations (σ , π , $\cup$, $-$, $\times$, $\bowtie$) on the given Employee and Department relations to retrieve required records.	BL3 – Apply	5
2	Write SQL DDL statements to create STUDENT(SID, Name, DOB, DeptID) and DEPARTMENT(DeptID, DeptName) tables with all appropriate constraints.	BL3 – Apply	5
3	Formulate SQL queries using GROUP BY, HAVING, and aggregate functions (COUNT, SUM, AVG, MAX, MIN) on a given Sales dataset.	BL3 – Apply	5
4	Write a correlated sub-query to find employees earning more than the average salary of their own department.	BL3 – Apply	5
5	Apply all types of JOIN operations (INNER, LEFT OUTER, RIGHT OUTER, FULL OUTER, CROSS) on Employee and Project tables.	BL3 – Apply	5
6	Create a view 'DeptSalaryView' that displays department name, total employees, and average salary. Write a query on this view.	BL6 – Create	5
7	Construct a relational algebra expression for the following: Find names of students who are enrolled in all courses offered.	BL6 – Create	5


8	Write SQL DML statements (INSERT, UPDATE, DELETE) with integrity constraint enforcement for a given scenario.	BL3 – Apply	5
9	Apply tuple relational calculus to express a query: Find all employees who work in the 'IT' department and earn more than 50000.	BL3 – Apply	5
10	Design a relational schema for an Airline Reservation System and write 5 SQL queries demonstrating joins, sub-queries, and views.	BL6 – Create	5

Code of Conduct:

I K.MOHAMMED NAFEEZ[192571070] certify that this submission is my original work and that I have adhered to the guidelines specified for this assessment. I understand that any violation of academic integrity rules will result in disciplinary action.

s.sayed sahil

Signature of the student:



RUBRICS FOR CALCULATION:

Numerical Problems					
Criteria	Weightage	Level 4 (Exemplary)	Level 3 (Proficient)	Level 2 (Developing)	Level 1 (Beginning)
Problem Understanding	20%	Clearly interprets problem, identifies all parameters and requirements accurately	Understands problem with minor gaps	Partial understanding ; misses key elements	Misinterprets or unable to understand problem
Method Selection	20%	Selects most appropriate method/formula with strong justification	Selects correct method with minor errors	Inappropriate or partially correct method	Unable to select method

Solution Process	25%	Logical, systematic steps with correct approach throughout	Mostly correct steps with minor mistakes	Disorganized steps; multiple errors	No clear process
Accuracy of Calculation	20%	All calculations accurate; correct final answer	Minor calculation errors	Frequent errors; incorrect final answer	No valid calculations
Interpretation of Results	15%	Clearly interprets results with units and engineering relevance	Basic interpretation with minor omissions	Limited or unclear interpretation	No interpretation

1Q)

```
create database companydb;  
use companydb;
```

```
create table department(  
deptid int primary key,  
deptname varchar(30),  
location varchar(30)  
);
```

```
create table employee(  
empid int primary key,  
empname varchar(30),  
salary int,  
deptid int,  
foreign key(deptid) references department(deptid)  
);
```

```
insert into department values  
(101,'hr','chennai'),  
(102,'it','bangalore'),  
(103,'finance','mumbai');
```

```
insert into employee values  
(1,'rahul',45000,101),  
(2,'sneha',60000,102),  
(3,'arjun',55000,102),  
(4,'priya',40000,103),  
(5,'karan',70000,101);
```

```
select * from department;  
select * from employee;
```

```
select * from employee where salary>50000;  
select empname,salary from employee;  
select deptid from employee  
union  
select deptid from department;
```

```
select deptid from department  
where deptid not in(select deptid from employee);
```

```
select * from employee
cross join department;
```

```
select e.empid,e.empname,e.salary,d.deptname,d.location
from employee e
inner join department d
on e.deptid=d.deptid;
```

OUTPUT:

```
MySQL 8.0 Command Line Cl...
mysql> SELECT *
-> FROM Employee
-> CROSS JOIN Department;

+----+-----+-----+-----+-----+-----+
| EmpID | EmpName | Salary | DeptID | DeptID | DeptName | Location |
+----+-----+-----+-----+-----+-----+
| 1 | Rahul | 45000 | 101 | 103 | Finance | Mumbai |
| 1 | Rahul | 45000 | 101 | 102 | IT | Bangalore |
| 1 | Rahul | 45000 | 101 | 101 | HR | Chennai |
| 2 | Sneha | 60000 | 102 | 103 | Finance | Mumbai |
| 2 | Sneha | 60000 | 102 | 102 | IT | Bangalore |
| 2 | Sneha | 60000 | 102 | 101 | HR | Chennai |
| 3 | Arjun | 55000 | 102 | 103 | Finance | Mumbai |
| 3 | Arjun | 55000 | 102 | 102 | IT | Bangalore |
| 3 | Arjun | 55000 | 102 | 101 | HR | Chennai |
| 4 | Priya | 40000 | 103 | 103 | Finance | Mumbai |
| 4 | Priya | 40000 | 103 | 102 | IT | Bangalore |
| 4 | Priya | 40000 | 103 | 101 | HR | Chennai |
| 5 | Karan | 70000 | 101 | 103 | Finance | Mumbai |
| 5 | Karan | 70000 | 101 | 102 | IT | Bangalore |
| 5 | Karan | 70000 | 101 | 101 | HR | Chennai |
+----+-----+-----+-----+-----+-----+
15 rows in set (0.03 sec)

mysql> SELECT Employee.EmpID,
-> Employee.EmpName,
-> Employee.Salary,
-> Department.DeptName,
-> Department.Location
-> FROM Employee
-> INNER JOIN Department
-> ON Employee.DeptID = Department.DeptID;

+----+-----+-----+-----+-----+
| EmpID | EmpName | Salary | DeptName | Location |
+----+-----+-----+-----+-----+
| 1 | Rahul | 45000 | HR | Chennai |
| 2 | Sneha | 60000 | IT | Bangalore |
| 3 | Arjun | 55000 | IT | Bangalore |
| 4 | Priya | 40000 | Finance | Mumbai |
| 5 | Karan | 70000 | HR | Chennai |
+----+-----+-----+-----+-----+
5 rows in set (0.00 sec)

mysql>
```

2Q)

```
create database collegedb;
use collegedb;
```

```
create table department(
deptid int primary key,
deptname varchar(30) not null unique
);
```

```
create table student(
sid int primary key,
name varchar(30) not null,
dob date not null,
deptid int,
foreign key(deptid) references department(deptid)
);
```

```
desc department;
```

desc student;

OUTPUT:

```
mysql> CREATE DATABASE CollegeDB;
Query OK, 1 row affected (0.07 sec)

mysql> USE CollegeDB;
Database changed
mysql> CREATE TABLE Department
-> (
->   DeptID INT PRIMARY KEY,
->   DeptName VARCHAR(30) NOT NULL UNIQUE
-> );
Query OK, 0 rows affected (0.14 sec)

mysql>
mysql> CREATE TABLE Student
-> (
->   SID INT PRIMARY KEY,
->   Name VARCHAR(30) NOT NULL,
->   DOB DATE NOT NULL,
->   DeptID INT NOT NULL,
->   FOREIGN KEY (DeptID) REFERENCES Department(DeptID)
-> );
Query OK, 0 rows affected (0.08 sec)

mysql> DESC Department;
+-----+-----+-----+-----+-----+-----+
| Field | Type | Null | Key | Default | Extra |
+-----+-----+-----+-----+-----+-----+
| DeptID | int | NO | PRI | NULL | |
| DeptName | varchar(30) | NO | UNI | NULL | |
+-----+-----+-----+-----+-----+-----+
2 rows in set (0.15 sec)

mysql> DESC Student;
+-----+-----+-----+-----+-----+-----+
| Field | Type | Null | Key | Default | Extra |
+-----+-----+-----+-----+-----+-----+
| SID | int | NO | PRI | NULL | |
| Name | varchar(30) | NO | | NULL | |
| DOB | date | NO | | NULL | |
| DeptID | int | NO | MUL | NULL | |
+-----+-----+-----+-----+-----+-----+
4 rows in set (0.00 sec)

mysql> |
```

3Q)

create database salesdb;

use salesdb;

```
create table sales(
saleid int primary key,
productname varchar(30),
category varchar(20),
quantity int,
price int
);
```

insert into sales values

```
(1,'laptop','electronics',2,50000),
(2,'mouse','electronics',5,500),
(3,'keyboard','electronics',3,1000),
(4,'chair','furniture',4,3000),
(5,'table','furniture',2,7000),
(6,'pen','stationery',20,20),
(7,'book','stationery',10,150);
```

select * from sales;

```
select category,count(*) totalproducts
from sales
```

group by category;

```
select category,sum(quantity) totalquantity
from sales
group by category;
```

```
select category,avg(price) averageprice
from sales
group by category;
```

```
select category,max(price) highestprice
from sales
group by category;
```

```
select category,min(price) lowestprice
from sales
group by category;
```

```
select category,sum(quantity) totalquantity
from sales
group by category
having
sum(quantity)>5;
```

OUTPUT :

```
mysql> SELECT Category, MIN(Price) AS LowestPrice
-> FROM Sales
-> GROUP BY Category;
+-----+-----+
| Category | LowestPrice |
+-----+-----+
| Electronics | 500 |
| Furniture | 3000 |
| Stationery | 20 |
+-----+-----+
3 rows in set (0.00 sec)

mysql> SELECT Category, SUM(Quantity) AS TotalQuantity
-> FROM Sales
-> GROUP BY Category
-> HAVING SUM(Quantity) > 5;
+-----+-----+
| Category | TotalQuantity |
+-----+-----+
| Electronics | 10 |
| Furniture | 6 |
| Stationery | 30 |
+-----+-----+
3 rows in set (0.03 sec)

mysql> SELECT Category,
-> COUNT(*) AS TotalProducts,
-> SUM(Quantity) AS TotalQuantity,
-> AVG(Price) AS AveragePrice,
-> MAX(Price) AS HighestPrice,
-> MIN(Price) AS LowestPrice
-> FROM Sales
-> GROUP BY Category;
+-----+-----+-----+-----+-----+-----+
| Category | TotalProducts | TotalQuantity | AveragePrice | HighestPrice | LowestPrice |
+-----+-----+-----+-----+-----+-----+
| Electronics | 3 | 10 | 17166.6667 | 50000 | 500 |
| Furniture | 2 | 6 | 5000.0000 | 7000 | 3000 |
| Stationery | 2 | 30 | 85.0000 | 150 | 20 |
+-----+-----+-----+-----+-----+-----+
3 rows in set (0.00 sec)


mysql> |
```

4Q)

use companydb;

```
select
empid,
empname,
salary, deptid
from employee e1
where salary >
(
select avg(salary)
from employee e2
where e1.deptid=e2.deptid
);
```

OUTPUT :

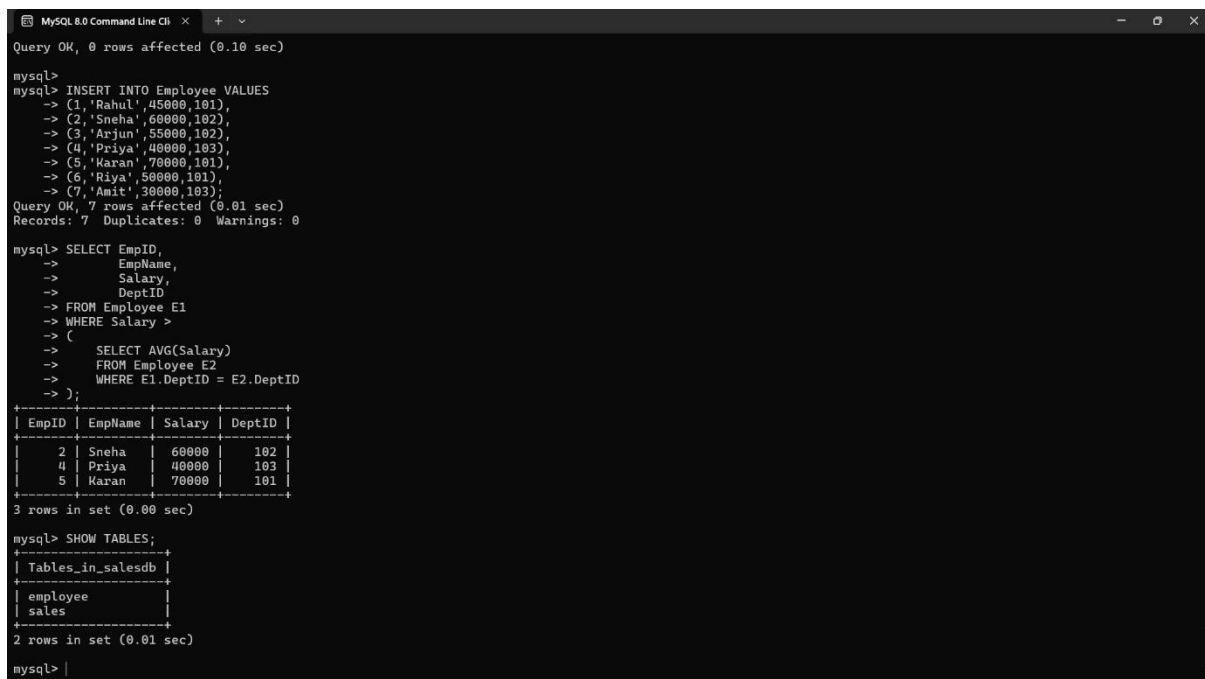

```
MySQL 8.0 Command Line C...
Query OK, 0 rows affected (0.10 sec)

mysql>
mysql> INSERT INTO Employee VALUES
-> (1,'Rahul',45000,101),
-> (2,'Sneha',60000,102),
-> (3,'Arjun',55000,102),
-> (4,'Priya',40000,103),
-> (5,'Karan',70000,101),
-> (6,'Riya',50000,101),
-> (7,'Amit',30000,103);
Query OK, 7 rows affected (0.01 sec)
Records: 7 Duplicates: 0 Warnings: 0

mysql> SELECT EmpID,
-> EmpName,
-> Salary,
-> DeptID
-> FROM Employee E1
-> WHERE Salary >
-> (
-> SELECT AVG(Salary)
-> FROM Employee E2
-> WHERE E1.DeptID = E2.DeptID
-> );
+-----+-----+-----+-----+
| EmpID | EmpName | Salary | DeptID |
+-----+-----+-----+-----+
| 2     | Sneha   | 60000  | 102    |
| 4     | Priya   | 40000  | 103    |
| 5     | Karan   | 70000  | 101    |
+-----+-----+-----+-----+
3 rows in set (0.00 sec)

mysql> SHOW TABLES;
+-----+
| Tables_in_salesdb |
+-----+
| employee           |
| sales              |
+-----+
2 rows in set (0.01 sec)

mysql> |
```

5Q)

use companydb;

```
create table project(
projectid int primary key,
projectname varchar(30),
deptid int
);
```

insert into project values


```
(1,'website',101),  
(2,'mobile app',102),  
(3,'payroll',103),  
(4,'ai system',104);
```

```
select * from employee;  
select * from project;
```

```
select e.empid,e.empname,p.projectname  
from employee e  
inner join project p  
on e.deptid=p.deptid;
```

```
select e.empid,e.empname,p.projectname  
from employee e  
left join project p  
on e.deptid=p.deptid;
```

```
select e.empid,e.empname,p.projectname  
from employee e  
right join project p  
on e.deptid=p.deptid;
```

```
select e.empid,e.empname,p.projectname  
from employee e  
left join project p  
on e.deptid=p.deptid
```

union

```
select e.empid,e.empname,p.projectname  
from employee e  
right join project p  
on e.deptid=p.deptid;
```

```
select *  
from employee  
cross join project;
```

OUTPUT :

```
MySQL 8.0 Command Line Cli  x  +  v
mysql> SELECT E.EmpID,E.EmpName,E.DeptID,P.ProjectName
-> FROM Employee E
-> LEFT JOIN Project P
-> ON E.DeptID=P.DeptID;
+----+-----+-----+-----+
| EmpID | EmpName | DeptID | ProjectName |
+----+-----+-----+-----+
| 1 | Rahul | 101 | Website |
| 2 | Sneha | 102 | Mobile App |
| 3 | Arjun | 102 | Mobile App |
| 4 | Priya | 103 | Payroll |
| 5 | Karan | 101 | Website |
| 6 | Riya | 101 | Website |
| 7 | Amit | 103 | Payroll |
+----+-----+-----+-----+
7 rows in set (0.00 sec)

mysql> SELECT *
-> FROM Employee
-> CROSS JOIN Project;
+----+-----+-----+-----+-----+-----+-----+
| EmpID | EmpName | Salary | DeptID | ProjectID | ProjectName | DeptID |
+----+-----+-----+-----+-----+-----+-----+
| 1 | Rahul | 45000 | 101 | 4 | AI System | 104 |
| 1 | Rahul | 45000 | 101 | 3 | Payroll | 103 |
| 1 | Rahul | 45000 | 101 | 2 | Mobile App | 102 |
| 1 | Rahul | 45000 | 101 | 1 | Website | 101 |
| 2 | Sneha | 60000 | 102 | 4 | AI System | 104 |
| 2 | Sneha | 60000 | 102 | 3 | Payroll | 103 |
| 2 | Sneha | 60000 | 102 | 2 | Mobile App | 102 |
| 2 | Sneha | 60000 | 102 | 1 | Website | 101 |
| 3 | Arjun | 55000 | 102 | 4 | AI System | 104 |
| 3 | Arjun | 55000 | 102 | 3 | Payroll | 103 |
| 3 | Arjun | 55000 | 102 | 2 | Mobile App | 102 |
| 3 | Arjun | 55000 | 102 | 1 | Website | 101 |
| 4 | Priya | 40000 | 103 | 4 | AI System | 104 |
| 4 | Priya | 40000 | 103 | 3 | Payroll | 103 |
| 4 | Priya | 40000 | 103 | 2 | Mobile App | 102 |
| 4 | Priya | 40000 | 103 | 1 | Website | 101 |
| 5 | Karan | 70000 | 101 | 4 | AI System | 104 |
| 5 | Karan | 70000 | 101 | 3 | Payroll | 103 |
| 5 | Karan | 70000 | 101 | 2 | Mobile App | 102 |
| 5 | Karan | 70000 | 101 | 1 | Website | 101 |
| 6 | Riya | 50000 | 101 | 4 | AI System | 104 |
| 6 | Riya | 50000 | 101 | 3 | Payroll | 103 |
| 6 | Riya | 50000 | 101 | 2 | Mobile App | 102 |
| 6 | Riya | 50000 | 101 | 1 | Website | 101 |
| 7 | Amit | 30000 | 103 | 4 | AI System | 104 |
| 7 | Amit | 30000 | 103 | 3 | Payroll | 103 |
| 7 | Amit | 30000 | 103 | 2 | Mobile App | 102 |
| 7 | Amit | 30000 | 103 | 1 | Website | 101 |
+----+-----+-----+-----+-----+-----+-----+
28 rows in set (0.00 sec)
```

6Q)

use companydb;

```
create view deptsalaryview as
select d.deptname,
count(e.empid) as totalemployees,
avg(e.salary) as averagesalary
from department d
join employee e
on d.deptid=e.deptid
group by d.deptname;
```

```
select * from deptsalaryview;
```

OUTPUT :

```
MySQL 8.0 Command Line CLi x + -
+-----+-----+-----+-----+-----+-----+
| 4 | Priya | 40000 | 103 | 2 | Mobile App | 102 |
| 4 | Priya | 40000 | 103 | 1 | Website | 101 |
| 5 | Karan | 70000 | 101 | 4 | AI System | 104 |
| 5 | Karan | 70000 | 101 | 3 | Payroll | 103 |
| 5 | Karan | 70000 | 101 | 2 | Mobile App | 102 |
| 5 | Karan | 70000 | 101 | 1 | Website | 101 |
| 6 | Riya | 50000 | 101 | 4 | AI System | 104 |
| 6 | Riya | 50000 | 101 | 3 | Payroll | 103 |
| 6 | Riya | 50000 | 101 | 2 | Mobile App | 102 |
| 6 | Riya | 50000 | 101 | 1 | Website | 101 |
| 7 | Amit | 30000 | 103 | 4 | AI System | 104 |
| 7 | Amit | 30000 | 103 | 3 | Payroll | 103 |
| 7 | Amit | 30000 | 103 | 2 | Mobile App | 102 |
| 7 | Amit | 30000 | 103 | 1 | Website | 101 |
+-----+-----+-----+-----+-----+-----+
20 rows in set (0.00 sec)

mysql> CREATE TABLE Department
-> (
-> DeptID INT PRIMARY KEY,
-> DeptName VARCHAR(30)
-> );
Query OK, 0 rows affected (0.09 sec)

mysql>
mysql> INSERT INTO Department VALUES
-> (101,'HR'),
-> (102,'IT'),
-> (103,'Finance');
Query OK, 3 rows affected (0.02 sec)
Records: 3 Duplicates: 0 Warnings: 0

mysql> CREATE VIEW DeptSalaryView AS
-> SELECT D.DeptName,
-> COUNT(E.EmpID) AS TotalEmployees,
-> AVG(E.Salary) AS AverageSalary
-> FROM Department D
-> JOIN Employee E
-> ON D.DeptID=E.DeptID
-> GROUP BY D.DeptName;
Query OK, 0 rows affected (0.09 sec)

mysql> SELECT * FROM DeptSalaryView;
+-----+-----+-----+
| DeptName | TotalEmployees | AverageSalary |
+-----+-----+-----+
| HR | 3 | 55000.0000 |
| IT | 2 | 57500.0000 |
| Finance | 2 | 35000.0000 |
+-----+-----+-----+
3 rows in set (0.07 sec)

mysql> |
```

7Q)

create database studentdb;

use studentdb;

```
create table student(
sid int primary key,
name varchar(30)
);
```

```
create table course(
courseid int primary key,
coursename varchar(30)
);
```

```
create table enrollment(
sid int,
courseid int,
primary key(sid,courseid),
foreign key(sid) references student(sid),
foreign key(courseid) references course(courseid)
);
```

insert into student values

```
(1,'rahul'),
(2,'sneha'),
(3,'arjun');
```

insert into course values
(101,'dbms'),
(102,'java'),
(103,'python');

insert into enrollment values
(1,101),
(1,102),
(1,103),
(2,101),
(2,102),
(3,101);

OUTPUT :

```
3 rows in set (0.07 sec)

mysql> INSERT INTO Employee
-> VALUES(8,'Kavya',65000,102);
Query OK, 1 row affected (0.05 sec)

mysql> UPDATE Employee
-> SET Salary=70000
-> WHERE EmpID=8;
Query OK, 1 row affected (0.05 sec)
Rows matched: 1 Changed: 1 Warnings: 0

mysql> DELETE FROM Employee
-> WHERE EmpID=8;
Query OK, 1 row affected (0.05 sec)

mysql> |
```

8Q)

use companydb;

insert into employee
values(6,'riya',50000,102);
select * from employee;

update employee

set salary=65000
where empid=6;

select * from employee;

delete from employee
where empid=6;

select * from employee;

OUTPUT :

```
mysql> INSERT INTO Employee
-> VALUES(8,'Kavya',65000,102);
Query OK, 1 row affected (0.06 sec)

mysql> UPDATE Employee
-> SET Salary=70000
-> WHERE EmpID=8;
Query OK, 1 row affected (0.05 sec)
Rows matched: 1 Changed: 1 Warnings: 0

mysql> DELETE FROM Employee
-> WHERE EmpID=8;
Query OK, 1 row affected (0.05 sec)

mysql> |
```

9Q)

use companydb;

```
create table department1(
deptid int primary key,
deptname varchar(30)
);
```

```
insert into department1 values
(101,'hr'),
(102,'it'),
(103,'finance');
```

```
select * from employee;
select * from department1;
```

```
select e.empid,
e.empname,
e.salary,
d.deptname
from employee e
join department1 d
on e.deptid=d.deptid
where d.deptname='it'
and e.salary>50000;
```

OUTPUT :

```
-> Employee(E)
-> ^ E.DeptID = 102
-> ^ E.Salary > 50000
-> };
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MySQL server version for the right syntax to use near '{ E |
Employee(E)
? E.DeptID = 102
? E.Salary > 50000
}' at line 1
mysql> SELECT E.EmpID,
-> E.EmpName,
-> E.Salary,
-> D.DeptName
-> FROM Employee E
-> JOIN Department D
-> ON E.DeptID = D.DeptID
-> WHERE D.DeptName = 'IT'
-> AND E.Salary > 50000;
+----+-----+-----+-----+
| EmpID | EmpName | Salary | DeptName |
+----+-----+-----+-----+
| 2 | Sneha | 60000 | IT |
| 3 | Arjun | 55000 | IT |
+----+-----+-----+-----+
2 rows in set (0.03 sec)

mysql> |
```

10Q)

create database airlinedb;

```
use airlinedb;
```

```
create table passenger(  
passengerid int primary key,  
passengername varchar(30),  
phone varchar(15)  
);
```

```
create table flight(  
flightid int primary key,  
flightname varchar(30),  
source varchar(30),  
destination varchar(30)  
);
```

```
create table booking(  
bookingid int primary key,  
passengerid int,  
flightid int,  
journeydate date,  
foreign key(passengerid) references passenger(passengerid),  
foreign key(flightid) references flight(flightid)  
);
```

```
insert into passenger values  
(101,'rahul','9876543210'),  
(102,'sneha','9876543211'),  
(103,'arjun','9876543212'),  
(104,'priya','9876543213');
```

```
insert into flight values (201,'air  
india','chennai','delhi'),  
(202,'indigo','bangalore','mumbai'),  
(203,'spicejet','hyderabad','kolkata');
```

```
insert into booking values  
(301,101,201,'2026-08-10'),  
(302,102,202,'2026-08-11'),  
(303,103,203,'2026-08-12'),  
(304,104,201,'2026-08-13');
```

```
select * from passenger;  
select * from flight;  
select * from booking;
```

```
select passengername,flightname
from passenger p
join booking b
on p.passengerid=b.passengerid
join flight f
on b.flightid=f.flightid;
```

```
select passengername
from passenger
where passengerid in
(
select passengerid
from booking
);
```

```
select flightname,passengername
from flight f
join booking b
on f.flightid=b.flightid
join passenger p
on p.passengerid=b.passengerid;
```

```
create view flightbookingview as
select passengername,flightname
from passenger p
join booking b
on p.passengerid=b.passengerid
join flight f
on b.flightid=f.flightid;
select * from flightbookingview;
```

```
select flightid,
```

```
count(*) as totalbookings
from booking
group by flightid;
```

OUTPUT :

```
Query OK, 3 rows affected (0.01 sec)
Records: 3 Duplicates: 0 Warnings: 0

mysql> INSERT INTO Booking VALUES
-> (301,101,201,'2026-08-10'),
-> (302,102,202,'2026-08-11'),
-> (303,103,203,'2026-08-12'),
-> (304,104,201,'2026-08-13');
Query OK, 4 rows affected (0.01 sec)
Records: 4 Duplicates: 0 Warnings: 0

mysql> show table
-> show table;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MySQL server version for the right syntax to use near 'show table' at line 2
mysql> show table;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MySQL server version for the right syntax to use near '' at line 1
mysql> SELECT * FROM Passenger;
+-----+-----+-----+
| PassengerID | PassengerName | Phone |
+-----+-----+-----+
| 101 | Rahul | 9876543210 |
| 102 | Sneha | 9876543211 |
| 103 | Arjun | 9876543212 |
| 104 | Priya | 9876543213 |
+-----+-----+-----+
4 rows in set (0.00 sec)

mysql>
mysql> SELECT * FROM Flight;
+-----+-----+-----+-----+
| FlightID | FlightName | Source | Destination |
+-----+-----+-----+-----+
| 201 | Air India | Chennai | Delhi |
| 202 | Indigo | Bangalore | Mumbai |
| 203 | SpiceJet | Hyderabad | Kolkata |
+-----+-----+-----+-----+
3 rows in set (0.00 sec)

mysql>
mysql> SELECT * FROM Booking;
+-----+-----+-----+-----+
| BookingID | PassengerID | FlightID | JourneyDate |
+-----+-----+-----+-----+
| 301 | 101 | 201 | 2026-08-10 |
| 302 | 102 | 202 | 2026-08-11 |
| 303 | 103 | 203 | 2026-08-12 |
| 304 | 104 | 201 | 2026-08-13 |
+-----+-----+-----+-----+
4 rows in set (0.00 sec)

mysql> |
```