

NAME : G.MOHAN SAI

WEEK 5 ASSESSMENT:

1) Create a new React Application with the name “myfirstreact”, Run the application to print “welcome to the first session of React” as heading of that page.

App.js

```
import React from "react";

function App() {
  return (
    <div>
      <h1>Welcome to the first session of React</h1>
    </div>
  );
}

export default App;
```

Commands Used:

```
npx create-react-app firstsession
cd bloggerapp
npm start
```

OUTPUT:



2) Create a react app for Student Management Portal named StudentApp and create a component named Home which will display the Message “Welcome to the Home page of Student Management Portal”. Create another component named About and display the Message “Welcome to the About page of the Student Management Portal”. Create a third component named Contact and display the Message “Welcome to the Contact page of the Student Management Portal”. Call all the three components.

Home.js

```
import React, { Component } from "react";

class Home extends Component {

  render() {

    return (

      <div>

        <h2>Welcome to the Home page of Student Management Portal</h2>

      </div>

    );

  }

}

export default Home;
```

About.js

```
import React, { Component } from "react";

class About extends Component {

  render() {

    return (

      <div>

        <h2>Welcome to the About page of the Student Management Portal</h2>
```

```
    </div>

  );
}
}
```

```
export default About;
```

Contact.js

```
import React, { Component } from "react";
```

```
class Contact extends Component {
  render() {
    return (
      <div>
        <h2>Welcome to the Contact page of the Student Management Portal</h2>
      </div>
    );
  }
}
```

```
export default Contact;
```

App.js

```
import React, { Component } from "react";
import Home from "../Components/Home";
import About from "../Components/About";
import Contact from "../Components/Contact";
```

```
class App extends Component {
  render() {
```

```
    return (  
      <div>  
        <Home />  
        <About />  
        <Contact />  
      </div>  
    );  
  }  
}
```

```
export default App;
```


index.js

```
import React from "react";  
import ReactDOM from "react-dom/client";  
import App from "./App";  
  
const root = ReactDOM.createRoot(document.getElementById("root"));  
  
root.render(  
  <React.StrictMode>  
    <App />  
  </React.StrictMode>  
);
```

Commands Used:

```
npx create-react-app managementsapp  
cd bloggerapp  
npm start
```

OUTPUT :

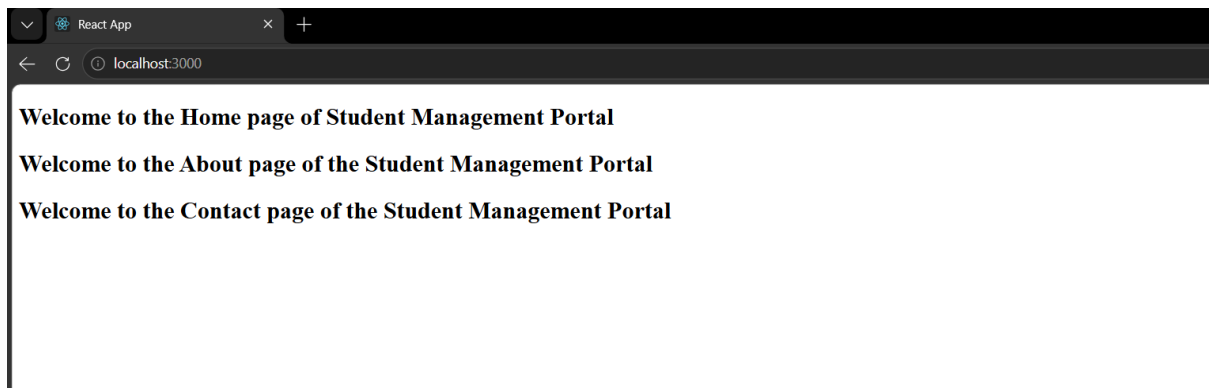

3) Create a react app for Student Management Portal named scorecalculatorapp and create a function component named “CalculateScore” which will accept Name, School, Total and goal in order to calculate the average score of a student and display the same

1. CalculateScore.js

```
import React from "react";

import "../Stylesheets/mystyle.css";

function CalculateScore(props) {

  const average = props.Total / props.Goal;

  return (

    <div className="container">

      <h1>Student Management Portal</h1>

      <p><b>Name:</b> {props.Name}</p>

      <p><b>School:</b> {props.School}</p>

      <p><b>Total Score:</b> {props.Total}</p>

      <p><b>Number of Goals:</b> {props.Goal}</p>

      <p><b>Average Score:</b> {average}</p>

    </div>
```

```
);  
}
```

```
export default CalculateScore;
```

2. mystyle.css

```
.container {  
  width: 400px;  
  margin: 40px auto;  
  padding: 20px;  
  border: 2px solid black;  
  border-radius: 10px;  
  background-color: #f2f2f2;  
  text-align: center;  
  font-family: Arial, sans-serif;  
}
```

```
h1 {  
  color: blue;  
}
```

```
p {  
  font-size: 18px;  
}
```

3. App.js

```
import React from "react";  
import CalculateScore from "../Components/CalculateScore";
```

```
function App() {
```

```
return (  
  <div>  
    <CalculateScore  
      Name="Rahul"  
      School="ABC Public School"  
      Total={500}  
      Goal={5}  
    />  
  </div>  
);  
}
```

```
export default App;
```

4. index.js


```
import React from "react";  
import ReactDOM from "react-dom/client";  
import App from "./App";  
  
const root = ReactDOM.createRoot(document.getElementById("root"));  
  
root.render(  
  <React.StrictMode>  
    <App />  
  </React.StrictMode>  
);
```

Commands Used:

```
npx create-react-app studentapp  
cd bloggerapp
```

npm start

OUTPUT :

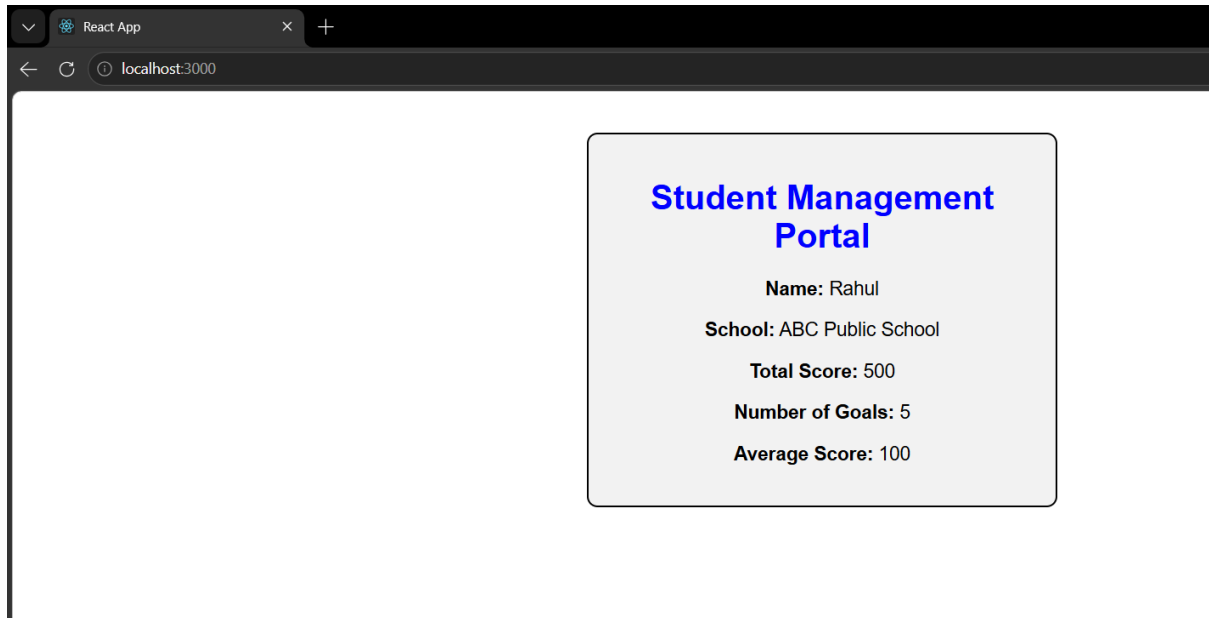

4 QUESTION

1. Create a new react application using *create-react-app* tool with the name as “blogapp”
2. Open the application using VS Code
3. Create a new file named as **Post.js** in **src folder** with following properties
4. Create a new class based component named as **Posts** inside **Posts.js** file
5. Initialize the component with a list of Post in state of the component using the constructor
6. Create a new method in component with the name as **loadPosts()** which will be responsible for using Fetch API and assign it to the component state created earlier. To get the posts use the url (<https://jsonplaceholder.typicode.com/posts>)
7. Implement the **componentDidMount()** hook to make calls to **loadPosts()** which will fetch the posts
8. Implement the **render()** which will display the title and post of posts in html page using heading and paragraphs respectively.
9. Define a **componentDidCatch()** method which will be responsible for displaying any error happening in the component as alert messages.

10. Add the Posts component to App component.
11. Build and Run the application using *npm start* command.

Post.js

```
class Post {  
  constructor(id, title, body) {  
    this.id = id;  
    this.title = title;  
    this.body = body;  
  }  
}  
  
export default Post;
```

3. Posts.js

```
import React, { Component } from "react";  
import Post from "../Post";  
  
class Posts extends Component {  
  constructor(props) {  
    super(props);  
  
    this.state = {  
      posts: []  
    };  
  }  
  
  loadPosts() {  
    fetch("https://jsonplaceholder.typicode.com/posts")
```

```
.then((response) => response.json())
.then((data) => {
  const postList = data.map(
    (item) => new Post(item.id, item.title, item.body)
  );

  this.setState({
    posts: postList
  });
})
.catch((error) => {
  alert(error);
});
}
```

```
componentDidMount() {
  this.loadPosts();
}
```

```
componentDidCatch(error, info) {
  alert("Error: " + error);
}
```

```
render() {
  return (
    <div>
      <h1>Blog Posts</h1>
```

```
    {this.state.posts.map((post) => (  
      <div key={post.id}>  
        <h2>{post.title}</h2>  
        <p>{post.body}</p>  
        <hr />  
      </div>  
    ))}  
  </div>  
);  
}  
}
```

export default Posts;

4. App.js

```
import React from "react";  
import Posts from "../Posts";
```

```
function App() {  
  return (  
    <div>  
      <Posts />  
    </div>  
  );  
}
```

export default App;

5. index.js

```
import React from "react";
```

```
import ReactDOM from "react-dom/client";

import App from "./App";

const root = ReactDOM.createRoot(document.getElementById("root"));

root.render(

  <React.StrictMode>

    <App />


  </React.StrictMode>

);
```

Commands Used:

```
npx create-react-app blogapp
cd bloggerapp
npm start
```

OUTPUT :

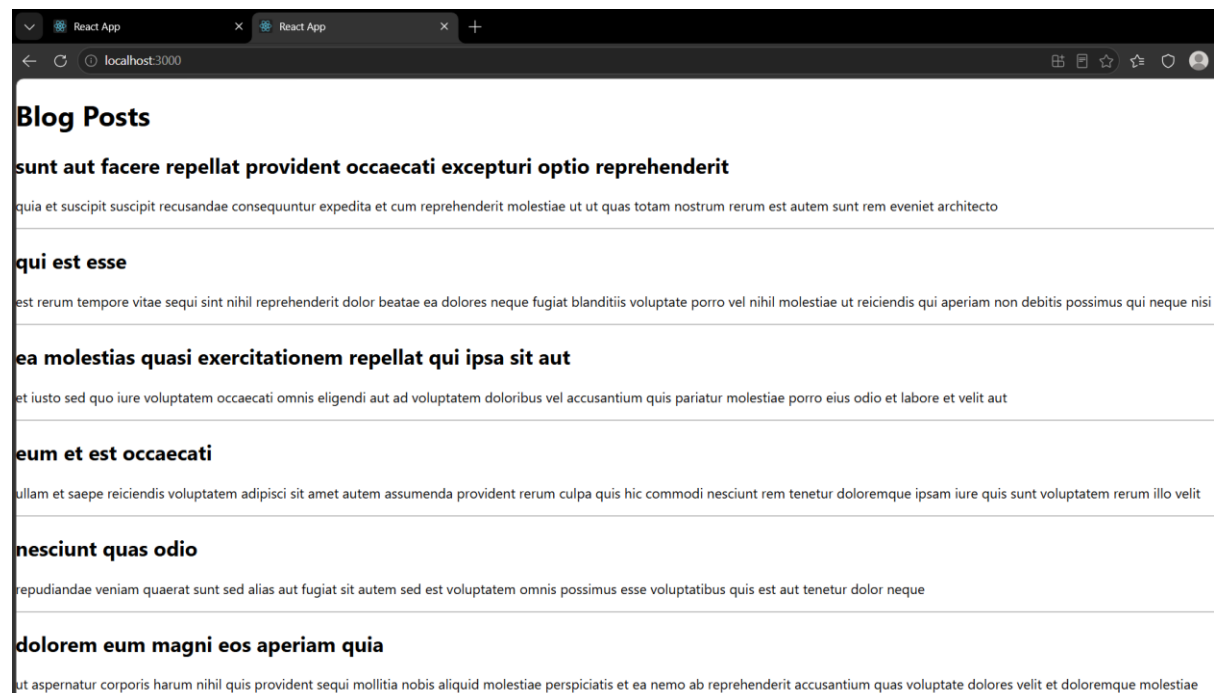

5 QUESTION

1. Create CohortDetails.module.css

CohortDetails.module.css

```
.box {  
  width: 300px;  
  display: inline-block;  
  margin: 10px;  
  padding: 10px 20px;  
  border: 1px solid black;  
  border-radius: 10px;  
}  
  
dt {  
  font-weight: 500;  
}
```

2. CohortDetails.js

```
import React from "react";  
  
import styles from "../CohortDetails.module.css";  
  
function CohortDetails(props) {  
  return (  
    <div className={styles.box}>  
      <h3  
        style={{  
          color:  
            props.status.toLowerCase() === "ongoing"  
              ? "green"  
              : "blue",  
        }}  
      >  
    </div>  
  )  
}
```

```
        {props.cohortName}
    </h3>
    <dl>
        <dt>Started On</dt>
        <dd>{props.startDate}</dd>
        <dt>Current Status</dt>
        <dd>{props.status}</dd>
        <dt>Coach</dt>
        <dd>{props.coach}</dd>

        <dt>Trainer</dt>
        <dd>{props.trainer}</dd>
    </dl>
</div>

);
}
```

```
export default CohortDetails;
```

3. App.js

```
import React from "react";
import CohortDetails from "../CohortDetails";

function App() {
    return (
        <div>

            <CohortDetails

                cohortName="React Bootcamp"

                startDate="01-07-2026"

                status="ongoing"

                coach="John"
```

```
        trainer="David"

    />

    <CohortDetails

        cohortName="Java Full Stack"

        startDate="15-06-2026"

        status="completed"

        coach="Mary"

        trainer="Robert"

    />

</div>

);

}

export default App;
```

6) QUESTION :

1. ListofPlayers.js

```
import React from "react";

function ListofPlayers() {

    const players = [

        { name: "Virat", score: 90 },

        { name: "Rohit", score: 85 },

        { name: "Gill", score: 45 },

        { name: "Rahul", score: 78 },

        { name: "Pant", score: 60 },

        { name: "Hardik", score: 88 },

        { name: "Jadeja", score: 65 },

        { name: "Ashwin", score: 72 },

        { name: "Shami", score: 55 },

        { name: "Bumrah", score: 80 },
```

```
{ name: "Siraj", score: 69 }  
];  
const lowScorePlayers = players.filter(player => player.score < 70);  
return (  
  <div>  
    <h2>List of Players</h2>  
    <table border="1" cellPadding="5">  
      <thead>  
        <tr>  
          <th>Name</th>  
          <th>Score</th>  
        </tr>  
      </thead>  
      <tbody>  
        {players.map((player, index) => (  
          <tr key={index}>  
            <td>{player.name}</td>  
            <td>{player.score}</td>  
          </tr>  
        ))}  
      </tbody>  
    </table>  
    <h2>Players with Score Below 70</h2>  
  
    <ul>  
      {lowScorePlayers.map((player, index) => (  
        <li key={index}>  
          {player.name} - {player.score}  
        </li>  
      ))}  
    </ul>  
  </div>  
)
```

```

        </li>

    )})
</ul>

</div>

);
}

export default ListofPlayers;

```

2. IndianPlayers.js

```

import React from "react";

function IndianPlayers() {

    const players = [

        "Virat",

        "Rohit",

        "Gill",

        "Rahul",

        "Pant",

        "Hardik",

        "Jadeja",

        "Ashwin"

    ];

    const [odd1, even1, odd2, even2, odd3, even3, odd4, even4] = players;

    const T20players = ["Virat", "Rohit", "Hardik"];

    const RanjiPlayers = ["Pujara", "Rahane", "Saha"];

    const mergedPlayers = [...T20players, ...RanjiPlayers];

    return (

        <div>

            <h2>Odd Team Players</h2>

```

```

<ul>
  <li>{odd1}</li>
  <li>{odd2}</li>
  <li>{odd3}</li>
  <li>{odd4}</li>
</ul>

<h2>Even Team Players</h2>

<ul>
  <li>{even1}</li>
  <li>{even2}</li>
  <li>{even3}</li>
  <li>{even4}</li>
</ul>

<h2>Merged Players</h2>

<ul>
  {mergedPlayers.map((player, index) => (
    <li key={index}>{player}</li>
  ))}
</ul>

</div>

);
}

```

```
export default IndianPlayers;
```

3. App.js

```

import React from "react";
import ListofPlayers from "./ListofPlayers";
import IndianPlayers from "./IndianPlayers";
function App() {

```

```
const flag = true;

if (flag) {
  return (
    <div>
      <ListofPlayers />
    </div>
  );
} else {
  return (
    <div>
      <IndianPlayers />
    </div>
  );
}
}

export default App;
```

4. index.js

```
import React from "react";
import ReactDOM from "react-dom/client";
import App from "./App";

const root = ReactDOM.createRoot(document.getElementById("root"));

root.render(
  <React.StrictMode>
    <App />
  </React.StrictMode>
);
```


Commands Used:

npx create-react-app players

cd bloggerapp

npm start

OUTPUT :

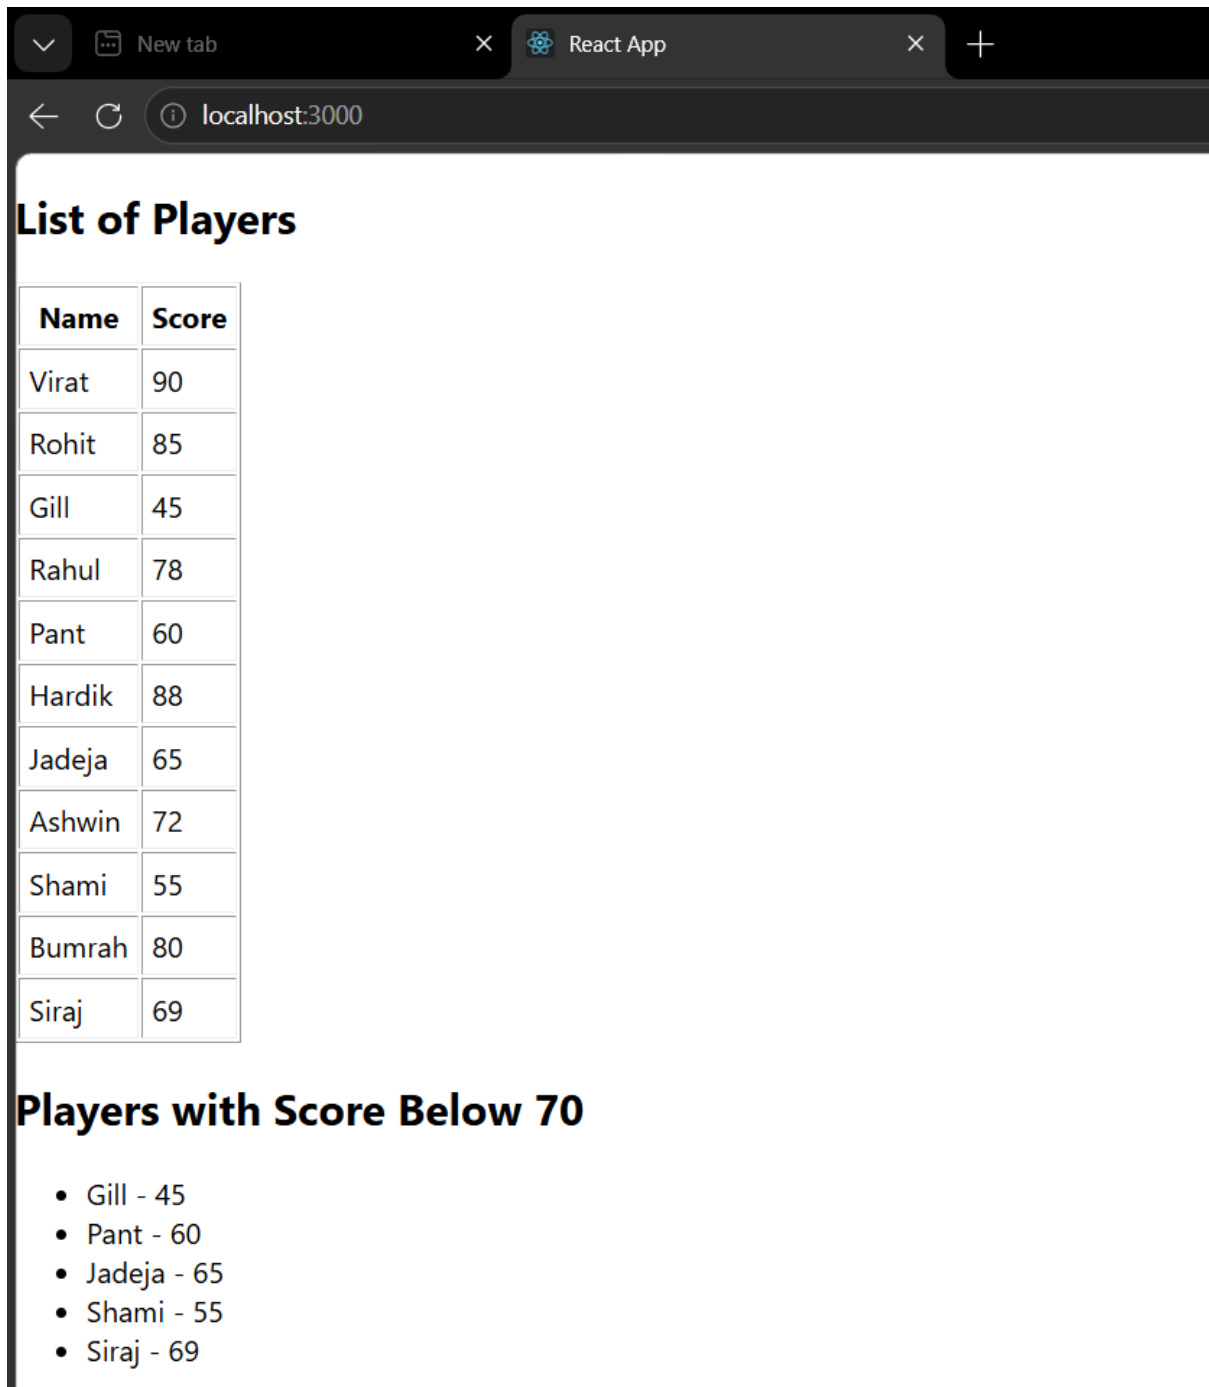

The screenshot shows a web browser with a single tab titled 'React App' at the address 'localhost:3000'. The page content includes a heading 'List of Players' followed by a table with 12 rows of player data. Below the table, a heading 'Players with Score Below 70' is followed by a bulleted list of five players whose scores are below 70.

Name	Score
Virat	90
Rohit	85
Gill	45
Rahul	78
Pant	60
Hardik	88
Jadeja	65
Ashwin	72
Shami	55
Bumrah	80
Siraj	69

Players with Score Below 70

- Gill - 45
- Pant - 60
- Jadeja - 65
- Shami - 55
- Siraj - 69

7) QUESTION :

App.js

```
import React from "react";

import officeImage from "./office.jpg";

function App() {

  const office = {

    name: "Skyline Office",

    rent: 55000,

    address: "Hyderabad"

  };

  const officeList = [

    {

      name: "Skyline Office",

      rent: 55000,

      address: "Hyderabad"

    },

    {

      name: "Tech Park",

      rent: 75000,

      address: "Bangalore"

    },

    {

      name: "Business Hub",

      rent: 45000,

      address: "Chennai"

    },

    {
```

```
    name: "Corporate Plaza",
    rent: 85000,
    address: "Pune"
  }
];
return (
  <div style={{ margin: "20px", fontFamily: "Arial" }}>
    <h1>Office Space Rental App</h1>
    <img
      src={officeImage}
      alt="Office Space"
      width="400"
      height="250"
    />
    <h2>Single Office Details</h2>
    <p><b>Name:</b> {office.name}</p>
    <p>
      <b>Rent:</b>{" "}
      <span
        style={{
          color: office.rent < 60000 ? "red" : "green"
        }}
      >
        ₹{office.rent}
      </span>
    </p>
    <p><b>Address:</b> {office.address}</p>
    <hr />
```

```

<h2>Office Space List</h2>
{officeList.map((item, index) => (
  <div
    key={index}
    style={{
      border: "1px solid black",
      padding: "10px",
      marginBottom: "10px",
      width: "350px"
    }}
  >
    <p><b>Name:</b> {item.name}</p>
    <p>
      <b>Rent:</b>{" "}
      <span
        style={{
          color: item.rent < 60000 ? "red" : "green"
        }}
      >
        ₹{item.rent}
      </span>
    </p>
    <p><b>Address:</b> {item.address}</p>
  </div>
)}}
</div>
);

```

```
}  
  
export default App;  
  
index.js  
  
import React from "react";  
  
import ReactDOM from "react-dom/client";  
  
import App from "./App";  
  
const root = ReactDOM.createRoot(document.getElementById("root"));  
  
root.render(  
  <React.StrictMode>  
    <App />  
  </React.StrictMode>  
);
```


Commands Used :

```
npx create-react-app officespacerentalapp
```

```
cd officespacerentalapp
```

```
npm start
```

OUTPUT :

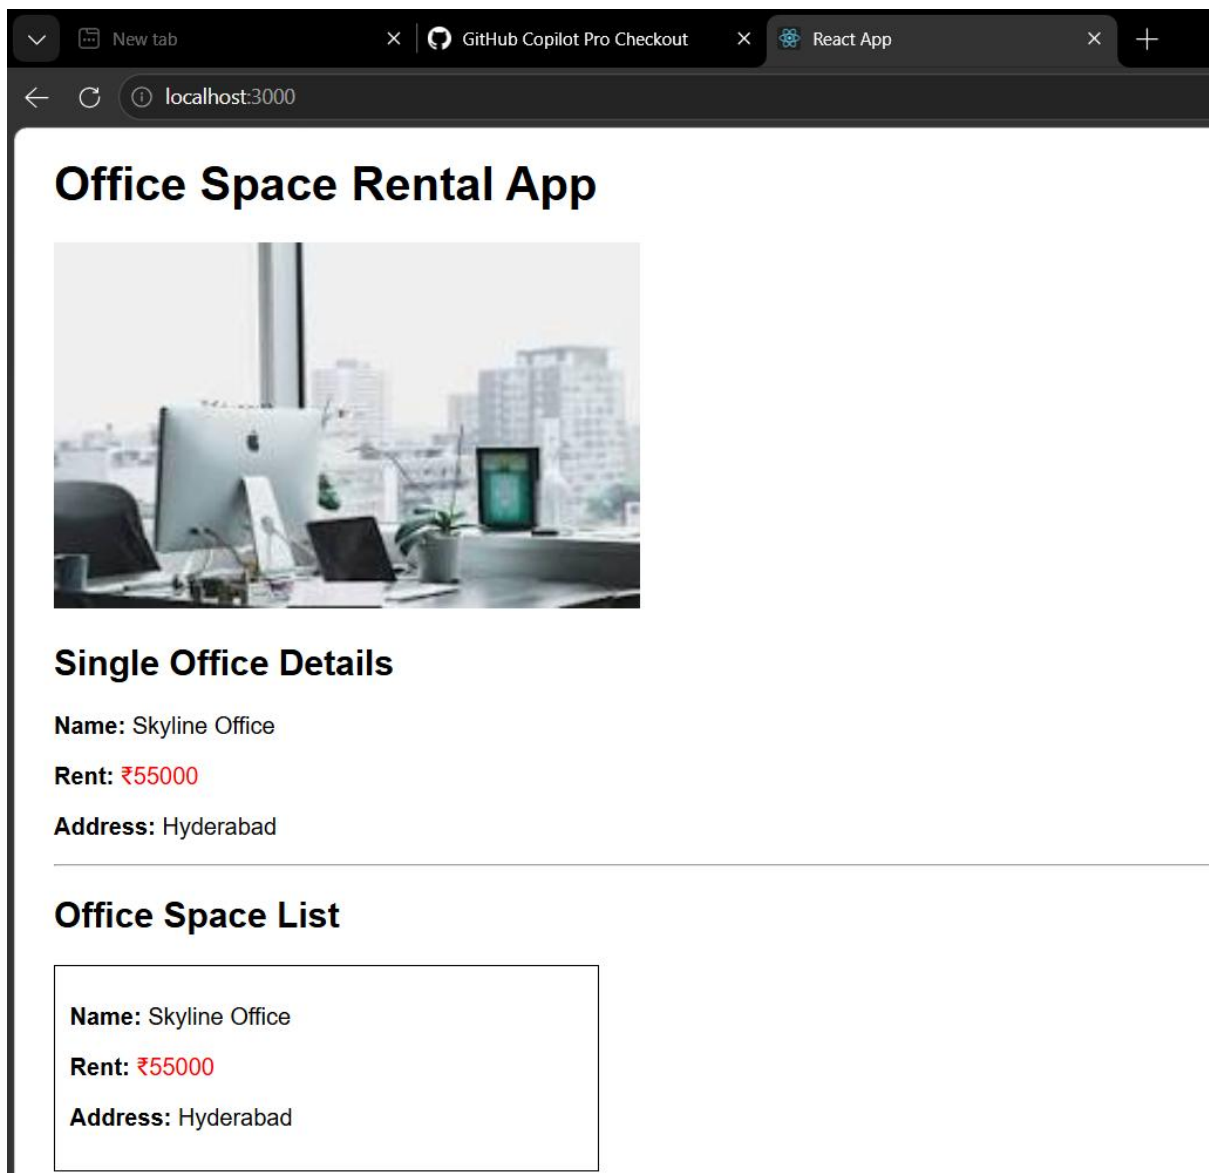

Address: Hyderabad

Office Space List

Name: Skyline Office

Rent: ₹55000

Address: Hyderabad

Name: Tech Park

Rent: ₹75000

Address: Bangalore

Name: Business Hub

Rent: ₹45000

Address: Chennai

Name: Corporate Plaza

Rent: ₹85000

Address: Pune

8 QUESTION:

1. App.js

```
import React, { Component } from "react";
import CurrencyConvertor from "../CurrencyConvertor";
class App extends Component {
  constructor(props) {
    super(props);
    this.state = {
      count: 0,
    };
  }
  increment = () => {
```

```
this.setState({
  count: this.state.count + 1,
});
};

decrement = () => {
  this.setState({
    count: this.state.count - 1,
  });
};

sayHello = () => {
  alert("Hello! Welcome to React Event Handling.");
};

incrementAndHello = () => {
  this.increment();
  this.sayHello();
};

sayWelcome = (message) => {
  alert(message);
};

onPress = () => {
  alert("I was clicked");
};

render() {
  return (
    <div style={{ margin: "20px" }}>
      <h1>Event Handling Example</h1>
      <h2>Counter : {this.state.count}</h2>
      <button onClick={this.incrementAndHello}>
```

Increment

</button>

<button onClick={this.decrement}>

Decrement

</button>

<button

onClick={() => this.sayWelcome("Welcome")}

>

Say Welcome

</button>

<button onClick={this.onPress}>

OnPress

</button>

<hr />

<CurrencyConvertor />

```
    </div>

  );
}
}
```

```
export default App;
```

2. CurrencyConvertor.js

```
import React, { Component } from "react";
```

```
class CurrencyConvertor extends Component {
```

```
  constructor(props) {
    super(props);
```

```
    this.state = {
      rupees: "",
      euro: "",
    };
  }
```

```
  handleChange = (event) => {
    this.setState({
      rupees: event.target.value,
    });
  };
```

```
  handleSubmit = (event) => {
    event.preventDefault();
```

```
const euro = (this.state.rupees / 90).toFixed(2);
```

```
this.setState({  
  euro: euro,  
});  
};
```

```
render() {  
  return (  
    <div>  
      <h2>Currency Convertor</h2>  
  
      <form onSubmit={this.handleSubmit}>  
        <label>Indian Rupees :</label>  
  
        <input  
          type="number"  
          value={this.state.rupees}  
          onChange={this.handleChange}  
        />  
  
        <br />  
        <br />  
  
        <button type="submit">  
          Convert  
        </button>  
      </form>
```

```
    <h3>Euro : € {this.state.euro}</h3>
  </div>
);
}
}
```

```
export default CurrencyConvertor;
```

3. index.js

```
import React from "react";
import ReactDOM from "react-dom/client";
import App from "./App";



const root = ReactDOM.createRoot(document.getElementById("root"));


root.render(
  <React.StrictMode>
    <App />
  </React.StrictMode>
);
```

Commands Used:

```
npx create-react-app eventexamplesapp
cd bloggerapp
npm start
```

OUTPUTS :

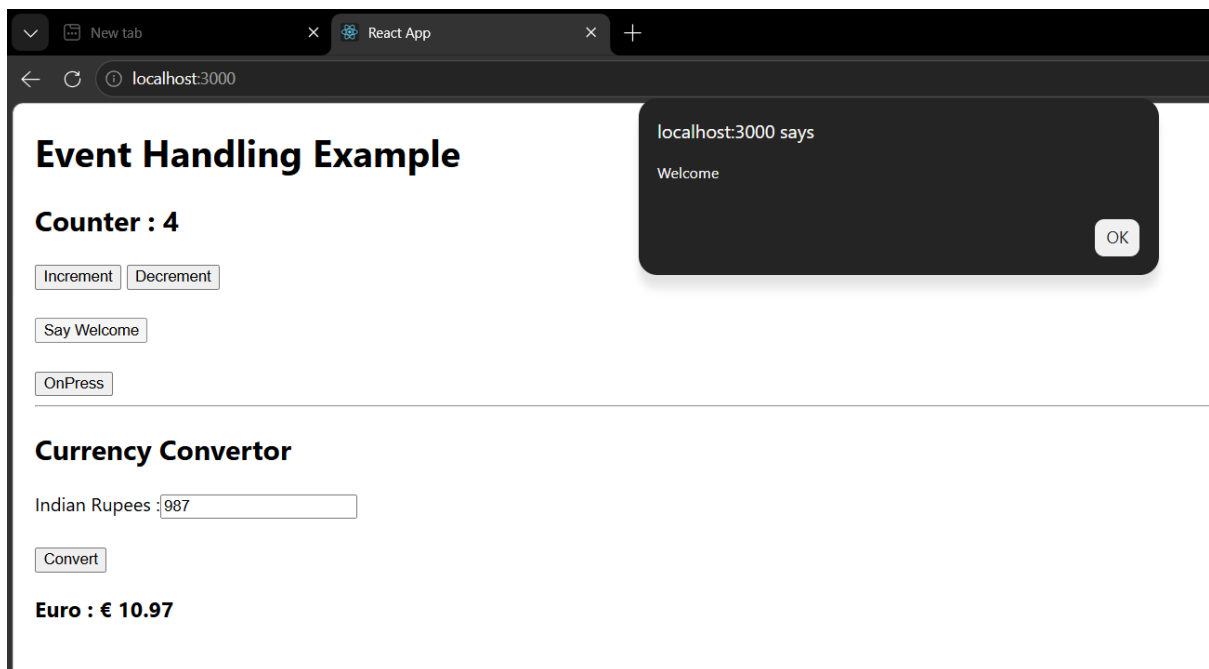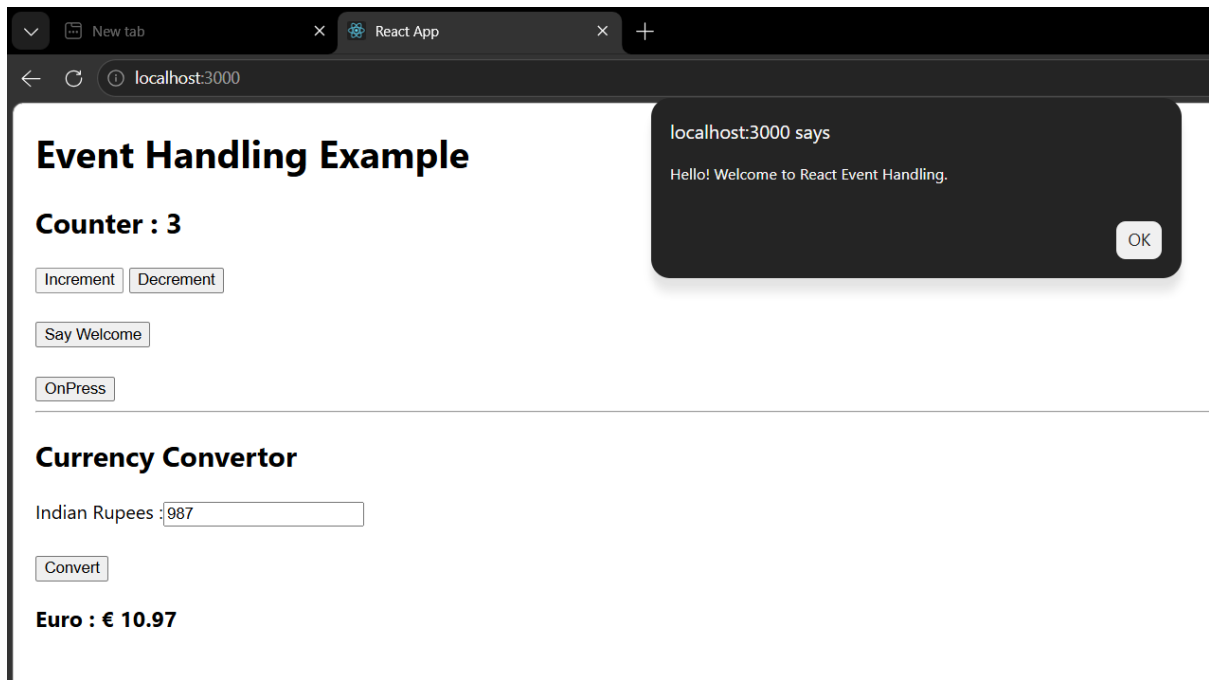

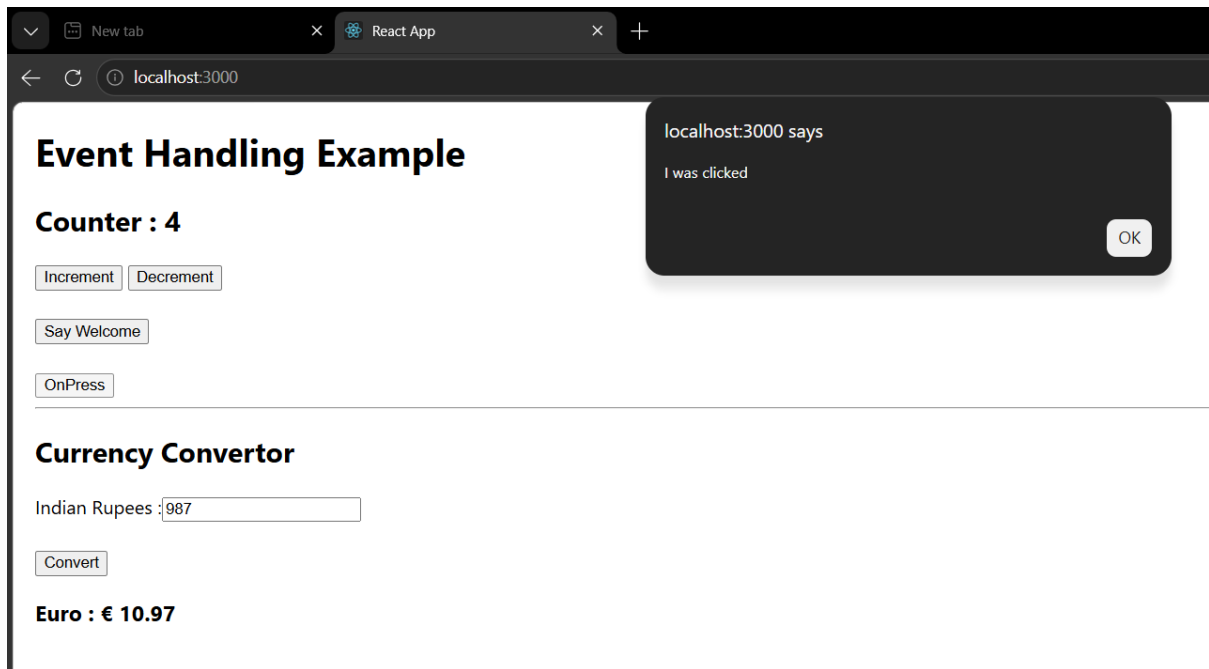

9 QUESTION

1. Guest.js

```
import React from "react";

function Guest() {

  return (

    <div>

      <h2>Welcome Guest</h2>

      <h3>Flight Details</h3>

      <ul>

        <li>Flight : AI-202</li>

        <li>From : Hyderabad</li>

        <li>To : Delhi</li>

        <li>Departure : 10:00 AM</li>

      </ul>

      <p>Please Login to Book Tickets.</p>

    </div>

  );
```

```
}  
  
export default Guest;
```

2. User.js

```
import React from "react";  
  
function User() {  
  return (  
    <div>  
      <h2>Welcome User</h2>  
      <h3>Flight Details</h3>  
      <ul>  
        <li>Flight : AI-202</li>  
        <li>From : Hyderabad</li>  
        <li>To : Delhi</li>  
        <li>Departure : 10:00 AM</li>  
      </ul>  
  
      <button>Book Ticket</button>  
    </div>  
  );  
}  
  
export default User;
```

3. App.js

```
import React, { Component } from "react";  
  
import Guest from "../Guest";  
  
import User from "../User";  
  
class App extends Component {  
  constructor(props) {  
    super(props);
```

```
this.state = {
  isLoggedIn: false,
};
}
login = () => {
  this.setState({
    isLoggedIn: true,
  });
};
logout = () => {
  this.setState({
    isLoggedIn: false,
  });
};
render() {
  let page;
  if (this.state.isLoggedIn) {
    page = <User />;
  } else {
    page = <Guest />;
  }
  return (
    <div style={{ margin: "20px" }}>
      <h1>Ticket Booking App</h1>
      {page}
      <br />
      {this.state.isLoggedIn ? (
        <button onClick={this.logout}>Logout</button>
      )}
```

```
    ) : (  
      <button onClick={this.login}>Login</button>  
    )}  
  </div>  
  
);  
}  
}
```

export default App;

4. index.js

```
import React from "react";  
import ReactDOM from "react-dom/client";  
import App from "./App";  
  
const root = ReactDOM.createRoot(document.getElementById("root"));  
root.render(  
  <React.StrictMode>  
    <App />  
  </React.StrictMode>  
);
```


Commands Used:


npx create-react-app ticketbookingapp

cd bloggerapp

npm start

OUTPUT :

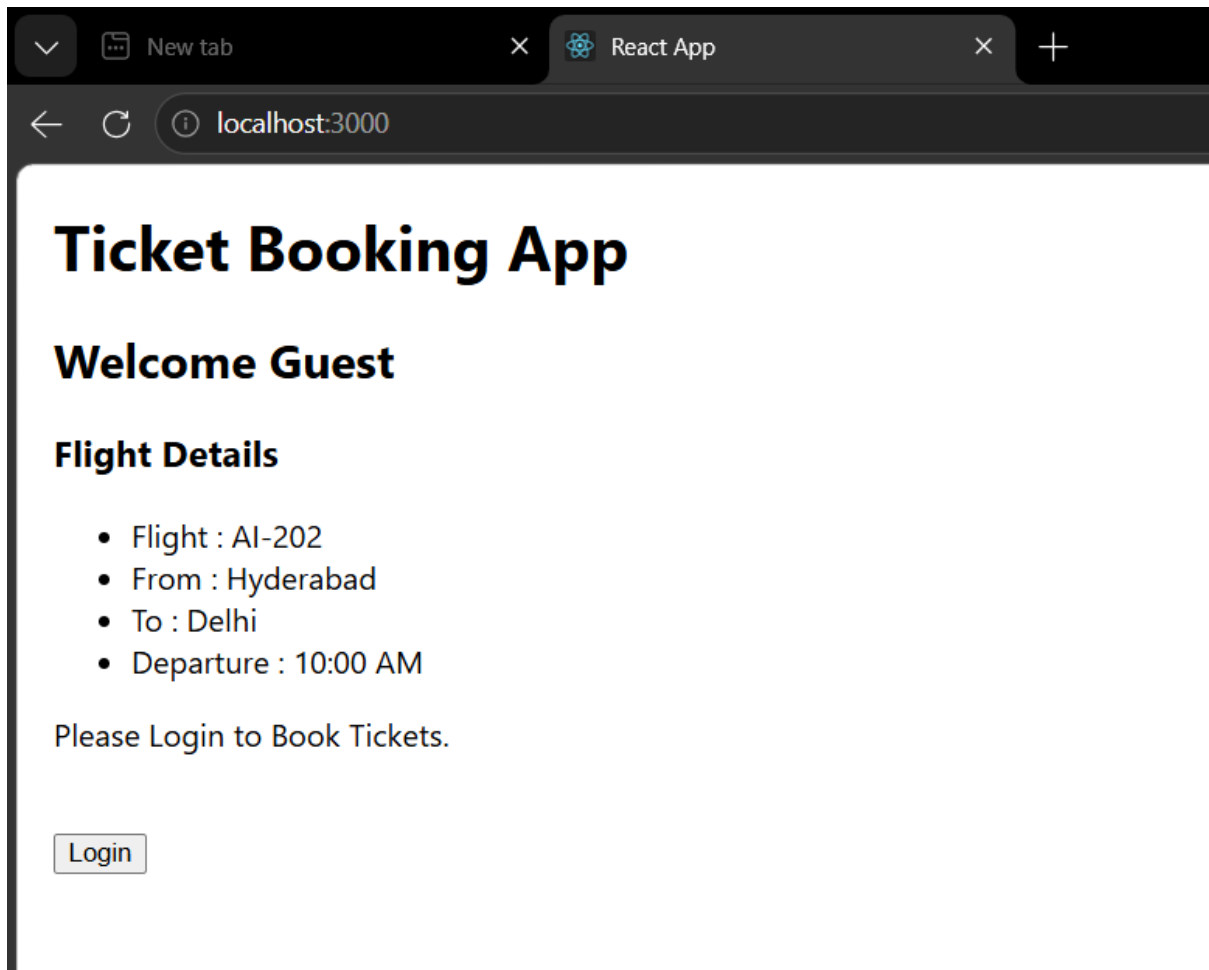

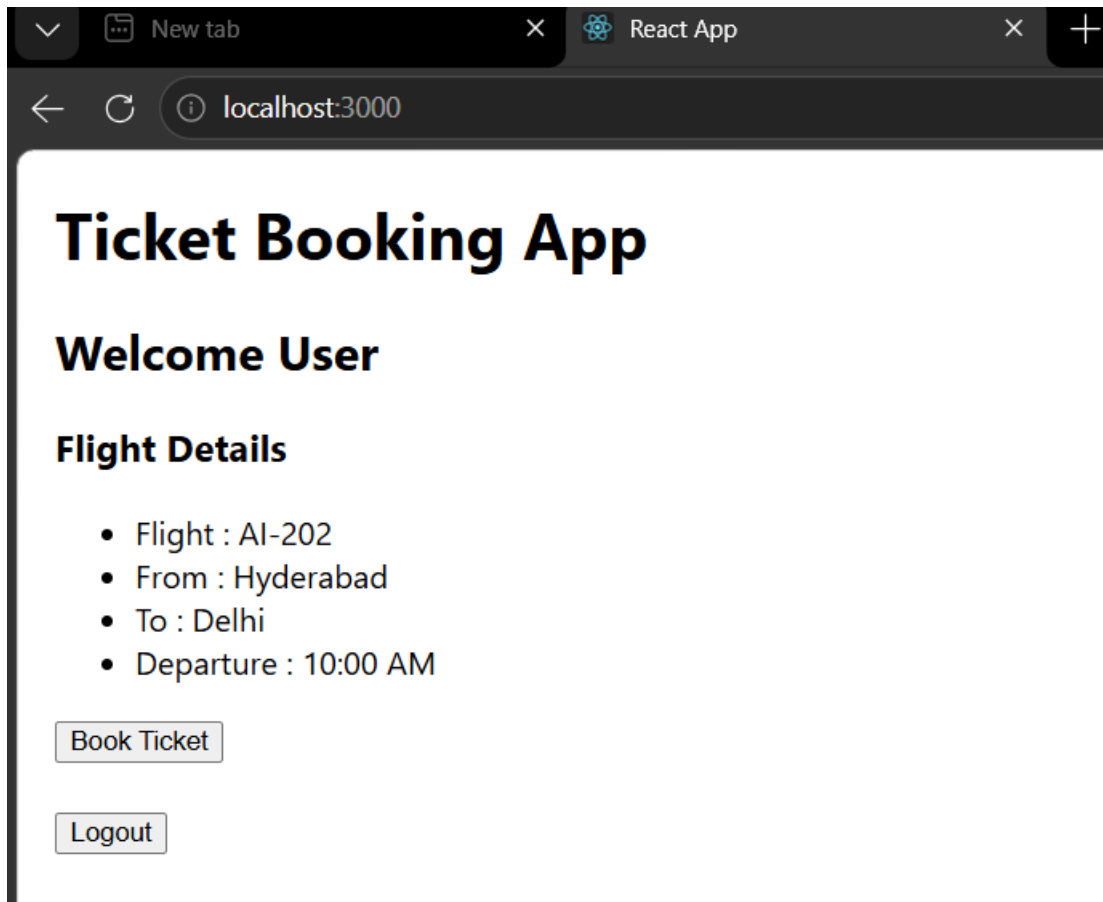

10 Question

1. BookDetails.js

```
import React from "react";

function BookDetails() {

  const books = [

    { id: 1, title: "React Basics", author: "John" },

    { id: 2, title: "Java Programming", author: "James" },

    { id: 3, title: "Python Guide", author: "David" }

  ];

  return (

    <div>

      <h2>Book Details</h2>
```

```
<ul>

  {books.map(book => (
    <li key={book.id}>
      <b>{book.title}</b> - {book.author}
    </li>
  ))}
</ul>

</div>

);
}
```

```
export default BookDetails;
```

2. BlogDetails.js

```
import React from "react";

function BlogDetails() {
  const blogs = [
    { id: 1, title: "React Hooks", writer: "Alex" },
    { id: 2, title: "JavaScript ES6", writer: "Robert" }
  ];
  return (
    <div>
      <h2>Blog Details</h2>

      <ul>
        {blogs.map(blog => (
          <li key={blog.id}>
            <b>{blog.title}</b> - {blog.writer}
          </li>
        ))}
      </ul>
    </div>
  );
}
```

```
    </ul>
  </div>
);
}
export default BlogDetails;
```

3. CourseDetails.js

```
import React from "react";
function CourseDetails() {
  const courses = [
    { id: 1, name: "ReactJS", duration: "45 Days" },
    { id: 2, name: "Java Full Stack", duration: "60 Days" }
  ];
  return (
    <div>
      <h2>Course Details</h2>
      <ul>
        {courses.map(course => (
          <li key={course.id}>
            <b>{course.name}</b> - {course.duration}
          </li>
        ))}
      </ul>
    </div>
  );
}
export default CourseDetails;
```

4. App.js

```
import React from "react";
```

```
import BookDetails from "./BookDetails";
import BlogDetails from "./BlogDetails";
import CourseDetails from "./CourseDetails";

function App() {

  const showBooks = true;

  const showBlogs = false;

  const showCourses = true;

  let blogComponent;

  if (showBlogs) {

    blogComponent = <BlogDetails />;

  } else {

    blogComponent = <h3>Blog Details Hidden</h3>;

  }


  return (

    <div style={{ margin: "20px" }}>

      <h1>Blogger App</h1>

      {/* Ternary Operator */}

      {showBooks ? <BookDetails /> : <h3>Book Details Hidden</h3>}

      <hr />

      {/* If Else */}

      {blogComponent}

      <hr />

      {/* Logical AND */}

      {showCourses && <CourseDetails />}

    </div>

  );

}
```

```
export default App;
```

5. index.js

```
import React from "react";
```

```
import ReactDOM from "react-dom/client";
```

```
import App from "./App";
```

```
const root = ReactDOM.createRoot(document.getElementById("root")); \
```

```
root.render(
```

```
  <React.StrictMode>
```

```
    <App />
```

```
  </React.StrictMode>
```

```
);
```

Commands Used:

```
npx create-react-app bloggerapp
```

```
cd bloggerapp
```

```
npm start
```

OUTPUT :

