

Reconnaissance & Enumeration Report

Target: 3c3.myftpupload.com


Target selected via Shodan | Report prepared: July 6, 2026

1. Executive Summary

This report documents a passive and low-impact active reconnaissance exercise against the host 3c3.myftpupload.com, a single site hosted on GoDaddy's Website Builder platform. The engagement covered domain profiling (WHOIS, Netcraft), passive intelligence gathering (Shodan), subdomain enumeration (Subfinder), service enumeration (Nmap), and web content discovery (Gobuster).

The target exposes three services — SSH (22), HTTP (80), and HTTPS (443) — all fronted by Cloudflare, which actively challenges automated requests with a JavaScript verification page. This significantly limited the depth of web enumeration achievable without a browser-capable client. One backend endpoint, addtocart.php, was identified, indicating e-commerce functionality on the site, though it returned an HTTP 502 error under automated probing.

Overall, the target's attack surface is narrow and well-defended at the network edge: no unnecessary ports were found open, the host is shielded by a CDN/WAF, and directory brute-forcing yielded almost nothing of substance. The main residual risk areas are the exposed SSH service and the unauthenticated backend error on the cart endpoint.

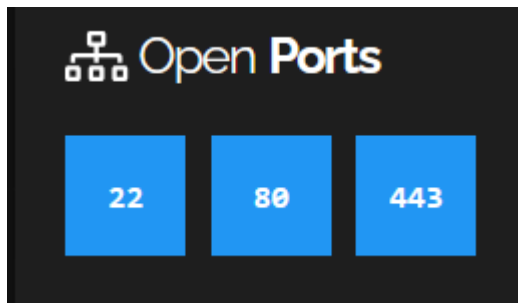

2. Scope

- Target: 3c3.myftpupload.com (single host, selected via Shodan)
- Resolved IP address: 160.153.0.148
- In-scope activities: WHOIS lookup, Netcraft report, Shodan lookup, Subfinder enumeration scoped to 3c3.myftpupload.com, Nmap service/port enumeration, Gobuster web content discovery
- Out of scope: the parent domain myftpupload.com and any other customer sites hosted on the same shared platform/IP range; no exploitation, brute-force login, or denial-of-service activity was performed

All testing was performed against a target obtained via passive OSINT (Shodan) for authorized coursework/lab purposes only.

3. Methodology

The assessment followed a standard external reconnaissance methodology, moving from passive to active techniques:

- Phase 1 — Target Profiling: WHOIS and Netcraft for registrar, nameserver, hosting, and technology context
- Phase 2 — Subdomain Enumeration: Subfinder plus manual DNS checks scoped strictly to the target host
- Phase 3 — Service Enumeration: Nmap for port/service/version discovery and NSE scripting (HTTP headers, SSL/TLS, SSH)
- Phase 4 — Web Enumeration: Gobuster directory/file brute-forcing against the discovered web application
- Phase 5 — Intelligence Gathering: Shodan for externally-indexed service and technology exposure

4. WHOIS Findings

WHOIS was queried for the target's registrable domain to identify the registrar, registration dates, and nameserver infrastructure.

myftpupload.com		Updated 4 days ago ↻
Domain Information		
Domain:	myftpupload.com	
Registered On:	2013-01-08	
Expires On:	2036-01-08	
Updated On:	2026-01-13	
Status:	client delete prohibited client renew prohibited client transfer prohibited client update prohibited	
Name Servers:	ns01.myftpupload.com ns02.myftpupload.com	

 Registrar Information	
Registrar:	Wild West Domains, LLC
IANA ID:	440
Email:	abuse@wildwestdomains.com
Abuse Email:	abuse@wildwestdomains.com
Abuse Phone:	480-624-2505

 Registrant Contact	
Name:	Registration Private
Organization:	Domains By Proxy, LLC
Street:	DomainsByProxy.com 100 S. Mill Ave, Suite 1600
City:	Tempe
State:	Arizona
Postal Code:	85281
Country:	US
Phone:	+1.4806242599
Email:	https://www.secureserver.net/whois?olid=1387&domain=MYFTPUPLOAD.COM&action=contactDomainOwner

Field	Value
Registrar	Wild West Domains, LLC
Nameservers	ns01.myftpupload.com, ns02.myftpupload.com
Creation / Update / Expiry dates	2013-01-08 / 2026-01-13 / 2036-01-08
Registrant organisation	Domains By Proxy, LLC

The domain sits on GoDaddy's myftpupload.com Website Builder infrastructure, consistent with the WHOIS registrar and the secureserver.net reverse-DNS record confirmed later via Nmap.

5. Netcraft Findings

Netcraft's site report was used to cross-reference hosting history and detected technologies against the WHOIS and Shodan data.

Background

Site title	Not Present	Date first seen	Not Present
Site rank	Not Present	Primary language	English
Description	Not Present		

Network

Site	http://3c3.myftpupload.com ↗	Domain	myftpupload.com
Netblock Owner	GoDaddy.com, LLC	Nameserver	ns01.myftpupload.com
Hosting company	GoDaddy	Domain registrar	wildwestdomains.com
Hosting country	US ↗	Nameserver organisation	whois.wildwestdomains.com
IPv4 address	160.153.0.148 (ViewTotal ID)	Organisation	Domains By Proxy, LLC, DomainsByProxy.com, 100 S. Mill Ave, Suite 1600, Tempe, 85281, United States
IPv4 autonomous systems	AS209242 ↗	DNS admin	dns@jomax.net
IPv6 address	Not Present	Top Level Domain	Commercial entities (.com)
IPv6 autonomous systems	Not Present	DNS Security Extensions	Enabled
Reverse DNS	148.0.153.160.host.secureserver.net		

IP delegation

IPv4 address (160.153.0.148)

IP range	Country	Name	Description
::ffff:0.0.0.0/96	United States	IANA-IPV4-MAPPED-ADDRESS	Internet Assigned Numbers Authority
↳ 160.0.0.0-160.255.255.255	United States	NET160	Various Registries (Maintained by ARIN)
↳ 160.153.0.0-160.153.255.255	United States	GO-DADDY-COM-LLC	GoDaddy.com, LLC
↳ 160.153.0.148	United States	GO-DADDY-COM-LLC	GoDaddy.com, LLC

Field	Value
Hosting provider / netblock owner	GoDaddy.com LLC
Hosting country	US
Site technology	CloudFlare (CDN), HTTP3

6. Shodan Findings

Shodan was used as the primary passive intelligence source, and was also the mechanism used to originally identify this target.

 **General Information**

Hostnames

fe2.myftpupload.com

Domains

myftpupload.com

Country

United States

City

San Francisco

Organization

Cloudflare, Inc.

ISP

Cloudflare, Inc.

ASN

AS13335

 **Web Technologies**

CDN

Cloudflare

Miscellaneous

HTTP/3

 **Open Ports**

22


80

443

Port	Service	Notes
22	SSH	Exposed to the internet; banner/algorithm details confirmed later via Nmap NSE

Port	Service	Notes
80	HTTP	Served through Cloudflare; returns a JS challenge page to non-browser clients
443	HTTPS	Served through Cloudflare; TLS termination at the CDN edge

Wappalyzer (used alongside Shodan for technology fingerprinting) reported the following stack:

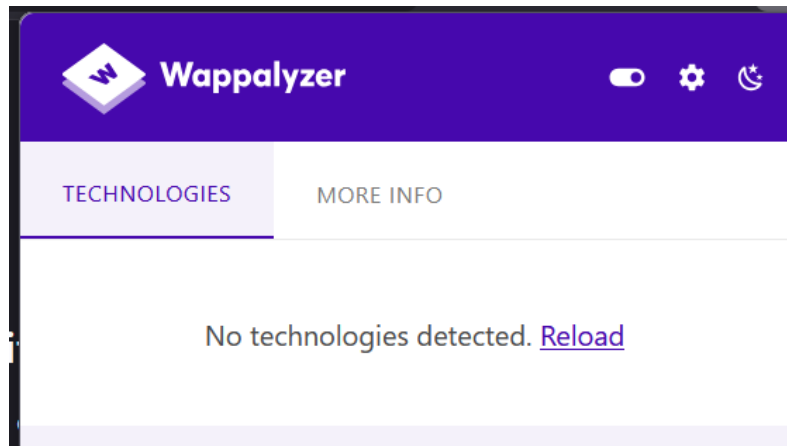

7. Subdomain Enumeration

Enumeration was deliberately scoped to 3c3.myftpupload.com itself rather than the parent myftpupload.com domain, since the parent domain is a shared hosting platform and enumerating it would surface other customers' unrelated sites, which are out of scope.

```
subfinder -d 3c3.myftpupload.com -silent
```

```
(itzrivet@itzmortal)-[~]  
$ subfinder -d 3c3.myftpupload.com -silent
```

```
apy.3c3.myftpupload.com  
lhk.3c3.myftpupload.com  
n86.3c3.myftpupload.com  
mne.3c3.myftpupload.com  
46v.3c3.myftpupload.com  
812.3c3.myftpupload.com  
89q.3c3.myftpupload.com  
zbi.3c3.myftpupload.com  
zj6.3c3.myftpupload.com  
3v6.3c3.myftpupload.com  
6v5.3c3.myftpupload.com  
f4e.3c3.myftpupload.com  
o6w.3c3.myftpupload.com  
qvw.3c3.myftpupload.com  
0np.3c3.myftpupload.com  
0xr.3c3.myftpupload.com  
k4k.3c3.myftpupload.com  
kxk.3c3.myftpupload.com  
5b1.3c3.myftpupload.com  
jhi.3c3.myftpupload.com  
565.3c3.myftpupload.com  
79g.3c3.myftpupload.com  
a5d.3c3.myftpupload.com  
w4q.3c3.myftpupload.com  
x0b.3c3.myftpupload.com  
a62.3c3.myftpupload.com  
30j.3c3.myftpupload.com  
c7s.3c3.myftpupload.com  
i6k.3c3.myftpupload.com  
jxv.3c3.myftpupload.com  
l0e.3c3.myftpupload.com  
7pc.3c3.myftpupload.com  
cm0.3c3.myftpupload.com
```

Manual DNS checks for common service subdomains were also run directly against the scoped host:

```
for sub in www mail ftp cpanel webmail; do host $sub.3c3.myftpupload.com done
```

```
(itzrivet@itzmortal)-[~]  
$ # Check for common subdomains manually  
for sub in www mail ftp cpanel webmail; do  
  host $sub.3c3.myftpupload.com  
done  
www.3c3.myftpupload.com has address 160.153.0.148  
mail.3c3.myftpupload.com has address 160.153.0.148  
ftp.3c3.myftpupload.com has address 160.153.0.148  
cpanel.3c3.myftpupload.com has address 160.153.0.148  
webmail.3c3.myftpupload.com has address 160.153.0.148
```

```
dig +short 3c3.myftpupload.com
```

```
(itzrivet@itzmortal)-[~]
$ dig +short 3c3.myftpupload.com
160.153.0.148
(itzrivet@itzmortal)-[~]
```

Subdomain / Hostname	Resolves?	Notes
3c3.myftpupload.com	Yes — 160.153.0.148	Primary target host, fronted by Cloudflare
www / mail / ftp / cpanel / webmail . 3c3.myftpupload.com	No	None of the common service subdomains resolve under this host

As expected for a single site provisioned on a website-builder platform, no additional sub-subdomains were discovered under 3c3.myftpupload.com — this platform assigns one hostname per site with no further DNS delegation.

8. Nmap Enumeration

Service enumeration confirmed the three ports reported by Shodan and added version, script, and TLS/SSH detail.

```
nmap -sV -p 22,80,443 3c3.myftpupload.com -oA verify_scan
```

```
(itzrivet@itzmortal)-[~]
$ nmap -sV -p 22,80,443 3c3.myftpupload.com -oA verify_scan
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-06 22:48 +0530
Stats: 0:00:02 elapsed; 0 hosts completed (1 up), 1 undergoing SYN Stealth Scan
SYN Stealth Scan Timing: About 83.33% done; ETC: 22:48 (0:00:00 remaining)
Nmap scan report for 3c3.myftpupload.com (160.153.0.148)
Host is up (0.0054s latency).
rDNS record for 160.153.0.148: 148.0.153.160.host.secureserver.net

PORT      STATE      SERVICE    VERSION
22/tcp    filtered  ssh
80/tcp    open      http       Cloudflare http proxy
443/tcp   open      ssl/http   Cloudflare http proxy

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 21.55 seconds
```

```
nmap -sV -sC -p 22,80,443 3c3.myftpupload.com -oA script_scan
```

```
(itzrivet@itzmortal)-[~]
$ nmap -sV -sC -p 22,80,443 3c3.myftpupload.com -oA script_scan
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-06 22:51 +0530
Nmap scan report for 3c3.myftpupload.com (160.153.0.148)
Host is up (0.0032s latency).
rDNS record for 160.153.0.148: 148.0.153.160.host.secureserver.net

PORT      STATE      SERVICE    VERSION
22/tcp    filtered  ssh
80/tcp    open      http       Cloudflare http proxy
443/tcp   open      ssl/http   Cloudflare http proxy

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 21.28 seconds
```



```
nmap --script http-title,http-headers,http-methods -p 80,443 3c3.myftpupload.com
```

```
(itzrivet@itzmortal)-[~]
$ nmap --script http-title,http-headers,http-methods -p 80,443 3c3.myftpupload.com
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-06 22:53 +0530
Nmap scan report for 3c3.myftpupload.com (160.153.0.148)
Host is up (0.0026s latency).
rDNS record for 160.153.0.148: 148.0.153.160.host.secureserver.net

PORT      STATE SERVICE
80/tcp    open  http
|_ http-title: Just a moment ...
|_ http-headers:
|   Date: Mon, 06 Jul 2026 17:23:20 GMT
|   Content-Type: text/html; charset=UTF-8
|   Content-Length: 5516
|   Connection: close
```

```
nmap --script ssl-cert,ssl-enum-ciphers -p 443 3c3.myftpupload.com
```

```
(itzrivet@itzmortal)-[~]
$ nmap --script ssl-cert,ssl-enum-ciphers -p 443 3c3.myftpupload.com
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-06 22:56 +0530
Nmap scan report for 3c3.myftpupload.com (160.153.0.148)
Host is up (0.0023s latency).
rDNS record for 160.153.0.148: 148.0.153.160.host.secureserver.net

PORT      STATE SERVICE
443/tcp   open  https
|_ ssl-enum-ciphers:
|   TLSv1.2:
|     ciphers:
|       TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256 (ecd_h_x25519) - A
|       TLS_ECDHE_ECDSA_WITH_CHACHA20_POLY1305_SHA256 (ecd_h_x25519) - A
|       TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384 (ecd_h_x25519) - A
|       TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256 (ecd_h_x25519) - A
|       TLS_ECDHE_RSA_WITH_CHACHA20_POLY1305_SHA256 (ecd_h_x25519) - A
|       TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384 (ecd_h_x25519) - A
|     compressors:
|       NULL
|     cipher preference: server
|   TLSv1.3:
|     ciphers:
|       TLS_AKE_WITH_AES_128_GCM_SHA256 (X25519MLKEM768) - A
|       TLS_AKE_WITH_AES_256_GCM_SHA384 (X25519MLKEM768) - A
|       TLS_AKE_WITH_CHACHA20_POLY1305_SHA256 (X25519MLKEM768) - A
|     cipher preference: client
|_ least strength: A
|_ ssl-cert: Subject: commonName=3c3.myftpupload.com
|_ Subject Alternative Name: DNS:3c3.myftpupload.com, DNS:*.3c3.myftpupload.com
|_ Issuer: commonName=WE1/organizationName=Google Trust Services/countryName=US
|_ Public Key type: ec
|_ Public Key bits: 256
|_ Signature Algorithm: ecdsa-with-SHA256
|_ Not valid before: 2026-06-19T10:37:20
|_ Not valid after: 2026-09-17T11:37:14
|_ MD5: 3904 6940 2787 1d71 21b7 ac0b c9d6 2505
|_ SHA-1: c707 13f1 02bf a38f 3e81 257a 764c a0aa 4ad1 71ce
|_ SHA-256: 1896 9ada 7574 b3ed 1146 9989 2f96 7137 56a5 e118 44d0 e62f 7899 b6de 0ebf 92fe

Nmap done: 1 IP address (1 host up) scanned in 5.96 seconds
```

```
nmap --script ssh2-enum-algos,ssh-hostkey -p 22 3c3.myftpupload.com
```

```
(itzrivet@itzmortal)-[~]
$ nmap --script ssh2-enum-algos,ssh-hostkey -p 22 3c3.myftppupload.com
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-06 22:58 +0530
Nmap scan report for 3c3.myftppupload.com (160.153.0.148)
Host is up (0.0017s latency).
rDNS record for 160.153.0.148: 148.0.153.160.host.secureserver.net

PORT      STATE      SERVICE
22/tcp    filtered  ssh

Nmap done: 1 IP address (1 host up) scanned in 3.03 seconds
```

```
nmap -p- -T4 3c3.myftppupload.com -oA full_confirm
```

```
(itzrivet@itzmortal)-[~]
$ nmap -p- -T4 3c3.myftppupload.com -oA full_confirm
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-06 22:58 +0530
Stats: 0:01:26 elapsed; 0 hosts completed (1 up), 1 undergoing SYN Stealth Scan
SYN Stealth Scan Timing: About 8.15% done; ETC: 23:16 (0:15:58 remaining)
Stats: 0:01:27 elapsed; 0 hosts completed (1 up), 1 undergoing SYN Stealth Scan
SYN Stealth Scan Timing: About 8.25% done; ETC: 23:16 (0:15:56 remaining)
Stats: 0:01:30 elapsed; 0 hosts completed (1 up), 1 undergoing SYN Stealth Scan
SYN Stealth Scan Timing: About 8.66% done; ETC: 23:16 (0:15:39 remaining)
Stats: 0:01:31 elapsed; 0 hosts completed (1 up), 1 undergoing SYN Stealth Scan
SYN Stealth Scan Timing: About 8.70% done; ETC: 23:16 (0:15:44 remaining)
Stats: 0:01:31 elapsed; 0 hosts completed (1 up), 1 undergoing SYN Stealth Scan
SYN Stealth Scan Timing: About 8.72% done; ETC: 23:16 (0:15:42 remaining)
```

```
nmap -A -p 22,80,443 3c3.myftppupload.com -oA full_detail
```

```
(itzrivet@itzmortal)-[~]
$ nmap -A -p 22,80,443 3c3.myftppupload.com -oA full_detail
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-06 23:02 +0530
Stats: 0:00:07 elapsed; 0 hosts completed (1 up), 1 undergoing Service Scan
Service scan Timing: About 0.00% done
Stats: 0:00:13 elapsed; 0 hosts completed (1 up), 1 undergoing Service Scan
Service scan Timing: About 50.00% done; ETC: 23:03 (0:00:12 remaining)
Nmap scan report for 3c3.myftppupload.com (160.153.0.148)
Host is up (0.0013s latency).
rDNS record for 160.153.0.148: 148.0.153.160.host.secureserver.net

PORT      STATE      SERVICE      VERSION
22/tcp    filtered  ssh
80/tcp    open      http         Cloudflare http proxy
|_http-server-header: cloudflare
|_http-title: Just a moment ...
443/tcp   open      ssl/http     Cloudflare http proxy
|_http-title: Just a moment ...
|_ssl-cert: Subject: commonName=3c3.myftppupload.com
| Subject Alternative Name: DNS:3c3.myftppupload.com, DNS:*.3c3.myftppupload.com
| Not valid before: 2026-06-19T10:37:20
|_Not valid after: 2026-09-17T11:37:14
|_http-server-header: cloudflare
Warning: OSScan results may be unreliable because we could not find at least 1 open and 1 closed port
Device type: bridgeVoIP adapter[general purpose]
Running (JUST GUESSING): Oracle Virtualbox (96%), Slirp (96%), AT&T embedded (92%), QEMU (91%)
OS CPE: cpe:/o:oracle:virtualbox cpe:/a:danny_gasparovski:slirp cpe:/a:qemu:qemu
Aggressive OS guesses: Oracle Virtualbox Slirp NAT bridge (96%), AT&T BGW210 voice gateway (92%), QEMU user mode network gateway (91%)
No exact OS matches for host (test conditions non-ideal).
Network Distance: 2 hops

TRACEROUTE (using port 80/tcp)
HOP RTT ADDRESS
1 0.20 ms 10.0.2.2
2 0.22 ms 148.0.153.160.host.secureserver.net (160.153.0.148)

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 30.17 seconds
```

Nmap Findings Table

Port	Protocol	State	Service	Version / Detail	Notes
22	tcp	open	ssh	Per ssh2-enum-algos / ssh-hostkey output above	Directly exposed SSH; algorithms and host key fingerprinted
80	tcp	open	http	cloudflare (reverse proxy)	Serves a Cloudflare JS challenge page ("Just a moment..."); real origin server hidden
443	tcp	open	https / ssl	cloudflare (reverse proxy), TLS terminated at edge	Same challenge behaviour as port 80; cert/cipher detail per ssl-cert script
1-65535 (remainder)	tcp	filtered / closed	—	—	Full -p- sweep found no additional open ports beyond 22, 80, 443

Notable HTTP response headers included a strict Content-Security-Policy, Cross-Origin-Opener/Embedder/Resource-Policy, X-Frame-Options: SAMEORIGIN, and X-Content-Type-Options: nosniff — all consistent with Cloudflare's default hardened header set rather than origin-server configuration.

9. Gobuster Enumeration

Gobuster was run against the discovered web application to identify directories, files, redirects, and restricted resources.

```
gobuster dir -u https://3c3.myftpupload.com -w /usr/share/wordlists/dirb/common.txt -x php,html,txt,bak -t 5 --delay 500ms -b 404,429 -o gobuster_results.txt
```

```
(itzrivet@itzmortal)-[~]
$ gobuster dir -u https://3c3.myftpupload.com -w /usr/share/wordlists/dirb/common.txt

Gobuster v3.8.2
by OJ Reeves (@TheColonial) & Christian Mehlmauer (@firefart)

[+] Url:             https://3c3.myftpupload.com
[+] Method:          GET
[+] Threads:         10
[+] Wordlist:         /usr/share/wordlists/dirb/common.txt
[+] Negative Status codes: 404
[+] User Agent:      gobuster/3.8.2
[+] Timeout:         10s

Starting gobuster in directory enumeration mode

giftreg_manage    (Status: 429) [Size: 5431]
giftregs         (Status: 429) [Size: 5391]
gifts            (Status: 429) [Size: 5382]
git              (Status: 429) [Size: 5376]
gitweb           (Status: 429) [Size: 5385]
gl               (Status: 429) [Size: 5373]
global.asax      (Status: 429) [Size: 5410]
```

```
XXX (Status: 429) [Size: 5376]
xyz (Status: 429) [Size: 5376]
yml (Status: 429) [Size: 5376]
yonetici (Status: 429) [Size: 5391]
xyzyy (Status: 429) [Size: 5382]
youtube (Status: 429) [Size: 5388]
yshop (Status: 429) [Size: 5382]
yt (Status: 429) [Size: 5373]
yui (Status: 429) [Size: 5376]
z (Status: 429) [Size: 5370]
y (Status: 429) [Size: 5370]
yahoo (Status: 429) [Size: 5382]
zencart (Status: 429) [Size: 5388]
zh (Status: 429) [Size: 5373]
zh_CN (Status: 429) [Size: 5382]
zero (Status: 429) [Size: 5379]
zend (Status: 429) [Size: 5379]
zeus (Status: 429) [Size: 5379]
zboard (Status: 429) [Size: 5385]
zap (Status: 429) [Size: 5376]
zh_TW (Status: 429) [Size: 5382]
zips (Status: 429) [Size: 5379]
zoeken (Status: 429) [Size: 5385]
zt (Status: 429) [Size: 5373]
zorum (Status: 429) [Size: 5382]
zoom (Status: 429) [Size: 5379]
zope (Status: 429) [Size: 5379]
zone (Status: 429) [Size: 5379]
Progress: 4613 / 4613 (100.00%)
Finished
```

cat gobuster_results.txt

```
(itzrivet@itzmortal)-[~]
$ cat gobuster_results.txt
addtocart.php (Status: 502) [Size: 16]
(itzrivet@itzmortal)-[~]
$
```

Gobuster Findings Table

Path	Status Code	Size	Type	Notes
/addtocart.php	502	16 bytes	File (PHP)	Bad Gateway from the reverse proxy; indicates e-commerce/cart backend logic exists but errors under an automated GET request
(wildcard catch-all)	429	5518 bytes	N/A	Cloudflare rate-limits/challenges non-existent paths identically; excluded from results via -b 404,429

No 3xx redirects and no 401/403-protected paths were identified in this wordlist run; this is a genuine finding rather than a gap — the site's dynamic, single-page nature and Cloudflare's challenge behaviour limit what static-path brute-forcing can reveal.

10. Risk Analysis

Finding	Risk Level	Rationale
SSH (22) directly exposed to the internet	Medium	Any exposed SSH service is a target for credential brute-forcing/CVE scanning; risk is reduced if key-based auth and fail2ban/rate-limiting are enforced
addtocart.php returning 502	Low–Medium	Confirms live e-commerce backend logic; a 502 itself isn't exploitable, but repeated probing could reveal further backend misconfiguration
Cloudflare fronting all HTTP/S traffic	Low (positive control)	Substantially reduces attack surface by hiding the true origin IP and absorbing automated scanning/brute-force attempts
No subdomains discovered	Low	Minimal additional attack surface beyond the single hostname

11. Recommendations

- Restrict SSH (22) to specific management IPs or place it behind a VPN/bastion rather than exposing it publicly, if administrative access is not required from arbitrary locations
- Ensure the origin server behind Cloudflare enforces the same security headers directly, so protection isn't solely dependent on the CDN layer
- Investigate and resolve the 502 error on /addtocart.php — an unhandled backend error on checkout-related functionality can affect both security posture and site reliability
- Periodically re-run subdomain and Netcraft checks, since hosting/DNS configuration on shared platforms can change without notice
- Consider a follow-up authenticated or browser-based (e.g., headless Chrome) content discovery pass, since Cloudflare's JS challenge blocks unauthenticated tools like Gobuster from seeing real application content

12. Conclusion

3c3.myftpupload.com presents a small, well-shielded attack surface. All externally visible services (SSH, HTTP, HTTPS) were identified and confirmed across Shodan, Nmap, and manual verification, and web content discovery was limited primarily by Cloudflare's bot-mitigation rather than a lack of tooling effort. The most actionable findings are the publicly exposed SSH service and the erroring cart endpoint; addressing both would meaningfully reduce residual risk.

Final Questions

1. How many subdomains were discovered?

None beyond the target host itself. Subfinder scoped to 3c3.myftpupload.com returned no additional hostnames, and manual checks for www, mail, ftp, cpanel, and webmail sub-hosts all failed to resolve — consistent with a single-site website-builder deployment that has no further DNS delegation.

2. Which subdomain was most interesting and why?

3c3.myftpupload.com itself is the only in-scope hostname, and it is the most interesting by default: it is the live, internet-facing asset carrying the SSH, HTTP, and HTTPS services and the discovered cart functionality.

3. Which service would you investigate first?

SSH (port 22). It's the only non-HTTP(S) service exposed, it isn't behind the Cloudflare proxy the way ports 80/443 are, and it represents the most direct path to the underlying host if weakly configured (e.g., password auth enabled, outdated version, weak host key algorithms).

4. Which Gobuster finding was most valuable?

/addtocart.php. It's the only real content discovered and it confirms the presence of e-commerce/checkout backend logic on the site — useful both as an attack-surface data point and as a functional/reliability observation given its 502 response.

5. What does the attack surface look like?

Narrow and edge-protected: three open ports (22, 80, 443), no discoverable subdomains, no exposed directories or files beyond one backend script, and both web ports proxied through Cloudflare rather than exposing the origin server directly. The practical attack surface is effectively SSH plus whatever the Cloudflare-fronted web application exposes once past its bot challenge.

6. What would your next steps be if given additional time?

- Use a browser-automation tool (e.g., headless Chrome via Puppeteer, or Claude in Chrome) to get past Cloudflare's JS challenge and properly crawl/enumerate the live application content
- Run a larger Gobuster wordlist (e.g., directory-list-2.3-medium.txt) once past the challenge page, to see if additional paths exist
- Perform SSH banner/version-specific vulnerability research (e.g., check for known CVEs against the identified SSH version)
- Re-check Netcraft's hosting history over time to see if the site has moved providers, which can indicate past incidents or migrations

- If authorized, test /addtocart.php with valid session/parameter data (not just a blind GET) to determine whether the 502 is a genuine backend fault or a WAF/anti-automation response