Linear peptide sequence P


H_3N^+ **D** **A** **K** **B** **D** **E** **K** **B** COO^-

◆ *peptide bond (bond-cleavage prediction target)*

transform to residue graph

(a) Sequence Graph


adjacent residues only · window R = 1



—— type 0 backbone edge (sequence adjacency; sequence-strategy graphs only)

(b) Distance Graph

backbone + distance window · R = 5 (|i − j| ≤ 5)

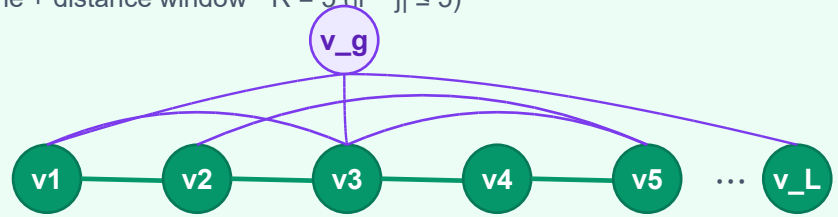

Legend

type 0 / type 1 near · |i − j| = 1

type 2 remote · 2 ≤ |i − j| ≤ R

type 4 global · v_g ↔ residues

window radius R = 5