Zenmap

Scan Tools Profile Help

Target: nmap -T5 -A 192.168.1.68 | Profile: Intense scan | Scan | Cancel

Command: nmap -T4 -A -v nmap -T5 -A 192.168.1.68 -T 5 -T 5 -T 5 -T 5

Hosts | Services

OS | Host

Nmap Output | Ports / Hosts | Topology | Host Details | Scans

nmap -T4 -A -v nmap 192.168.1.1 -T 5 -T 5 | Details

```
Starting Nmap 7.95 ( https://nmap.org ) at 2025-03-22 13:32 India Standard Time
NSE: Loaded 157 scripts for scanning.
NSE: Script Pre-scanning.
Initiating NSE at 13:32
Completed NSE at 13:32, 0.00s elapsed
Initiating NSE at 13:32
Completed NSE at 13:32, 0.00s elapsed
Initiating NSE at 13:32
Completed NSE at 13:32, 0.00s elapsed
Failed to resolve "nmap".
Initiating ARP Ping Scan at 13:32
Scanning 192.168.1.1 [1 port]
Completed ARP Ping Scan at 13:32, 1.52s elapsed (1 total hosts)
Nmap scan report for 192.168.1.1 [host down]
NSE: Script Post-scanning.
Initiating NSE at 13:32
Completed NSE at 13:32, 0.00s elapsed
Initiating NSE at 13:32
Completed NSE at 13:32, 0.00s elapsed
Initiating NSE at 13:32
Completed NSE at 13:32, 0.00s elapsed
Read data files from: C:\Program Files (x86)\Nmap
Note: Host seems down. If it is really up, but blocking our ping probes, try -Pn
Nmap done: 1 IP address (0 hosts up) scanned in 9.67 seconds
           Raw packets sent: 2 (56B) | Rcvd: 0 (0B)
```

Filter Hosts

Zenmap

Scan Tools Profile Help

Target: nmap -D RND:10 192.168.1.68 | Profile: Intense scan | Scan | Cancel

Command: nmap -T4 -A -v -D RND:10 nmap -D RND:10 192.168.1.68 -D RND:10 -D RND:10 -D RND:10 -D RND:10 -T 5 -T 5 -T 5 -T 5 -T 5

Hosts | Services

OS | Host

192.168.1.68

Nmap Output | Ports / Hosts | Topology | Host Details | Scans

nmap -T4 -A -v -D RND:10 nmap 192.168.1.68 -D RND:10 -D RND:10 -D RND:10 -D RND:10 -T 5 -T 5 -T 5 -T 5 -T 5 | Details

```
Starting Nmap 7.95 ( https://nmap.org ) at 2025-03-22 13:40 India Standard Time
NSE: Loaded 157 scripts for scanning.
NSE: Script Pre-scanning.
Initiating NSE at 13:40
Completed NSE at 13:40, 0.00s elapsed
Initiating NSE at 13:40
Completed NSE at 13:40, 0.00s elapsed
Initiating NSE at 13:40
Completed NSE at 13:40, 0.00s elapsed
Failed to resolve "nmap".
Initiating Parallel DNS resolution of 1 host. at 13:40
Completed Parallel DNS resolution of 1 host. at 13:40, 0.04s elapsed
Initiating SYN Stealth Scan at 13:40
Scanning 192.168.1.68 [1000 ports]
Discovered open port 445/tcp on 192.168.1.68
Discovered open port 139/tcp on 192.168.1.68
Discovered open port 135/tcp on 192.168.1.68
Completed SYN Stealth Scan at 13:40, 0.92s elapsed (1000 total ports)
Initiating Service scan at 13:40
Scanning 3 services on 192.168.1.68
Completed Service scan at 13:40, 6.12s elapsed (3 services on 1 host)
Initiating OS detection (try #1) against 192.168.1.68
NSE: Script scanning 192.168.1.68.
Initiating NSE at 13:40
Completed NSE at 13:40, 14.24s elapsed
Initiating NSE at 13:40
Completed NSE at 13:40, 0.05s elapsed
Initiating NSE at 13:40
Completed NSE at 13:40, 0.00s elapsed
Nmap scan report for 192.168.1.68
Host is up (0.0026s latency).
Not shown: 997 closed tcp ports (reset)
PORT     STATE SERVICE       VERSION
135/tcp open  msrpc         Microsoft Windows RPC
139/tcp open  netbios-ssn   Microsoft Windows netbios-ssn
445/tcp open  microsoft-ds?
Device type: general purpose
Running: Microsoft Windows 10|11
OS CPE: cpe:/o:microsoft:windows_10 cpe:/o:microsoft:windows_11
OS details: Microsoft Windows 10 1607 - 11 23H2
Uptime guess: 8.836 days (since Thu Mar 13 17:37:22 2025)
Network Distance: 0 hops
TCP Sequence Prediction: Difficulty=261 (Good luck!)
IP ID Sequence Generation: Incremental
```

Filter Hosts

Zenmap

Scan Tools Profile Help

Target: nmap --script vuln 192.168.1.68 Profile: Intense scan Scan Cancel

Command: nmap -T4 -A -v --script vuln nmap --script vuln 192.168.1.68 --script vuln --script vuln --script vuln --script vuln --script vuln --script vuln

Hosts Services

OS Host

Filter Hosts

Nmap Output Ports / Hosts Topology Host Details Scans

nmap -T4 -A -v --script vuln nmap --script vuln 192.168.1.68 --script vuln

Details

```
Starting Nmap 7.95 ( https://nmap.org ) at 2025-03-22 13:45 India Standard Time
NSE: Loaded 151 scripts for scanning.
NSE: Script Pre-scanning.
Initiating NSE at 13:45
NSE Timing: About 50.00% done; ETC: 13:46 (0:00:31 remaining)
Completed NSE at 13:46, 37.21s elapsed
Initiating NSE at 13:46
Completed NSE at 13:46, 0.00s elapsed
Pre-scan script results:
| broadcast-avahi-dos:
|   Discovered hosts:
|     224.0.0.251
|   After NULL UDP avahi packet DoS (CVE-2011-1002).
|_  Hosts are all up (not vulnerable).
Failed to resolve "nmap".
Initiating Parallel DNS resolution of 1 host. at 13:46
Completed Parallel DNS resolution of 1 host. at 13:46, 0.01s elapsed
Initiating SYN Stealth Scan at 13:46
Scanning 192.168.1.68 [1000 ports]
Discovered open port 135/tcp on 192.168.1.68
Discovered open port 139/tcp on 192.168.1.68
Discovered open port 445/tcp on 192.168.1.68
Completed SYN Stealth Scan at 13:46, 0.05s elapsed (1000 total ports)
Initiating Service scan at 13:46
Scanning 3 services on 192.168.1.68
Completed Service scan at 13:46, 6.07s elapsed (3 services on 1 host)
Initiating OS detection (try #1) against 192.168.1.68
NSE: Script scanning 192.168.1.68.
Initiating NSE at 13:46
```

Zenmap

Scan Tools Profile Help

Target: nmap --script smb-vuln* 192.168.1.68 Profile: Intense scan Scan Cancel

Command: nmap -T4 -A -v --script vuln nmap --script smb-vuln* 192.168.1.68 --script smb-vuln* --script smb-vuln* --script smb-vuln* --script smb-vuln* --script smb-vuln* --script smb-vuln* --script vuln --script vuln --script vuln --script vuln --script vuln --script vuln --script vuln

Hosts Services

OS Host

192.168.1.68

Filter Hosts

Nmap Output Ports / Hosts Topology Host Details Scans

nmap -T4 -A -v --script vuln nmap 192.168.1.68 --script smb-vuln* --script vuln --script vuln --script vuln --script vuln --script vuln --script vuln --script vuln

Details

```
Initiating SYN Stealth Scan at 13:47
Scanning 192.168.1.68 [1000 ports]
Discovered open port 135/tcp on 192.168.1.68
Discovered open port 139/tcp on 192.168.1.68
Discovered open port 445/tcp on 192.168.1.68
Completed SYN Stealth Scan at 13:47, 0.05s elapsed (1000 total ports)
Initiating Service scan at 13:47
Scanning 3 services on 192.168.1.68
Completed Service scan at 13:47, 6.10s elapsed (3 services on 1 host)
Initiating OS detection (try #1) against 192.168.1.68
NSE: Script scanning 192.168.1.68.
Initiating NSE at 13:47
Completed NSE at 13:48, 15.22s elapsed
Initiating NSE at 13:48
Completed NSE at 13:48, 0.05s elapsed
Nmap scan report for 192.168.1.68
Host is up (0.00042s latency).
Not shown: 997 closed tcp ports (reset)
PORT     STATE SERVICE       VERSION
135/tcp open  msrpc         Microsoft Windows RPC
139/tcp open  netbios-ssn   Microsoft Windows netbios-ssn
445/tcp open  microsoft-ds?
Device type: general purpose
Running: Microsoft Windows 10|11
OS CPE: cpe:/o:microsoft:windows_10 cpe:/o:microsoft:windows_11
OS details: Microsoft Windows 10 1607 - 11 23H2
Uptime guess: 0.841 days (since Thu Mar 13 17:37:23 2025)
Network Distance: 0 hops
TCP Sequence Prediction: Difficulty=253 (Good luck!)
IP ID Sequence Generation: Incremental
Service Info: OS: Windows; CPE: cpe:/o:microsoft:windows

Host script results:
|_samba-vuln-cve-2012-1182: Could not negotiate a connection:SMB: Failed to receive bytes: ERROR
|_smb-vuln-ms10-061: Could not negotiate a connection:SMB: Failed to receive bytes: ERROR
|_smb-vuln-ms10-054: false

NSE: Script Post-scanning.
Initiating NSE at 13:48
Completed NSE at 13:48, 0.00s elapsed
Initiating NSE at 13:48
Completed NSE at 13:48, 0.00s elapsed
Read data files from: C:\Program Files (x86)\Nmap
```

Zenmap

Scan Tools Profile Help

Target: nmap -sS -T2 -D 192.168.1.68 192.168.1.71 | Profile: Intense scan | Scan | Cancel

Command: nmap -sS -T4 -A -v -D 192.168.1.68 --script vuln nmap -sS -T2 -D 192.168.1.68 192.168.1.71 -T 2 -D 192.168.1.68 -T 2 -D 192.168.1.68 -T 2 -D 192.168.1.68 -T 2 -D 192.168.1.68 -T 2 -D 192.168.1.68 -T 2 -D 192.168.1.68 -T 2 -D 192.168.1.68 -T 2 -D 192.168.1.68 -T 2 -D 192.168.1.68 -T 2 -D 192.168.1.

Hosts | Services

OS | Host

192.168.1.68

192.168.1.71

Filter Hosts

Nmap Output | Ports / Hosts | Topology | Host Details | Scans

nmap -sS -T4 -A -v -D 192.168.1.68 --script vuln nmap 192.168.1.71 -T 2 -D 192.168.1.68 -T 2 -D 192.168.1.68 -T 2 -D 192.168.1.68 -T 2 -D 192.168.1.68 -T 2 -D 192.168.1.68 -T 2 -D 192.168.1.68 -T 2 -D 192.168.1.68 -T 2 -D 192.168.1.68 -T 2 -D ... | Details

```
Initiating Parallel DNS resolution of 1 host. at 13:51
Completed Parallel DNS resolution of 1 host. at 13:51, 0.01s elapsed
Initiating SYN Stealth Scan at 13:51
Scanning 192.168.1.71 [1000 ports]
SYN Stealth Scan Timing: About 7.55% done; ETC: 13:58 (0:06:20 remaining)
SYN Stealth Scan Timing: About 14.85% done; ETC: 13:58 (0:05:50 remaining)
SYN Stealth Scan Timing: About 22.25% done; ETC: 13:58 (0:05:18 remaining)
SYN Stealth Scan Timing: About 29.65% done; ETC: 13:58 (0:04:47 remaining)
SYN Stealth Scan Timing: About 36.95% done; ETC: 13:58 (0:04:18 remaining)
SYN Stealth Scan Timing: About 44.35% done; ETC: 13:58 (0:03:47 remaining)
SYN Stealth Scan Timing: About 51.75% done; ETC: 13:58 (0:03:17 remaining)
SYN Stealth Scan Timing: About 59.05% done; ETC: 13:58 (0:02:47 remaining)
SYN Stealth Scan Timing: About 66.45% done; ETC: 13:58 (0:02:17 remaining)
SYN Stealth Scan Timing: About 73.85% done; ETC: 13:58 (0:01:47 remaining)
SYN Stealth Scan Timing: About 81.15% done; ETC: 13:58 (0:01:17 remaining)
SYN Stealth Scan Timing: About 88.55% done; ETC: 13:58 (0:00:47 remaining)
Completed SYN Stealth Scan at 13:58, 407.22s elapsed (1000 total ports)
Initiating Service scan at 13:58
Initiating OS detection (try #1) against 192.168.1.71
Retrying OS detection (try #2) against 192.168.1.71
NSE: Script scanning 192.168.1.71.
Initiating NSE at 13:58
Completed NSE at 13:58, 1.01s elapsed
Initiating NSE at 13:58
Completed NSE at 13:58, 0.00s elapsed
Nmap scan report for 192.168.1.71
Host is up (0.0091s latency).
All 1000 scanned ports on 192.168.1.71 are in ignored states.
Not shown: 1000 closed tcp ports (reset)
MAC Address: 16:89:C5:36:7E:97 (Unknown)
Too many fingerprints match this host to give specific OS details
Network Distance: 1 hop

TRACEROUTE
HOP RTT     ADDRESS
1   9.08 ms 192.168.1.71

NSE: Script Post-scanning.
Initiating NSE at 13:58
Completed NSE at 13:58, 0.00s elapsed
Initiating NSE at 13:58
Completed NSE at 13:58, 0.00s elapsed
Read data files from: C:\Program Files (x86)\Nmap
OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/
```

Zenmap

Scan Tools Profile Help

Target: 192.168.1.68 | Profile: | Scan | Cancel

Command: nmap -T3 192.168.1.68

Hosts | Services

OS | Host

192.168.1.68

Filter Hosts

Nmap Output | Ports / Hosts | Topology | Host Details | Scans

nmap -T3 192.168.1.68 | Details

```
Starting Nmap 7.95 ( https://nmap.org ) at 2025-03-22 14:11 India Standard Time
Nmap scan report for 192.168.1.68
Host is up (0.000070s latency).
Not shown: 997 closed tcp ports (reset)
PORT     STATE SERVICE
135/tcp open  msrpc
139/tcp open  netbios-ssn
445/tcp open  microsoft-ds

Nmap done: 1 IP address (1 host up) scanned in 0.45 seconds
```

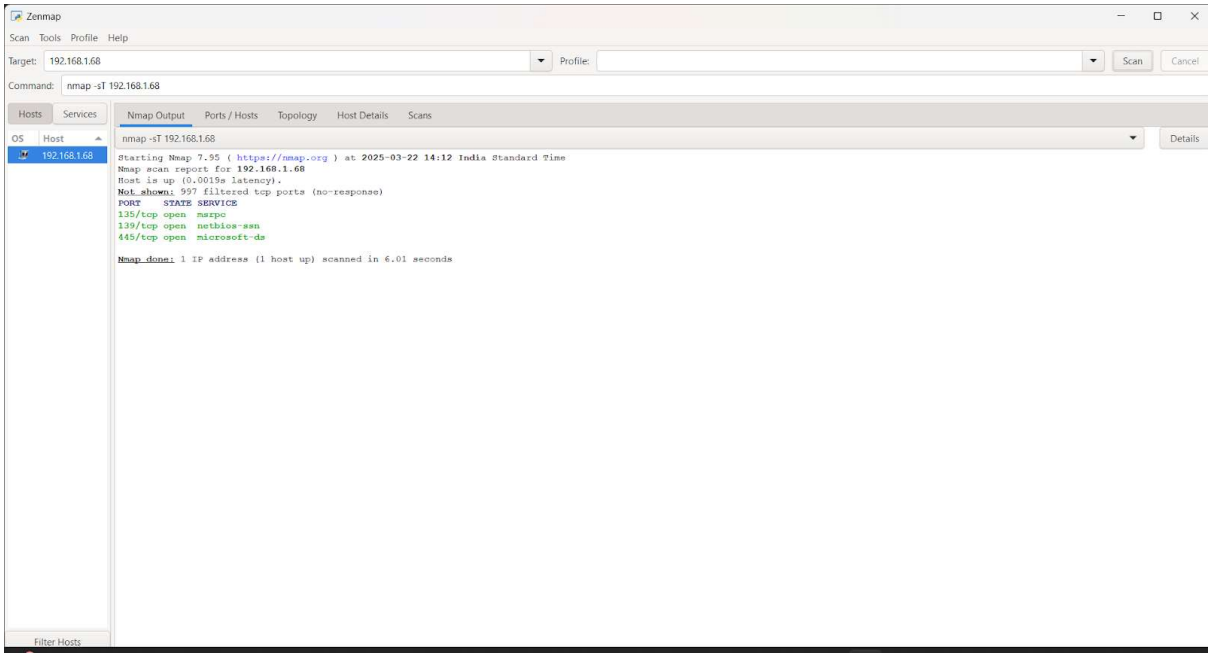
Zenmap
Scan Tools Profile Help
Target: 192.168.1.68
Profile:
Scan
Cancel
Command: nmap -sT 192.168.1.68
Hosts
Services
OS
Host
192.168.1.68
Nmap Output
Ports / Hosts
Topology
Host Details
Scans
nmap -sT 192.168.1.68
Details
Starting Nmap 7.95 (https://nmap.org) at 2025-03-22 14:12 India Standard Time
Nmap scan report for 192.168.1.68
Host is up (0.0019s latency).
Not shown: 997 filtered tcp ports (no-response)
PORT STATE SERVICE
135/tcp open msrpc
139/tcp open netbios-ssn
445/tcp open microsoft-ds
Nmap done: 1 IP address (1 host up) scanned in 6.01 seconds
Filter Hosts

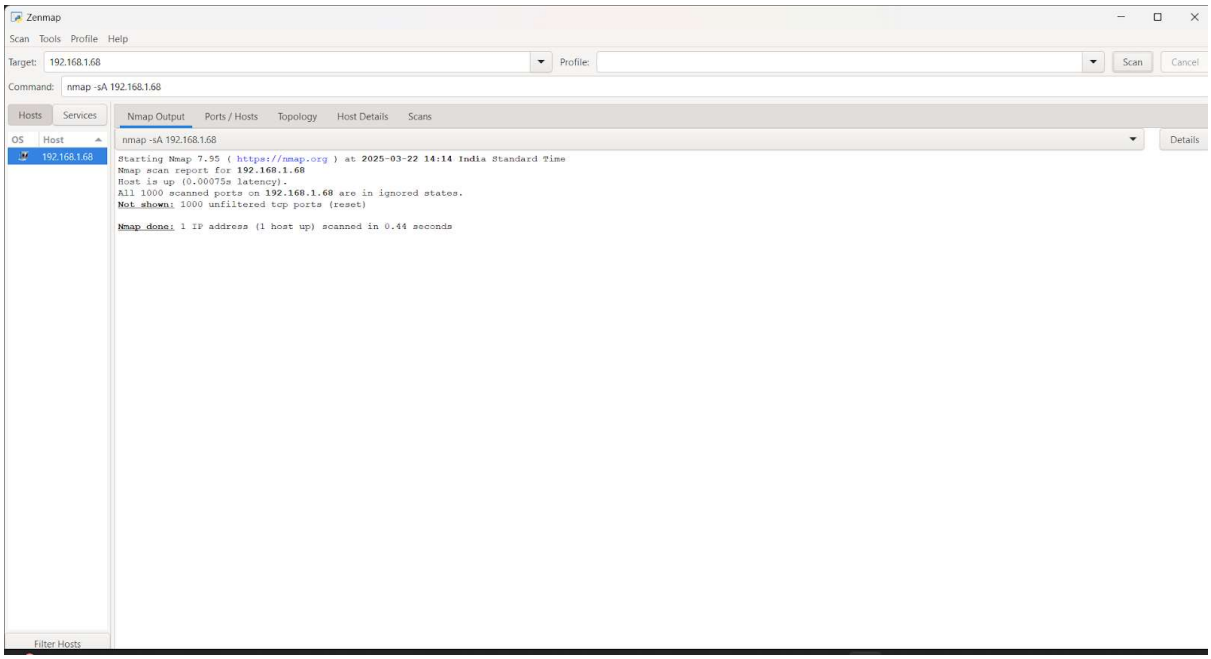
Zenmap
Scan Tools Profile Help
Target: 192.168.1.68
Profile:
Scan
Cancel
Command: nmap -sA 192.168.1.68
Hosts
Services
OS
Host
192.168.1.68
Nmap Output
Ports / Hosts
Topology
Host Details
Scans
nmap -sA 192.168.1.68
Details
Starting Nmap 7.95 (https://nmap.org) at 2025-03-22 14:14 India Standard Time
Nmap scan report for 192.168.1.68
Host is up (0.00075s latency).
All 1000 scanned ports on 192.168.1.68 are in ignored states.
Not shown: 1000 unfiltered tcp ports (reset)
Nmap done: 1 IP address (1 host up) scanned in 0.44 seconds
Filter Hosts

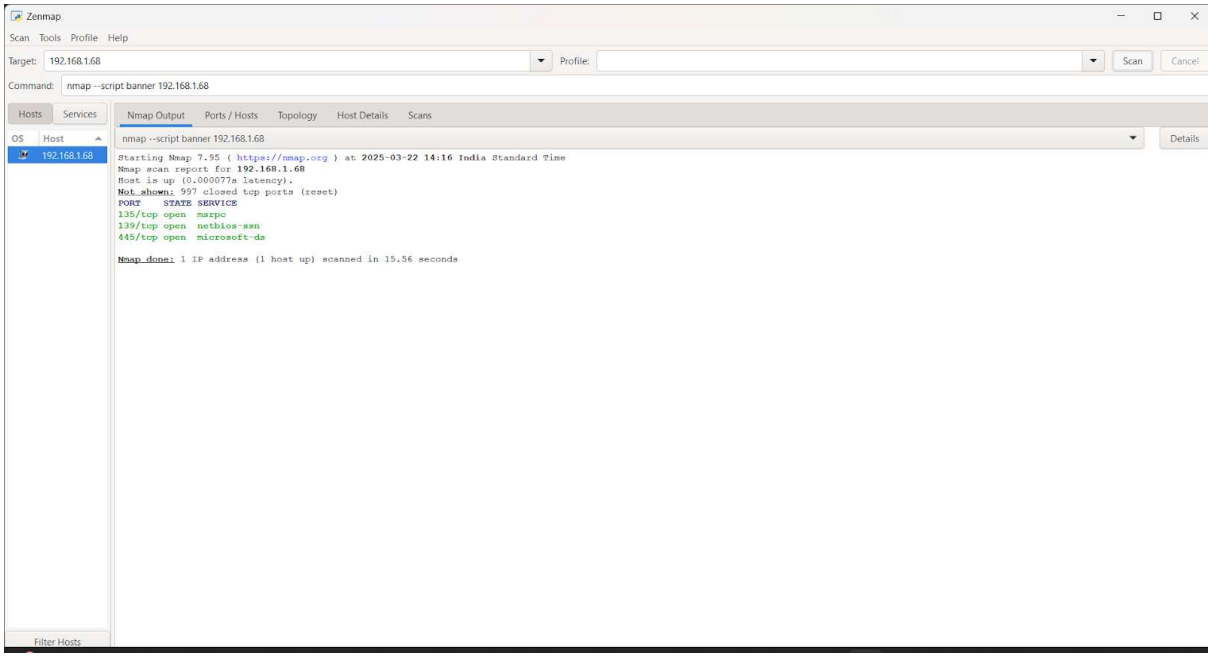
Zenmap
Scan Tools Profile Help
Target: 192.168.1.68
Profile:
Scan
Cancel
Command: nmap --script banner 192.168.1.68
Hosts
Services
Nmap Output
Ports / Hosts
Topology
Host Details
Scans
OS
Host
192.168.1.68
nmap --script banner 192.168.1.68
Details
Starting Nmap 7.95 (https://nmap.org) at 2025-03-22 14:16 India Standard Time
Nmap scan report for 192.168.1.68
Host is up (0.000077s latency).
Not shown: 997 closed tcp ports (reset)
PORT STATE SERVICE
135/tcp open msrpc
139/tcp open netbios-ssn
445/tcp open microsoft-ds
Nmap done: 1 IP address (1 host up) scanned in 15.56 seconds
Filter Hosts

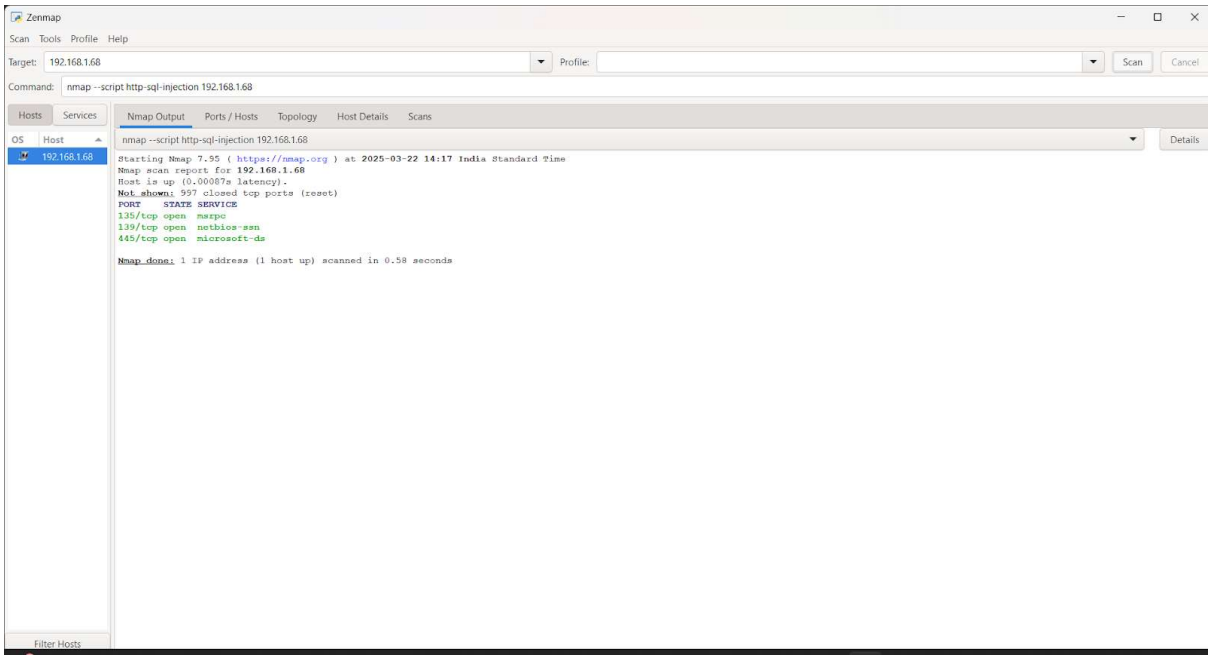
Zenmap
Scan Tools Profile Help
Target: 192.168.1.68
Profile:
Scan
Cancel
Command: nmap --script http-sql-injection 192.168.1.68
Hosts
Services
Nmap Output
Ports / Hosts
Topology
Host Details
Scans
OS
Host
192.168.1.68
nmap --script http-sql-injection 192.168.1.68
Details
Starting Nmap 7.95 (https://nmap.org) at 2025-03-22 14:17 India Standard Time
Nmap scan report for 192.168.1.68
Host is up (0.00087s latency).
Not shown: 997 closed tcp ports (reset)
PORT STATE SERVICE
135/tcp open msrpc
139/tcp open netbios-ssn
445/tcp open microsoft-ds
Nmap done: 1 IP address (1 host up) scanned in 0.58 seconds
Filter Hosts

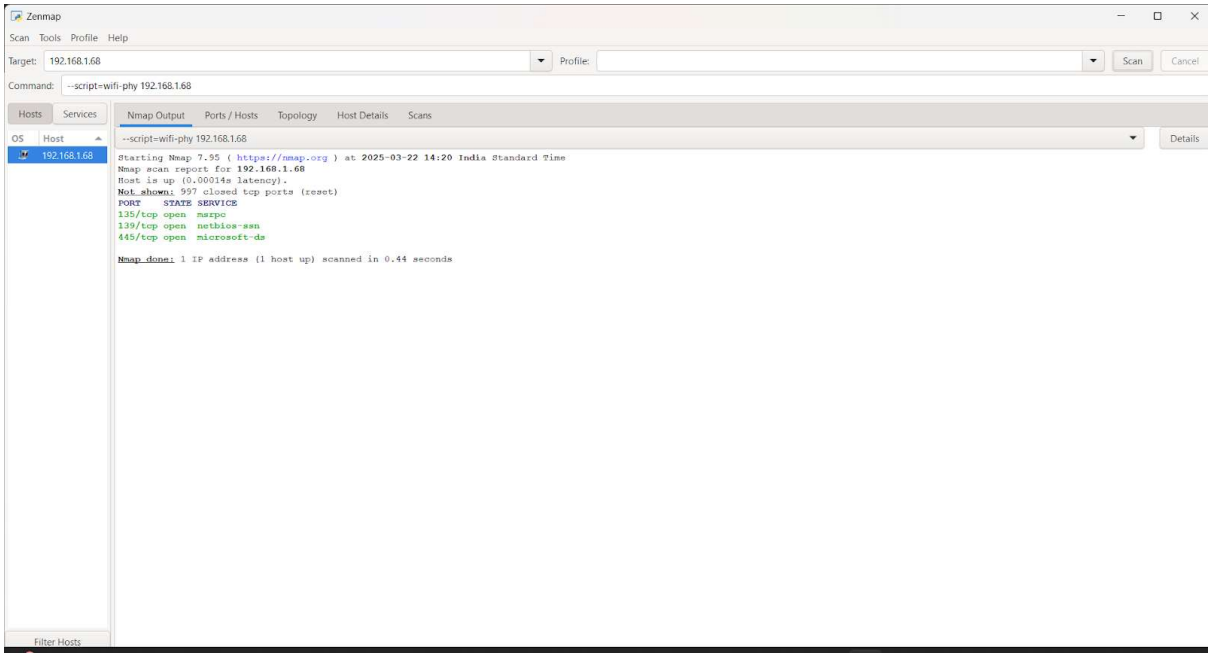

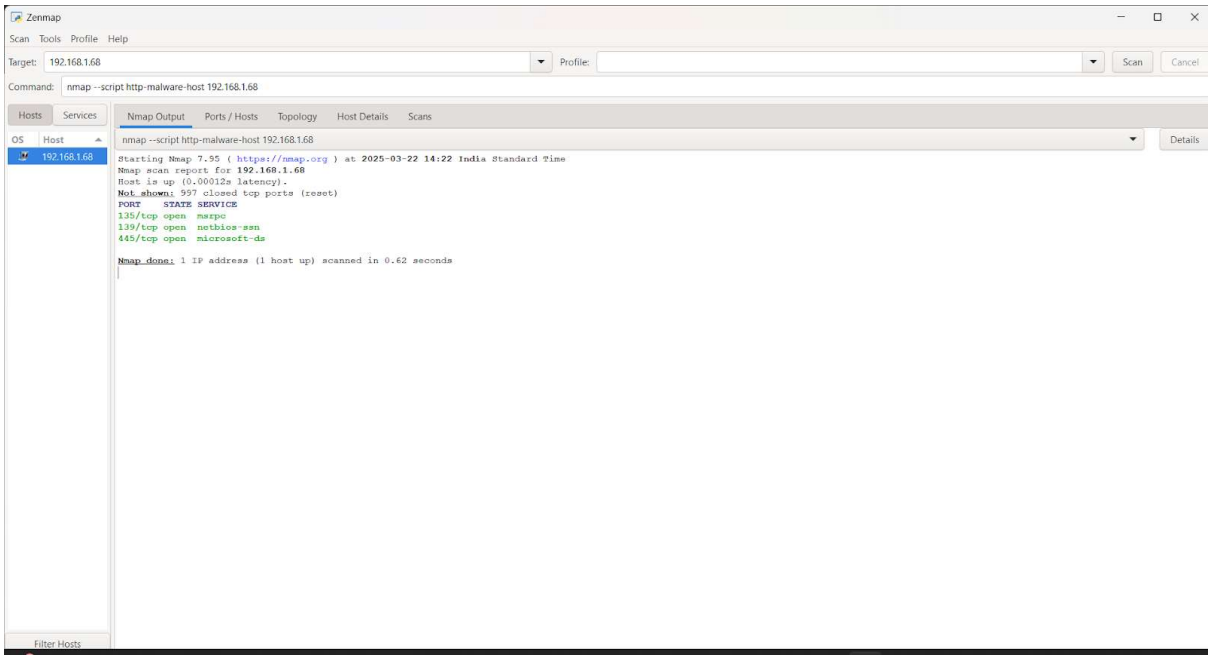

Advanced Nmap Commands with Descriptions

Aggressive Scan

nmap -A 192.168.1.1

1.

- Performs OS detection, version detection, script scanning, and traceroute. Useful for gathering maximum details about a target in one command.

Decoy Scan (Avoid Detection)

```
nmap -D RND:10 192.168.1.1
```

2.

- Uses 10 random decoys to hide the real scanner, making it difficult for IDS/IPS systems to identify the actual scanning source.

Spoofed IP Scan

```
nmap -S 192.168.1.100 192.168.1.1
```

3.

- Sends scan requests from a fake IP address, useful for masking the attack origin but requires privileged access.

Skip Ping Scan

```
nmap -Pn 192.168.1.1
```

4.

- Skips ICMP requests and scans directly, useful when the target has ping requests disabled by a firewall.

Vulnerability Scan

```
nmap --script vuln 192.168.1.1
```

5.

- Detects known vulnerabilities in the target by running vulnerability-related scripts from the Nmap Scripting Engine (NSE).

SMB Exploit Detection

```
nmap --script smb-vuln* -p 445 192.168.1.1
```

6.

- Checks for SMB-related vulnerabilities like EternalBlue, which can be used for remote code execution.

Slow Stealth Scan

nmap -sS -T2 -D 192.168.1.100 192.168.1.1

7.

- Uses slow SYN scan and decoys to avoid detection by security systems. It is useful for evading IDS logs.

IPv6 Scan

nmap -6 2001:db8::ff00:42:8329

8.

- Scans an IPv6 target, useful for networks transitioning to IPv6 addressing.

Firewall Evasion via Fragmentation

nmap -f 192.168.1.1

9.

- Uses fragmented packets to bypass firewalls that filter based on standard packet sizes.

10. **UDP Scan**

nmap -sU -p 53,161,162 192.168.1.1

- Scans UDP ports like DNS and SNMP, useful for detecting services that don't rely on TCP.

11. **Service Version Detection**

nmap -sV --version-intensity 9 192.168.1.1

- Retrieves detailed service versions, useful for identifying outdated or vulnerable software.

12. **Full Port Scan (1-65535)**

nmap -p- 192.168.1.1

- Scans all possible TCP ports to ensure no open port is missed during reconnaissance.

13. **Comprehensive Script Scan**

nmap -sC 192.168.1.1

- Runs default scripts for in-depth scanning, including banner grabbing, service enumeration, and OS detection.

14. **Traceroute Enabled Scan**

nmap --traceroute 192.168.1.1

- Displays the network path to the target, helping to understand network topology and detect potential traffic monitoring points.

15. **Scan for Default Credentials**

nmap --script=auth 192.168.1.1

- Checks for weak or default authentication credentials across common services like FTP, SSH, and Telnet.

16. **Detect Fake Wi-Fi (Evil Twin Attack)**

nmap --script=wifi-phy 192.168.1.1

- Detects rogue access points that mimic legitimate Wi-Fi networks to capture sensitive data.

17. **Find Malware Hosts**

nmap --script http-malware-host 192.168.1.1

- Scans for malware-infected servers, useful for identifying potential threats within a network.

18. **DNS Brute-Force for Subdomains**

nmap --script dns-brute -p 53 example.com

- Finds hidden subdomains that may be used for staging, development, or internal applications.

19. **Full IPv6 Network Discovery**

nmap -6 -sn 2001:db8::/64

- Scans an entire IPv6 subnet to identify live hosts and services.

20. **Detect CVEs on Target**

nmap --script vuln 192.168.1.1

- Identifies known vulnerabilities (CVEs) and provides details about possible exploits.

These commands help in penetration testing, vulnerability detection, and network security assessments by providing deep insights into target systems.