


Authentication is needed if content
should be **protected**
(not accessible by everyone)

Getting Permission

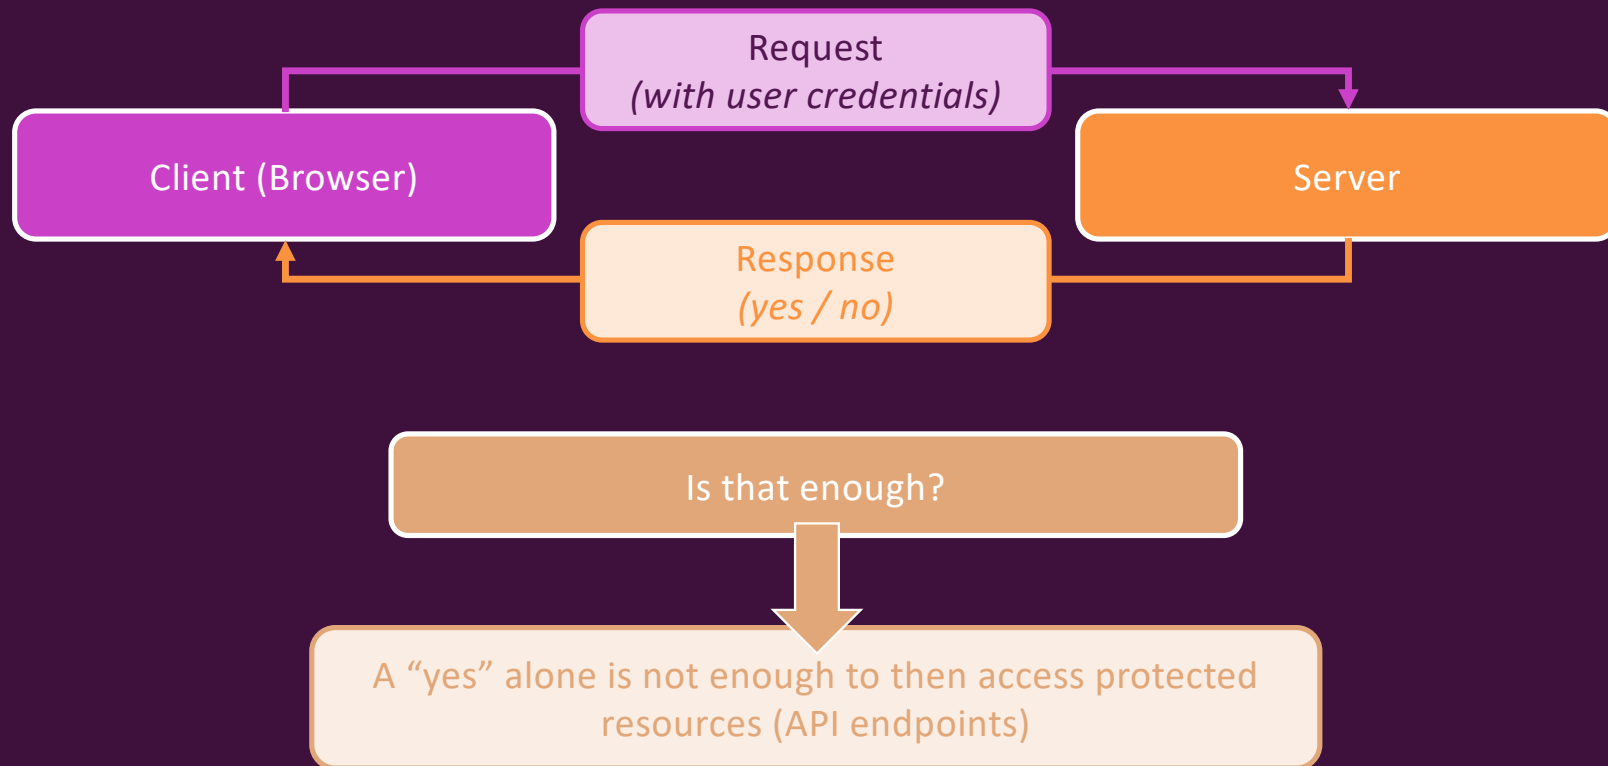

How Does Authentication Work?

We can't just save and use the "yes"



We could send a fake "yes" to the server to request protected data

Server-side Sessions

Store unique identifier on server, send same identifier to client


Client sends identifier along with requests to protected resources

Authentication Tokens

Create (but not store) "permission" token on server, send token to client

Client sends token along with requests to protected resources

Getting Permission

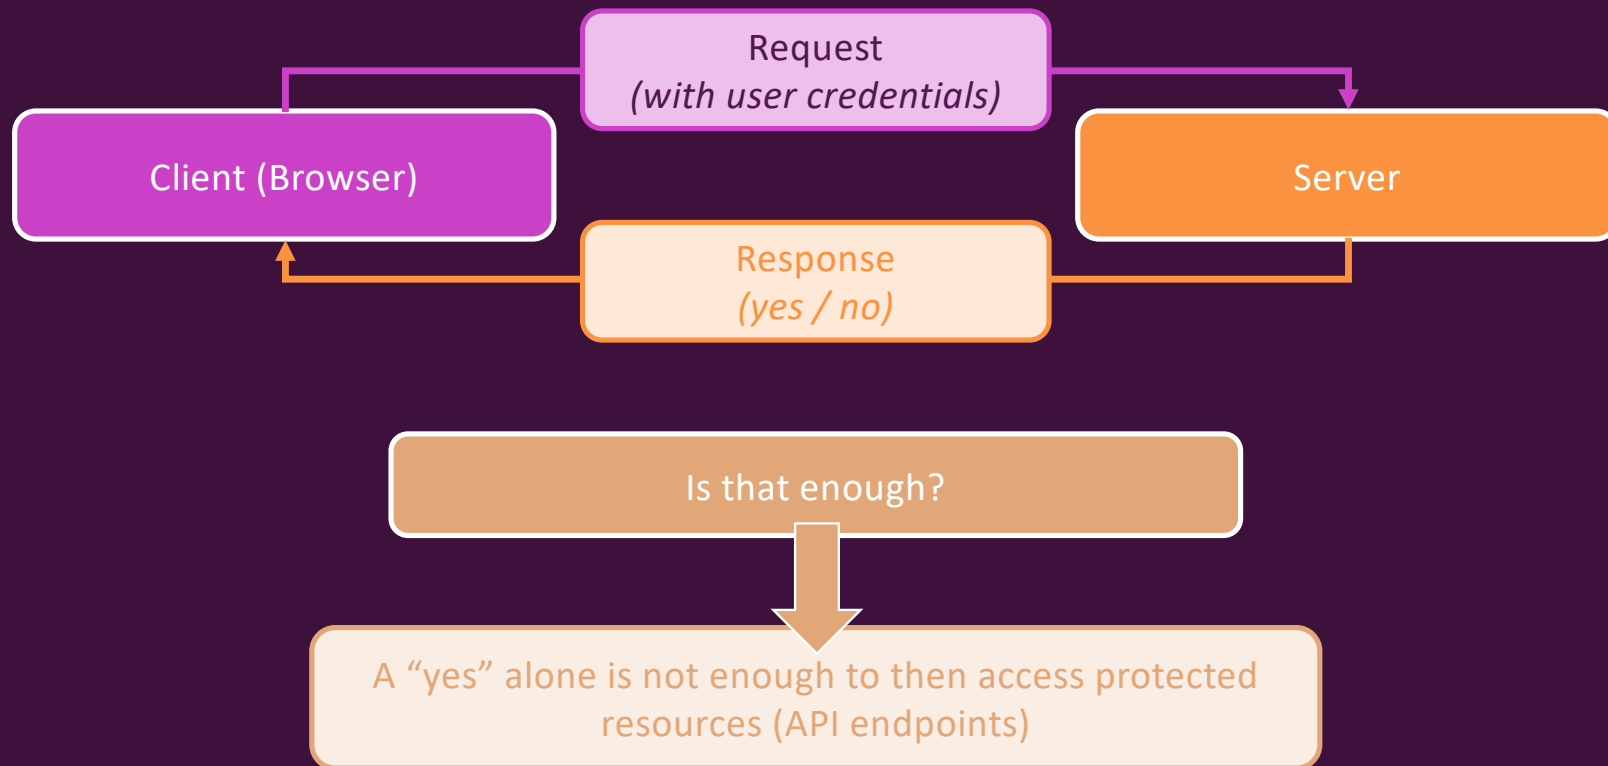

Getting Permission

