Please read the instructions carefully before you start the test.

TEST DURATION

100 Minutes

After 100 minutes, your test will be auto submitted

NUMBER OF ATTEMPTS

Only 1 Attempt

DO NOT reload, refresh or close the browser without submitting the test.

TEST STRUCTURE

Groups	Type of Questions	No. of Questions	Duration
Aptitude	ReferenceToContext, MCQ	15	20 mins
Technical	MCQ	20	25 mins
SQL Coding	Coding	2	15 mins
Language Coding	Coding	2	40 mins

SPECIAL INSTRUCTIONS

Welcome to Commonwealth Bank Assessment

Test Duration: 100 Mins

1 ☆ 2 3 4 5 6 7 8 9 10 11 12 13 14

QUESTION: 1 GROUP: **Aptitude** SECTION: **Logical Reasoning** Mark(s): 1

Direction: Read the information given below and answer the question based on it.

There are eight friends 'A', 'B', 'C', 'D', 'E', 'F', 'G' and 'H' who live in three different cities of India.

I) Three of them live in Bangalore, three of them in Mumbai and two of them in Delhi. Height of each person is different from one another.

II) The tallest does not live in Delhi and the shortest does not live in Bangalore.

III) 'F' is taller than 'A' and 'D' but shorter than 'H' and 'B'. 'E' who does not live in Bangalore, is taller than 'B' and is the second tallest. 'G' is shorter than 'D' but taller than 'A'.

IV) 'H', who is the fourth tallest, lives in Mumbai with 'D'.

V) 'G' does not live either in Bangalore or Delhi. 'B' does not live in Delhi.

Question: Who among the given options are the tallest and shortest respectively?

- 'E' and 'G'
- 'H' and 'D'
- 'C' and 'A'
- 'B' and 'A'

QUESTION: **2** GROUP: **Aptitude** SECTION: **Logical Reasoning** Mark(s): 1

Direction: Read the information given below and answer the question based on it.

There are eight friends 'A', 'B', 'C', 'D', 'E', 'F', 'G' and 'H' who live in three different cities of India.

I) Three of them live in Bangalore, three of them in Mumbai and two of them in Delhi. Height of each person is different from one another.

II) The tallest does not live in Delhi and the shortest does not live in Bangalore.

III) 'F' is taller than 'A' and 'D' but shorter than 'H' and 'B'. 'E' who does not live in Bangalore, is taller than 'B' and is the second tallest. 'G' is shorter than 'D' but taller than 'A'.

IV) 'H', who is the fourth tallest, lives in Mumbai with 'D'.

V) 'G' does not live either in Bangalore or Delhi. 'B' does not live in Delhi.

Question: Which pair of friends given in options lives in Delhi?

- EH
- EA
- HF
- EF

QUESTION: **3** GROUP: **Aptitude** SECTION: **Logical Reasoning** Mark(s): 1

Direction: Read the information given below and answer the question based on it.

There are eight friends 'A', 'B', 'C', 'D', 'E', 'F', 'G' and 'H' who live in three different cities of India.

I) Three of them live in Bangalore, three of them in Mumbai and two of them in Delhi. Height of each person is different from one another.

II) The tallest does not live in Delhi and the shortest does not live in Bangalore.

III) 'F' is taller than 'A' and 'D' but shorter than 'H' and 'B'. 'E' who does not live in Bangalore, is taller than 'B' and is the second tallest. 'G' is shorter than 'D' but taller than 'A'.

IV) 'H', who is the fourth tallest, lives in Mumbai with 'D'.

V) 'G' does not live either in Bangalore or Delhi. 'B' does not live in Delhi.

Question: What is the position of 'F' from the left, if they are arranged in decreasing order of their height from left to right?


- Sixth
- Second
- Fifth
- Fourth

1 2 3 4 ☆ 5 6 7 8 9 10 11 12 13 14

QUESTION: **4** GROUP: **Aptitude** SECTION: **Data Analysis** Mark(s): 1

Direction: Study the information given below and answer the questions that follow.

The bar graph given below shows the number of properties sold by a real estate firm X in different months of the year 2018.

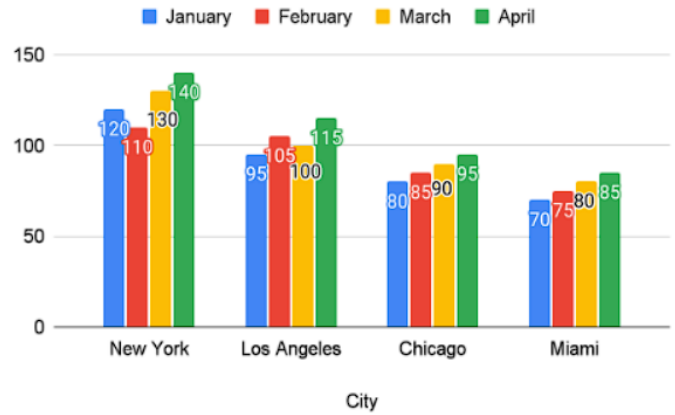

Question: What is the average number of properties sold in New York from January to March?


- 120
- 115
- 130

1 2 3 4 5 ☆ 6 7 8 9 10 11 12 13 14

QUESTION: 5 GROUP: **Aptitude** SECTION: **Data Analysis** Mark(s): 1

Direction: Study the information given below and answer the questions that follow.

The bar graph given below shows the number of properties sold by a real estate firm X in different months of the year 2018.

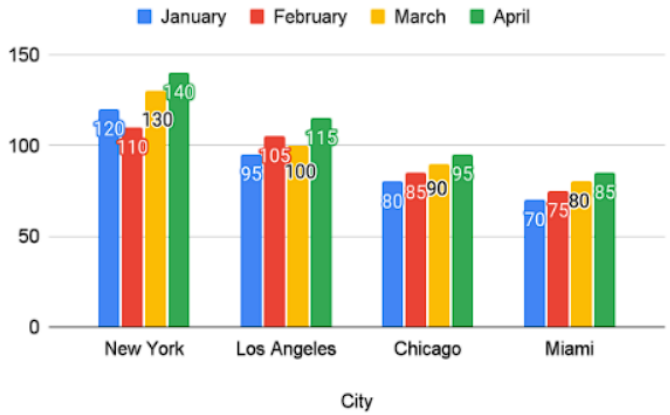

Question: What percentage increase in property sales was observed in Los Angeles from February to April?

- 12.25%
- 6.33%
- 15.50%

1
2
3
4
5
6 ☆
7
8
9
10
11
12
13
14
15

QUESTION: **6** GROUP: **Aptitude** SECTION: **Quant Math Ability** Mark(s): 1

In a cloth store a discount of 10% is always given. For a festive season a further successive discount of 20% is given. After giving these successive discounts the selling price of the shirt becomes Rs.1360. Find out the approximate list price (in Rs) of the shirt

- 1899
- 1889
- 1999
- 1989

2
3
4
5
6
7 ☆
8
9
10
11
12
13
14
15

QUESTION: 7 GROUP: **Aptitude** SECTION: **Attention to Details** Mark(s): 1

Below table represents the numeric codes followed by some conditions:

Number	9	8	7	6	5	1	2	3	4
Code	*	%	$	+	@	#	&	^^	/

Conditions:

I) If the middle most number is odd then it is coded as ©.

II) If the first number and last number are even then both are to be coded as £.

III) If the last number is prime then it is coded as Δ.

Then the code of the number 18582674963 is:

- #%@%&+$/*+Δ
- #@%@&+$/*+^^
- #%@%&+$/*+^^
- #@%@&+$/*+Δ

2
3
4
5
6
7
8 ☆
9
10
11
12
13
14
15

QUESTION: **8** GROUP: **Aptitude** SECTION: **Puzzles** Mark(s): 1

Which of the following will come in place of question mark (?) in the following sequence so that it will complete the sequence?

S1, Y4, T6, (?), U1

- W8
- X8
- Z4
- W6

2
3
4
5
6
7
8
9 ☆
10
11
12
13
14
15

QUESTION: **9** GROUP: **Aptitude** SECTION: **Data Sufficiency** Mark(s): 1

Direction: The question is followed by two statements (I) and (II). Answer the question using the following instructions.

Mark (A) if the question can be answered by one of the statements alone but not by the other.
Mark (B) if the question can be answered by using either statement alone.
Mark (C) if the question can be answered using both statements together, but can not be answered using either statements alone.
Mark (D) if the question cannot be answered.

At present, the age of Aman to Mahesh is in the ratio of 5 : 7. Mahesh is how many years older than Aman?

(I) 7 years before, the ratio of the age of Aman to Ajay was 3 : 4.
(II) After 7 years, the ratio of the age of Aman to Dinesh will become 7 : 8.

- (B)
- (D)
- (A)
- (C)

2
3
4
5
6
7
8
9
10 ☆
11
12
13
14
15

QUESTION: **10** GROUP: **Aptitude** SECTION: **Quant Math Ability** Mark(s): 1

10 men can finish a piece of work in 10 days. Whereas it takes 12 women to finish it in 10 days. If 15 men and 6 women undertake the work, how many days will they take to complete the work?

- 8 days
- 5 days
- 10 days
- 9 days

commbank 119237-13761791

2
3
4
5
6
7
8
9
10
11 ☆
12
13
14
15

QUESTION: **11** GROUP: **Aptitude** SECTION: **Puzzles** Mark(s): 1

How many pairs of letters are there in the word **"PENURIOUS"** which has as many letters between them (from both the sides) as in the alphabets from A to Z?

- 5
- 4
- 3
- 2

commbank 119237-13761791

2
3
4
5
6
7
8
9
10
11
12 ☆
13
14
15

QUESTION: **12** GROUP: **Aptitude** SECTION: **Quant Math Ability** Mark(s): 1

If A = {2, 5, 7, 9, 13, 19}. A subset containing three elements from A has to be selected, such that three elements are coefficients of a quadratic equation that has real roots. How many subsets are there?

- 15
- 18
- 10
- 12

2
3
4
5
6
7
8
9
10
11
12
13 ☆
14
15

QUESTION: **13** GROUP: **Aptitude** SECTION: **Quant Math Ability** Mark(s): 1

Lily visits a stationery store to purchase pens, notebooks, and markers. The items are sold at a fixed rate per piece. Lily buys 6 pens, 23 notebooks, and 7 markers. If she had bought 7 more notebooks instead of 7 markers, she could have reduced her expenditure by 23%. However, if she had bought 6 more notebooks instead of 6 pens, she could have reduced her expenditure by 33%. By what percentage would her expenditure have reduced if she had only bought 36 notebooks?

- 56%
- 62%
- 38%
- 44%

2
3
4
5
6
7
8
9
10
11
12
13
14 ☆
15

QUESTION: **14** GROUP: **Aptitude** SECTION: **Quant Math Ability** Mark(s): 1

The difference between the speed of the boat and speed of the water current is 3 km / h and the total time taken to travel upstream and downstream is 3 hours. What is the downstream speed, if the downstream and upstream distances are 3 km each?

- 4.5 km / h
- 4 km / h
- 3 km / h
- 2.5 km / h

2
3
4
5
6
7
8
9
10
11
12
13
14
15 ☆

QUESTION: **15** GROUP: **Aptitude** SECTION: **Attention to Details** Mark(s): 1

If '+' is coded as '/', '*' is coded as '+' and '-' is coded as '*', then the value of expression 65 + 5 * 42 - 4 will be:

- 174
- 156
- 181
- 145

16 ☆ 17 18 19 20 21 22 23 24 25 26 27 28 29

QUESTION: **16** GROUP: **Technical** SECTION: **Basics of Statistics** Mark(s): 1

Below is the sample data given by the two groups of students on conducting the "Mold Bread experiment" on the growth of fungus.

Days	Sample 1	Sample 2
1	15	8
2	22	12
3	28	9
4	26	16
5	18	15
6	17	10
7	29	
8	21	
9	24	

Find the difference between the estimates of the population variances.

- 13.78
- 15.15
- 14.12
- 21.05

QUESTION: **18** GROUP: **Technical** SECTION: **Machine Learning** Mark(s): 1

What among the following disadvantages coordinate descent are having?

- None of the above
- Easy to evaluate
- Non-smoothed multivariable function.
- Easy to synchronize

16
17
18
19 ☆
20
21
22
23
24
25
26
27
28
29

QUESTION: **19** GROUP: **Technical** SECTION: **Gen AI basics** Mark(s): 1

Which method is commonly used to train generative models by maximizing the probability of observed data?

- Maximum Likelihood Estimation (MLE)
- Gradient Descent
- Cross-Entropy
- Dimensionality Reduction

commbank 119237-13761791

16
17
18
19
20 ☆
21
22
23
24
25
26
27
28
29

QUESTION: **20** GROUP: **Technical** SECTION: **Basics of Statistics** Mark(s): 1

Given the nine sample values 4.5, 6.5, 3.8, 4.2, 7.7, 8.5, 9.4, 5.3, 3.9 from a normal distribution with mean μ and variance 4. Find the best critical region for testing simple null hypothesis (H_0) : μ = 4Vs. simple alternate hypothesis (H_1) : μ = 5 of size 0.05. (given $\lambda_{(\alpha = 0.05)} = 1.64$)

- 5.09 to ∞
- 1 to 5.09
- λ_α to 1
- 1 to ∞

16
17
18
19
20
21 ☆
22
23
24
25
26
27
28
29
30

QUESTION: **21** GROUP: **Technical** SECTION: **Gen AI basics** Mark(s): 1

Which generative model is based on two networks, generator and discriminator?

- VAE
- HMM
- GAN
- RNN

commbank 119237-13761791

QUESTION: **22** GROUP: **Technical** SECTION: **Gen AI basics** Mark(s): 1

How are generative models typically trained?

- Dimensionality reduction
- Minimize error
- Maximize accuracy
- Maximize data likelihood

commbank 119237-13761791

18
19
20
21
22
23 ☆
24
25
26
27
28
29
30
31
32

QUESTION: **23** GROUP: **Technical** SECTION: **Gen AI basics** Mark(s): 1

What does the discriminator in GAN do?

- Generates data
- Encodes data
- Predicts next values
- Distinguishes real vs fake

commbank 119237-13761791

19
20
21
22
23
24 ☆
25
26
27
28
29
30
31
32
33

QUESTION: **24** GROUP: **Technical** SECTION: **Machine Learning** Mark(s): 1

Decision tree can be used for:

I. Classification
II. Association
III. Regression
IV. Clustering

- Only II and IV
- Only IV
- Only I and III
- All I, II, III, and IV

QUESTION: **25** GROUP: **Technical** SECTION: **Basics of Statistics** Mark(s): 1

A cricket player gets to bat 280 times in a season. Player successfully hit 84 times. What is the probability of player getting a hit in percentage?

- 31%
- 32%
- 30%
- 34%

QUESTION: **26** GROUP: **Technical** SECTION: **Basics of Statistics** Mark(s): 1

Which among the following methods is not used to measure trend in time series?

- Ratio to trend method.
- Method of semi-averages
- Graphic method
- Method of moving averages

commbank 119237-13761791

QUESTION: **27** GROUP: **Technical** SECTION: **Basics of Statistics** Mark(s): 1

A magician has a box of 8 dice which all look the same. However, there are 4 dice of type A which are fair dice with a probability of getting 6 in a throw is 1/6. There are 4 dice of type B which are biased with a probability of getting 6 in a throw is 0.8. The magician takes a die from the box at random and rolls it on the table. Find the conditional probability of rolling a type B dice?

- 0.526
- 0.5
- 0.8
- 0.828

QUESTION: **28** GROUP: **Technical** SECTION: **Machine Learning** Mark(s): 1

Please select correct option for considered unbiased prediction model define as:

E(q) – Q = 0

- Mean(Q) = q
- q= Q
- Mean (q) = Q
- Q=1/q

QUESTION: **29** GROUP: **Technical** SECTION: **Machine Learning** Mark(s): 1

Which of the statement(s) given below is/are true about neural network?

I) Associative neural network does not have any feedback loop.
II) Training time of neural network depends on the size of the network.
III) Associative network is referred as perceptron.

- Only (I) and (II)
- Only (II)
- Only (I)
- Only (III)

22
23
24
25
26
27
28
29
30 ☆
31
32
33
34
35

QUESTION: **30** GROUP: **Technical** SECTION: **Machine Learning** Mark(s): 1

Identify the Loss function which is/are used for classification:

I. Mean Squared Error

II. Logistic Loss

III. Negative Log Likelihood

IV. Mean Absolute Error

- ○ Only II and III
- ○ Only I and IV
- ○ All I, II, III, and IV
- ○ Only I, III, and IV

QUESTION: **31** GROUP: **Technical** SECTION: **Machine Learning** Mark(s): 1

The impulse normally travels from _____ to the _____ of a neuron.

- axon, axon
- axon, dendrite
- dendrite, dendrite
- dendrite, axon

22
23
24
25
26
27
28
29
30
31
32 ☆
33
34
35

QUESTION: **32** GROUP: **Technical** SECTION: **Machine Learning** Mark(s): 1

Scenario: You are testing a speech generation system that produces synthetic voices. To evaluate the quality of the generated speech, you decide to ask human evaluators to rate the speech on a scale of 1 to 5.

Question: Which metric are you using to evaluate the generated speech?

- BLEU
- MOS (Mean Opinion Score)
- FID
- Perplexity

22
23
24
25
26
27
28
29
30
31
32
33 ☆
34
35

QUESTION: **33** GROUP: **Technical** SECTION: **Gen AI basics** Mark(s): 1

What is the main goal of generative models?

- Prediction
- Data generation
- Classification
- Clustering

commbank 119237-13761791

22
23
24
25
26
27
28
29
30
31
32
33
34 ☆
35

QUESTION: **34** GROUP: **Technical** SECTION: **Gen AI basics** Mark(s): 1

Which of the following best describes a transformer model used in Generative AI?

- A model used to analyze video content
- A model specifically used for natural language translation
- A model that optimizes storage
- A neural network architecture designed for sequential data processing

commbank 119237-13761791

22
23
24
25
26
27
28
29
30
31
32
33
34
35 ☆

QUESTION: **35** GROUP: **Technical** SECTION: **Machine Learning** Mark(s): 1

Logistic Loss function is used:

I. When probabilities are of interest that hard classification

II. Product of probabilities is customary to convert the log

III. When the network must be optimized for a hard classification

- Only I
- All I, II, and III
- Only III
- Only II

16
17 ☆
18
19
20
21
22
23
24
25
26
27
28
29

QUESTION: **17** GROUP: **Technical** SECTION: **Basics of Statistics** Mark(s): 1

The table below shows the marks scored by Rahul in various tests.

Test 1	22
Test 2	17
Test 3	-
Test 4	26
Test 5	32

Find the marks scored by Rahul in test 3, if the mean deviation of the test's is 4. Given that marks scored by Rahul in test 3 lie between 20 and 25.

- (●) 23.00
- ( ) 21.50
- ( ) 24.00
- ( ) 20.25

Unanswer

QUESTION: **36** GROUP: **SQL Coding** SECTION: **SQL Coding 1** Mark(s): 5

You are given two tables *Customer* and *Orders*.

Table *Customer* contains the columns: Customer_Id, Customer_Name, City, and State.
Table *Orders* contains the columns: Customer_Id, Product_Name, Quantity, and Price.

The column formats are given below. Write a query to get the names of the customers along with respective number of orders, who have more than one order.

Note: Please don't use Analytical or Windows functions such as RANK, DENSE RANK, ROW_NUMBER, etc, as they are not supported in MySQL.
Table Names and Column names should be in the same case (lower/uppercase/InitCap) given in question while writing SQL queries else it will create a syntax error

Customer:

Type	*Column*
Customer_Id	Varchar(10)
Customer_Name	Varchar(20)
City	Varchar(20)
State	Varchar(30)

Orders:

Type	*Column*
Customer_Id	Varchar(10)
Product_Name	Varchar(20)
Quantity	Int(20)
Price	Int(30)

Sample Input:

Customer			
Customer_Id	Customer_Name	City	State
20	Rupesh	Pune	Maharastra
10	Sanket	Bangalore	Karnataka

36 ☆

37

Sample Input:

Customer			
Customer_Id	Customer_Name	City	State
20	Rupesh	Pune	Maharastra
10	Sanket	Bangalore	Karnataka
30	John	Lynden	Washington
40	Sanjay	Bidar	Karnataka
50	Jimmy	Udgir	Maharastra
60	Saif	Hyderabad	Telangana
70	Raj	Thane	Mumbai
80	Pinky	Kerala	Tamilnadu
90	Jagan	Raichur	Karnataka

Orders			
Customer_Id	Product_Name	Quantity	Price
10	Notebook	10	200
30	water bottle	30	500
40	Pencil	40	700
50	bag	60	1200
70	Mouse	5	600
60	monitors	50	8000
20	monitors	10	4000
90	Pen	20	4000
20	Compassbox	30	4000

Sample Output:
Rupesh,2

Current Code | Previous Versions | MySQL

36 ☆

37

Sample Output:
Rupesh,2

Current Code | Previous Versions | MySQL


```
1
```

36
37 ☆

QUESTION: **37** GROUP: **SQL Coding** SECTION: **SQL Coding 2** Mark(s): 10

Consider three tables called employee, team_mates, and salary.
The employee table contains two columns: id and name.
The team_mates table contains two columns: id and teammates_id.
The salary table contains two columns: id and salary.

Write a query to display the names of those employees whose teammate earns a higher salary than them. The names must be ordered by the salary amount of the teammate. It can be assumed that no two employees have the same salary.

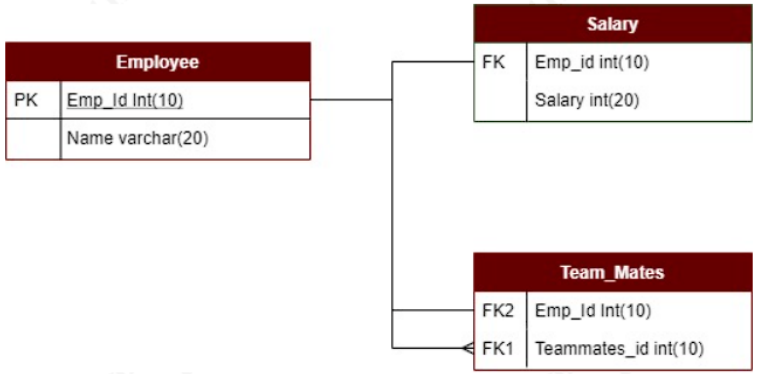

Sample Input:

Employee	
Emp_Id	**Name**
8562	Johny
2563	Nirav
4562	Kartik
6652	Aniket

Team_Mates	
Emp_id	**Teammates_id**

36

37 ☆

Sample Input:

Employee	
Emp_Id	**Name**
8562	Johny
2563	Nirav
4562	Kartik
6652	Aniket

Team_Mates	
Emp_id	**Teammates_id**
8562	2563
2563	4562
4562	6652
6652	8562

Salary	
Emp_id	**Salary**
8562	25000
2563	12000
4562	20000
6652	22000

Sample Output:
Nirav
Kartik
Aniket

Current Code | Previous Versions | MySQL

```
1
```

36

37 ☆

Current Code | Previous Versions | MySQL

```
1
```

Execute | Submit & Continue Coding

38 ☆ QUESTION: **38** GROUP: **Language Coding** SECTION: **Coding 2** Mark(s): 15

39

Sangeeta loves to jog every morning. She goes to a different park every day, and always runs across the park in the same zig-zag manner that she loves. The parks can be represented as squares of size N x N. The manner in which Sangeeta runs in a 4 x 4 sized park can be represented as follows:

1	3	4	10
2	5	9	11
6	8	12	15
7	13	14	16

The values in each block are the number of minutes Sangeeta takes to arrive there from her starting point. She always starts at the top left of the park and takes one minute to move to the next block. Consider the park blocks as 0-indexed where the top left block denotes the location (0,0) and the bottom right block denotes the location (N-1, N-1).

Given a park's dimensions, write a program to figure out how much time Sangeeta will take to reach a particular block in the park.

Read the input from STDIN and print the output to STDOUT. Do not write arbitrary strings anywhere in the program, as these contribute to the standard output and test cases will fail.

Constraints:
$1 \le N \le 10000$
$1 \le x \le N$
$1 \le y \le N$

Input Format:
A single line of input contains three space separated integers: N, x and y, where N indicates the size of the park and x, y indicate the position of the block for which time needs to be calculated.

Output Format:
The output is an integer, the time Sangeeta takes to arrive at (x,y).

Sample Input 1:
3 2 2

Sample Output 1:
9

Explanation 1:
The destination block is marked in yellow colour

1	3	4

38 ☆

39

Explanation 1:

The destination block is marked in yellow colour

1	3	4
2	5	8
6	7	9

So, it takes 9 minutes to reach the block (2,2).

Sample Input 2:

4 2 3

Sample Output 2:

15

Explanation 2:

The destination block is marked in yellow colour.

1	3	4	10
2	5	9	11
6	8	12	15
7	13	14	16

So, it takes 15 minutes to reach the block (2, 3).

Current Code | Previous Versions | Python 3

```
def calculateTime(N,x,y):
    '''In Given Data, "N" is the size of park and "x" and "y" is the position of the block for which time needs to be calculated.
    From Given data, calculate how much time it will take Sangeeta to reach a particular block in the park. store the result in "calcTime".'''
    calcTime = 0

    #WRITE YOUR CODE HERE.

    return calcTime

def main():
    str = input()
    str = str.split()
    N = int(str[0])
    x = int(str[1])
    y = int(str[2])
    result = calculateTime(N,x,y)
```

38 ☆

39

Current Code | Previous Versions | Python 3

```python
def calculateTime(N,x,y):
    '''In Given Data, "N" is the size of park and "x" and "y" is the position of the block for which time needs to be calculated.
    From Given data, calculate how much time it will take Sangeeta to reach a particular block in the park. store the result in "calcTime".'''
    calcTime = 0

    #WRITE YOUR CODE HERE.

    return calcTime

def main():
    str = input()
    str = str.split()
    N = int(str[0])
    x = int(str[1])
    y = int(str[2])
    result = calculateTime(N,x,y)
    print(result)

main()
```

Test against custom input

Compile & Execute | Submit & Continue Coding

QUESTION: **39** GROUP: **Language Coding** SECTION: **Coding 1** Mark(s): 10

Reeta loves spending time on Shopping and, most of all, she loves spending time in shopping malls. This time Reeta has decided to spend a very limited money on shopping and made plan to stop herself from overspending. she has the budget of X amount of money. The store she visited has n-numbers of items to buy.
Reeta's plan: She decided that, this time she won't wonder in store for comparing the products all she would do is, she will find sets of consecutive products which are in row and buy as much as she could.

With a program, help Reeta to identify the consecutive product such a way that she could buy the maximum number of products within the budget.

Read the input from STDIN and write the output to STDOUT. You should not write arbitrary strings while reading the input and while printing as these contribute to the standard output.

Constraints :
3 > | arr[n] | > 200
3 > | x | > 100
3 > | n | > 200

Input Format:
The first line of input contains two integers N and X, where N is number of items in store and X is the buget.
The second line contains N integers that represent the costs of the products.

Output Format:
The first and only line of output must contain the maximum number of item that Reeta can purchase.

Sample Input 1:
5 5
3 1 2 1 1

Sample Output 1:
4

Explanations :
Given Data,
if we skip first element in the array we can pick up to 4 items fulfilling the capacity of 5.

Sample Input 2:
5 10
3 2 5 4 3

38

39 ☆

Sample Input 2:
5 10
3 2 5 4 3

Sample Output 2:
3

Explanations:
The first 3 consecutive items in the list, stays in the budget.

commbank 9237-13761791

Current Code | Previous Versions | Select Language

```
1
```

QUESTION: **39** GROUP: **Language Coding** SECTION: **Coding 1** Mark(s): 10

Reeta loves spending time on Shopping and, most of all, she loves spending time in shopping malls. This time Reeta has decided to spend a very limited money on shopping and made plan to stop herself from overspending. she has the budget of X amount of money. The store she visited has n-numbers of items to buy.
Reeta's plan: She decided that, this time she won't wonder in store for comparing the products all she would do is, she will find sets of consecutive products which are in row and buy as much as she could.

With a program, help Reeta to identify the consecutive product such a way that she could buy the maximum number of products within the budget.

Read the input from STDIN and write the output to STDOUT. You should not write arbitrary strings while reading the input and while printing as these contribute to the standard output.

Constraints :
3 > | arr[n] | > 200
3 > | x | > 100
3 > | n | > 200

Input Format:
The first line of input contains two integers N and X, where N is number of items in store and X is the buget.
The second line contains N integers that represent the costs of the products.

Output Format:
The first and only line of output must contain the maximum number of item that Reeta can purchase.

Sample Input 1:
5 5
3 1 2 1 1

Sample Output 1:
4

Explanations :
Given Data,
if we skip first element in the array we can pick up to 4 items fulfilling the capacity of 5.

Sample Input 2:
5 10
3 2 5 4 3

38 ☆ QUESTION: **38** GROUP: **Language Coding** SECTION: **Coding 2** Mark(s): 15

39

Sangeeta loves to jog every morning. She goes to a different park every day, and always runs across the park in the same zig-zag manner that she loves. The parks can be represented as squares of size N x N. The manner in which Sangeeta runs in a 4 x 4 sized park can be represented as follows:

1	3	4	10
2	5	9	11
6	8	12	15
7	13	14	16

The values in each block are the number of minutes Sangeeta takes to arrive there from her starting point. She always starts at the top left of the park and takes one minute to move to the next block. Consider the park blocks as 0-indexed where the top left block denotes the location (0,0) and the bottom right block denotes the location (N-1, N-1).

Given a park's dimensions, write a program to figure out how much time Sangeeta will take to reach a particular block in the park.

Read the input from STDIN and print the output to STDOUT. Do not write arbitrary strings anywhere in the program, as these contribute to the standard output and test cases will fail.

Constraints:
$1 \le N \le 10000$
$1 \le x \le N$
$1 \le y \le N$

Input Format:
A single line of input contains three space separated integers: N, x and y, where N indicates the size of the park and x, y indicate the position of the block for which time needs to be calculated.

Output Format:
The output is an integer, the time Sangeeta takes to arrive at (x,y).

Sample Input 1:
3 2 2

Sample Output 1:
9

Explanation 1:
The destination block is marked in yellow colour

1	3	4

38 ☆

39

Sample Output 1:
9

Explanation 1:
The destination block is marked in yellow colour

1	3	4
2	5	8
6	7	9

So, it takes 9 minutes to reach the block (2,2).

Sample Input 2:
4 2 3

Sample Output 2:
15

Explanation 2:
The destination block is marked in yellow colour.

1	3	4	10
2	5	9	11
6	8	12	15
7	13	14	16

So, it takes 15 minutes to reach the block (2, 3).

Current Code | Previous Versions | Python 3

```
def calculateTime(N,x,y):
    '''In Given Data, "N" is the size of park and "x" and "y" is the position of the block for which time needs to be calculated.
    From Given data, calculate how much time it will take Sangeeta to reach a particular block in the park. store the result in "calcTime".'''
    calcTime = 0

    #WRITE YOUR CODE HERE.

    return calcTime

def main():
    str = input()
    str = str.split()
```

38 ☆

39

Explanation 2:

The destination block is marked in yellow colour.

1	3	4	10
2	5	9	11
6	8	12	15
7	13	14	16

So, it takes 15 minutes to reach the block (2, 3).

Current Code | Previous Versions | Python 3

```python
def calculateTime(N,x,y):
    '''In Given Data, "N" is the size of park and "x" and "y" is the position of the block for which time needs to be calculated.
    From Given data, calculate how much time it will take Sangeeta to reach a particular block in the park. store the result in "calcTime".'''
    calcTime = 0

    #WRITE YOUR CODE HERE.

    return calcTime

def main():
    str = input()
    str = str.split()
    N = int(str[0])
    x = int(str[1])
    y = int(str[2])
    result = calculateTime(N,x,y)
    print(result)

main()
```

QUESTION: **39** GROUP: **Language Coding** SECTION: **Coding 1** Mark(s): 10

Reeta loves spending time on Shopping and, most of all, she loves spending time in shopping malls. This time Reeta has decided to spend a very limited money on shopping and made plan to stop herself from overspending. she has the budget of X amount of money. The store she visited has n-numbers of items to buy.
Reeta's plan: She decided that, this time she won't wonder in store for comparing the products all she would do is, she will find sets of consecutive products which are in row and buy as much as she could.

With a program, help Reeta to identify the consecutive product such a way that she could buy the maximum number of products within the budget.

Read the input from STDIN and write the output to STDOUT. You should not write arbitrary strings while reading the input and while printing as these contribute to the standard output.

Constraints :
3 > | arr[n] | > 200
3 > | x | > 100
3 > | n | > 200

Input Format:
The first line of input contains two integers N and X, where N is number of items in store and X is the buget.
The second line contains N integers that represent the costs of the products.

Output Format:
The first and only line of output must contain the maximum number of item that Reeta can purchase.

Sample Input 1:
5 5
3 1 2 1 1

Sample Output 1:
4

Explanations :
Given Data,
if we skip first element in the array we can pick up to 4 items fulfilling the capacity of 5.

Sample Input 2:
5 10
3 2 5 4 3

QUESTION: **39** GROUP: **Language Coding** SECTION: **Coding 1** Mark(s): 10

Reeta loves spending time on Shopping and, most of all, she loves spending time in shopping malls. This time Reeta has decided to spend a very limited money on shopping and made plan to stop herself from overspending. she has the budget of X amount of money. The store she visited has n-numbers of items to buy.
Reeta's plan: She decided that, this time she won't wonder in store for comparing the products all she would do is, she will find sets of consecutive products which are in row and buy as much as she could.

With a program, help Reeta to identify the consecutive product such a way that she could buy the maximum number of products within the budget.

Read the input from STDIN and write the output to STDOUT. You should not write arbitrary strings while reading the input and while printing as these contribute to the standard output.

Constraints :
3 > | arr[n] | > 200
3 > | x | > 100
3 > | n | > 200

Input Format:
The first line of input contains two integers N and X, where N is number of items in store and X is the buget.
The second line contains N integers that represent the costs of the products.

Output Format:
The first and only line of output must contain the maximum number of item that Reeta can purchase.

Sample Input 1:
5 5
3 1 2 1 1

Sample Output 1:
4

Explanations :
Given Data,
if we skip first element in the array we can pick up to 4 items fulfilling the capacity of 5.

Sample Input 2:
5 10
3 2 5 4 3

QUESTION: **39** GROUP: **Language Coding** SECTION: **Coding 1** Mark(s): 10

Reeta loves spending time on Shopping and, most of all, she loves spending time in shopping malls. This time Reeta has decided to spend a very limited money on shopping and made plan to stop herself from overspending. she has the budget of X amount of money. The store she visited has n-numbers of items to buy.
Reeta's plan: She decided that, this time she won't wonder in store for comparing the products all she would do is, she will find sets of consecutive products which are in row and buy as much as she could.

With a program, help Reeta to identify the consecutive product such a way that she could buy the maximum number of products within the budget.

Read the input from STDIN and write the output to STDOUT. You should not write arbitrary strings while reading the input and while printing as these contribute to the standard output.

Constraints :
3 > | arr[n] | > 200
3 > | x | > 100
3 > | n | > 200

Input Format:
The first line of input contains two integers N and X, where N is number of items in store and X is the buget.
The second line contains N integers that represent the costs of the products.

Output Format:
The first and only line of output must contain the maximum number of item that Reeta can purchase.

Sample Input 1:
5 5
3 1 2 1 1

Sample Output 1:
4

Explanations :
Given Data,
if we skip first element in the array we can pick up to 4 items fulfilling the capacity of 5.

Sample Input 2:
5 10
3 2 5 4 3

QUESTION: **39** GROUP: **Language Coding** SECTION: **Coding 1** Mark(s): 10

Reeta loves spending time on Shopping and, most of all, she loves spending time in shopping malls. This time Reeta has decided to spend a very limited money on shopping and made plan to stop herself from overspending. she has the budget of X amount of money. The store she visited has n-numbers of items to buy.
Reeta's plan: She decided that, this time she won't wonder in store for comparing the products all she would do is, she will find sets of consecutive products which are in row and buy as much as she could.

With a program, help Reeta to identify the consecutive product such a way that she could buy the maximum number of products within the budget.

Read the input from STDIN and write the output to STDOUT. You should not write arbitrary strings while reading the input and while printing as these contribute to the standard output.

Constraints :
3 > | arr[n] | > 200
3 > | x | > 100
3 > | n | > 200

Input Format:
The first line of input contains two integers N and X, where N is number of items in store and X is the buget.
The second line contains N integers that represent the costs of the products.

Output Format:
The first and only line of output must contain the maximum number of item that Reeta can purchase.

Sample Input 1:
5 5
3 1 2 1 1

Sample Output 1:
4

Explanations :
Given Data,
if we skip first element in the array we can pick up to 4 items fulfilling the capacity of 5.

Sample Input 2:
5 10
3 2 5 4 3