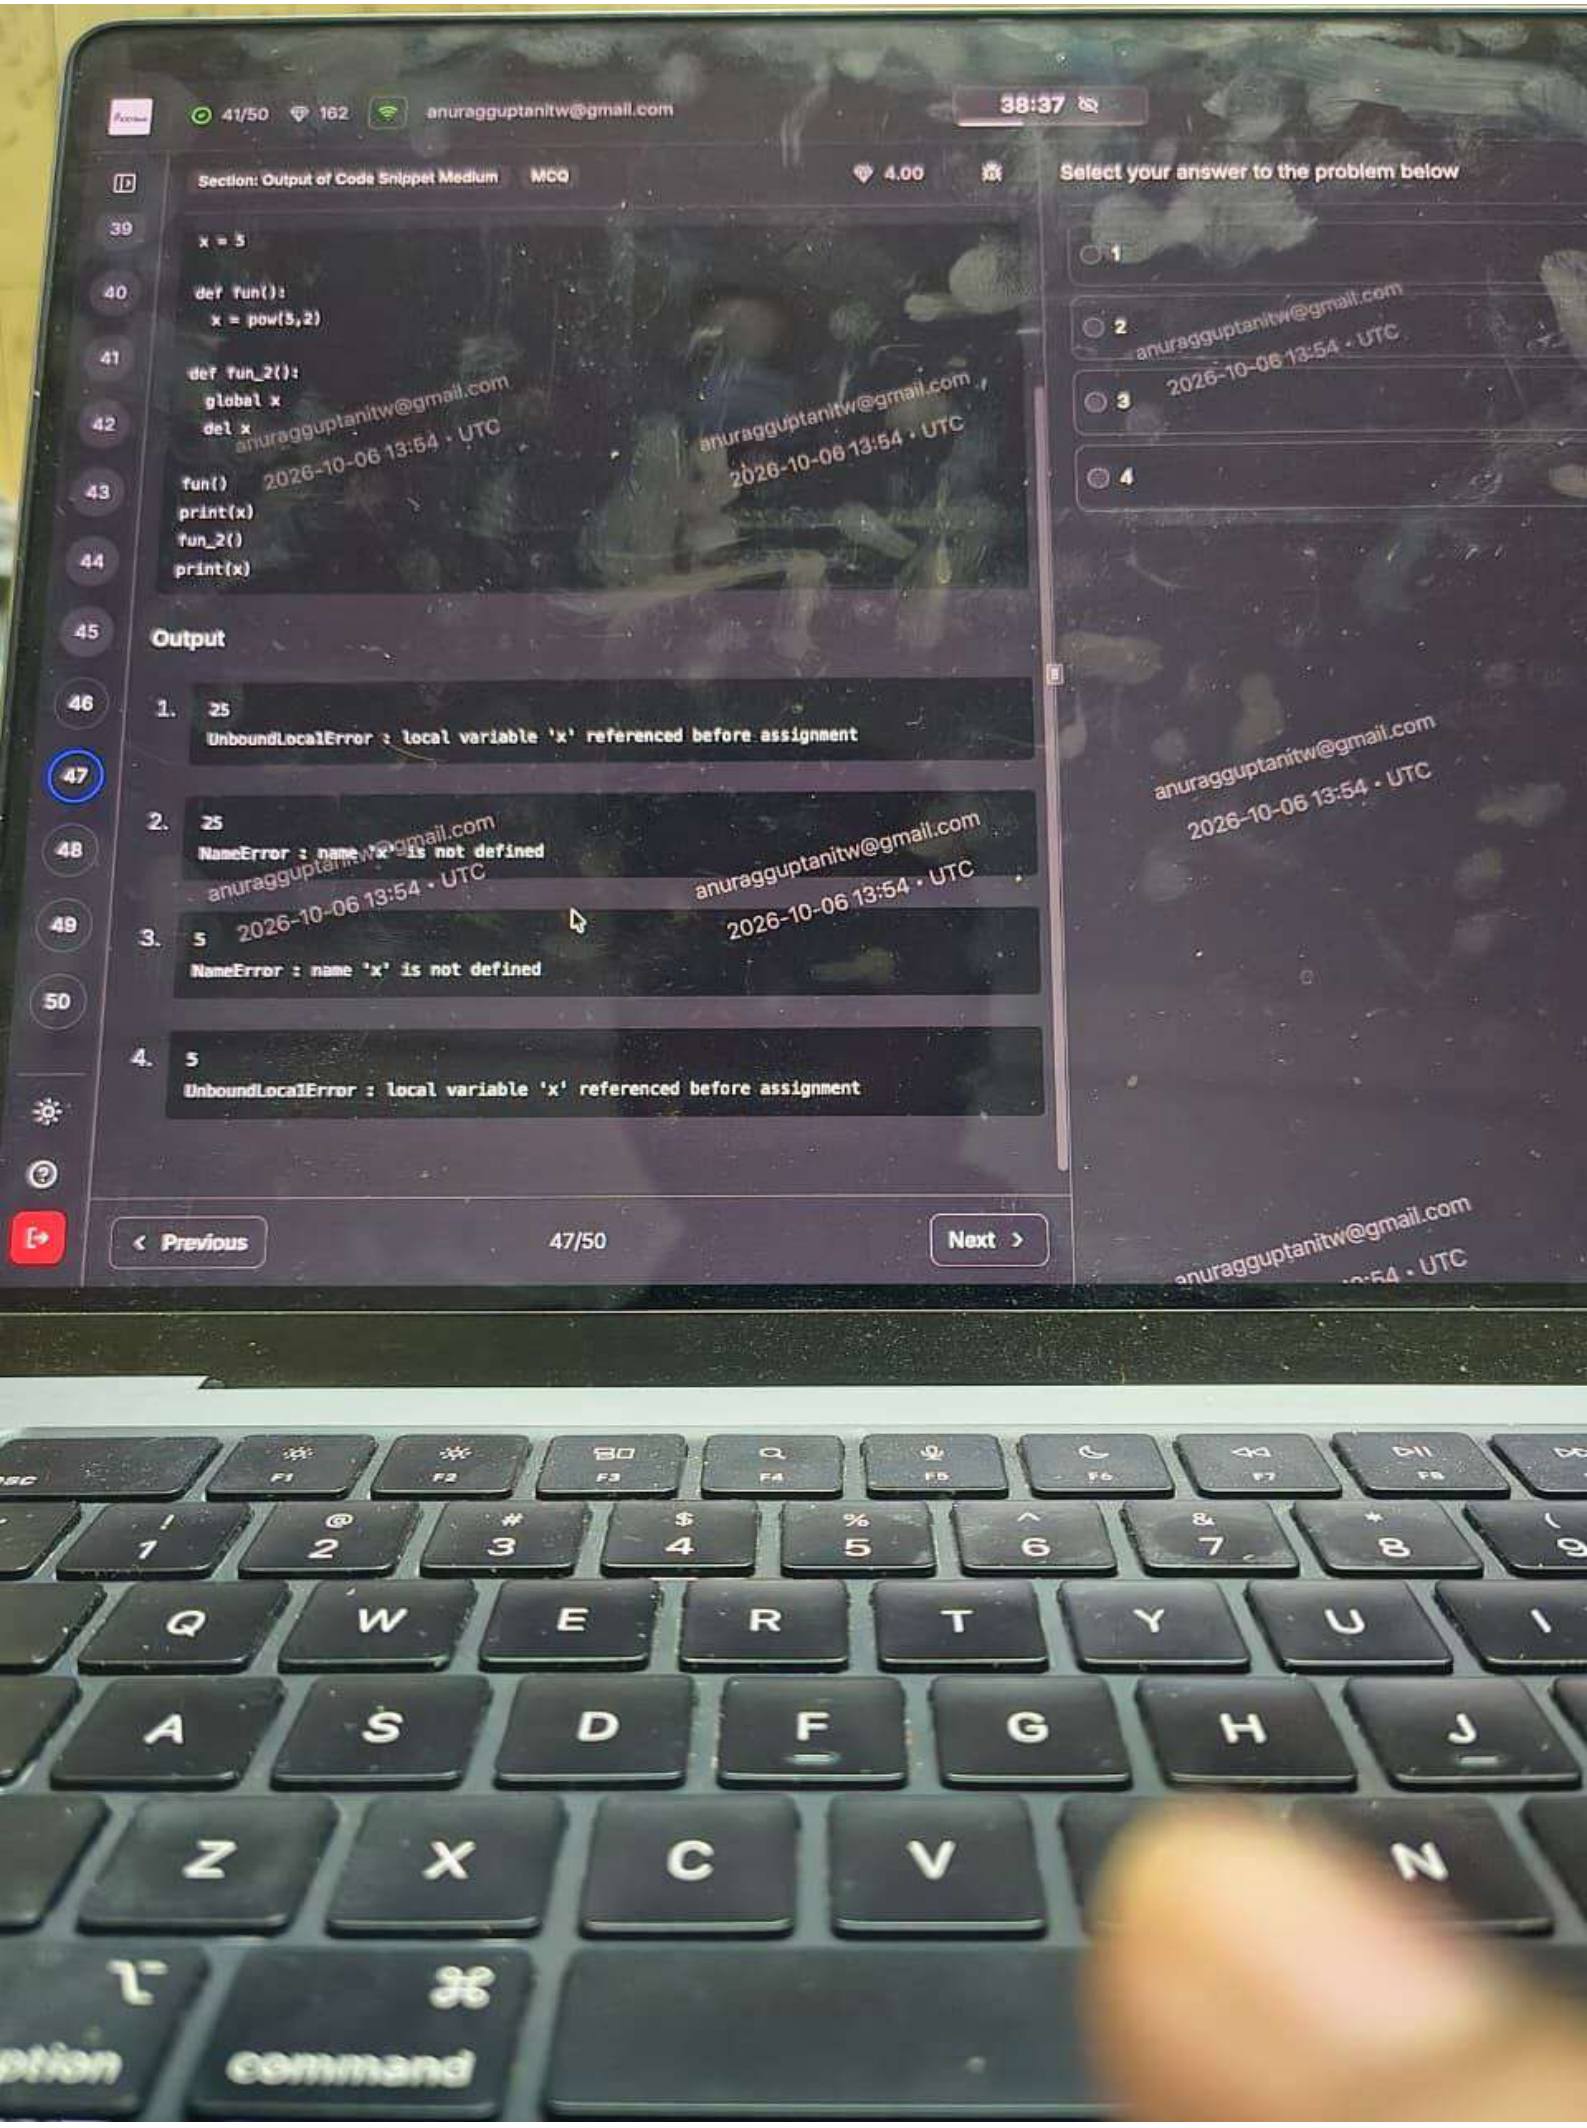
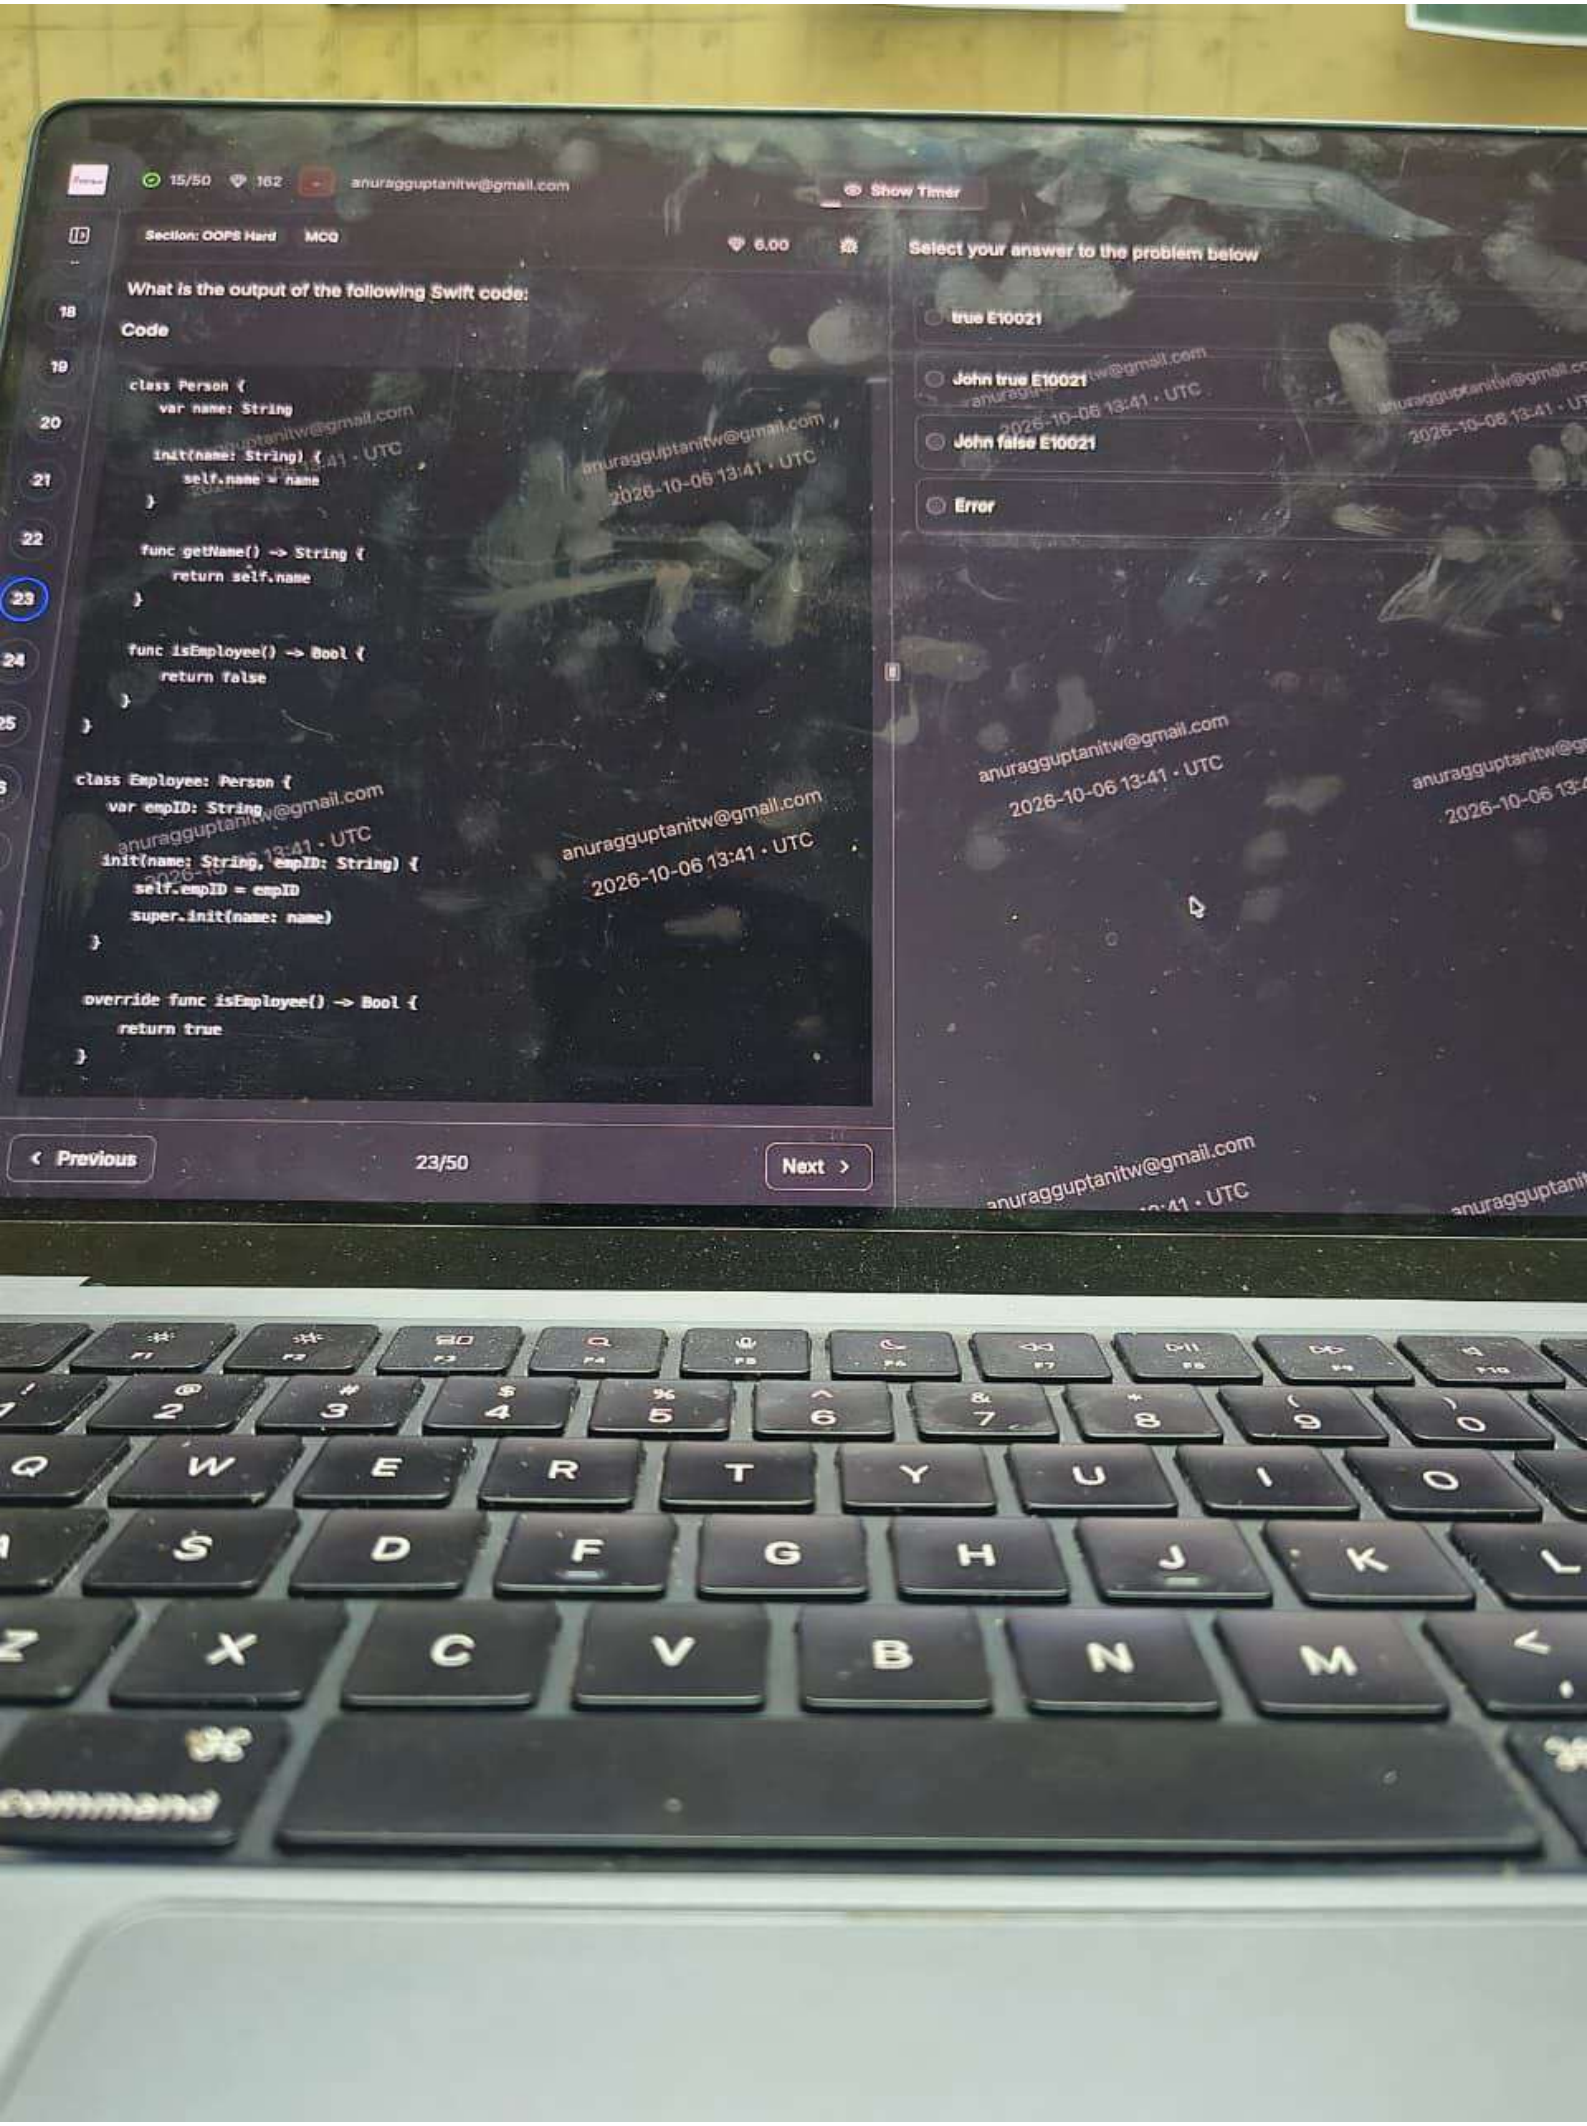

41/50
162
anuragguptanitw@gmail.com
38:37
Section: Output of Code Snippet Medium
MCQ
4.00
Select your answer to the problem below
x = 5
def fun():
x = pow(5,2)
def fun_2():
global x
del x
fun()
print(x)
fun_2()
print(x)
Output
1. 25
UnboundLocalError : local variable 'x' referenced before assignment
2. 25
NameError : name 'x' is not defined
3. 5
NameError : name 'x' is not defined
4. 5
UnboundLocalError : local variable 'x' referenced before assignment
1
2
3
4
Previous
47/50
Next
anuragguptanitw@gmail.com
2026-10-06 13:54 • UTC


15/50
162
anuragguptanitw@gmail.com
Show Timer
Section: OOPS Hard
MCQ
6.00
What is the output of the following Swift code:
Code
Select your answer to the problem below
true E10021
John true E10021
John false E10021
Error
class Person {
var name: String
init(name: String) {
self.name = name
}
func getName() -> String {
return self.name
}
func isEmployee() -> Bool {
return false
}
}
class Employee: Person {
var empID: String
init(name: String, empID: String) {
self.empID = empID
super.init(name: name)
}
override func isEmployee() -> Bool {
return true
}
anuragguptanitw@gmail.com
2026-10-06 13:41 · UTC
Previous
23/50
Next

25/50 162 anuragguptanitw@gmail.com

47:24

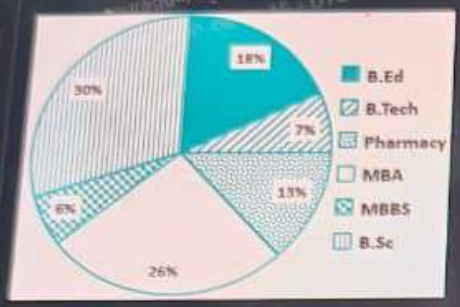
Section: Calculus MCQ

4.00

Study the following pie chart carefully which mentions the number of students who took courses in different fields .what is the difference between the number of B.Ed students and the number of MBA students who took courses?

Pie chart

Total students: 34000



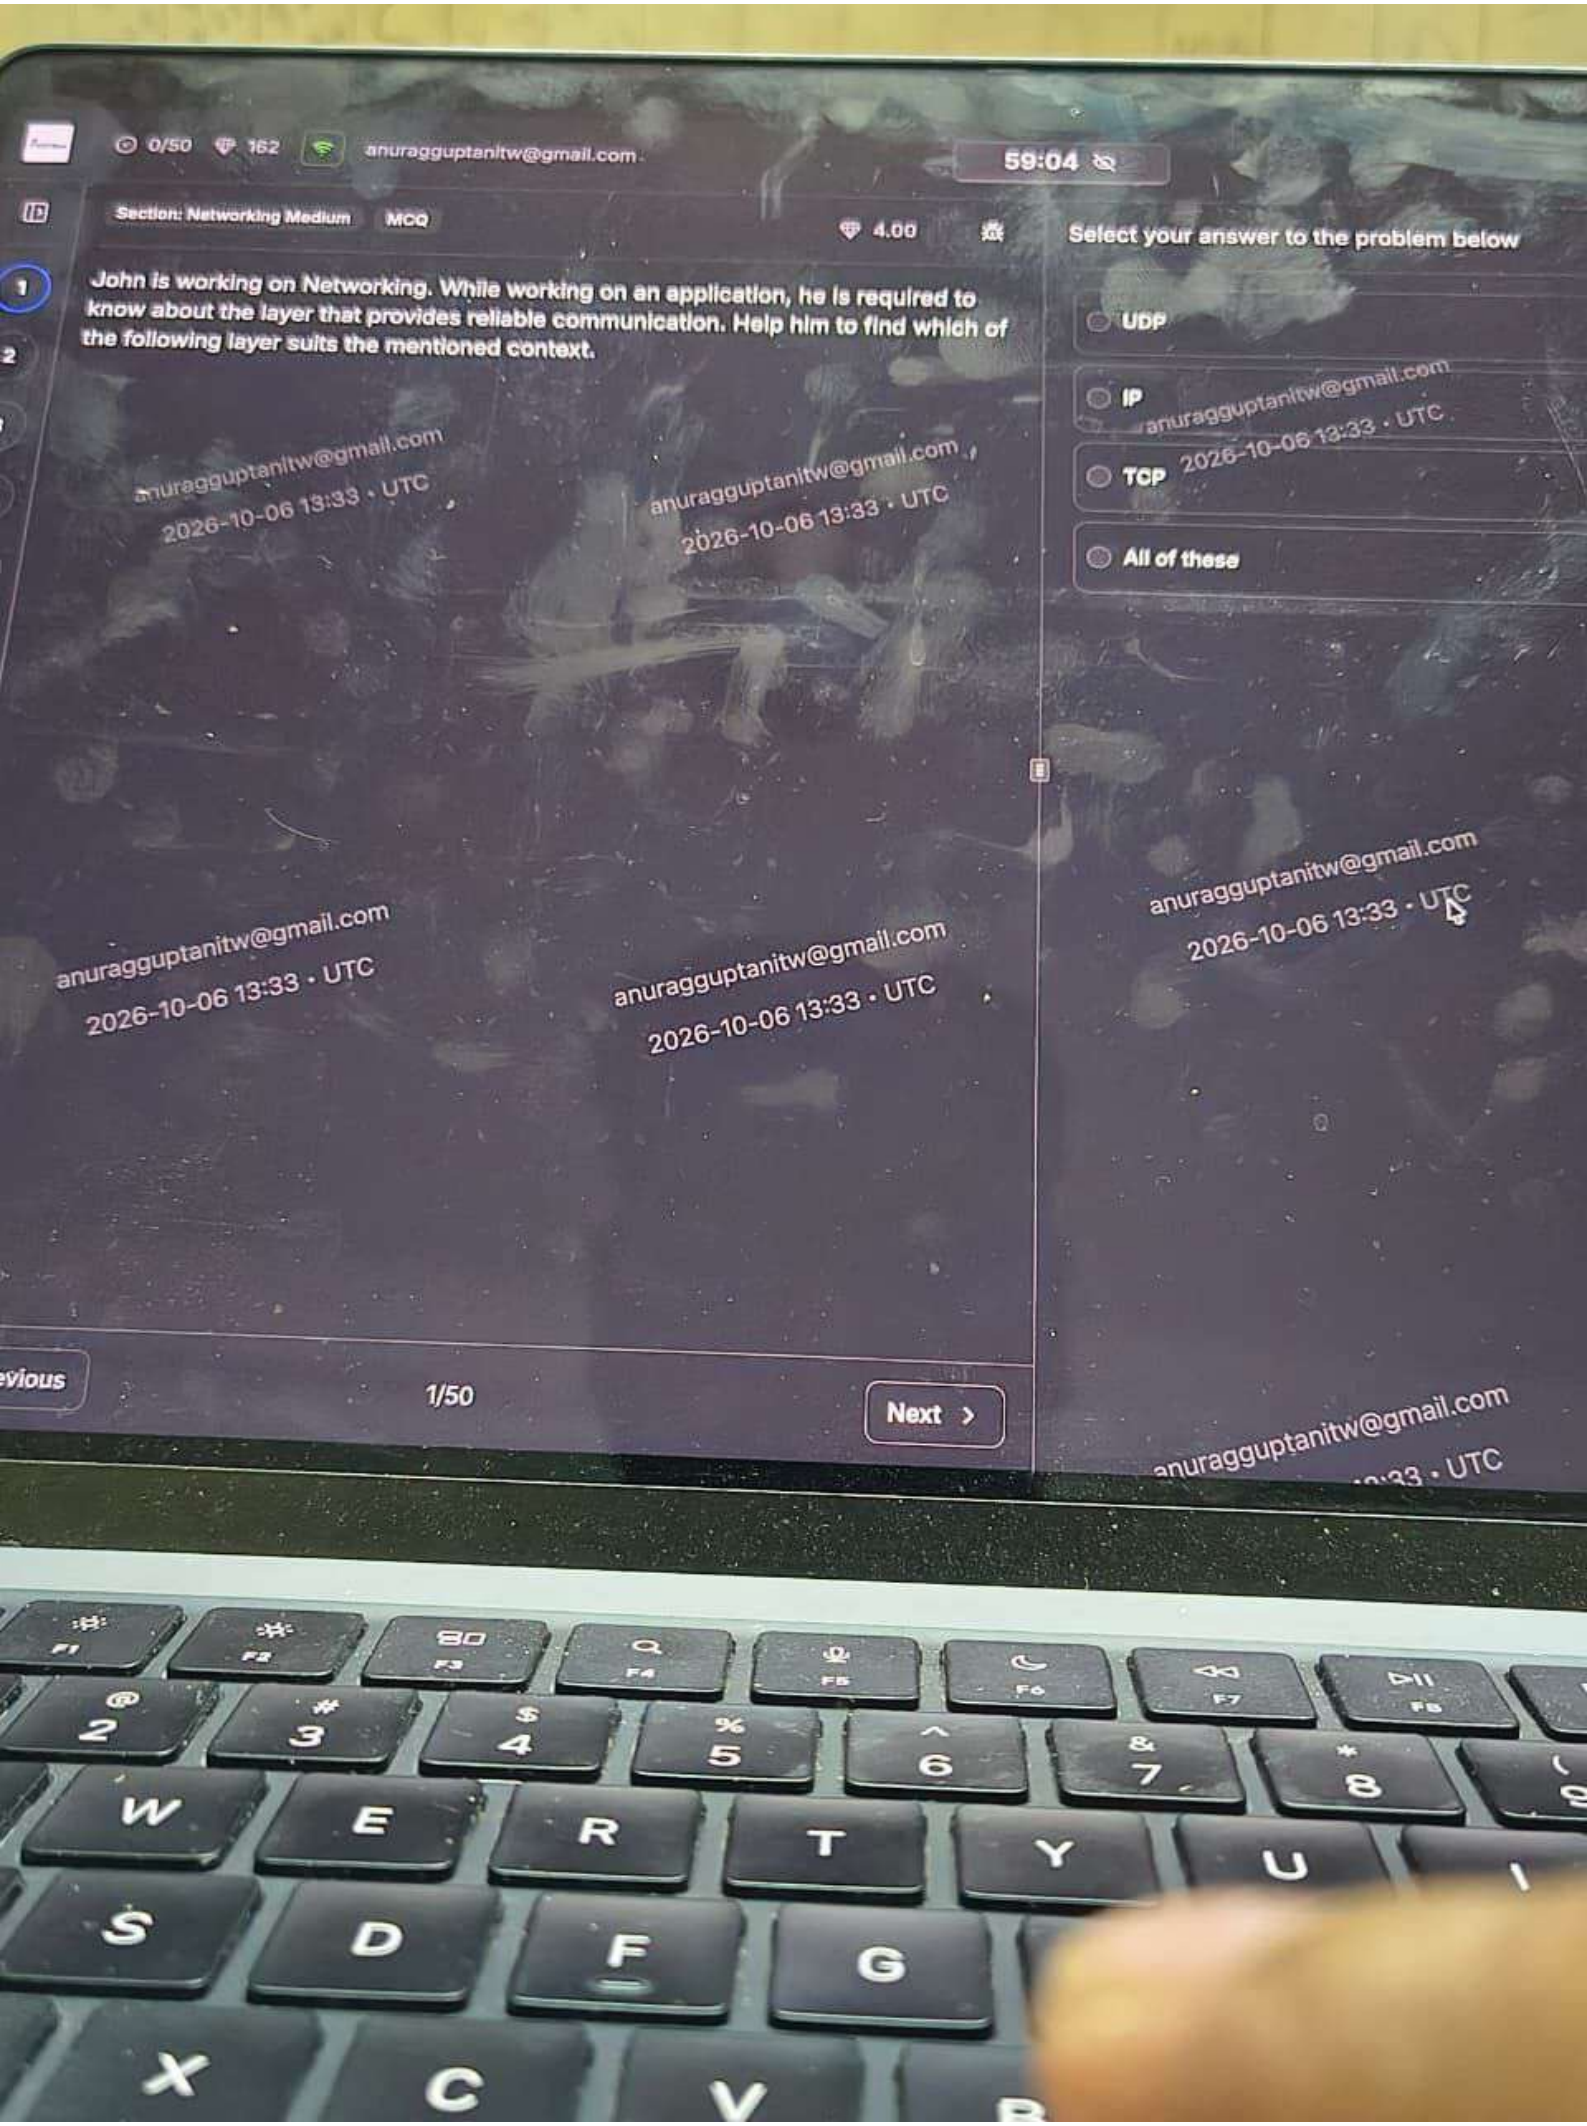
Select your answer to the problem below

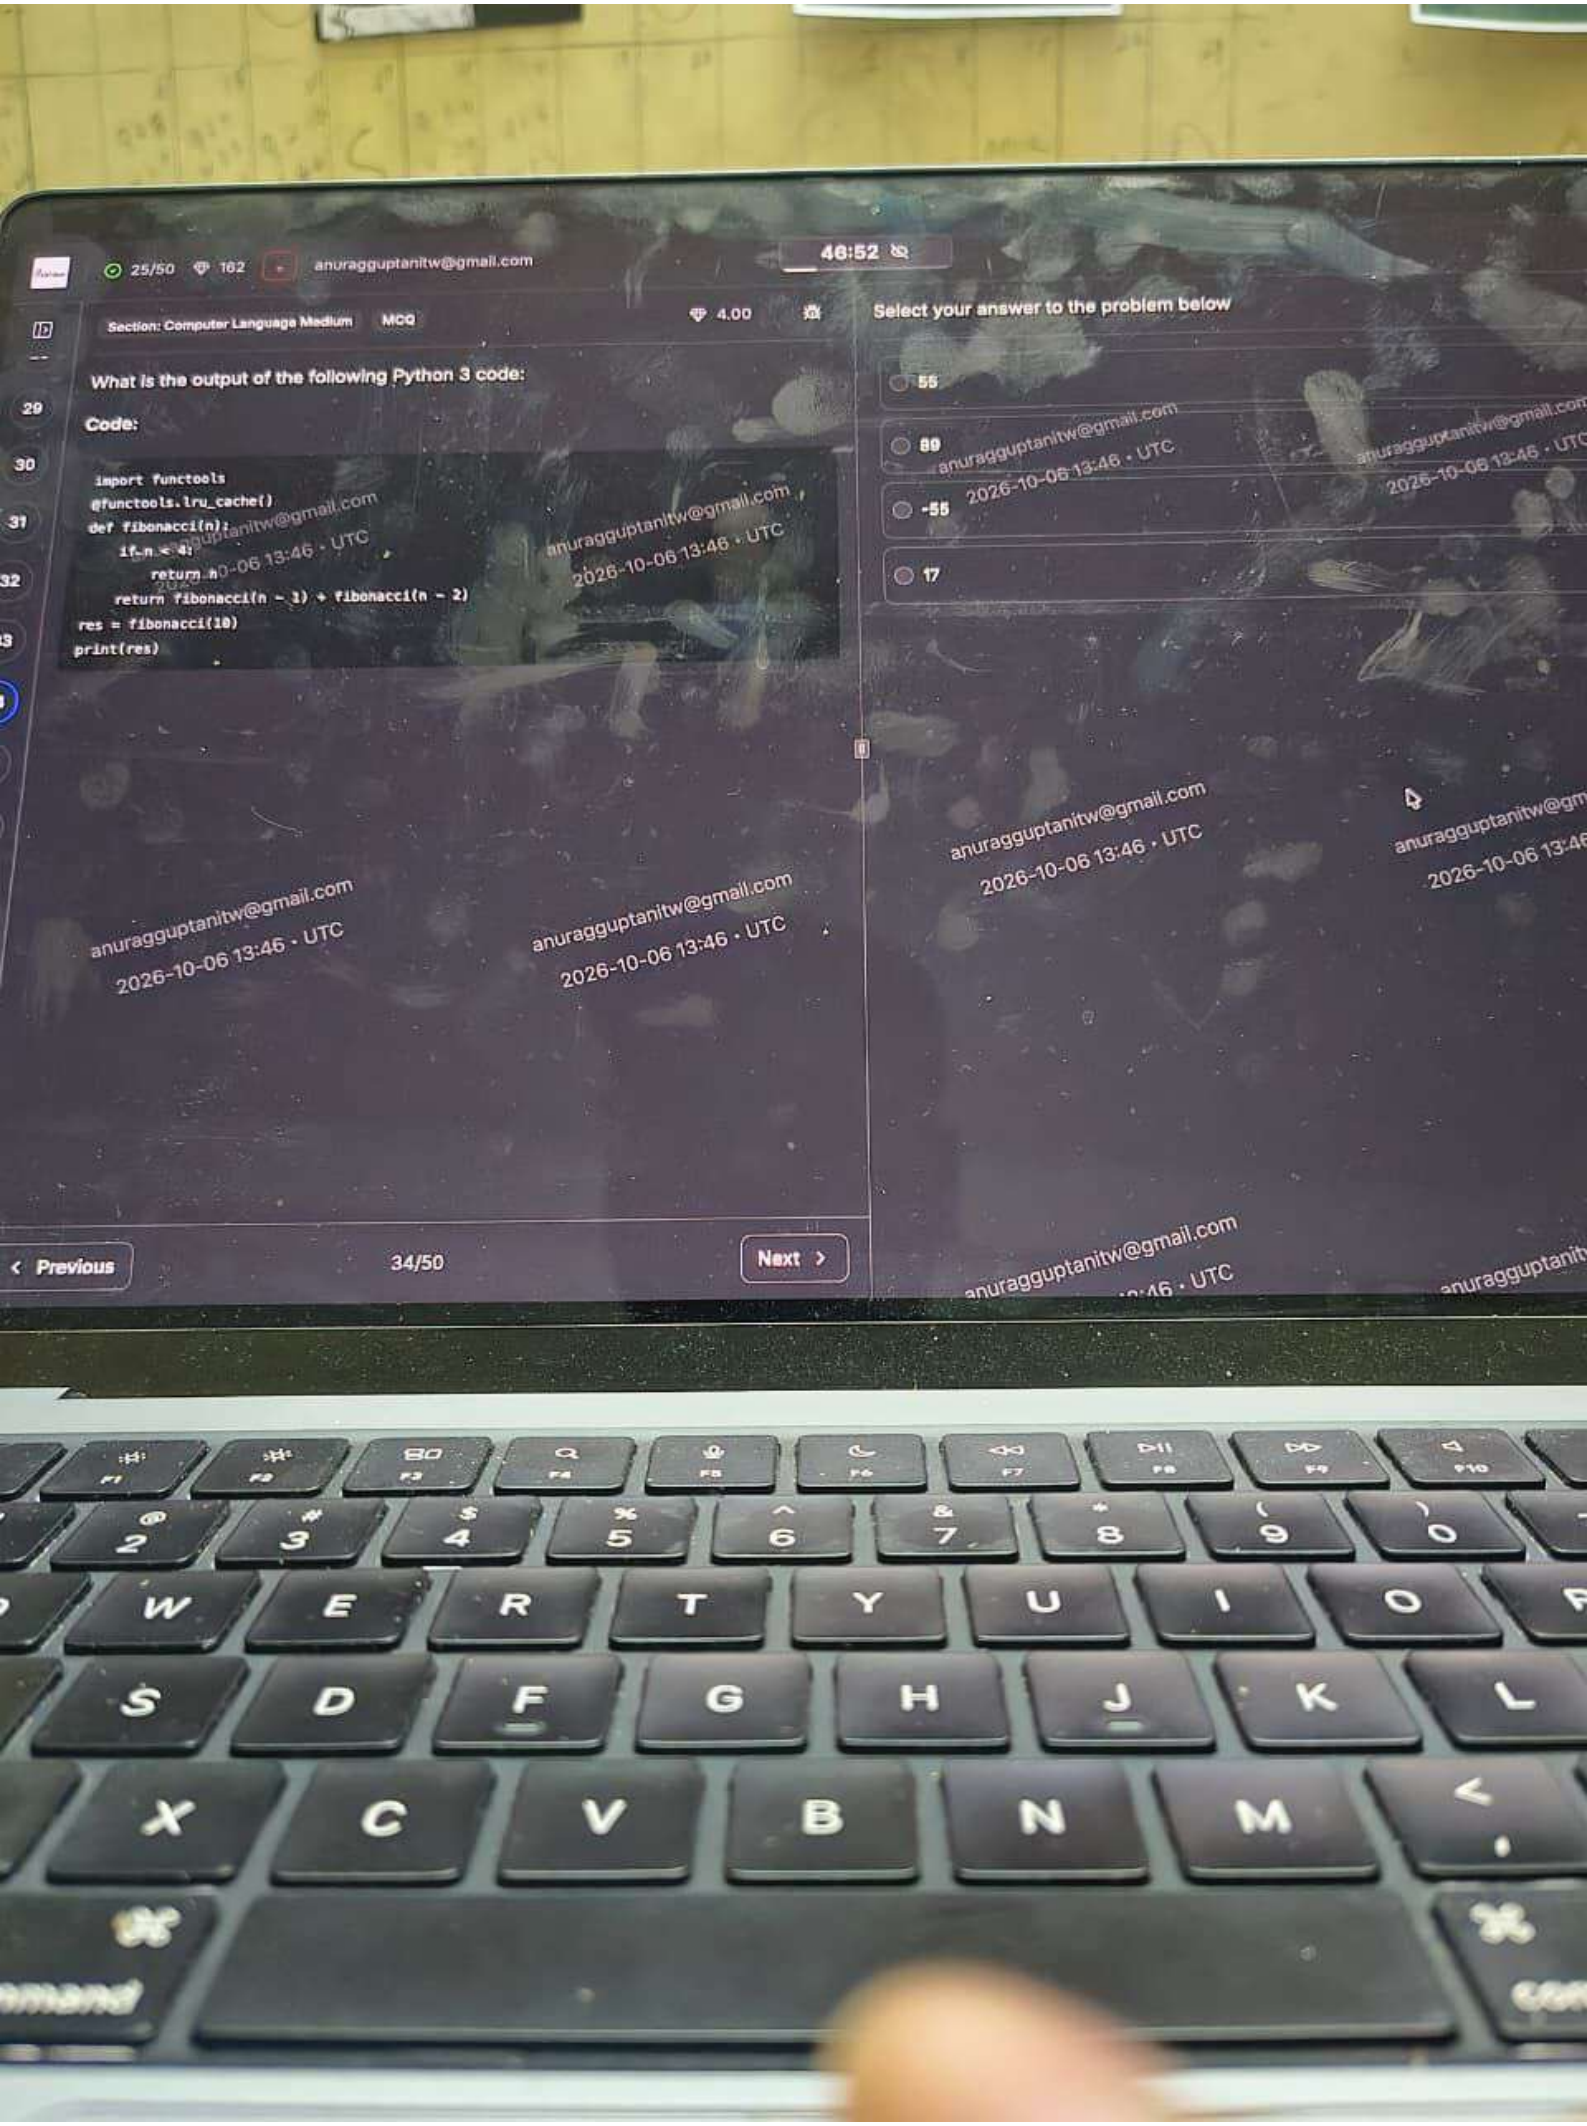
- 1336
- 4236
- 2720
- 10472

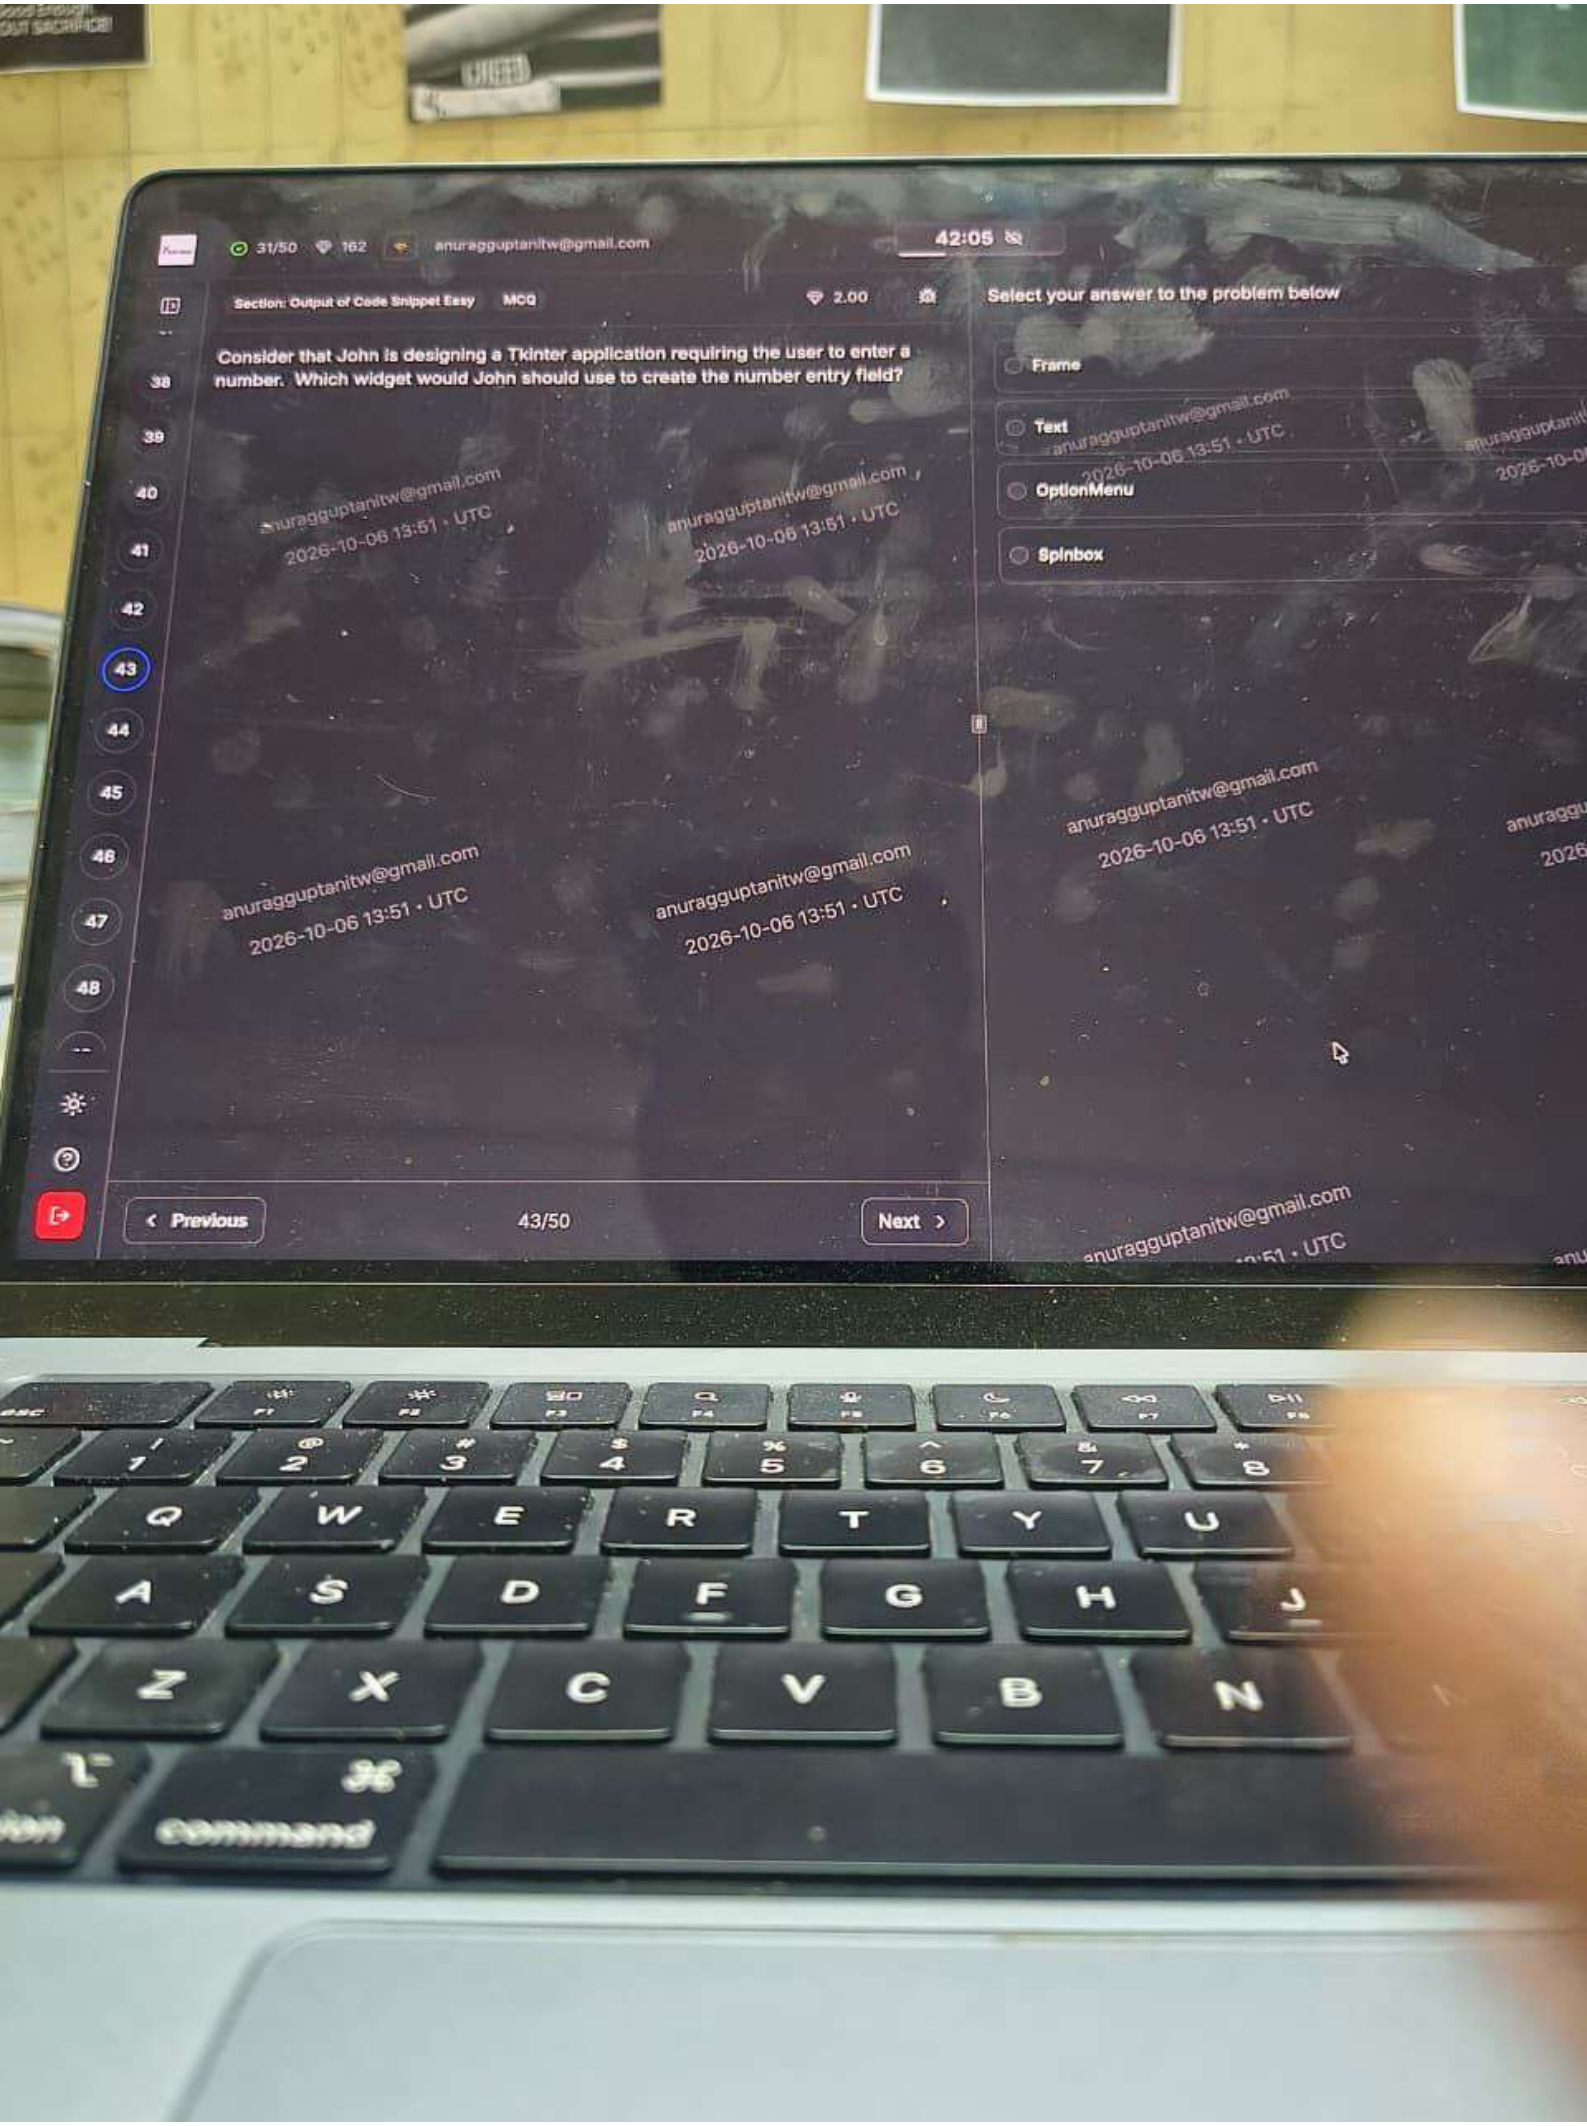
anuragguptanitw@gmail.com 2026-10-06 13:45 · UTC

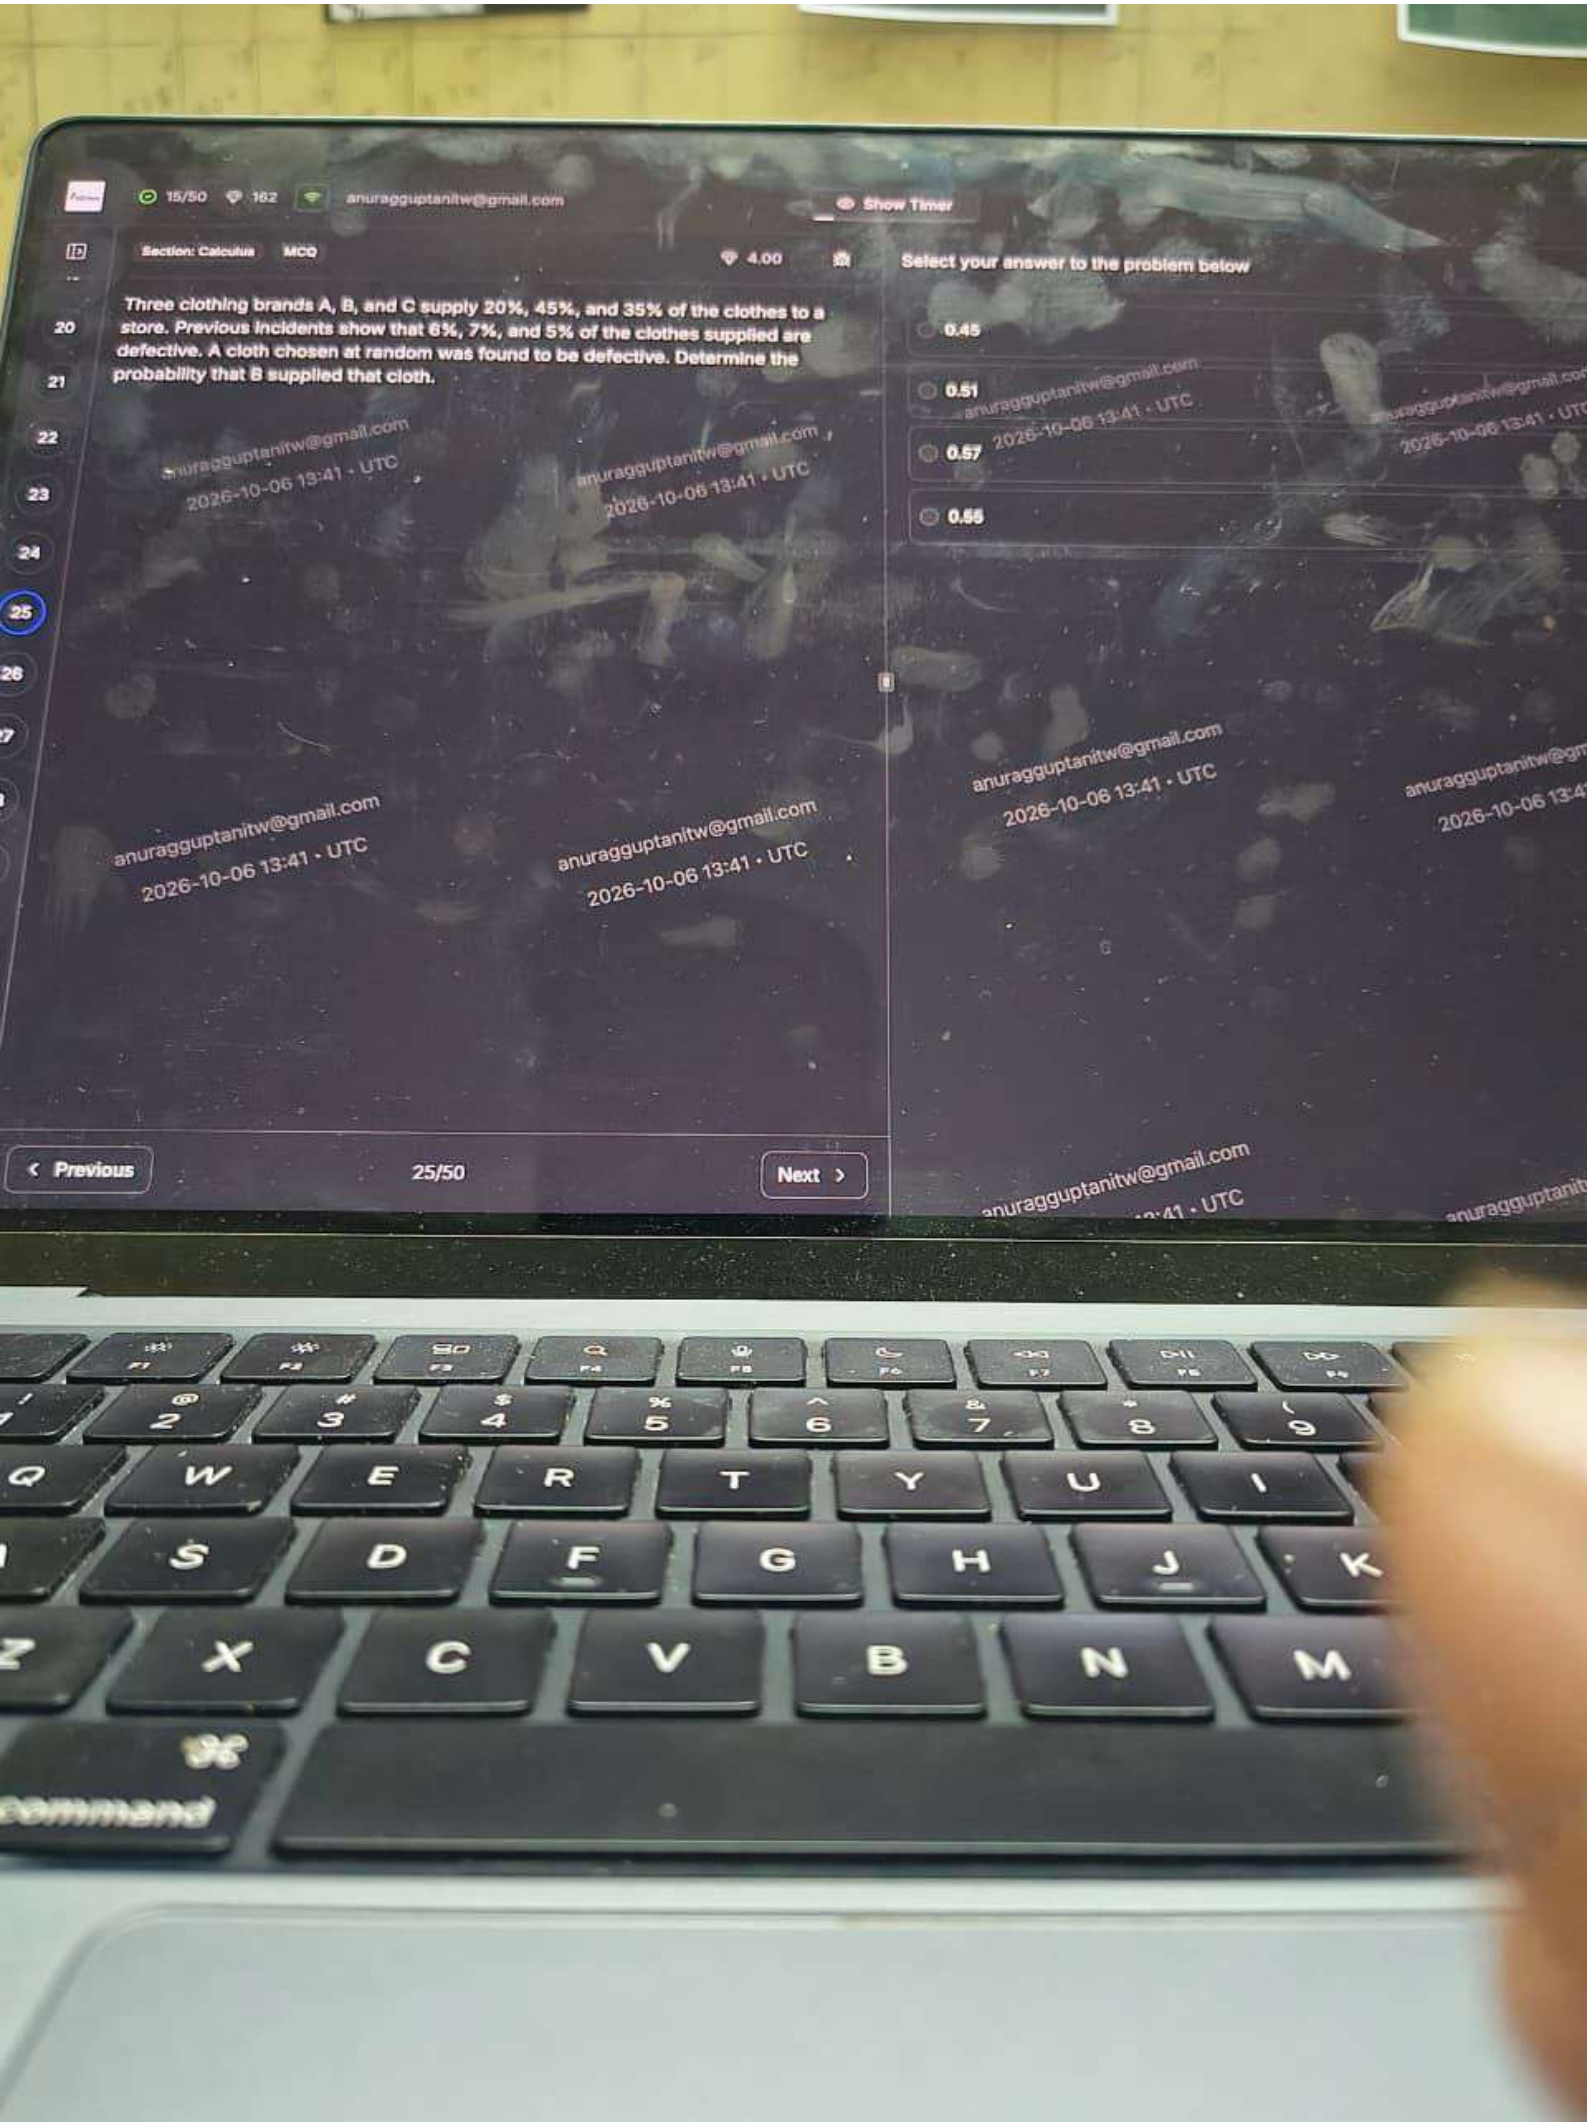
Previous 27/50 Next

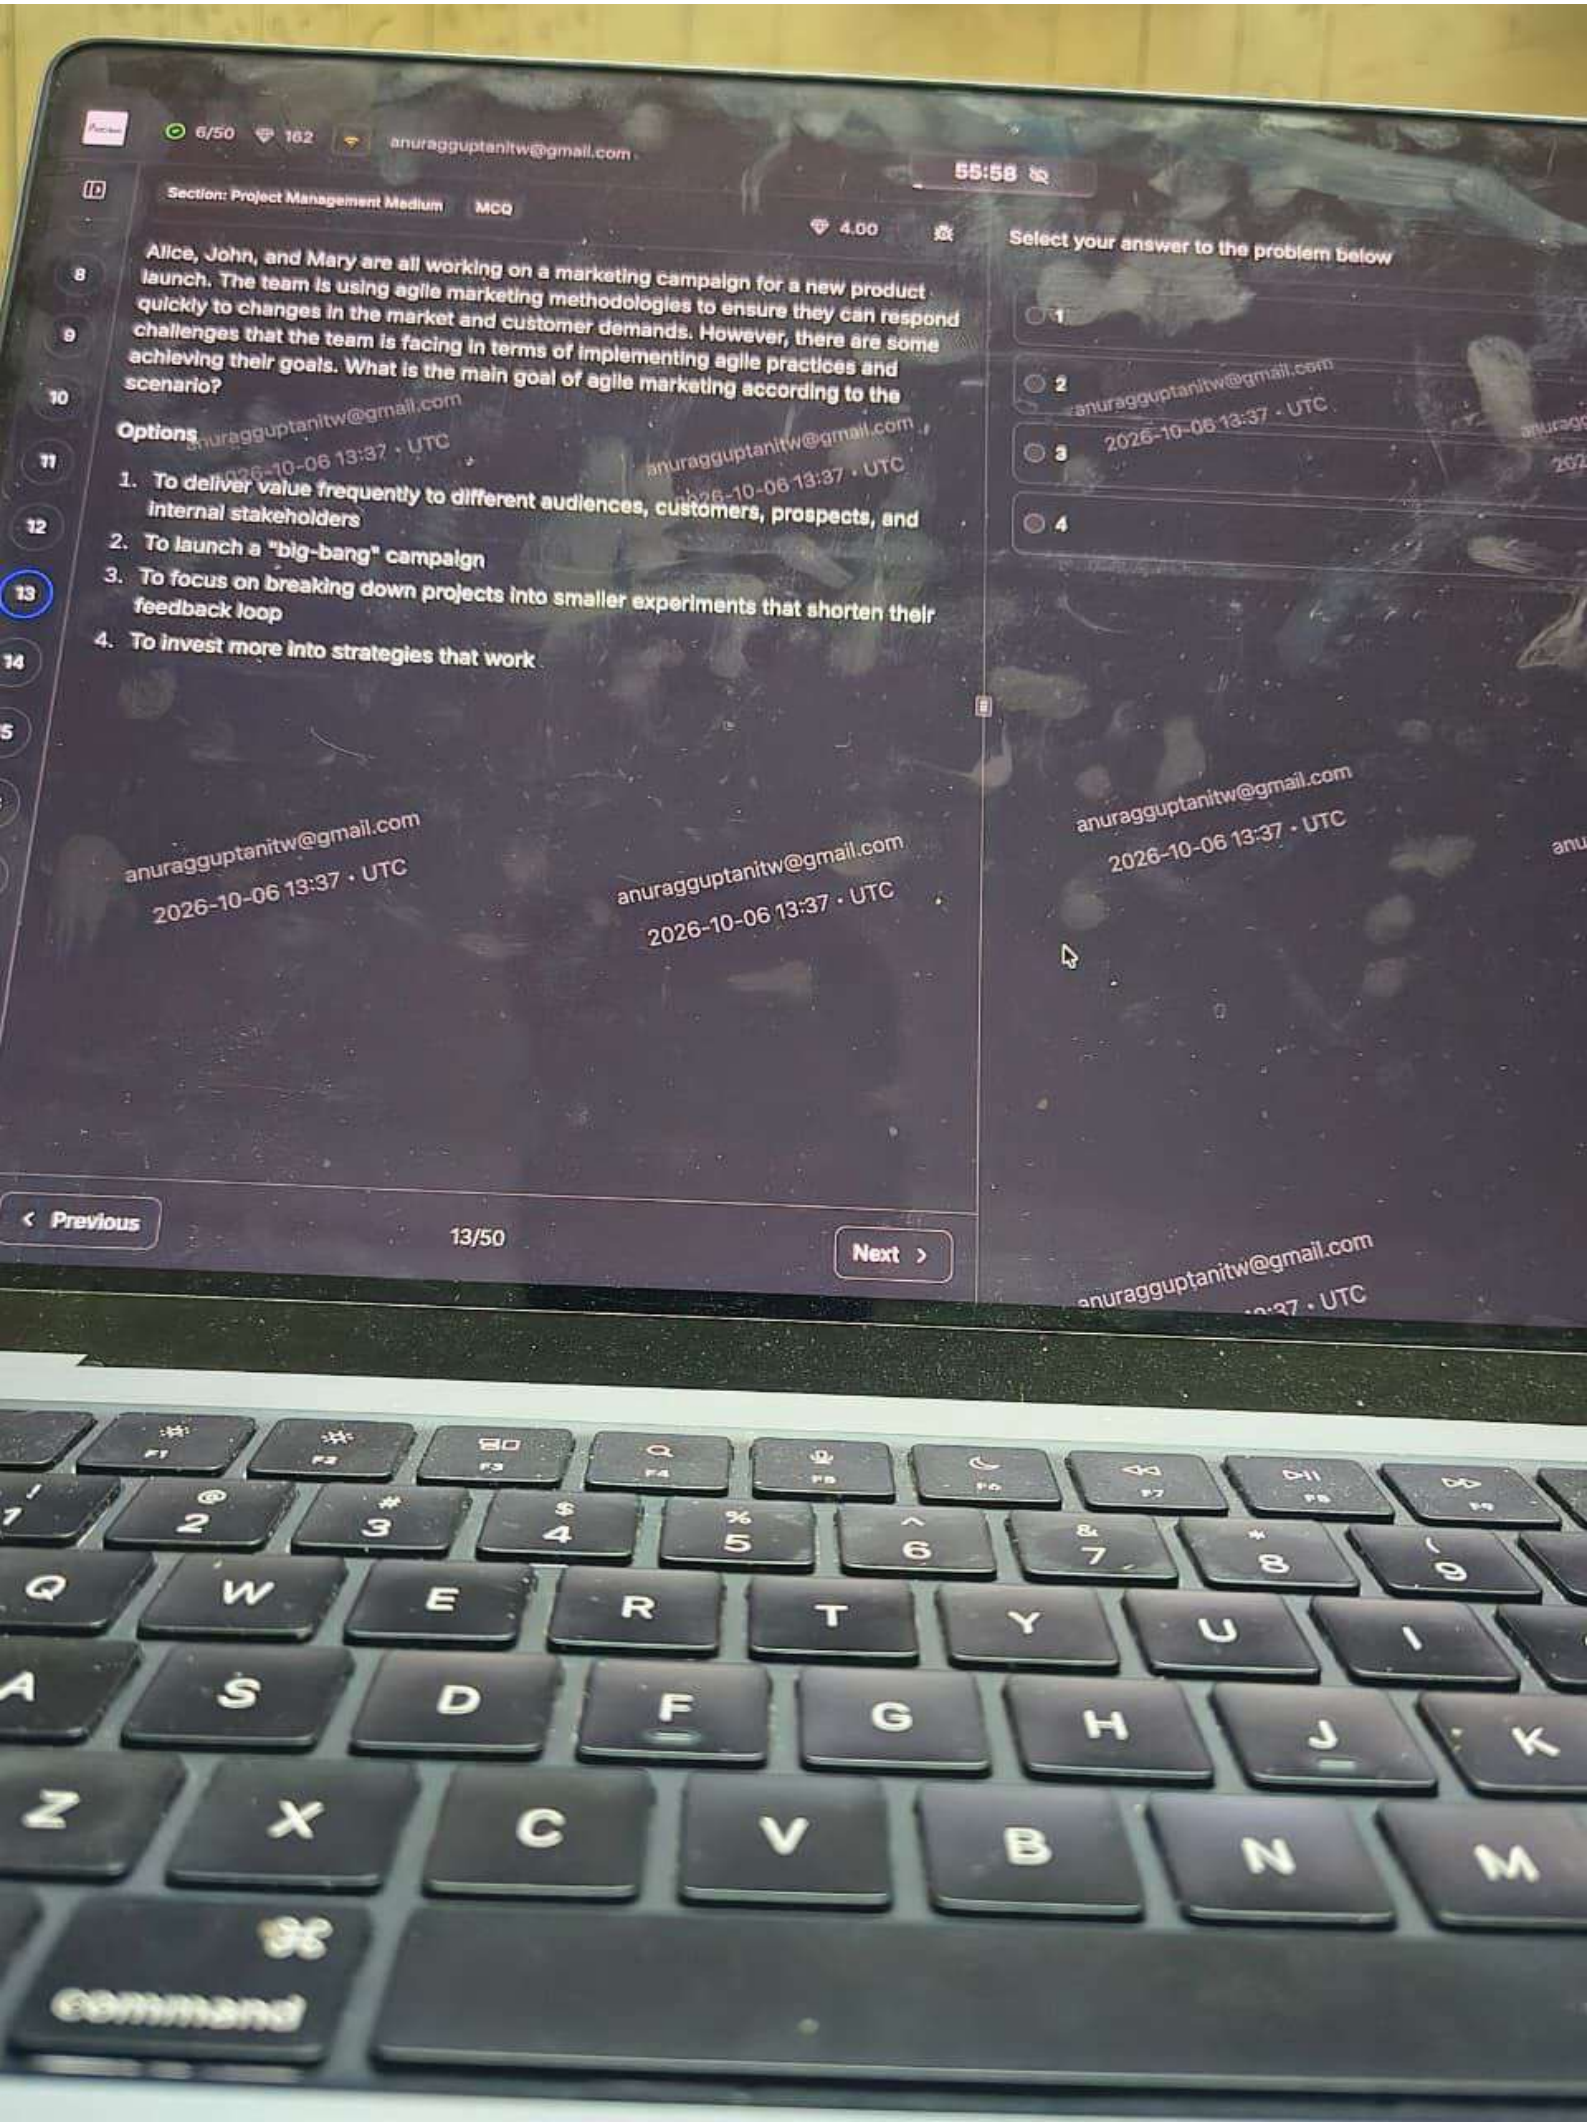
anuragguptanitw@gmail.com 2026-10-06 13:45 · UTC

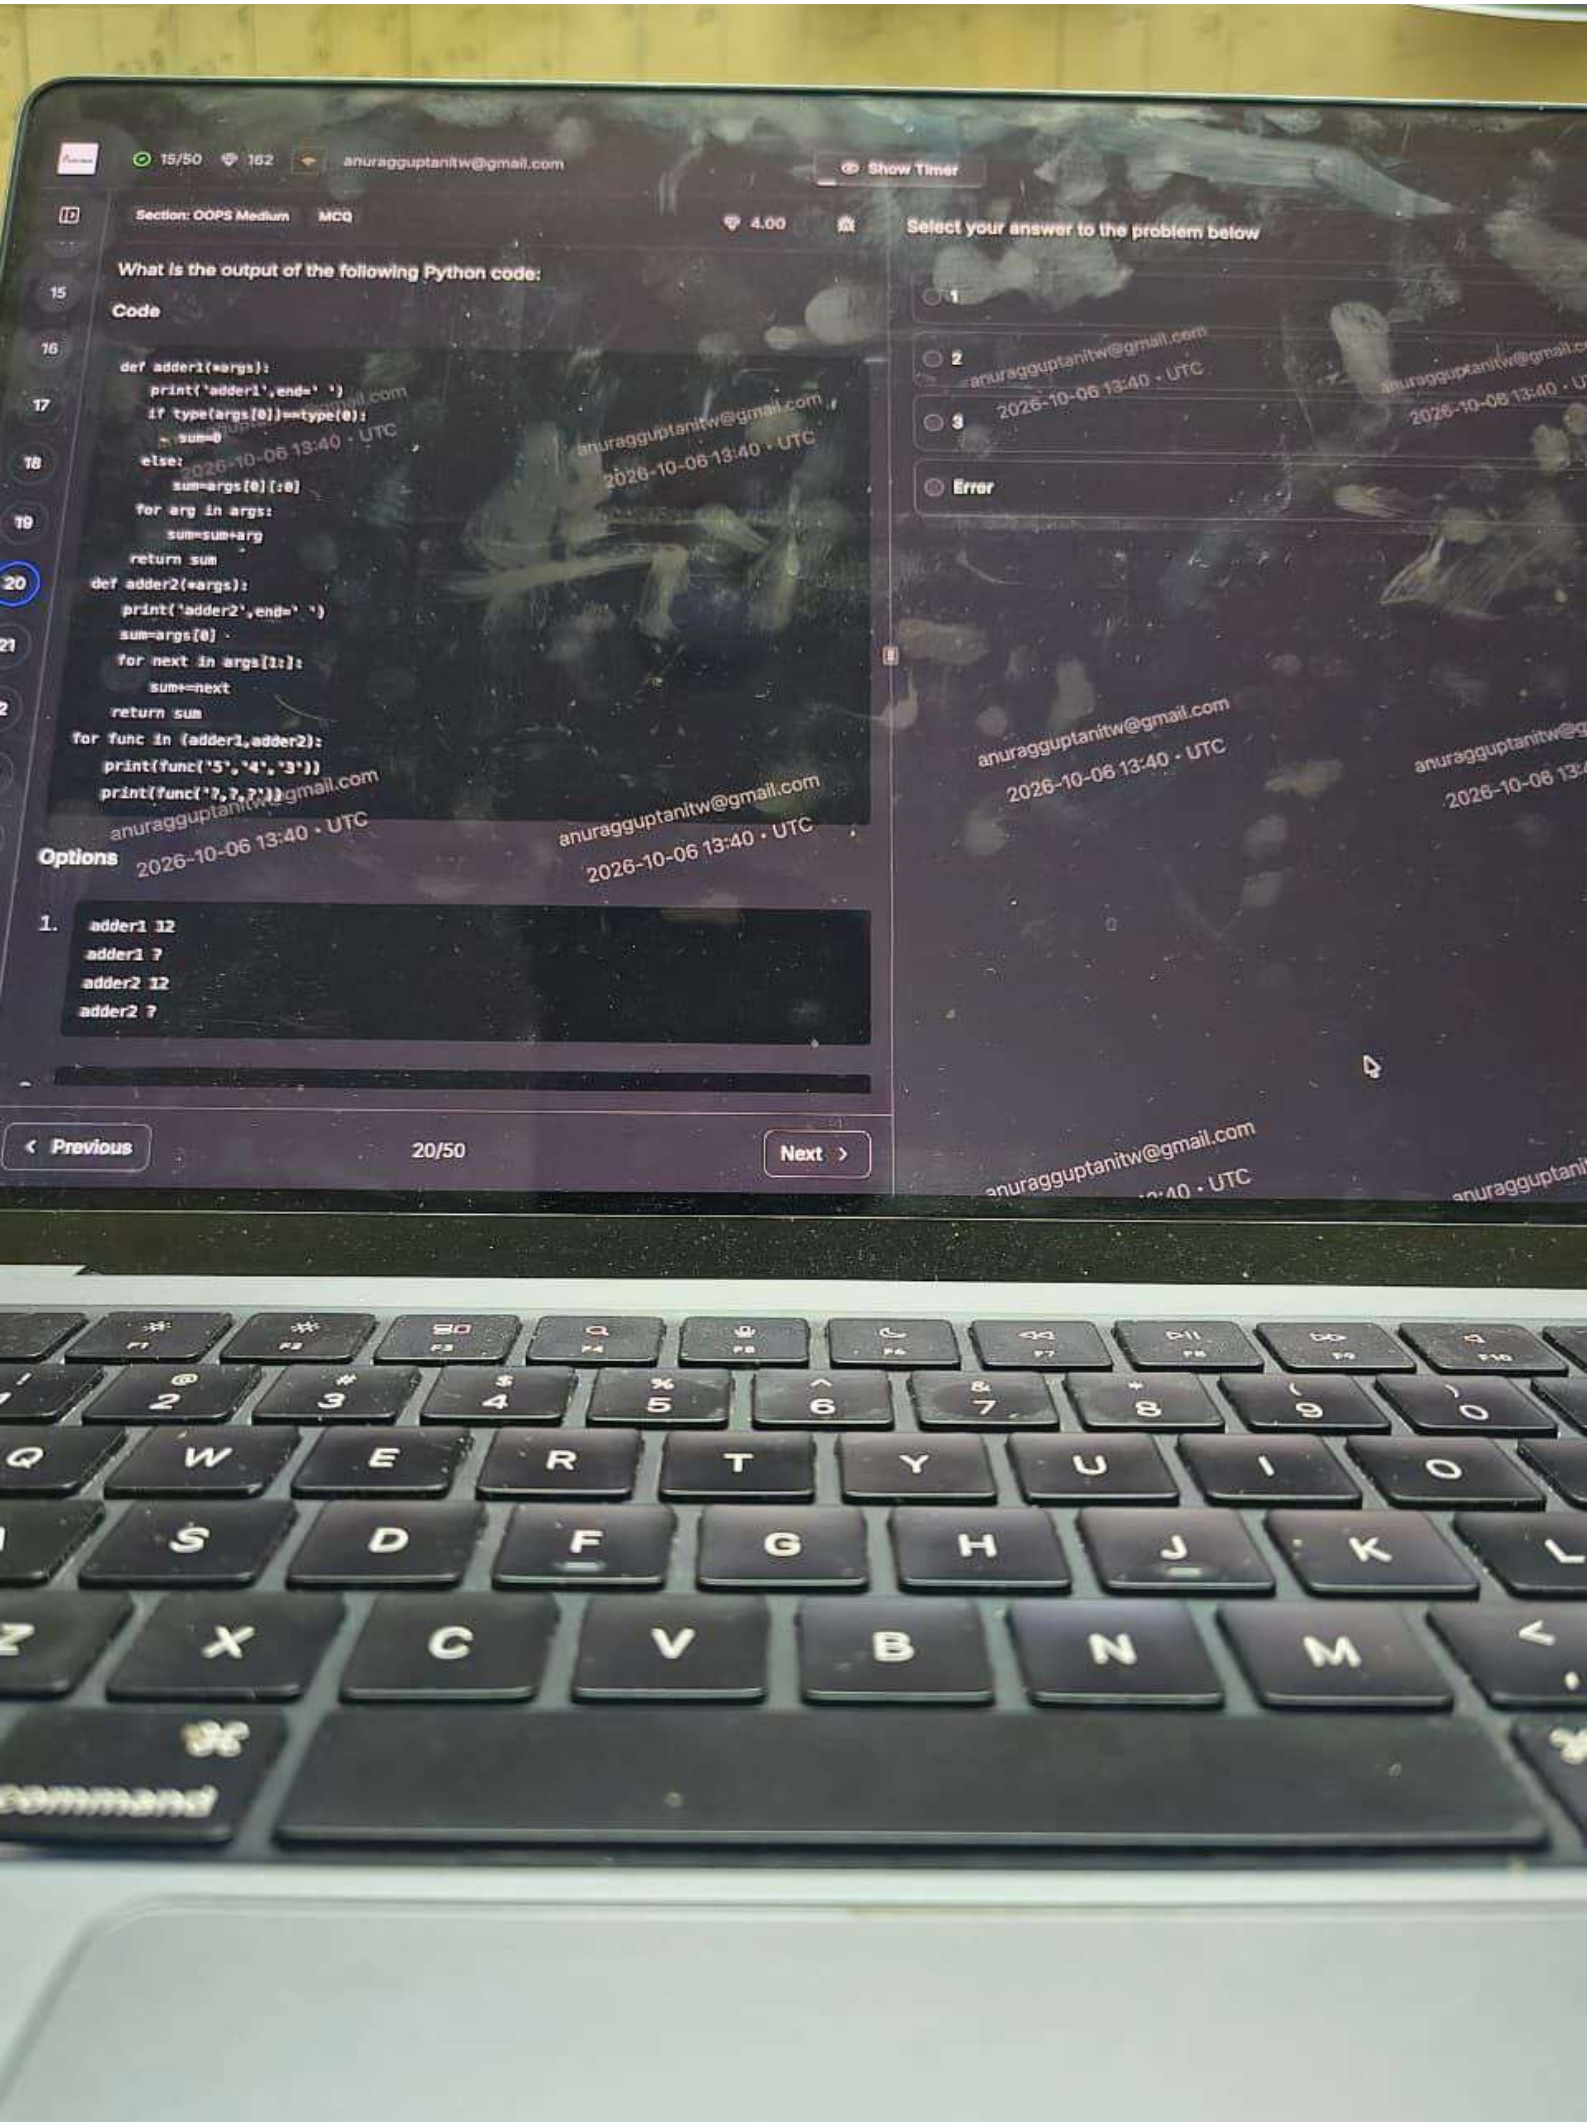

0/50
162
anuragguptanitw@gmail.com
59:04
Section: Networking Medium
MCQ
4.00
Select your answer to the problem below
John is working on Networking. While working on an application, he is required to know about the layer that provides reliable communication. Help him to find which of the following layer suits the mentioned context.
UDP
IP
TCP
All of these
anuragguptanitw@gmail.com
2026-10-06 13:33 • UTC
1/50
Next

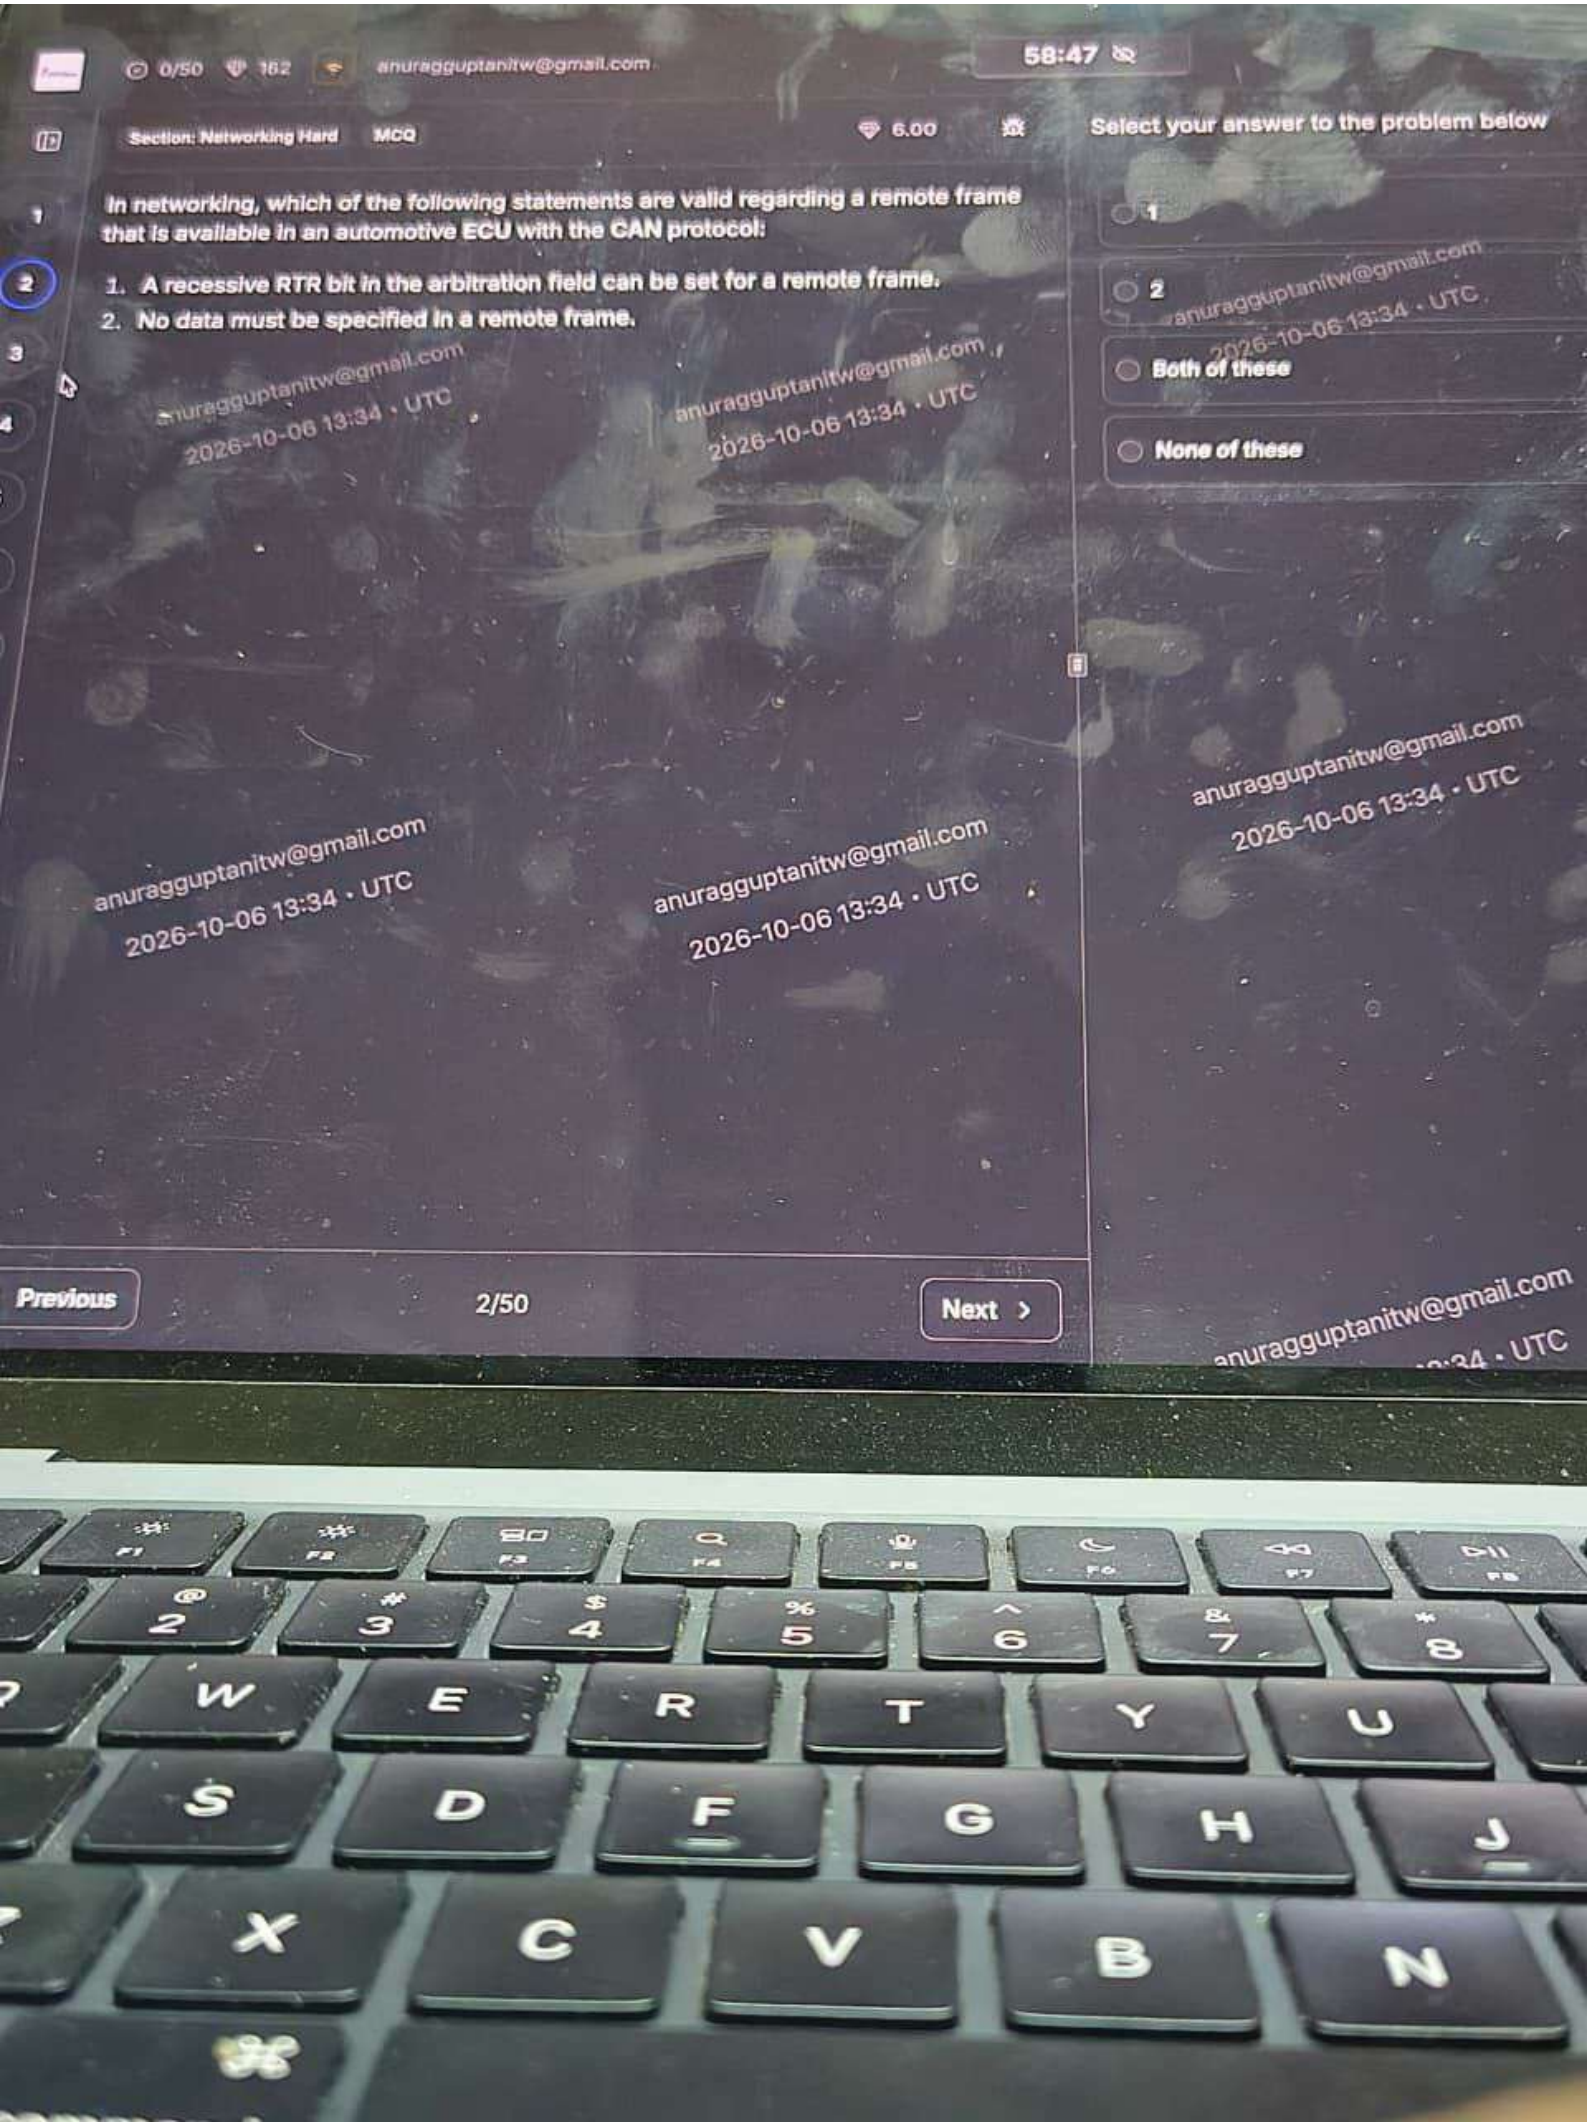

25/50
162
anuragguptanitw@gmail.com
46:52
Section: Computer Language Medium
MCQ
4.00
Select your answer to the problem below
What is the output of the following Python 3 code:
Code:
import functools
@functools.lru_cache()
def fibonacci(n):
if n < 4:
return n
return fibonacci(n - 1) + fibonacci(n - 2)
res = fibonacci(10)
print(res)
55
80
-55
17
anuragguptanitw@gmail.com
2026-10-06 13:46 • UTC
Previous
34/50
Next

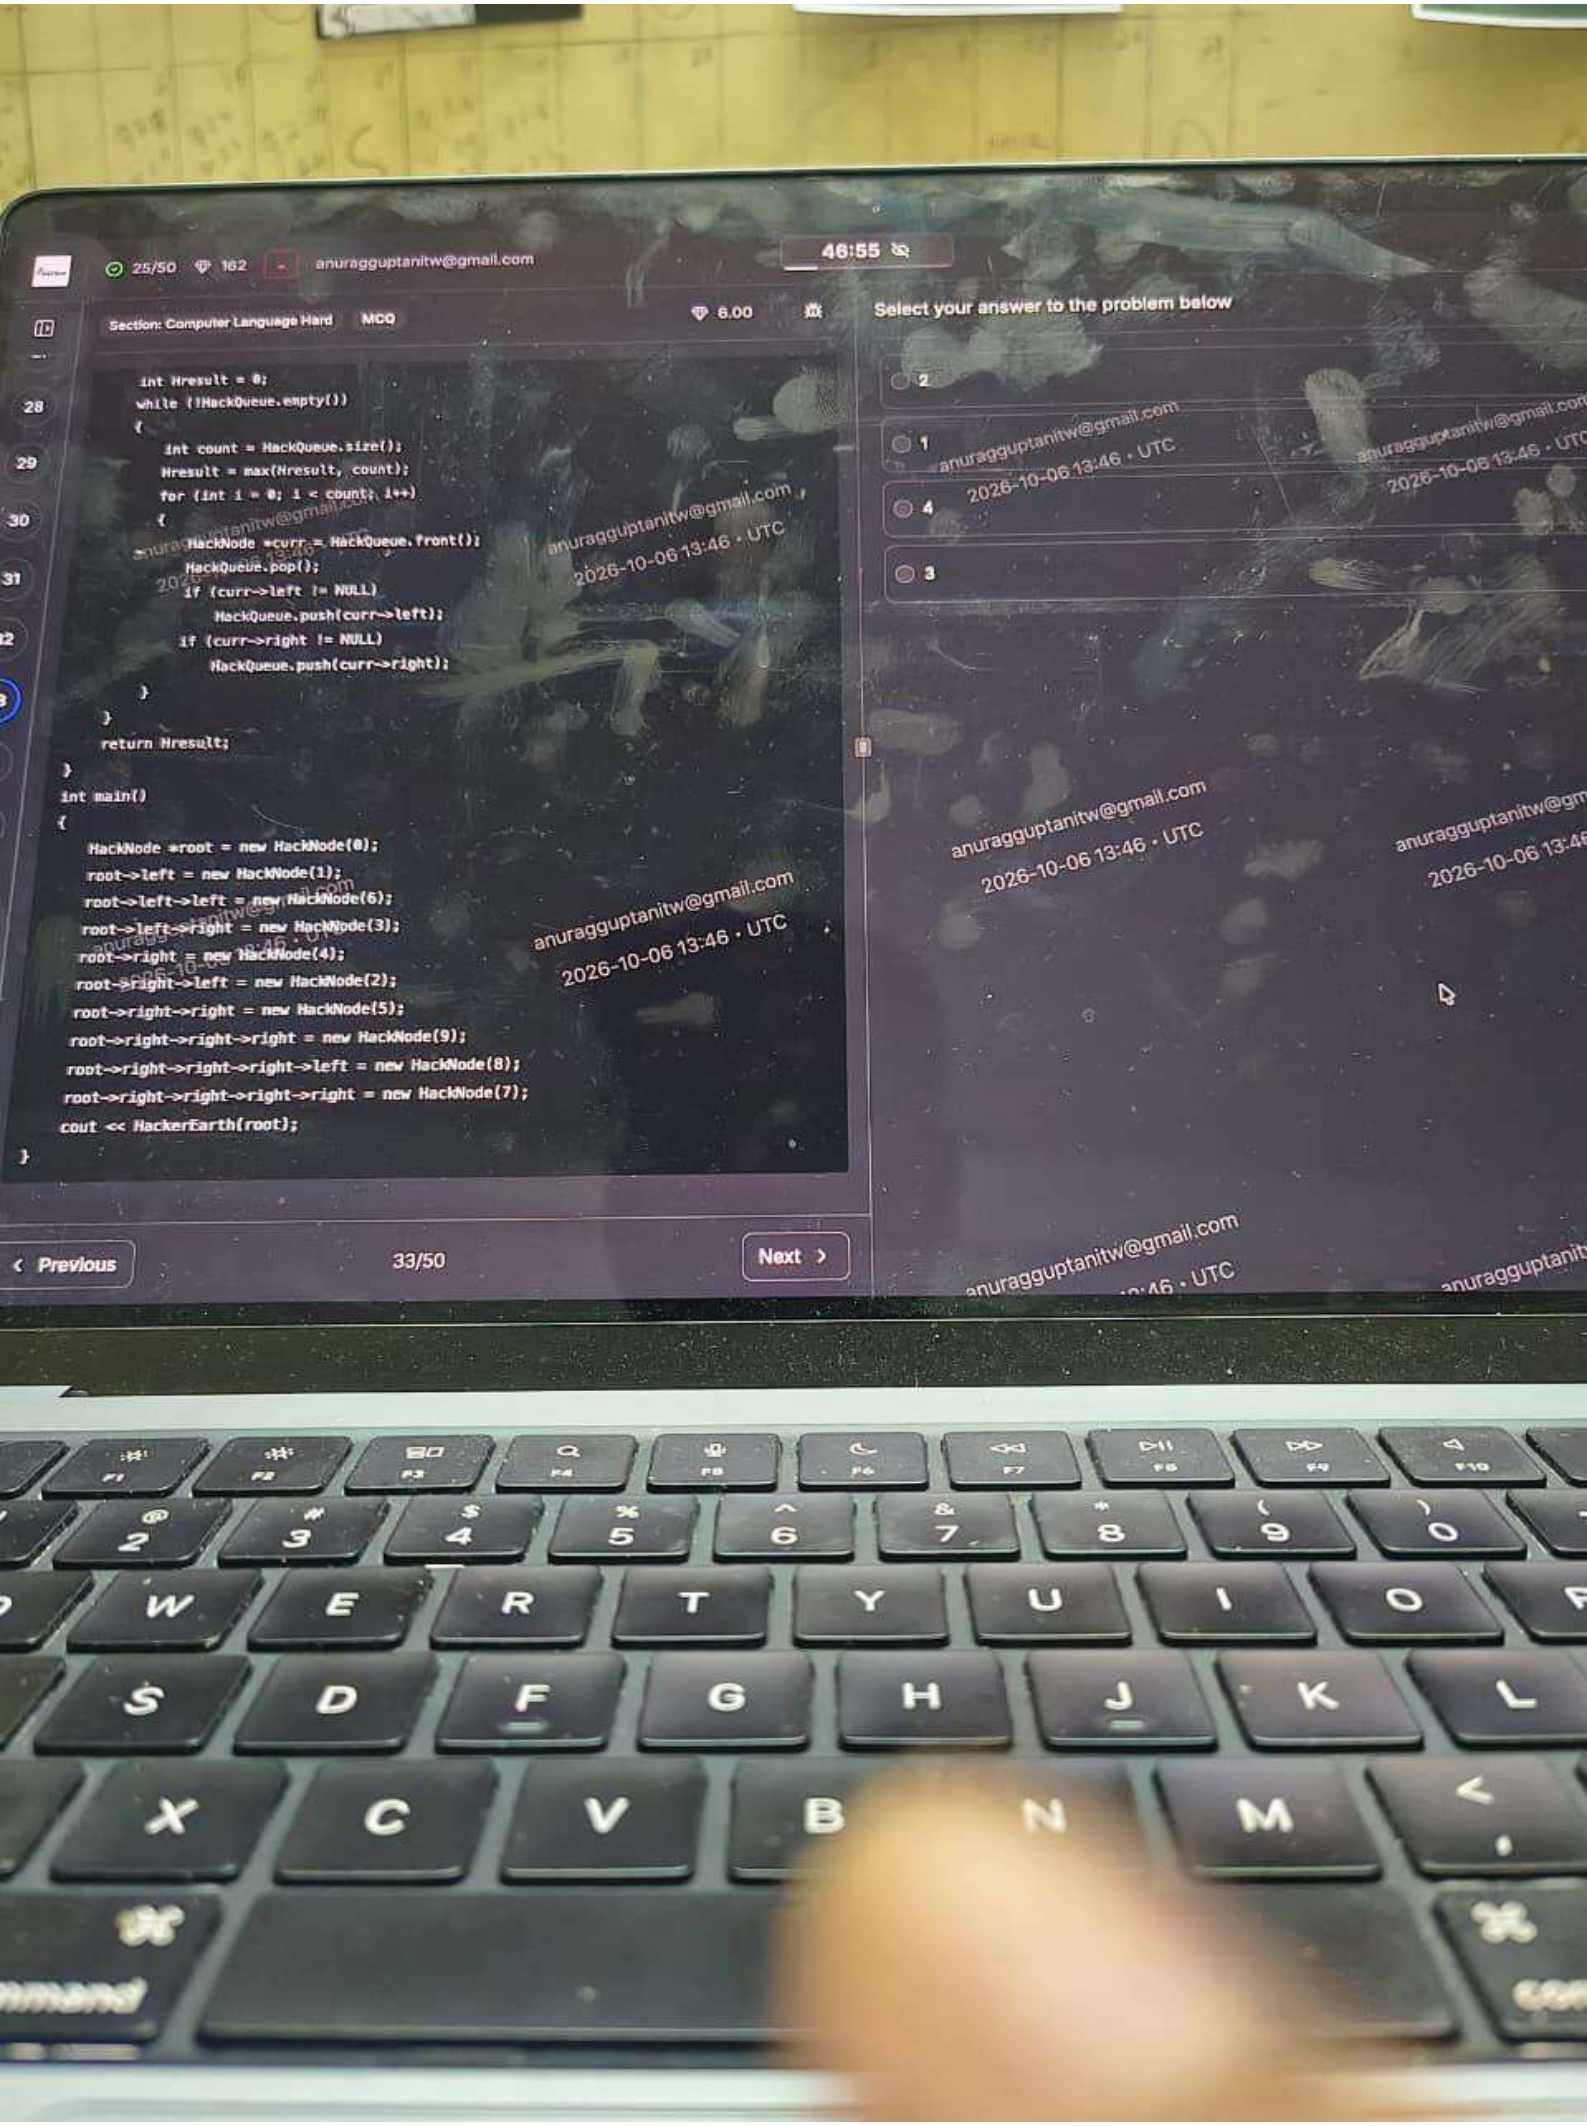

31/50
162
anuragguptanitw@gmail.com
42:05
Section: Output of Code Snippet Easy
MCQ
2.00
Select your answer to the problem below
Consider that John is designing a Tkinter application requiring the user to enter a number. Which widget would John should use to create the number entry field?
Frame
Text
OptionMenu
Spinbox
anuragguptanitw@gmail.com
2026-10-06 13:51 · UTC
Previous
43/50
Next

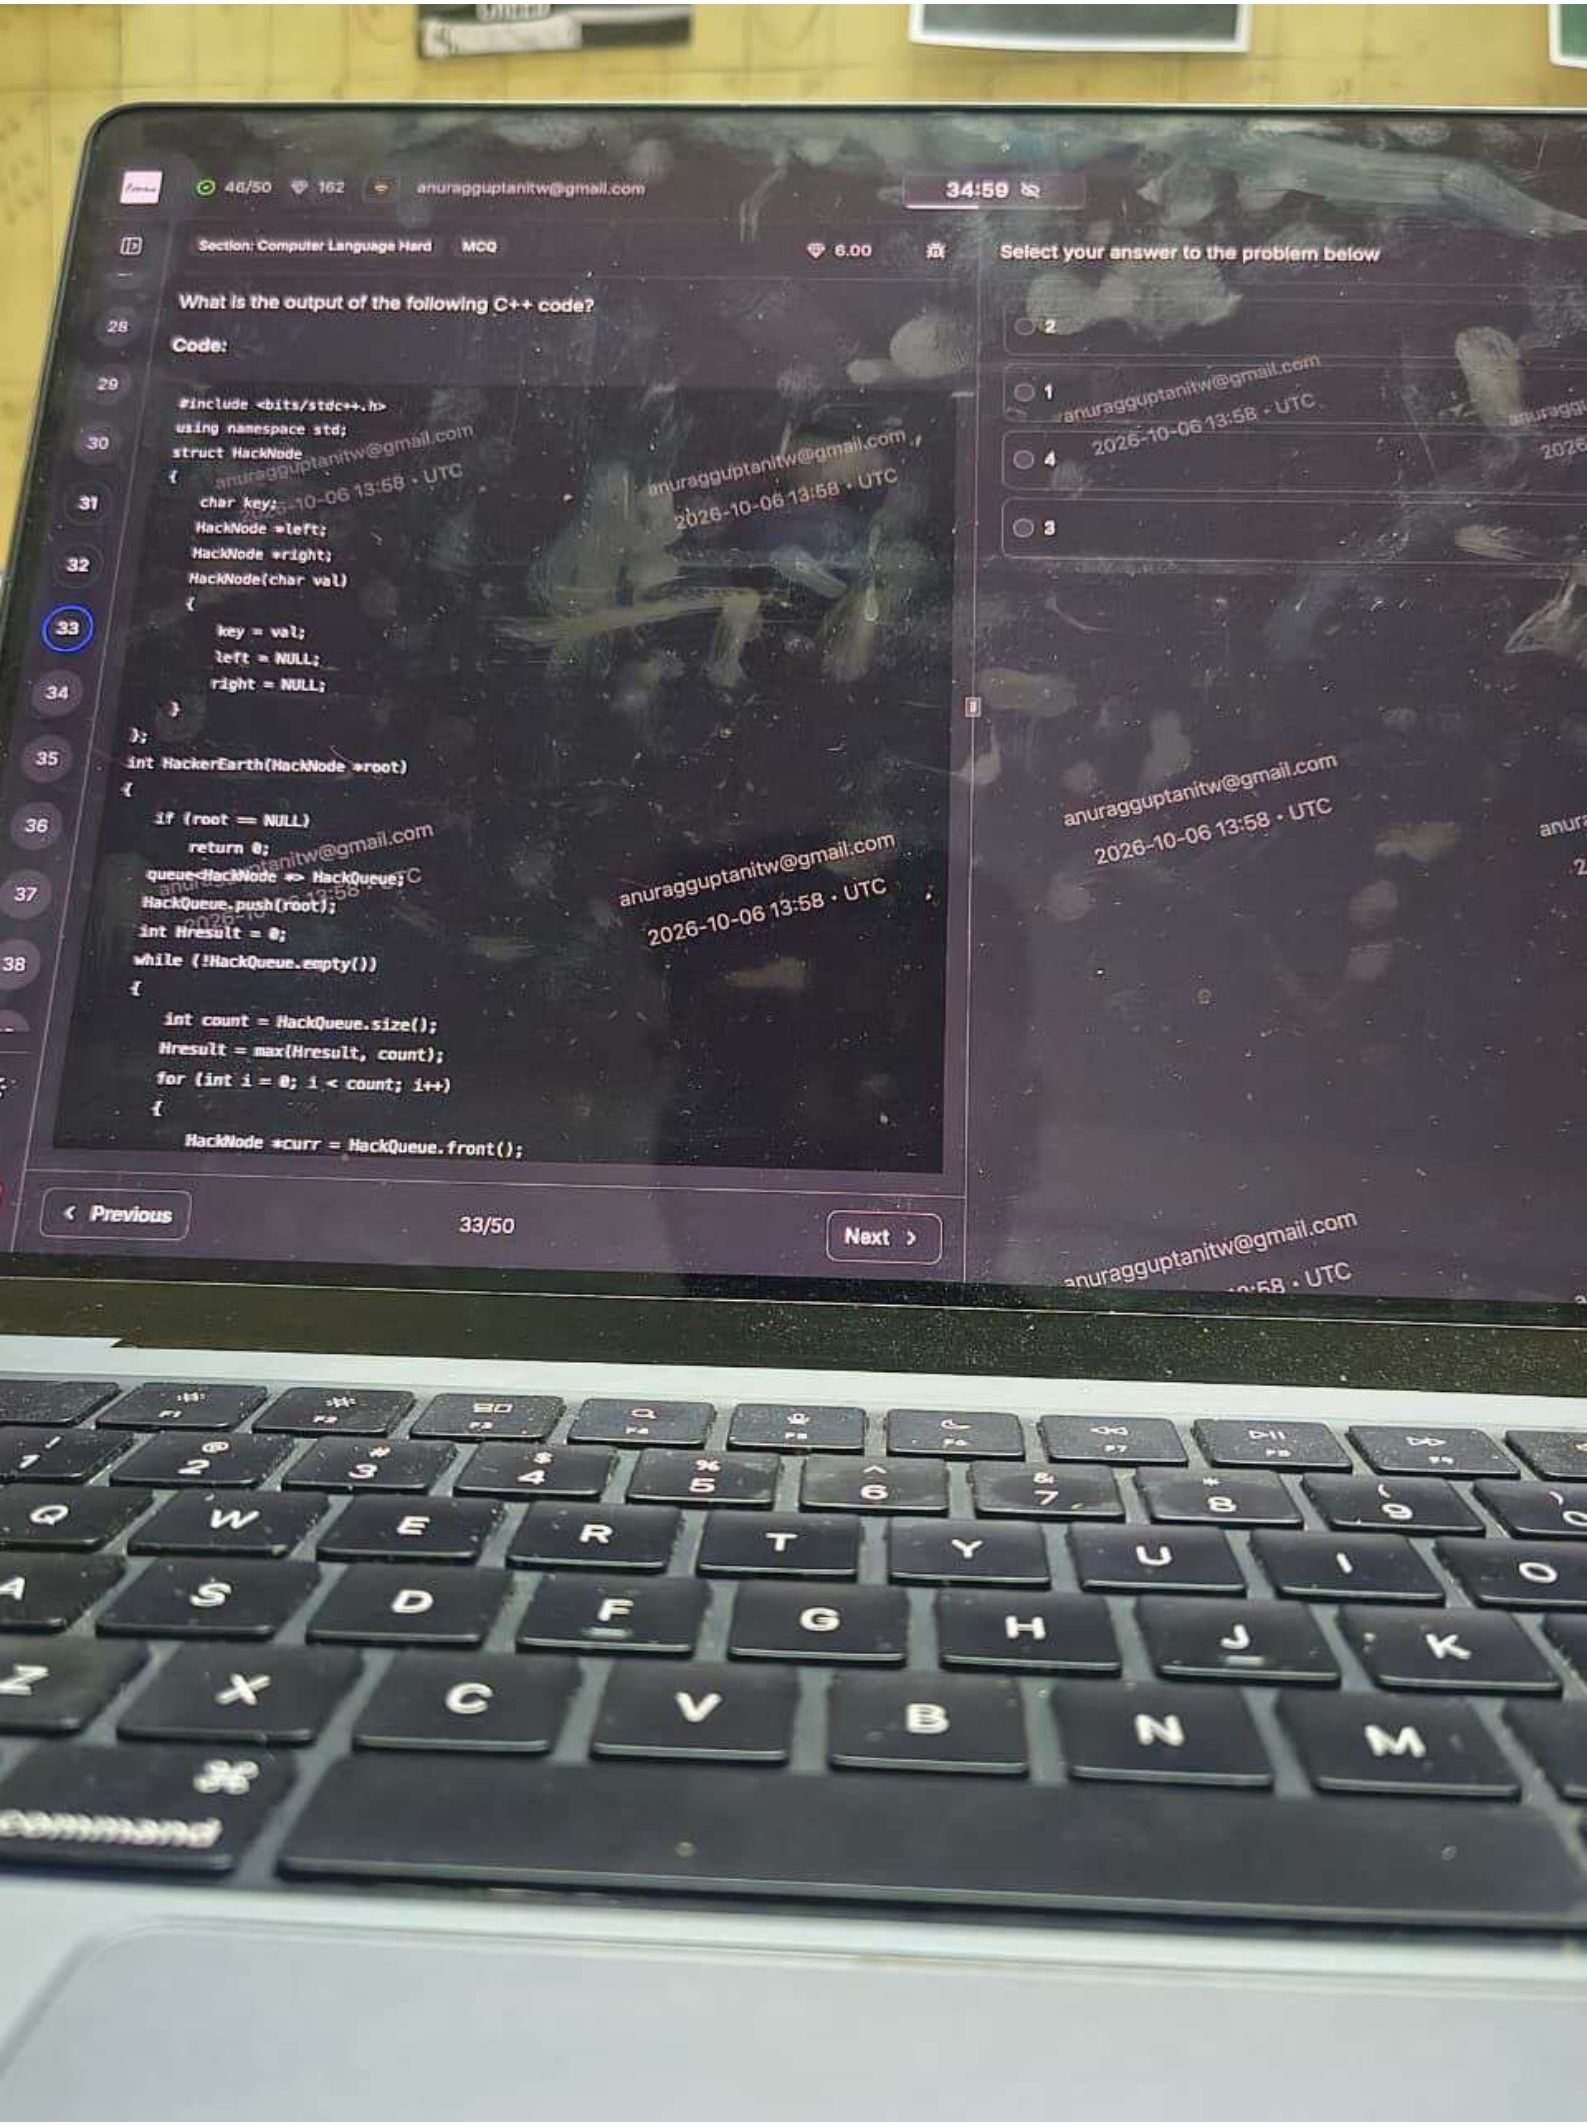

15/50
162
anuragguptanitw@gmail.com
Show Timer
Section: Calculus
MCQ
4.00
Three clothing brands A, B, and C supply 20%, 45%, and 35% of the clothes to a store. Previous incidents show that 6%, 7%, and 5% of the clothes supplied are defective. A cloth chosen at random was found to be defective. Determine the probability that B supplied that cloth.
Select your answer to the problem below
0.45
0.51
0.57
0.65
anuragguptanitw@gmail.com
2026-10-06 13:41 · UTC
Previous
25/50
Next

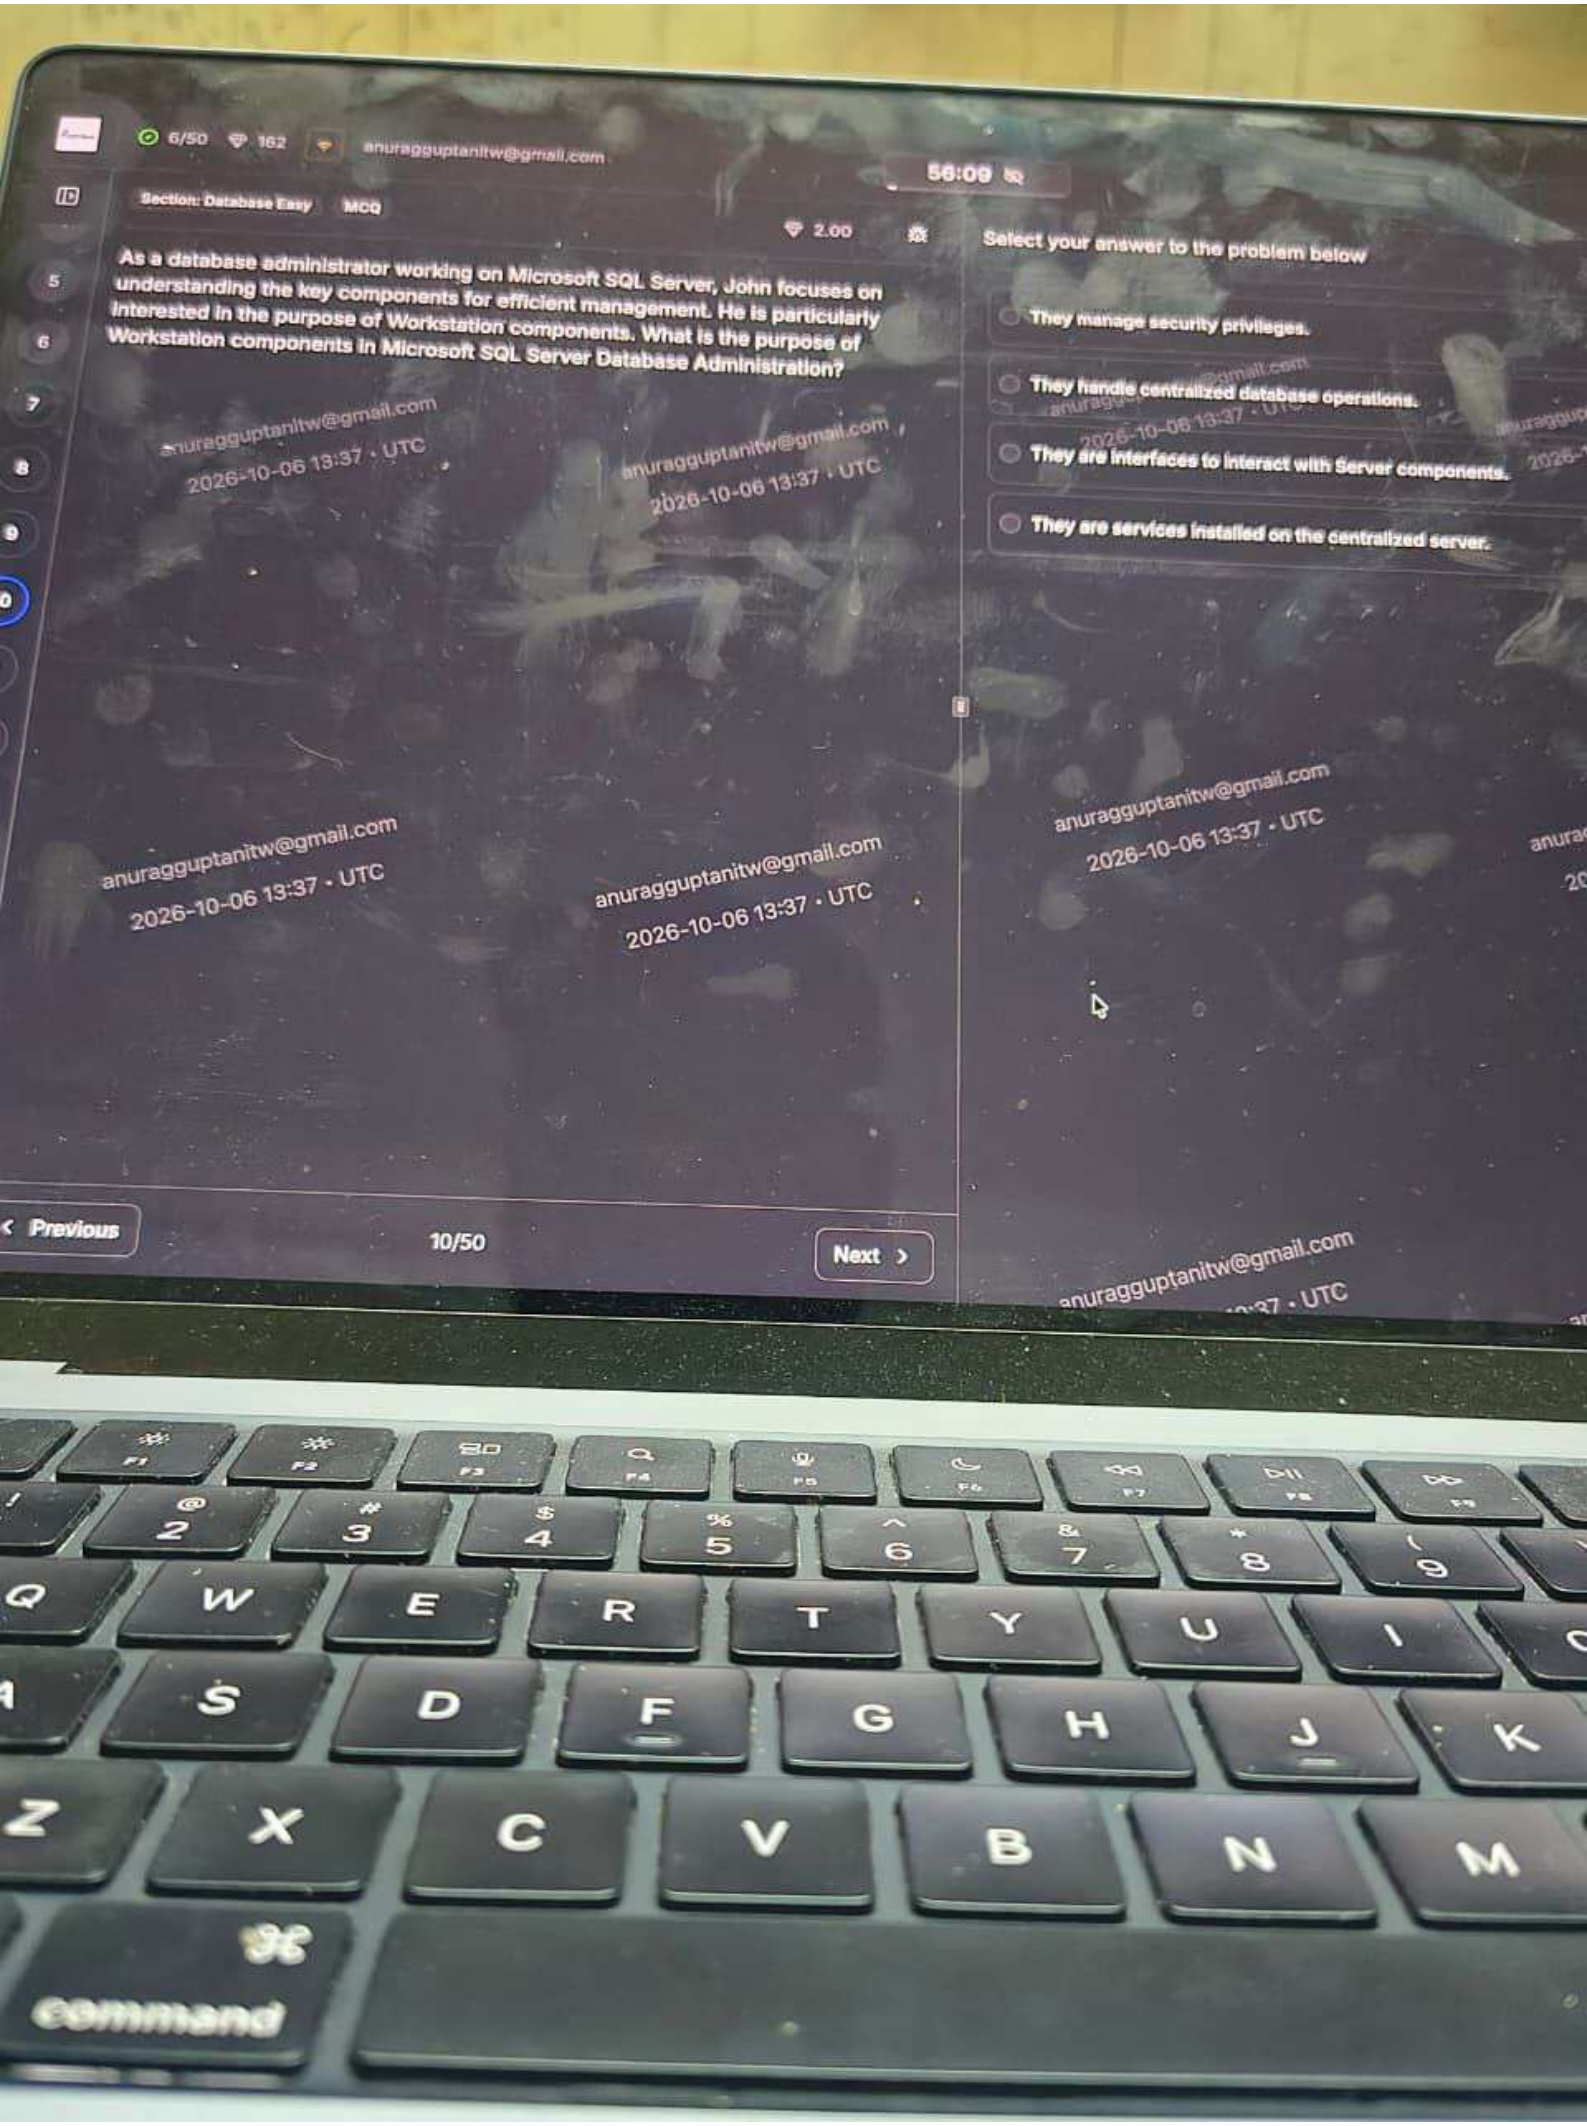

6/50
162
anuragguptanitw@gmail.com
55:58
Section: Project Management Medium
MCQ
4.00
Alice, John, and Mary are all working on a marketing campaign for a new product launch. The team is using agile marketing methodologies to ensure they can respond quickly to changes in the market and customer demands. However, there are some challenges that the team is facing in terms of implementing agile practices and achieving their goals. What is the main goal of agile marketing according to the scenario?
Options
1. To deliver value frequently to different audiences, customers, prospects, and internal stakeholders
2. To launch a "big-bang" campaign
3. To focus on breaking down projects into smaller experiments that shorten their feedback loop
4. To invest more into strategies that work
Select your answer to the problem below
1
2
3
4
anuragguptanitw@gmail.com
2026-10-06 13:37 · UTC
Previous
13/50
Next

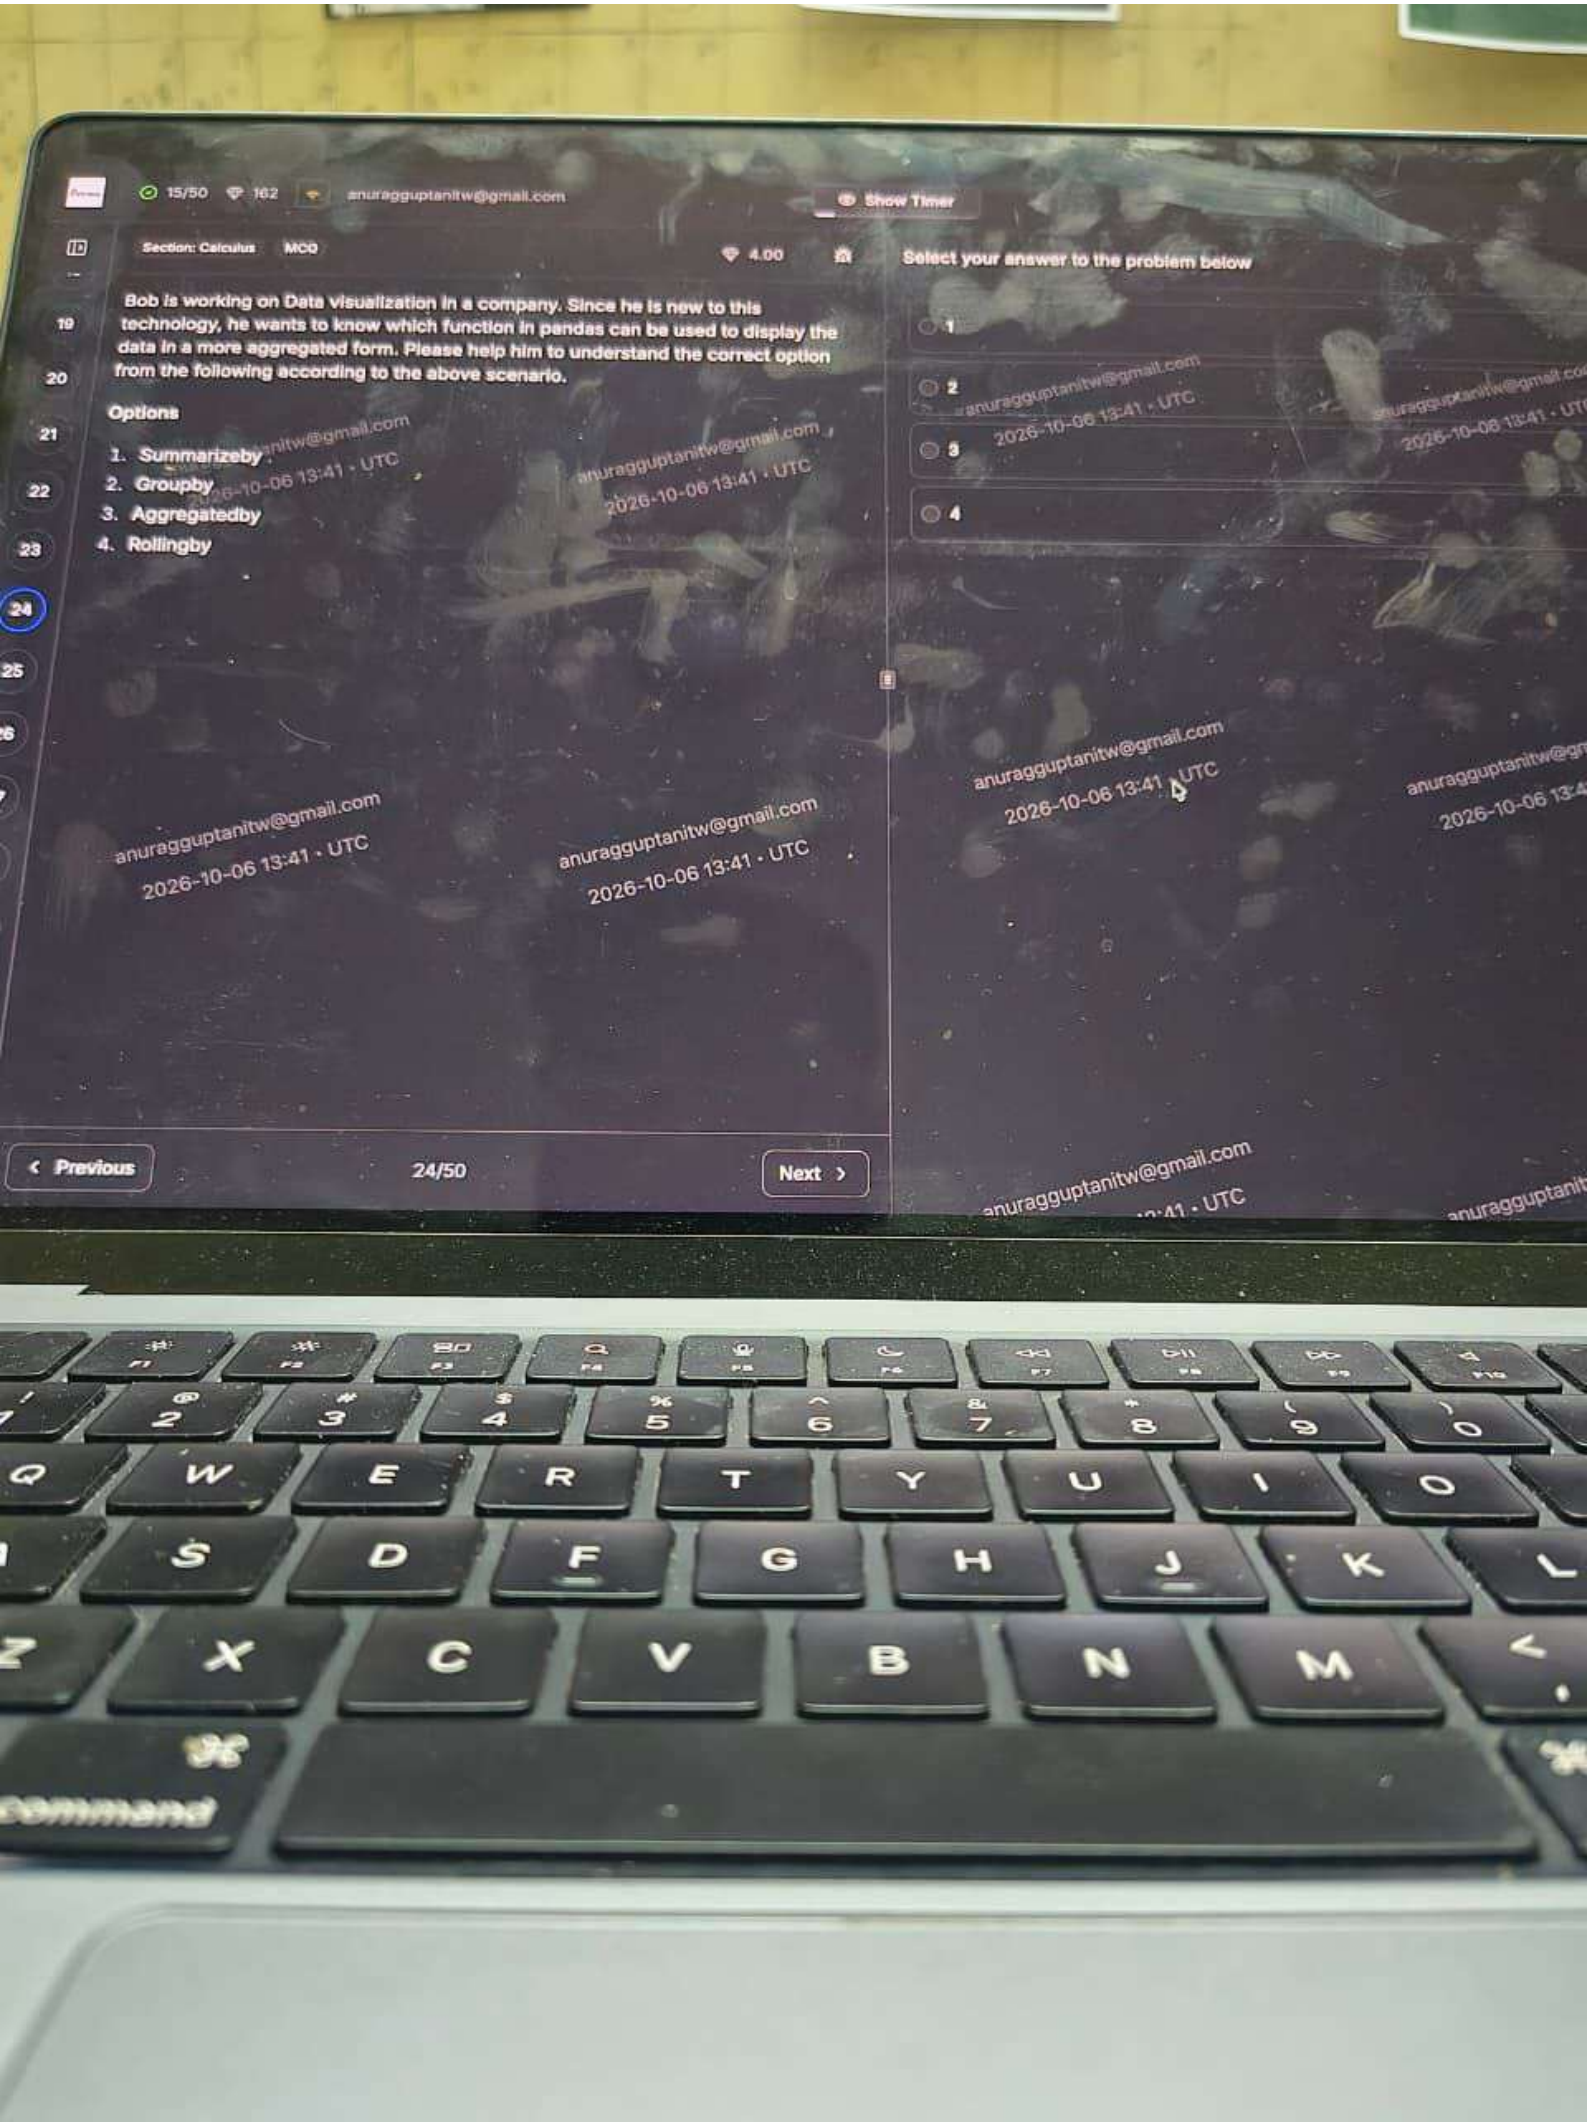

15/50
162
anuragguptanitw@gmail.com
Show Timer
Section: OOPS Medium
MCQ
4.00
Select your answer to the problem below
What is the output of the following Python code:
Code
def adder1(*args):
print('adder1',end=' ')
if type(args[0])==type(0):
sum=0
else:
sum=args[0][:0]
for arg in args:
sum=sum+arg
return sum
def adder2(*args):
print('adder2',end=' ')
sum=args[0]
for next in args[1:]:
sum+=next
return sum
for func in (adder1,adder2):
print(func('5','4','3'))
print(func('?,?,?'))
Options
1.
adder1 12
adder1 ?
adder2 12
adder2 ?
2
3
Error
Previous
20/50
Next

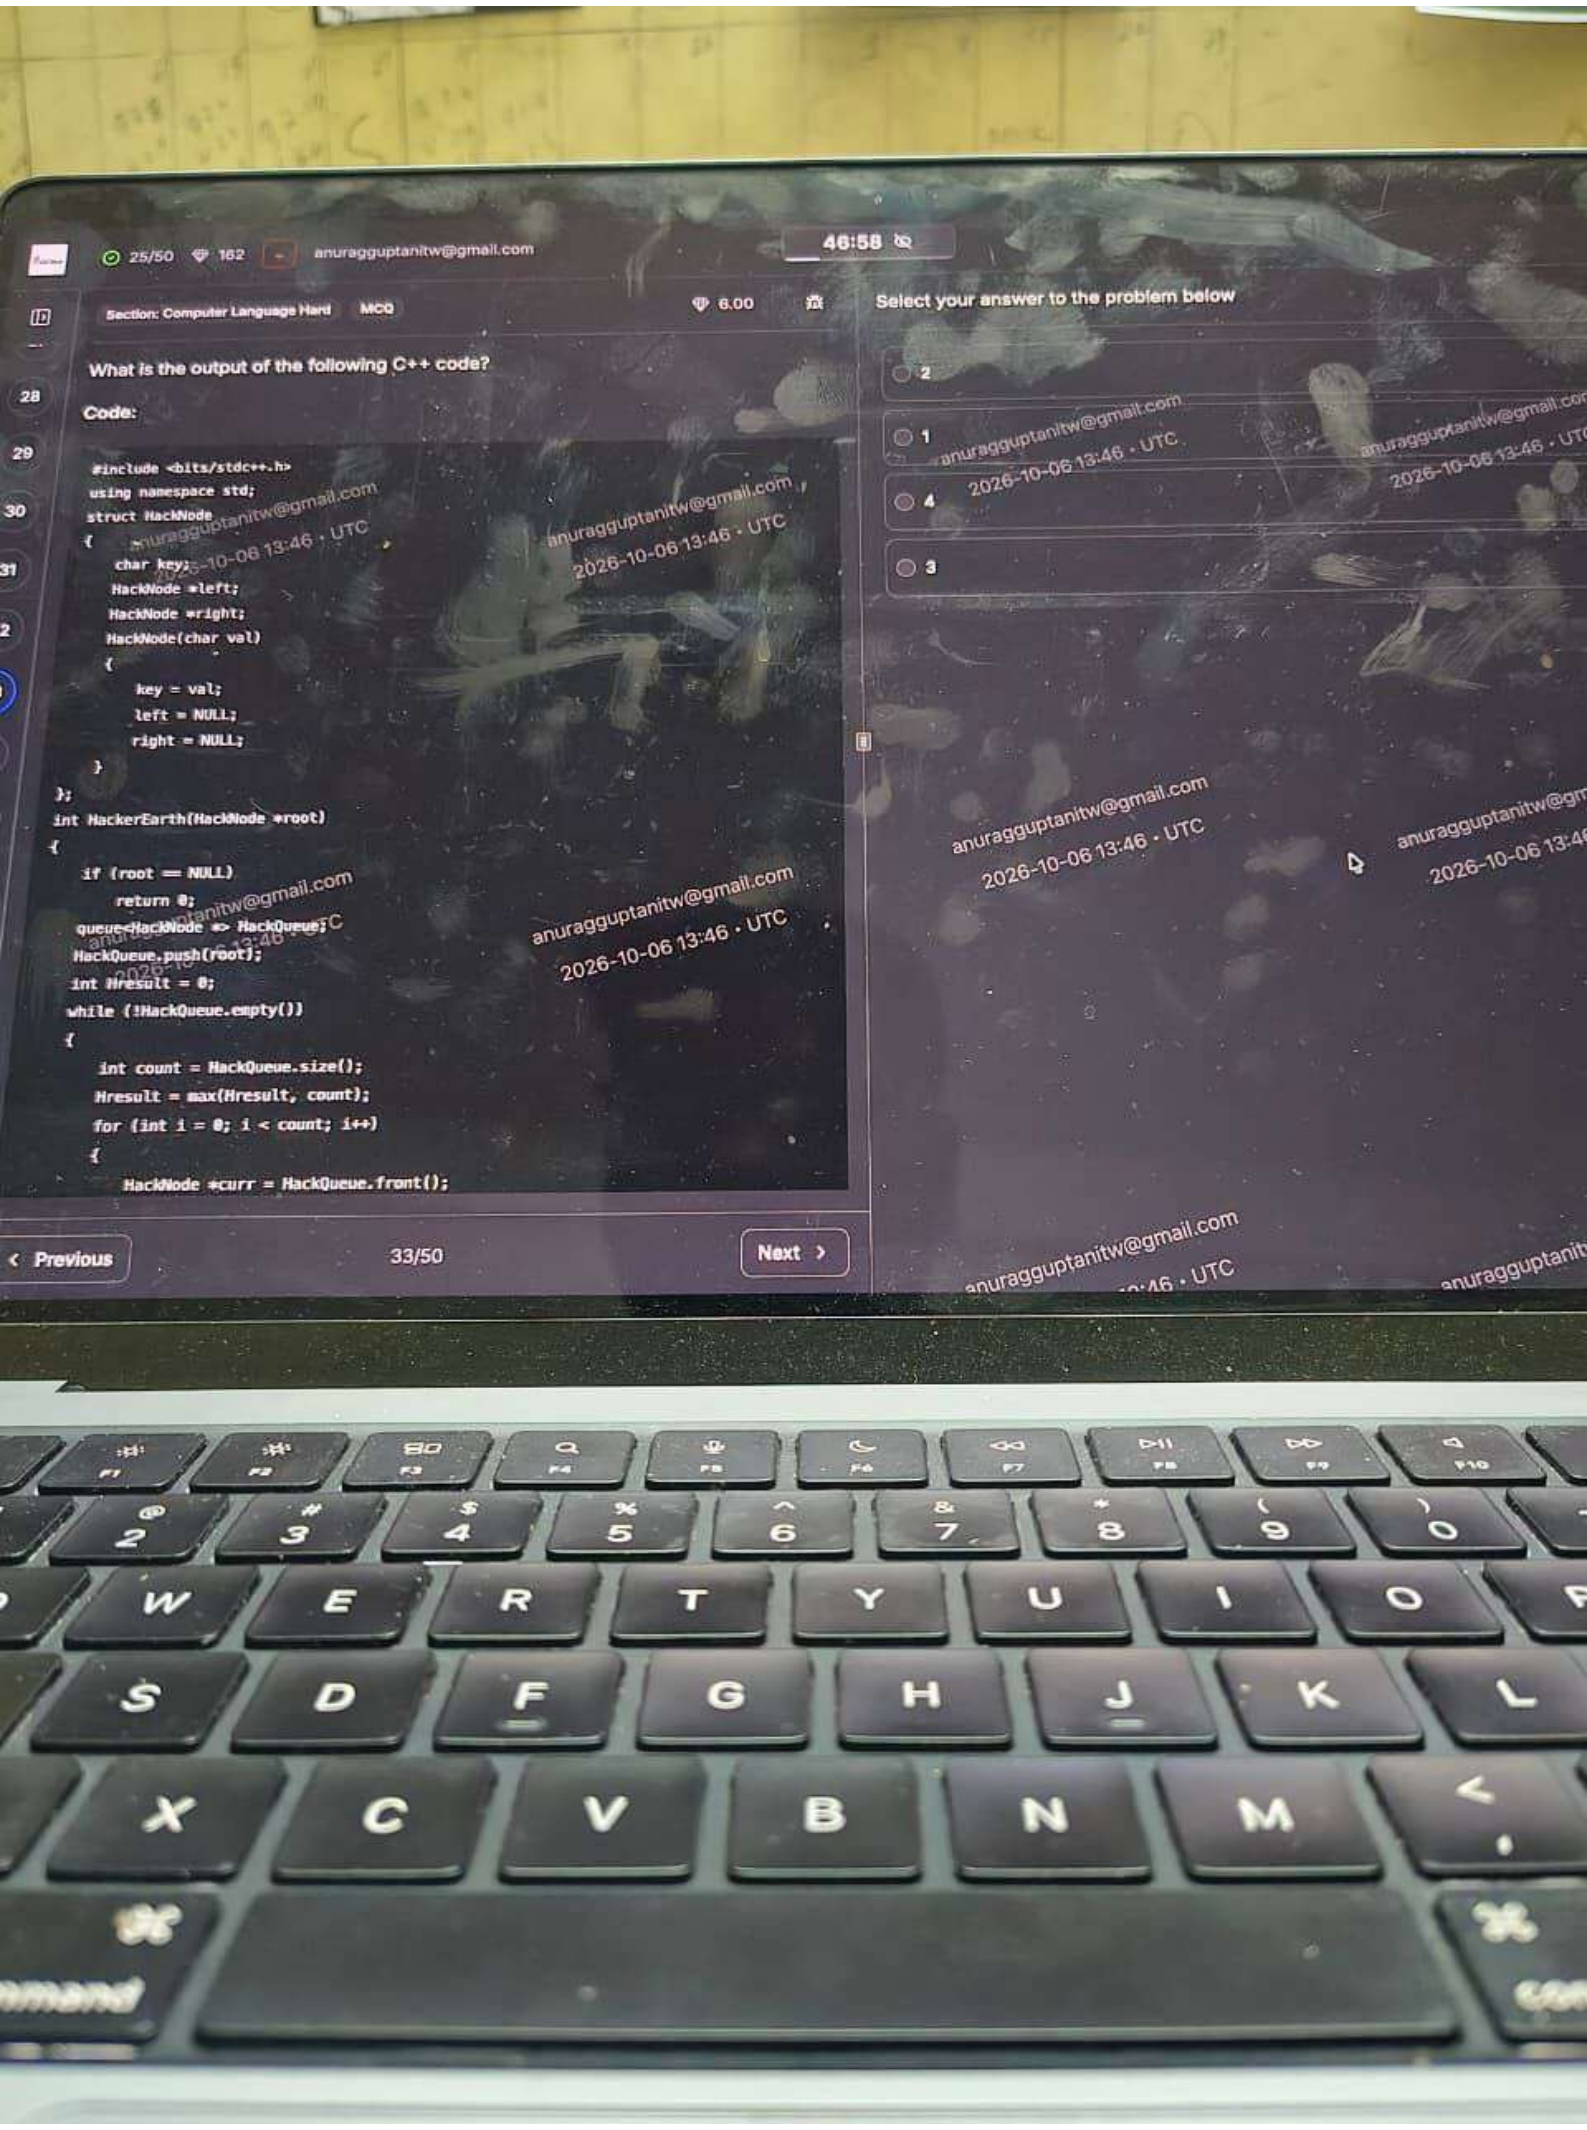

0/50
162
anuragguptanitw@gmail.com
58:47
Section: Networking Hard
MCQ
6.00
Select your answer to the problem below
In networking, which of the following statements are valid regarding a remote frame that is available in an automotive ECU with the CAN protocol:
1. A recessive RTR bit in the arbitration field can be set for a remote frame.
2. No data must be specified in a remote frame.
1
2
Both of these
None of these
anuragguptanitw@gmail.com
2026-10-06 13:34 • UTC
Previous
2/50
Next

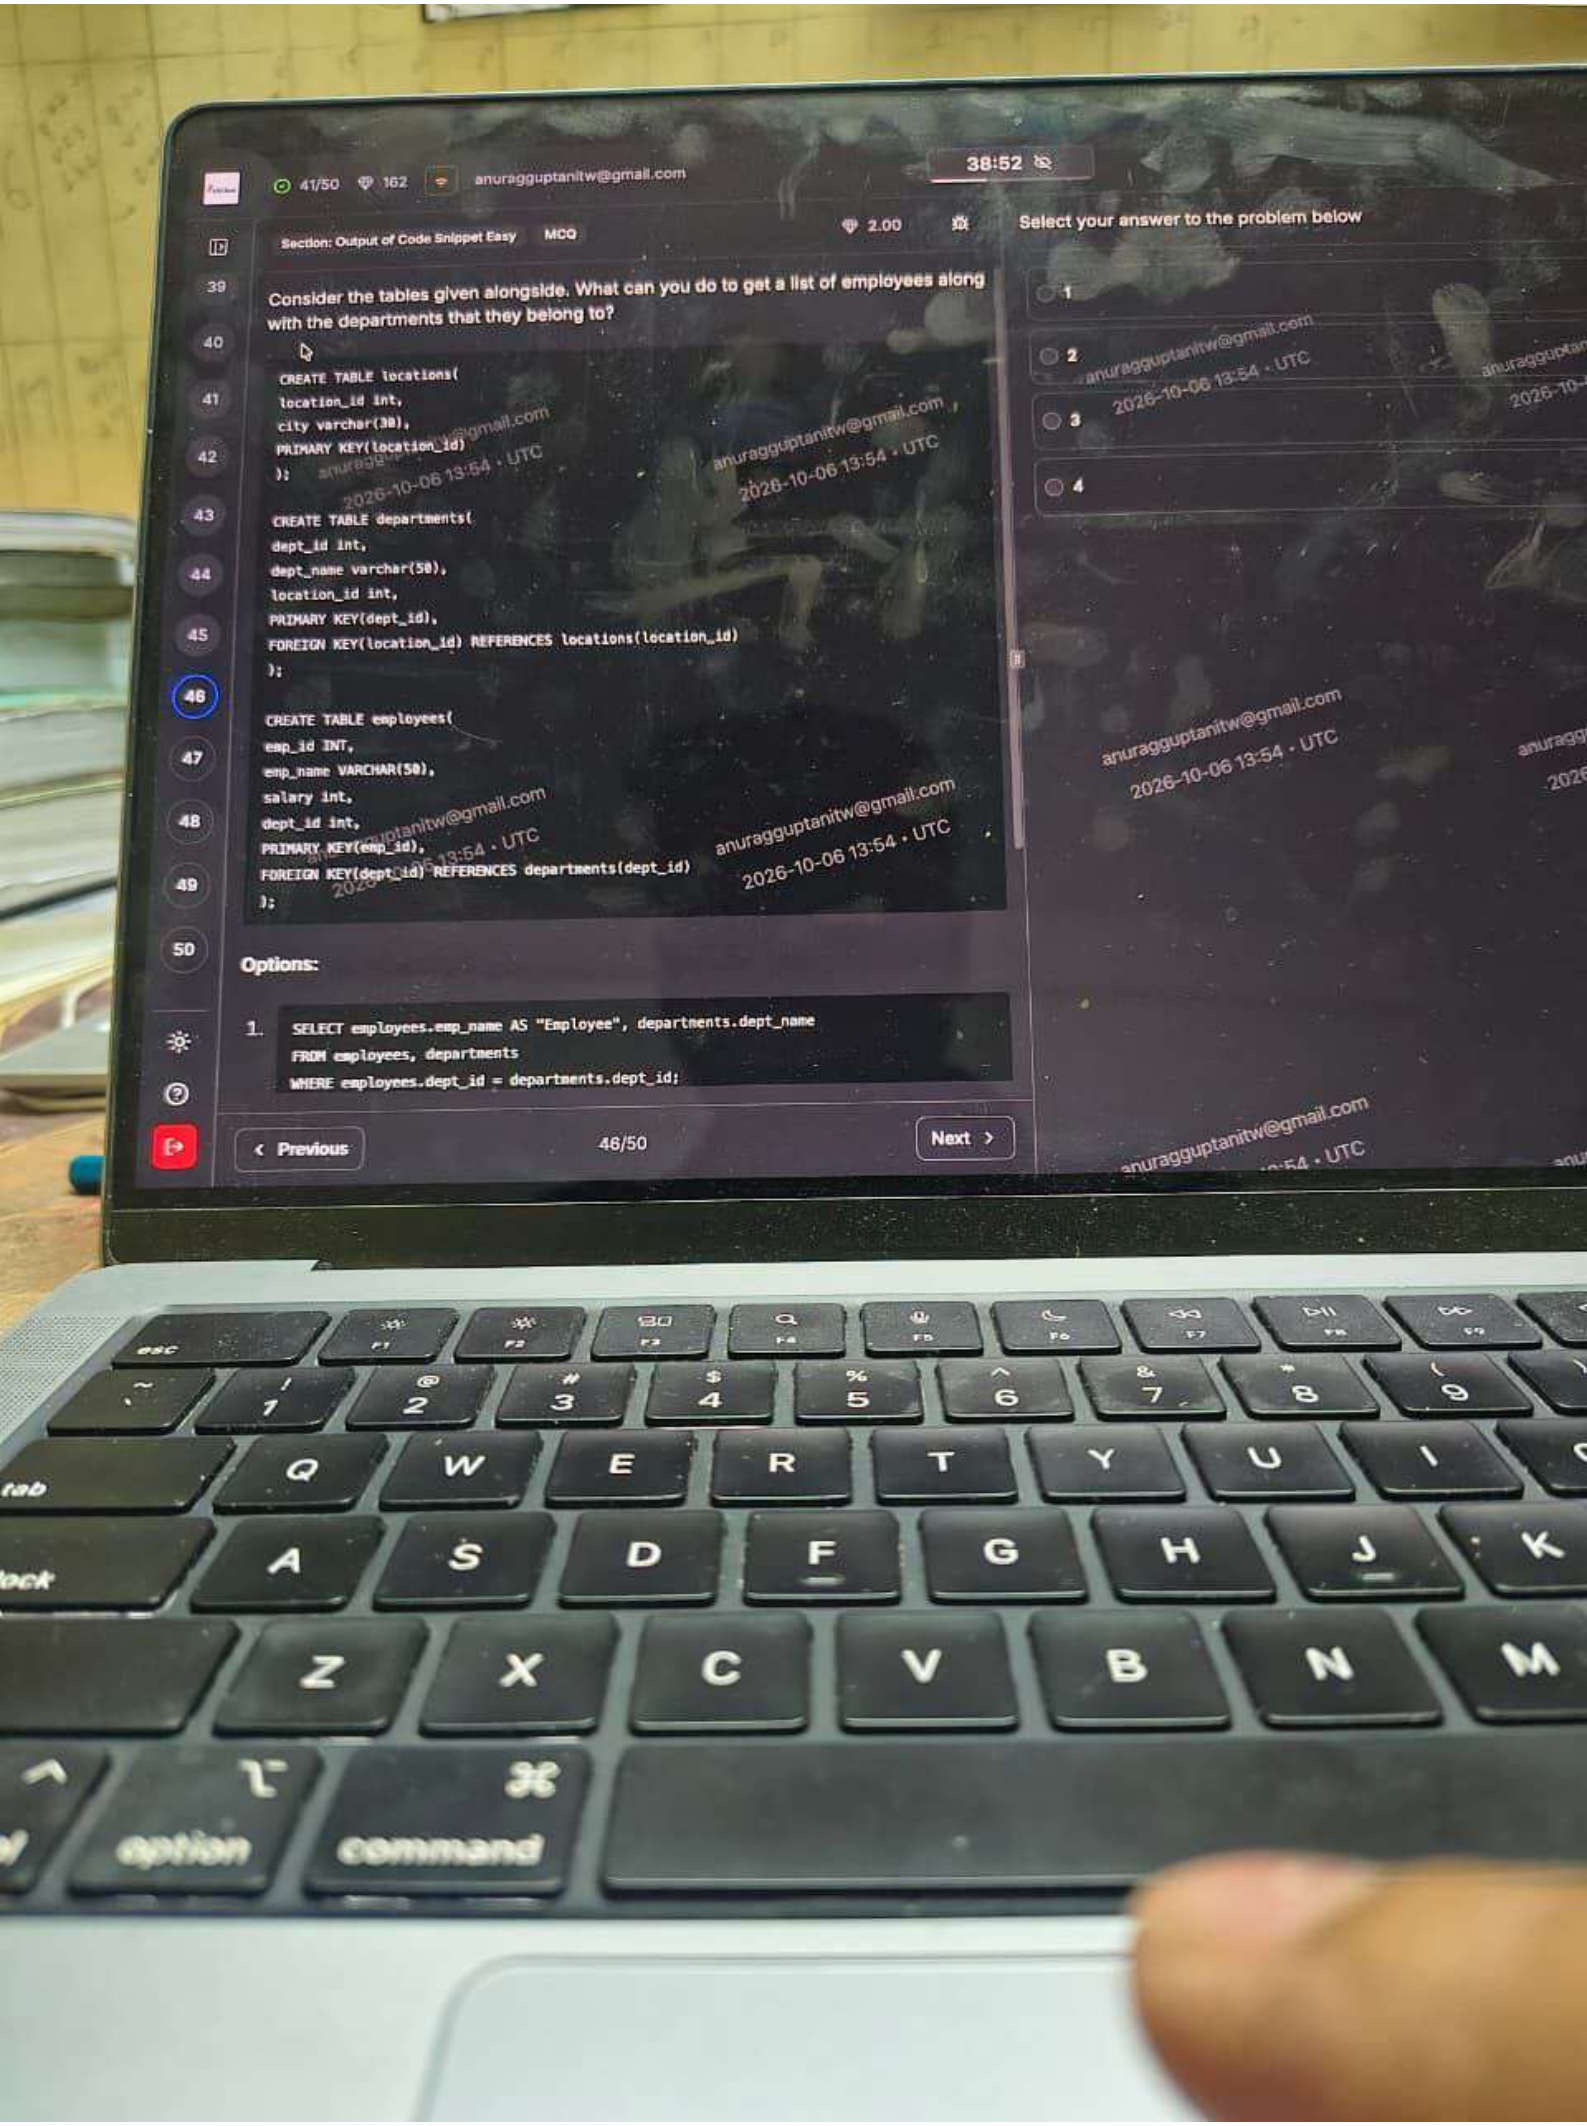

25/50 162 anuragguptanitw@gmail.com
46:55
Section: Computer Language Hard MCQ
6.00
Select your answer to the problem below
2
1
4
3
int Hresult = 0;
while (!HackQueue.empty())
{
int count = HackQueue.size();
Hresult = max(Hresult, count);
for (int i = 0; i < count; i++)
{
HackNode *curr = HackQueue.front();
HackQueue.pop();
if (curr->left != NULL)
HackQueue.push(curr->left);
if (curr->right != NULL)
HackQueue.push(curr->right);
}
}
return Hresult;
}
int main()
{
HackNode *root = new HackNode(0);
root->left = new HackNode(1);
root->left->left = new HackNode(6);
root->left->right = new HackNode(3);
root->right = new HackNode(4);
root->right->left = new HackNode(2);
root->right->right = new HackNode(5);
root->right->right->right = new HackNode(9);
root->right->right->right->left = new HackNode(8);
root->right->right->right->right = new HackNode(7);
cout << HackerEarth(root);
}
anuragguptanitw@gmail.com
2026-10-06 13:46 • UTC
Previous
33/50
Next

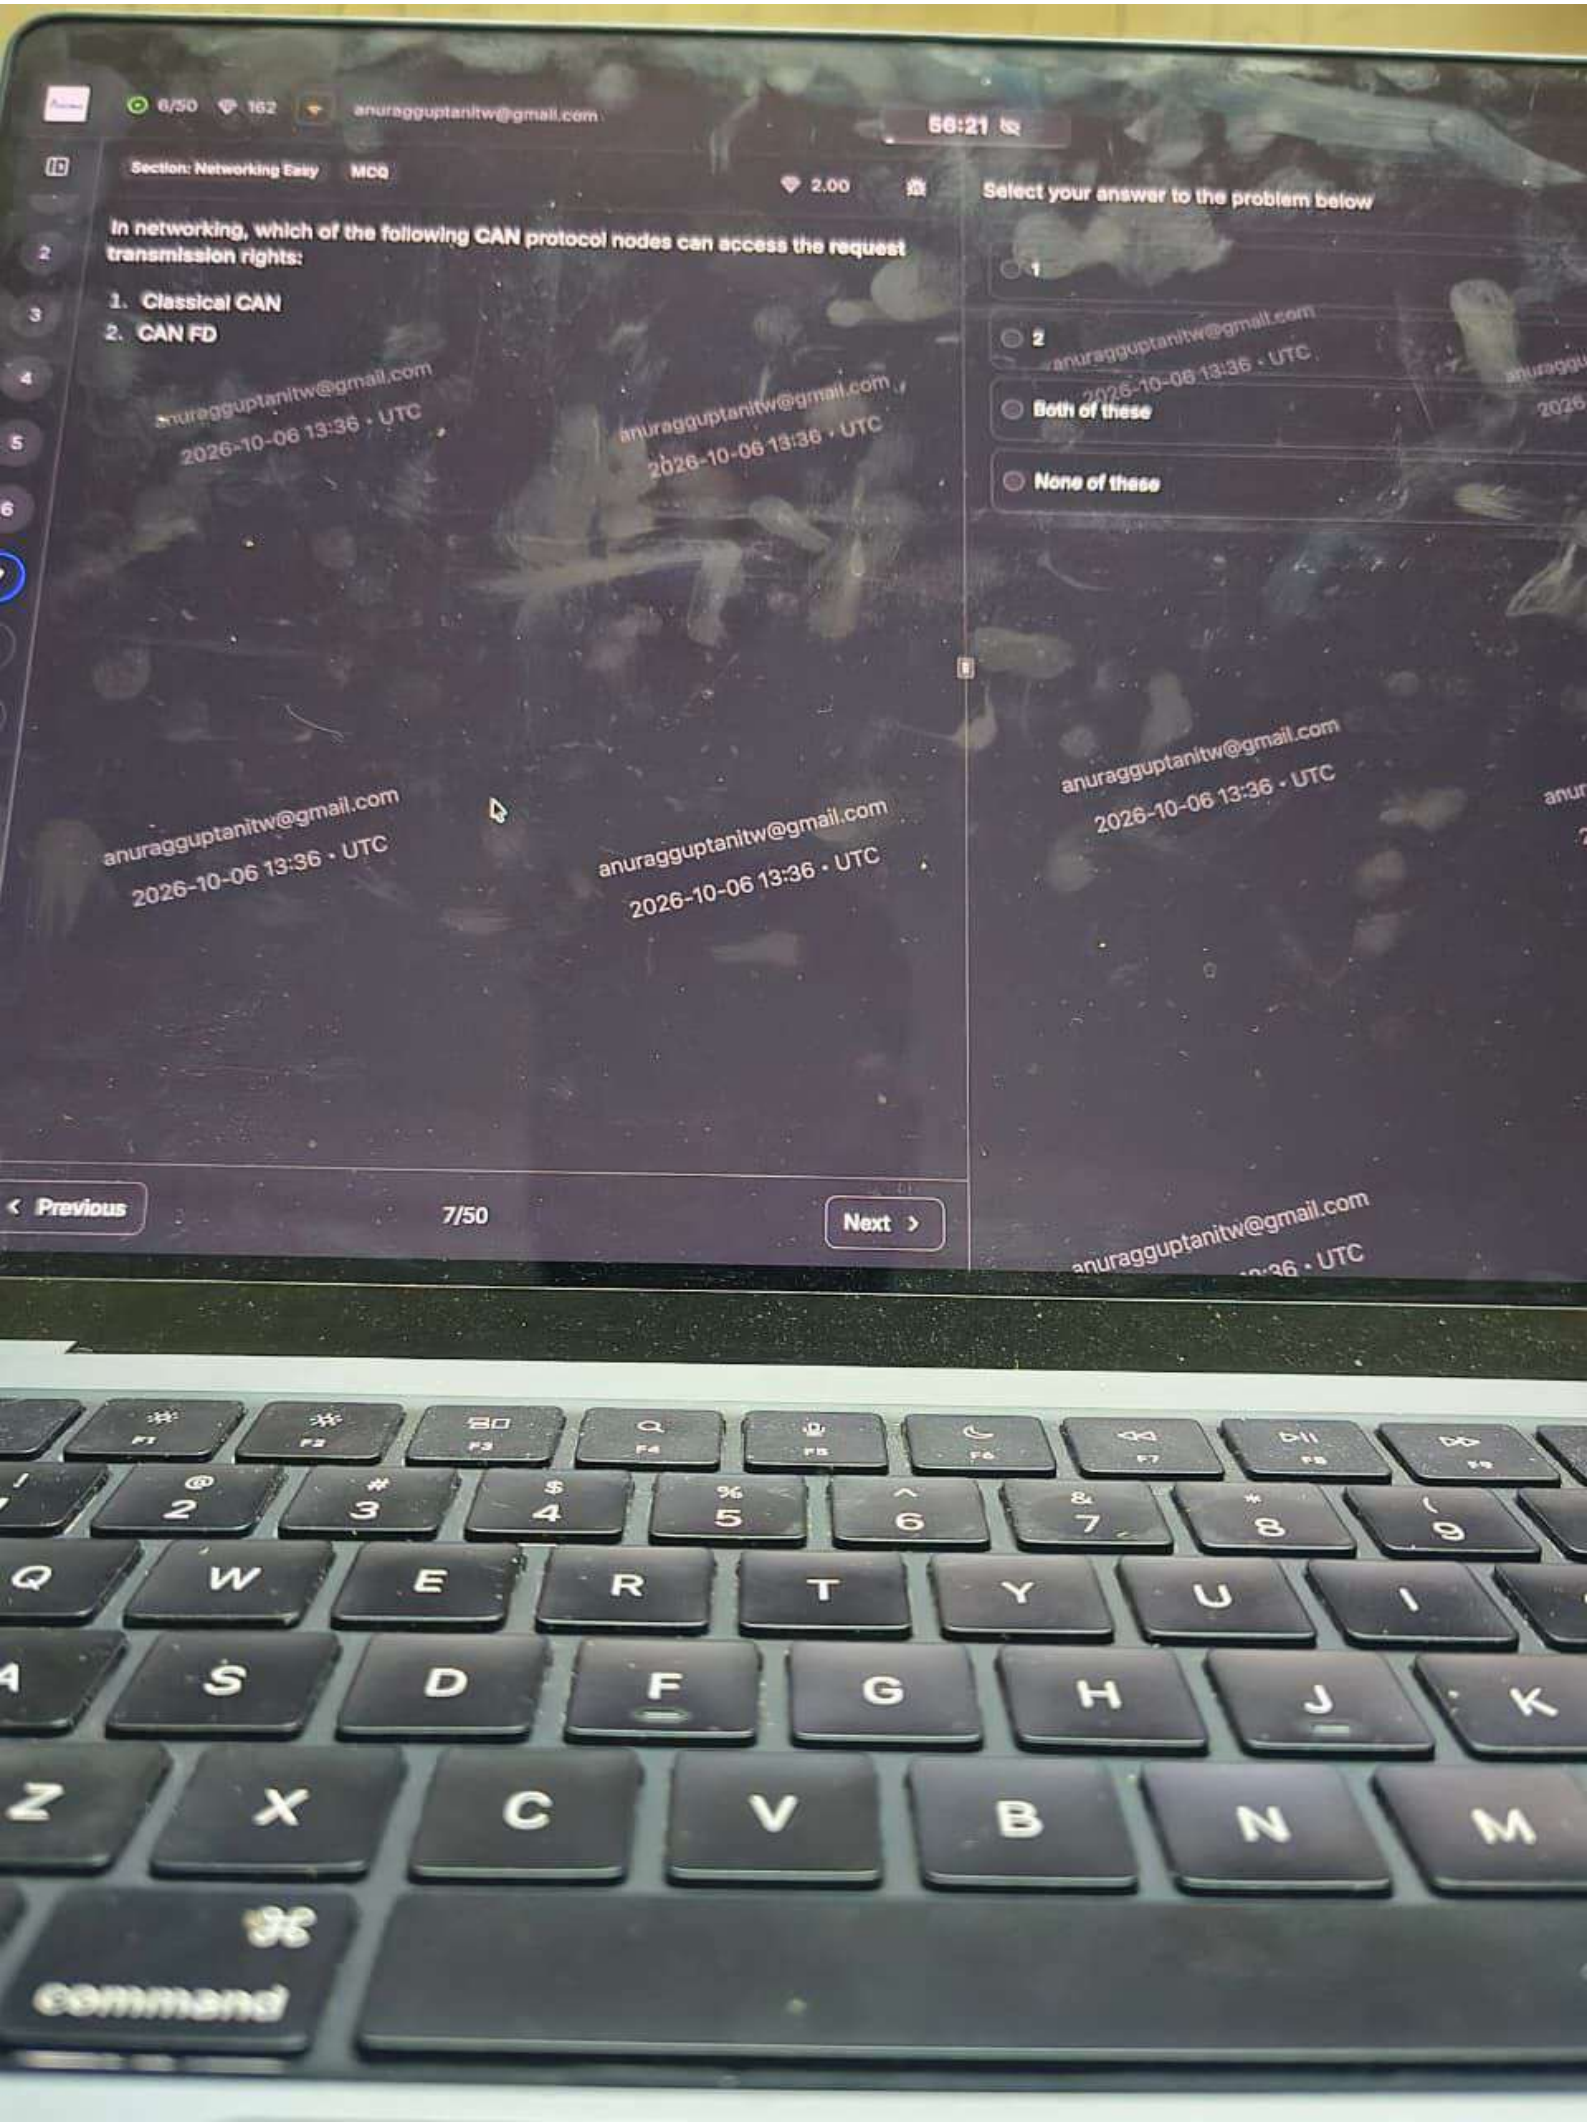

46/50
162
anuragguptanitw@gmail.com
34:59
Section: Computer Language Hard
MCQ
6.00
What is the output of the following C++ code?
Code:
#include <bits/stdc++.h>
using namespace std;
struct HackNode
{
char key;
HackNode *left;
HackNode *right;
HackNode(char val)
{
key = val;
left = NULL;
right = NULL;
}
};
int HackerEarth(HackNode *root)
{
if (root == NULL)
return 0;
queue<HackNode *> HackQueue;
HackQueue.push(root);
int Hresult = 0;
while (!HackQueue.empty())
{
int count = HackQueue.size();
Hresult = max(Hresult, count);
for (int i = 0; i < count; i++)
{
HackNode *curr = HackQueue.front();
Select your answer to the problem below
2
1
4
3
anuragguptanitw@gmail.com
2026-10-06 13:58 · UTC
Previous
33/50
Next

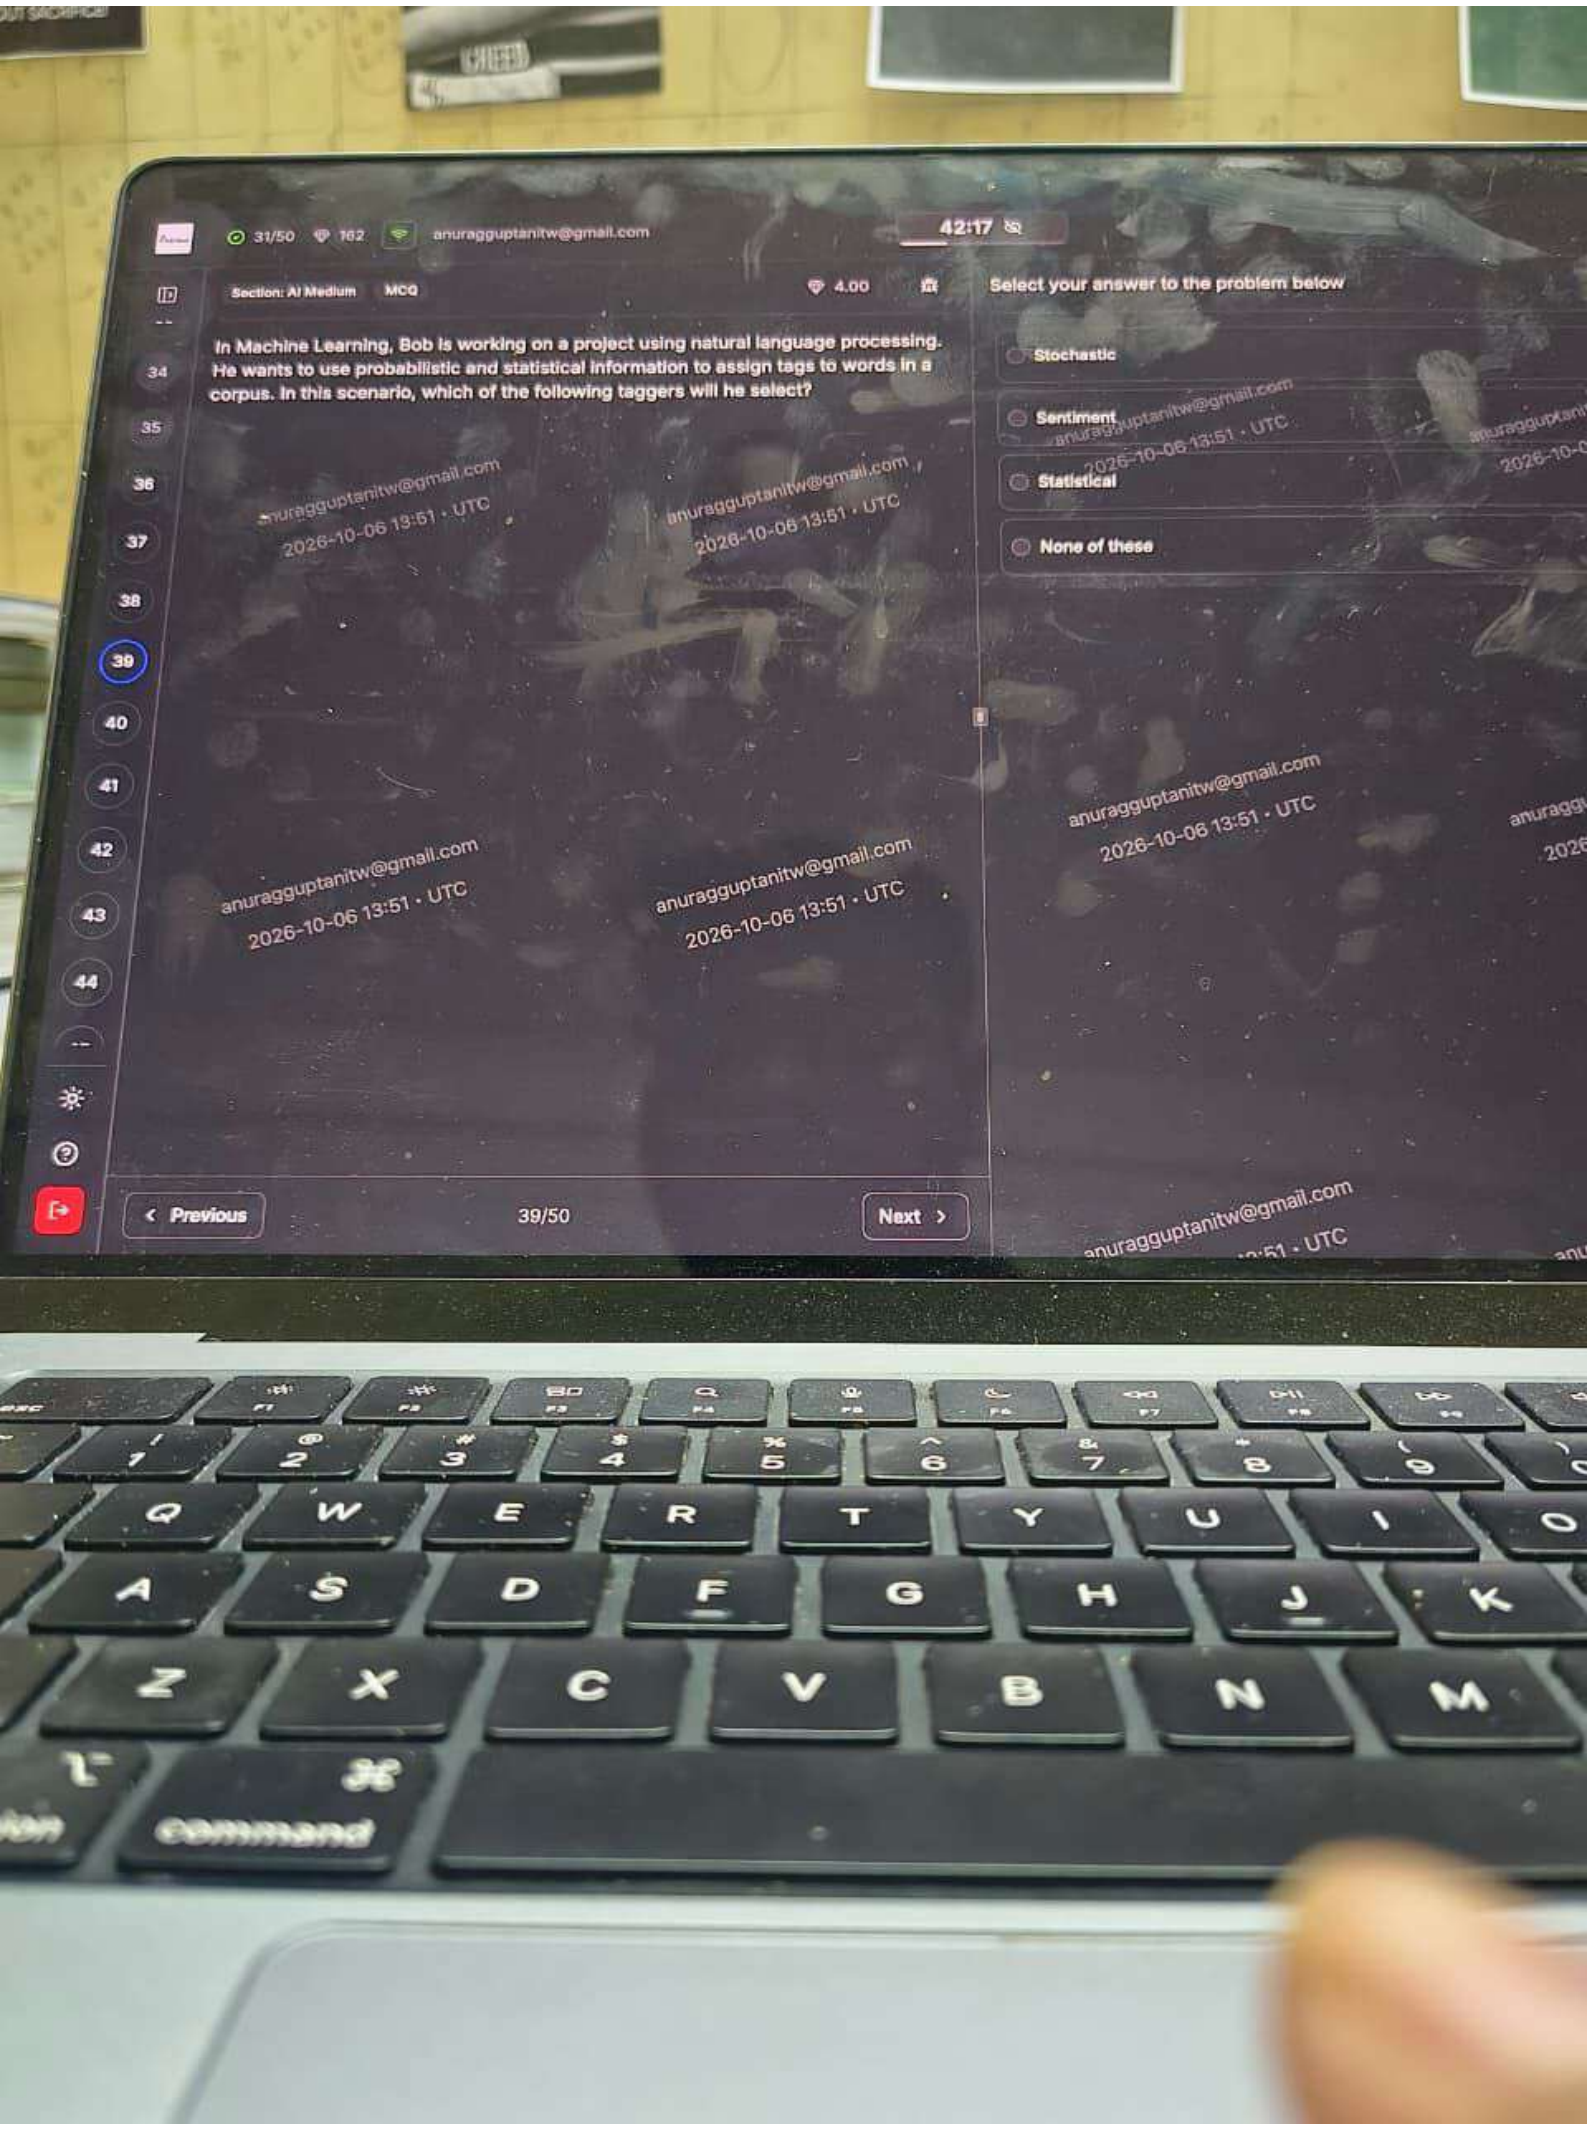

6/50
162
anuragguptanitw@gmail.com
56:09
Section: Database Easy
MCQ
2.00
As a database administrator working on Microsoft SQL Server, John focuses on understanding the key components for efficient management. He is particularly interested in the purpose of Workstation components. What is the purpose of Workstation components in Microsoft SQL Server Database Administration?
Select your answer to the problem below
They manage security privileges.
They handle centralized database operations.
They are interfaces to interact with Server components.
They are services installed on the centralized server.
anuragguptanitw@gmail.com
2026-10-06 13:37 • UTC
Previous
10/50
Next

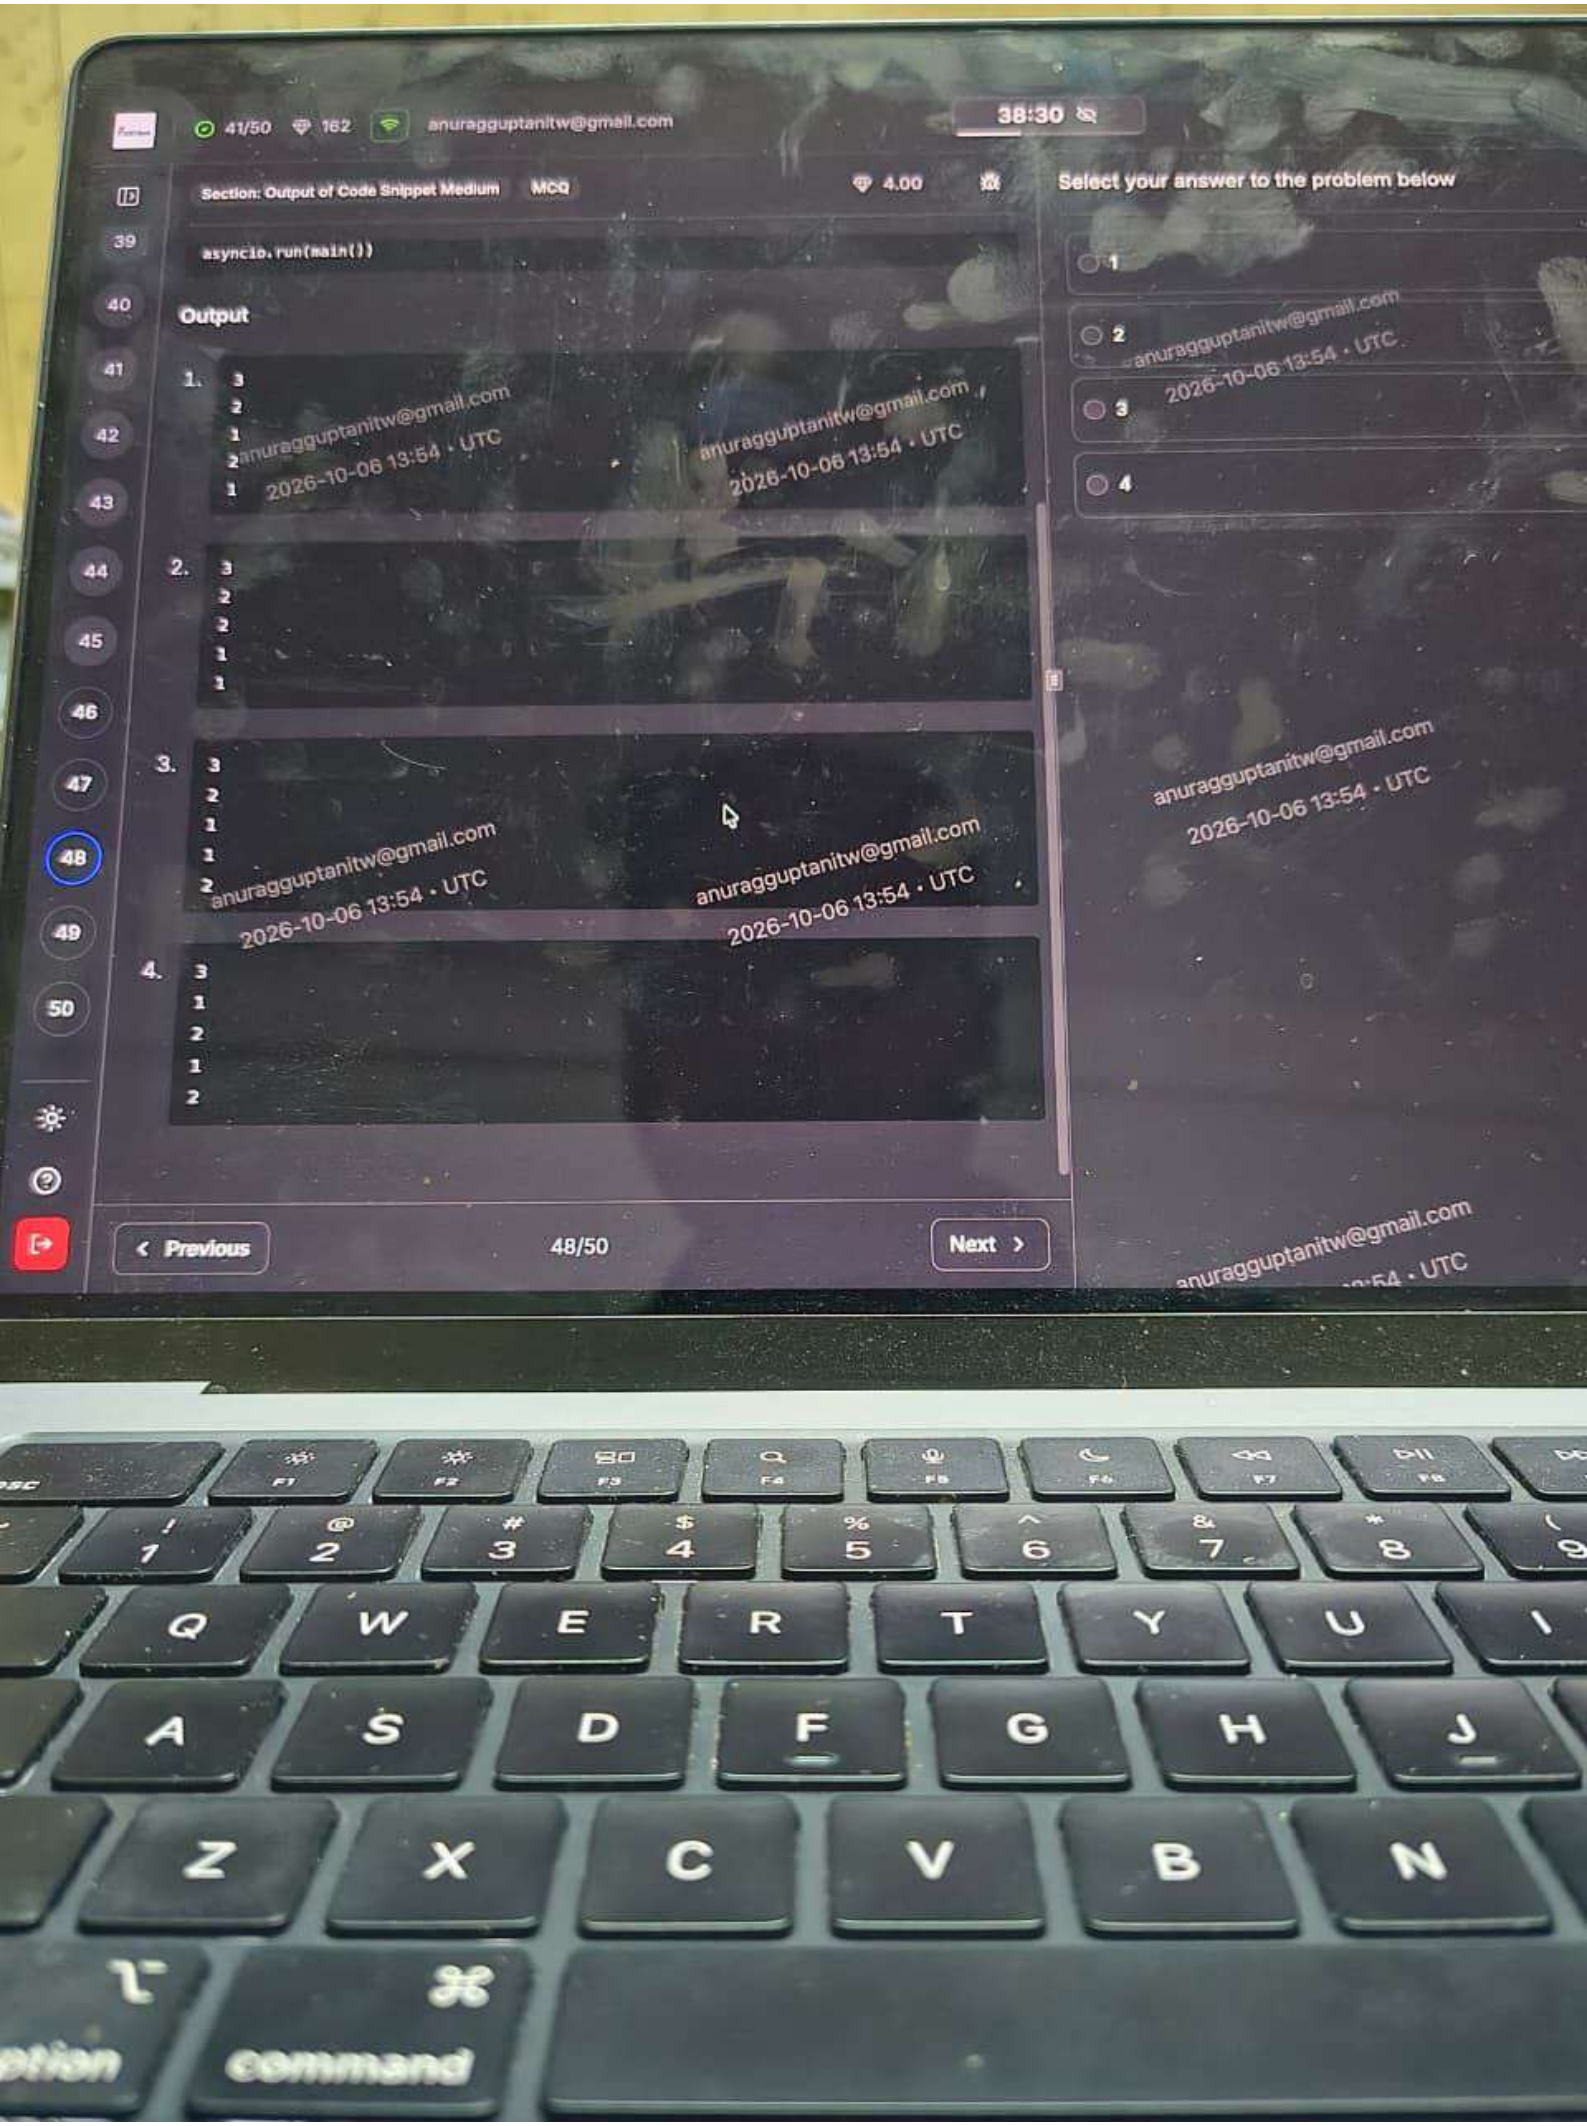

15/50
162
anuragguptanitw@gmail.com
Show Timer
Section: Calculus
MCQ
4.00
Select your answer to the problem below
Bob is working on Data visualization in a company. Since he is new to this technology, he wants to know which function in pandas can be used to display the data in a more aggregated form. Please help him to understand the correct option from the following according to the above scenario.
Options
1. Summarizeby
2. Groupby
3. Aggregatedby
4. Rollingby
1
2
3
4
anuragguptanitw@gmail.com
2026-10-06 13:41 • UTC
Previous
24/50
Next

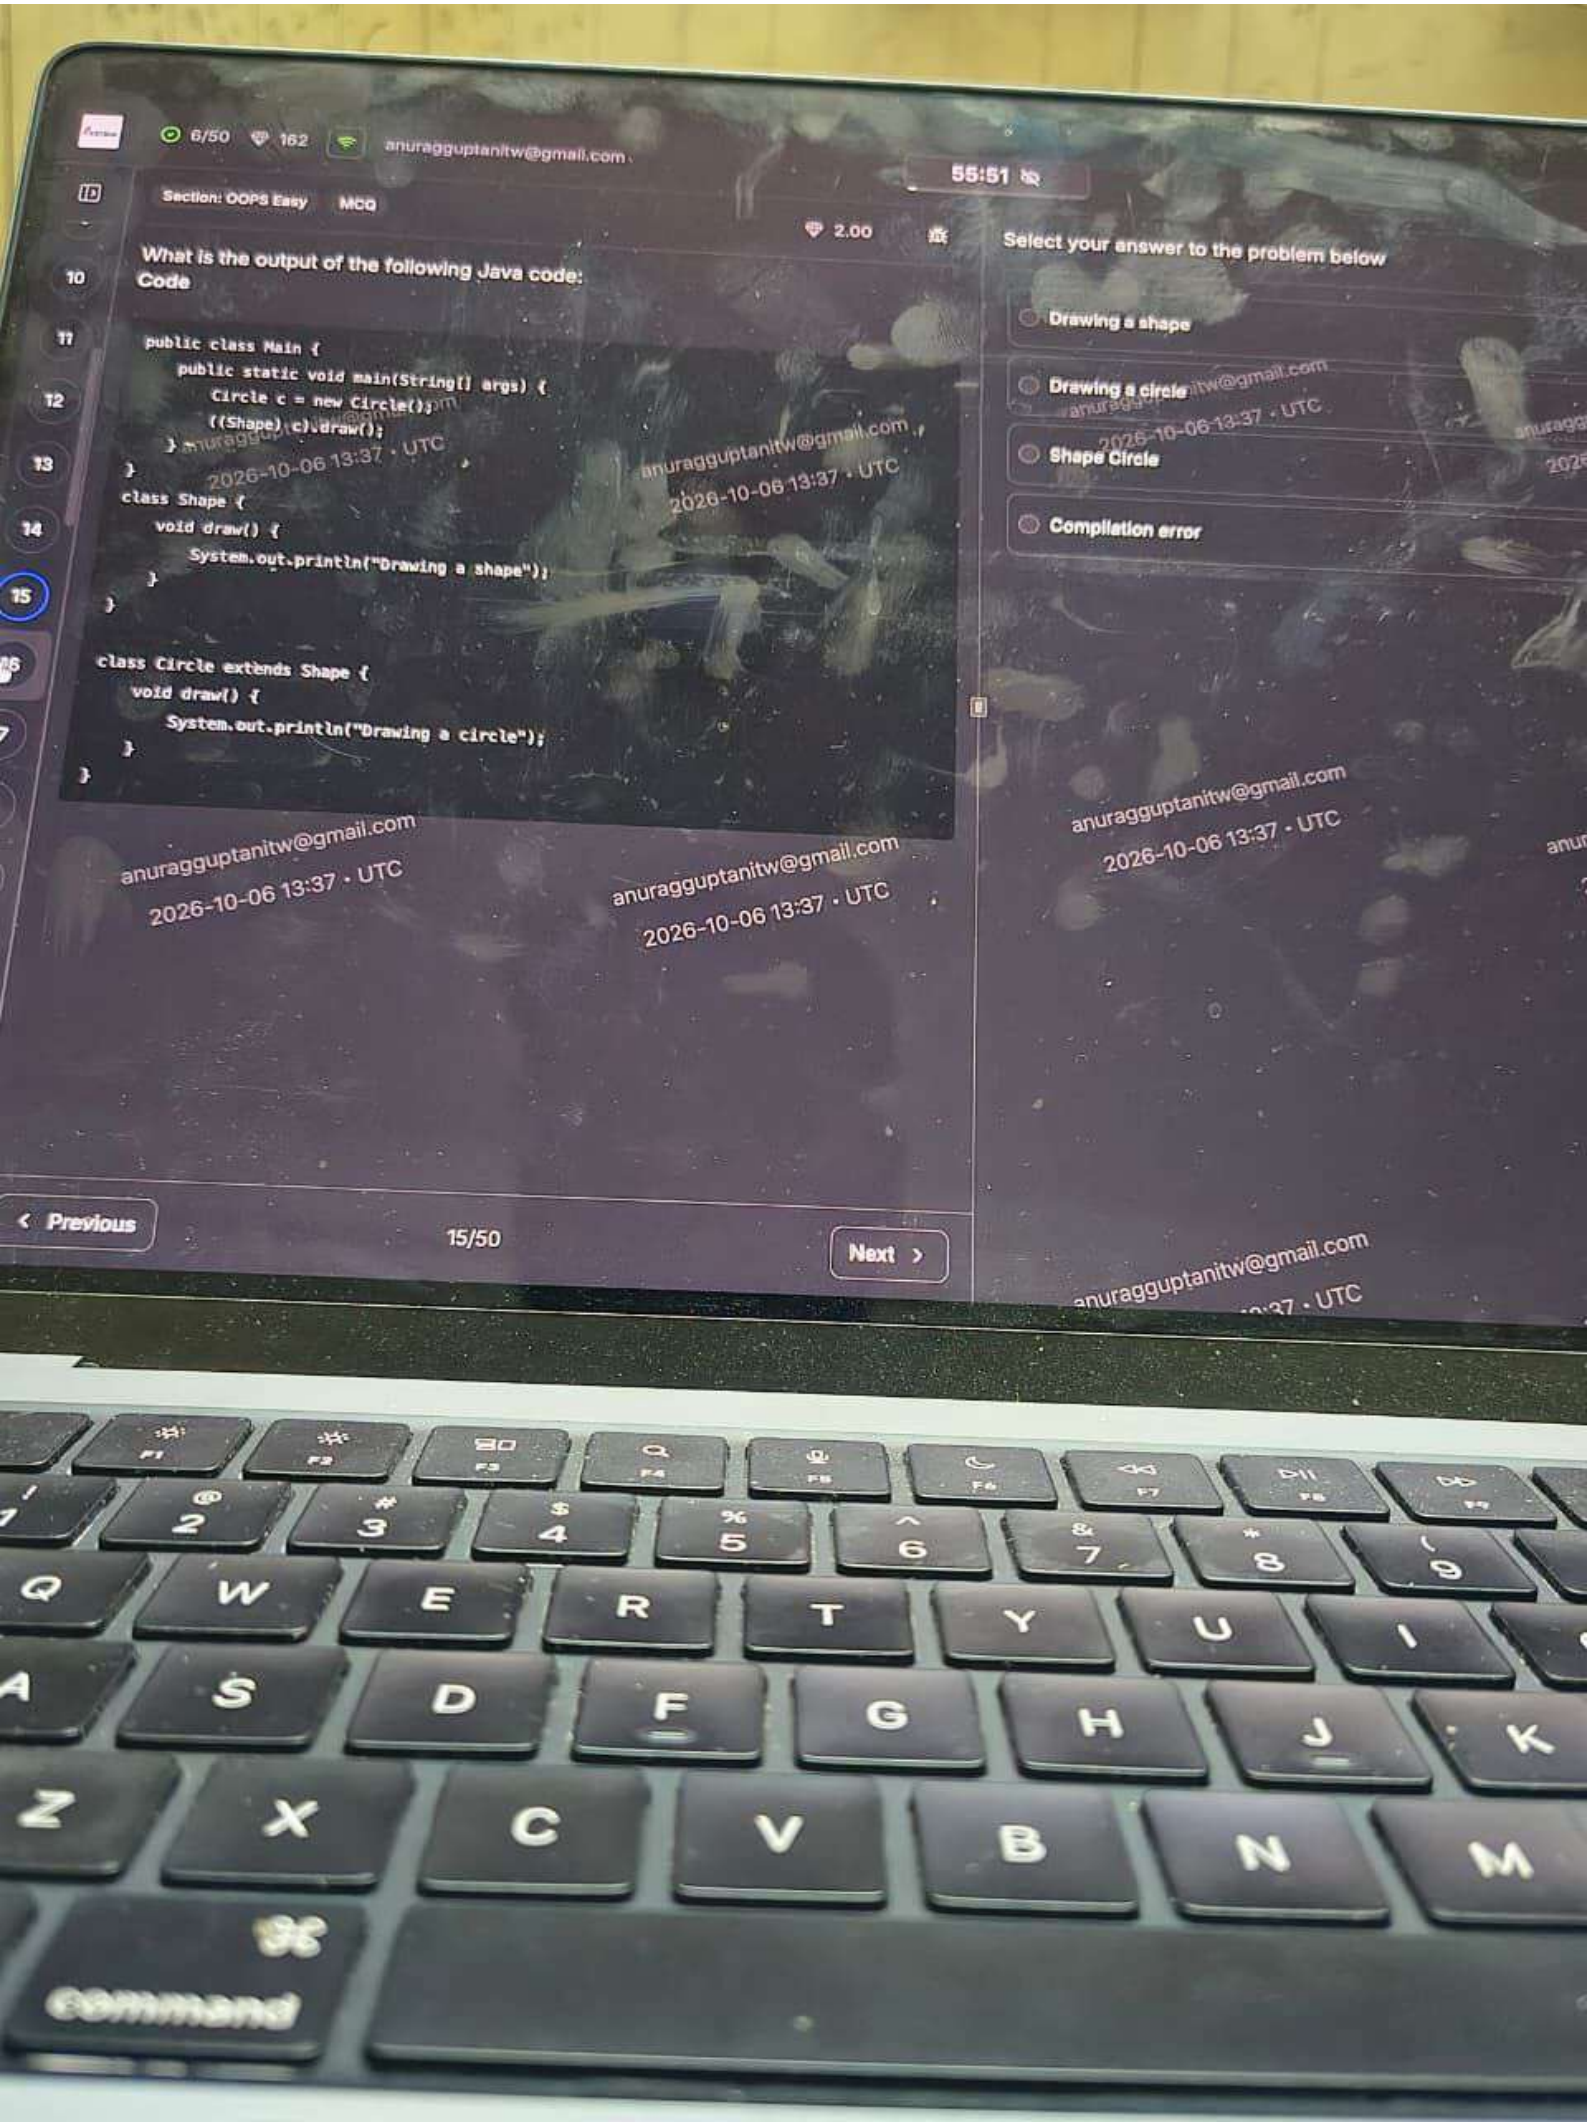

25/50
162
anuragguptanitw@gmail.com
46:58
Section: Computer Language Hard
MCQ
6.00
Select your answer to the problem below
What is the output of the following C++ code?
Code:
#include <bits/stdc++.h>
using namespace std;
struct HackNode
{
char key;
HackNode *left;
HackNode *right;
HackNode(char val)
{
key = val;
left = NULL;
right = NULL;
}
};
int HackerEarth(HackNode *root)
{
if (root == NULL)
return 0;
queue<HackNode *> HackQueue;
HackQueue.push(root);
int Hresult = 0;
while (!HackQueue.empty())
{
int count = HackQueue.size();
Hresult = max(Hresult, count);
for (int i = 0; i < count; i++)
{
HackNode *curr = HackQueue.front();
2
1
4
3
anuragguptanitw@gmail.com
2026-10-06 13:46 · UTC
Previous
33/50
Next

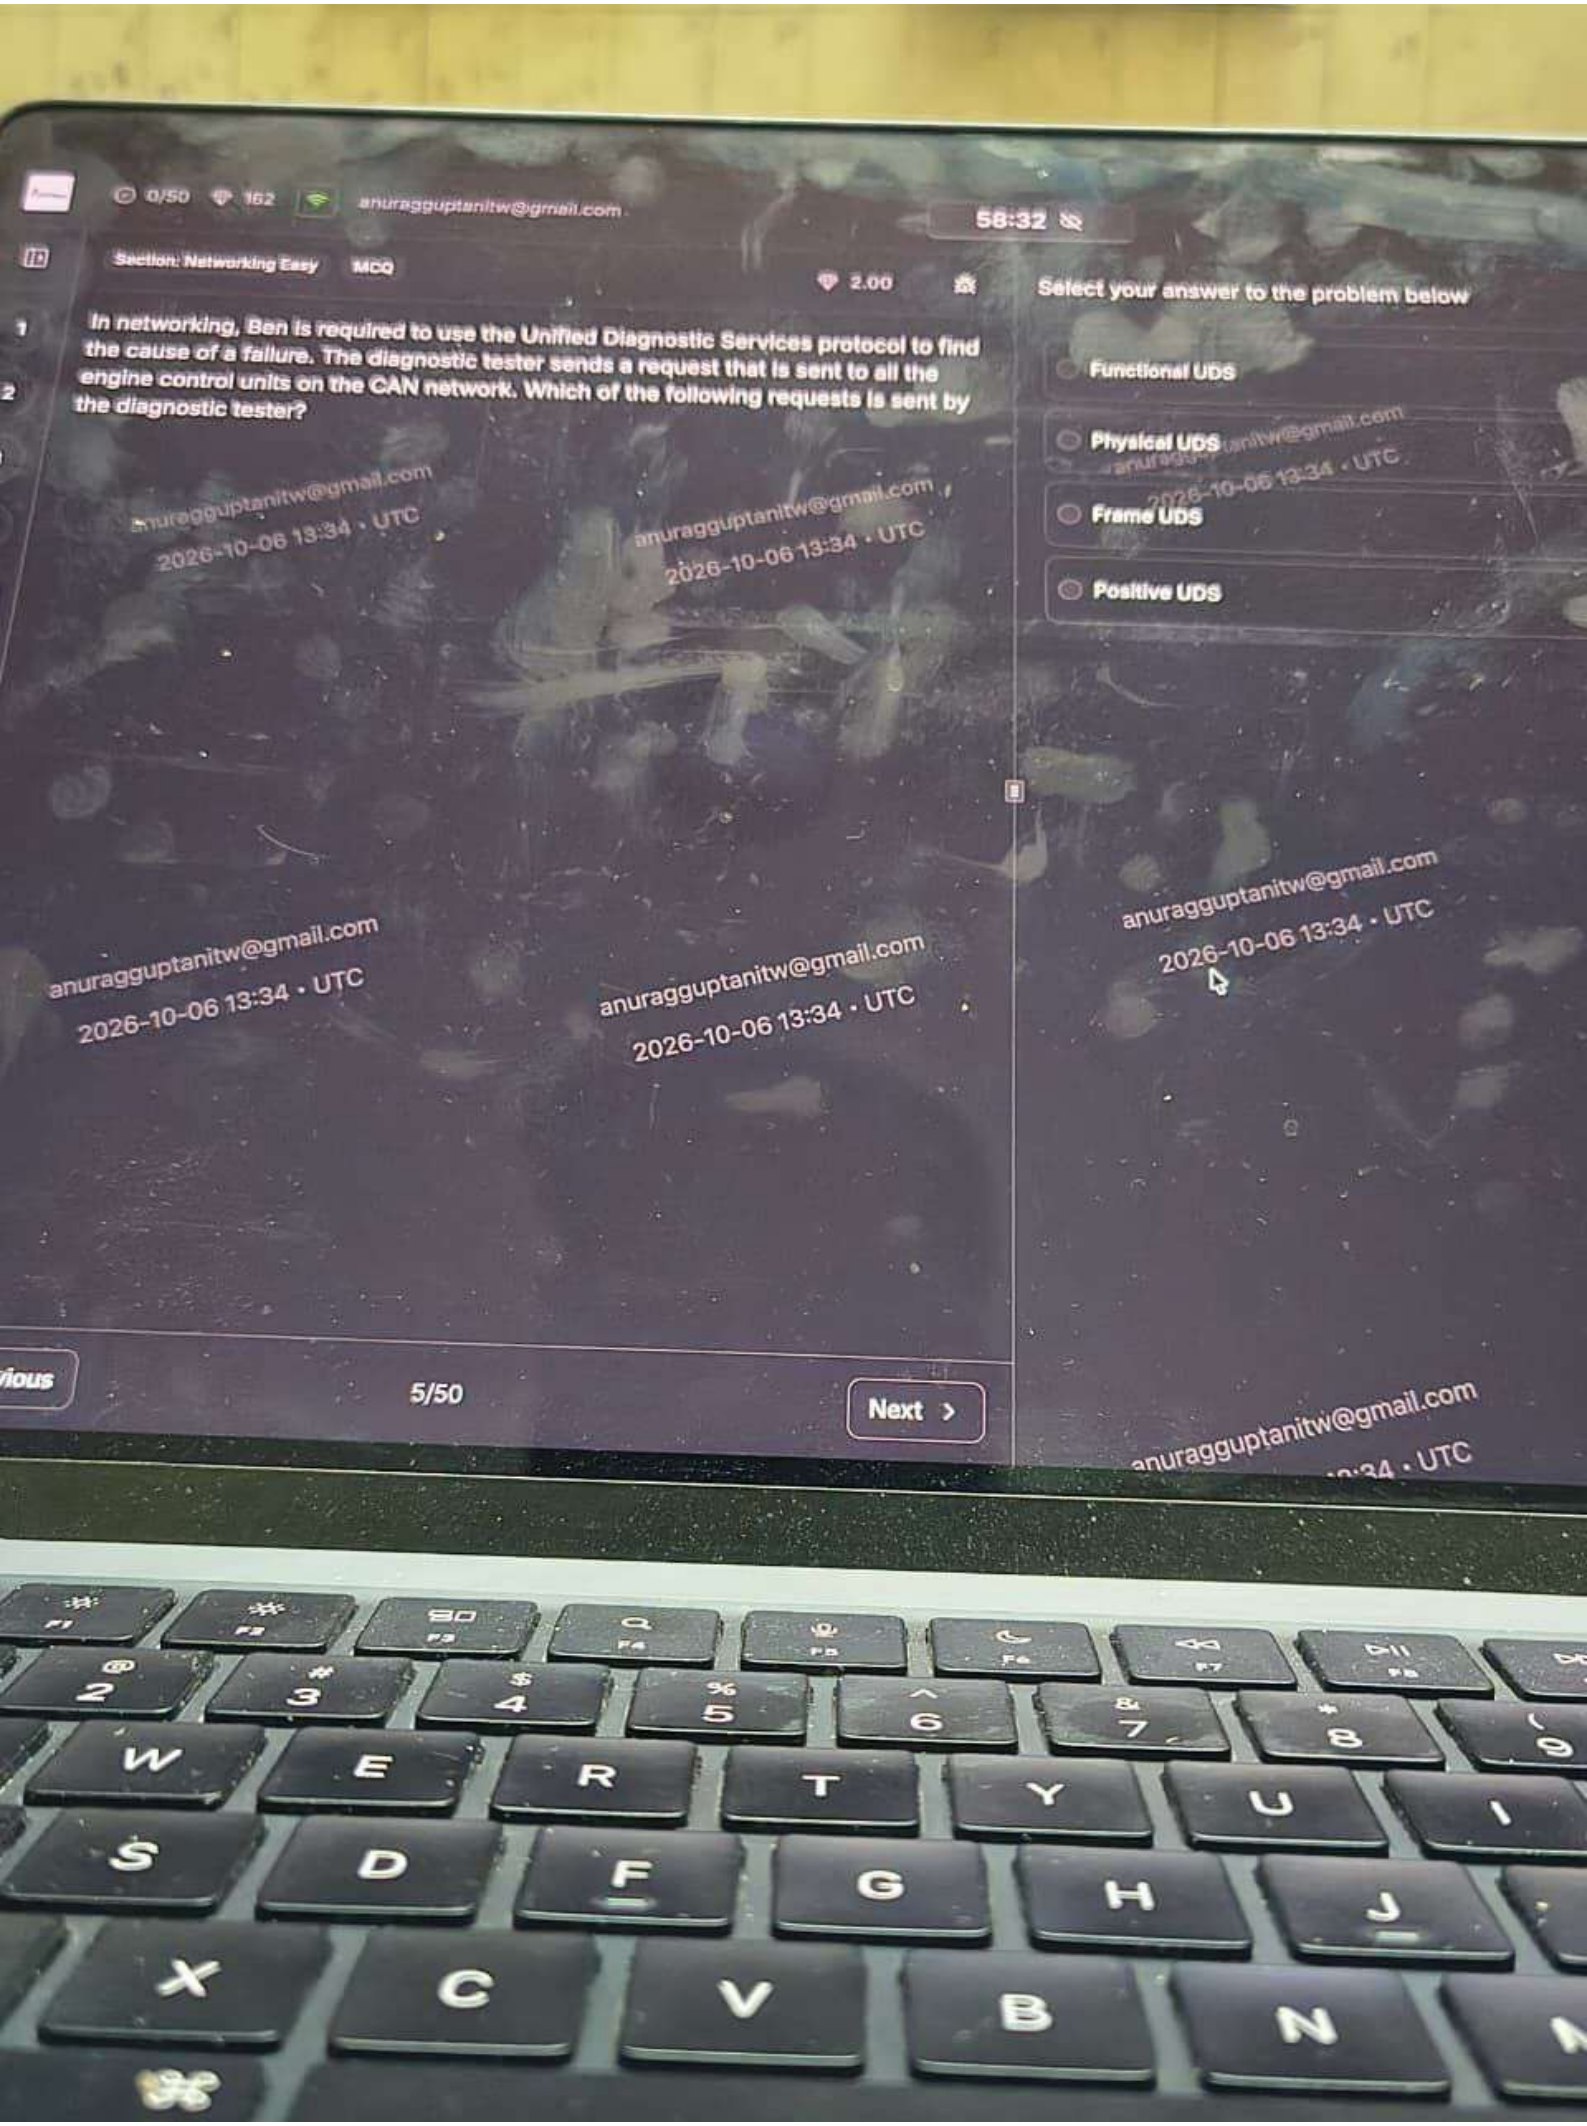

41/50
162
anuragguptanitw@gmail.com
38:52
Section: Output of Code Snippet Easy
MCQ
2.00
Select your answer to the problem below
Consider the tables given alongside. What can you do to get a list of employees along with the departments that they belong to?
CREATE TABLE locations(
location_id int,
city varchar(30),
PRIMARY KEY(location_id)
);
CREATE TABLE departments(
dept_id int,
dept_name varchar(50),
location_id int,
PRIMARY KEY(dept_id),
FOREIGN KEY(location_id) REFERENCES locations(location_id)
);
CREATE TABLE employees(
emp_id INT,
emp_name VARCHAR(50),
salary int,
dept_id int,
PRIMARY KEY(emp_id),
FOREIGN KEY(dept_id) REFERENCES departments(dept_id)
);
Options:
1. SELECT employees.emp_name AS "Employee", departments.dept_name
FROM employees, departments
WHERE employees.dept_id = departments.dept_id;
1
2
3
4
anuragguptanitw@gmail.com
2026-10-06 13:54 • UTC
Previous
46/50
Next

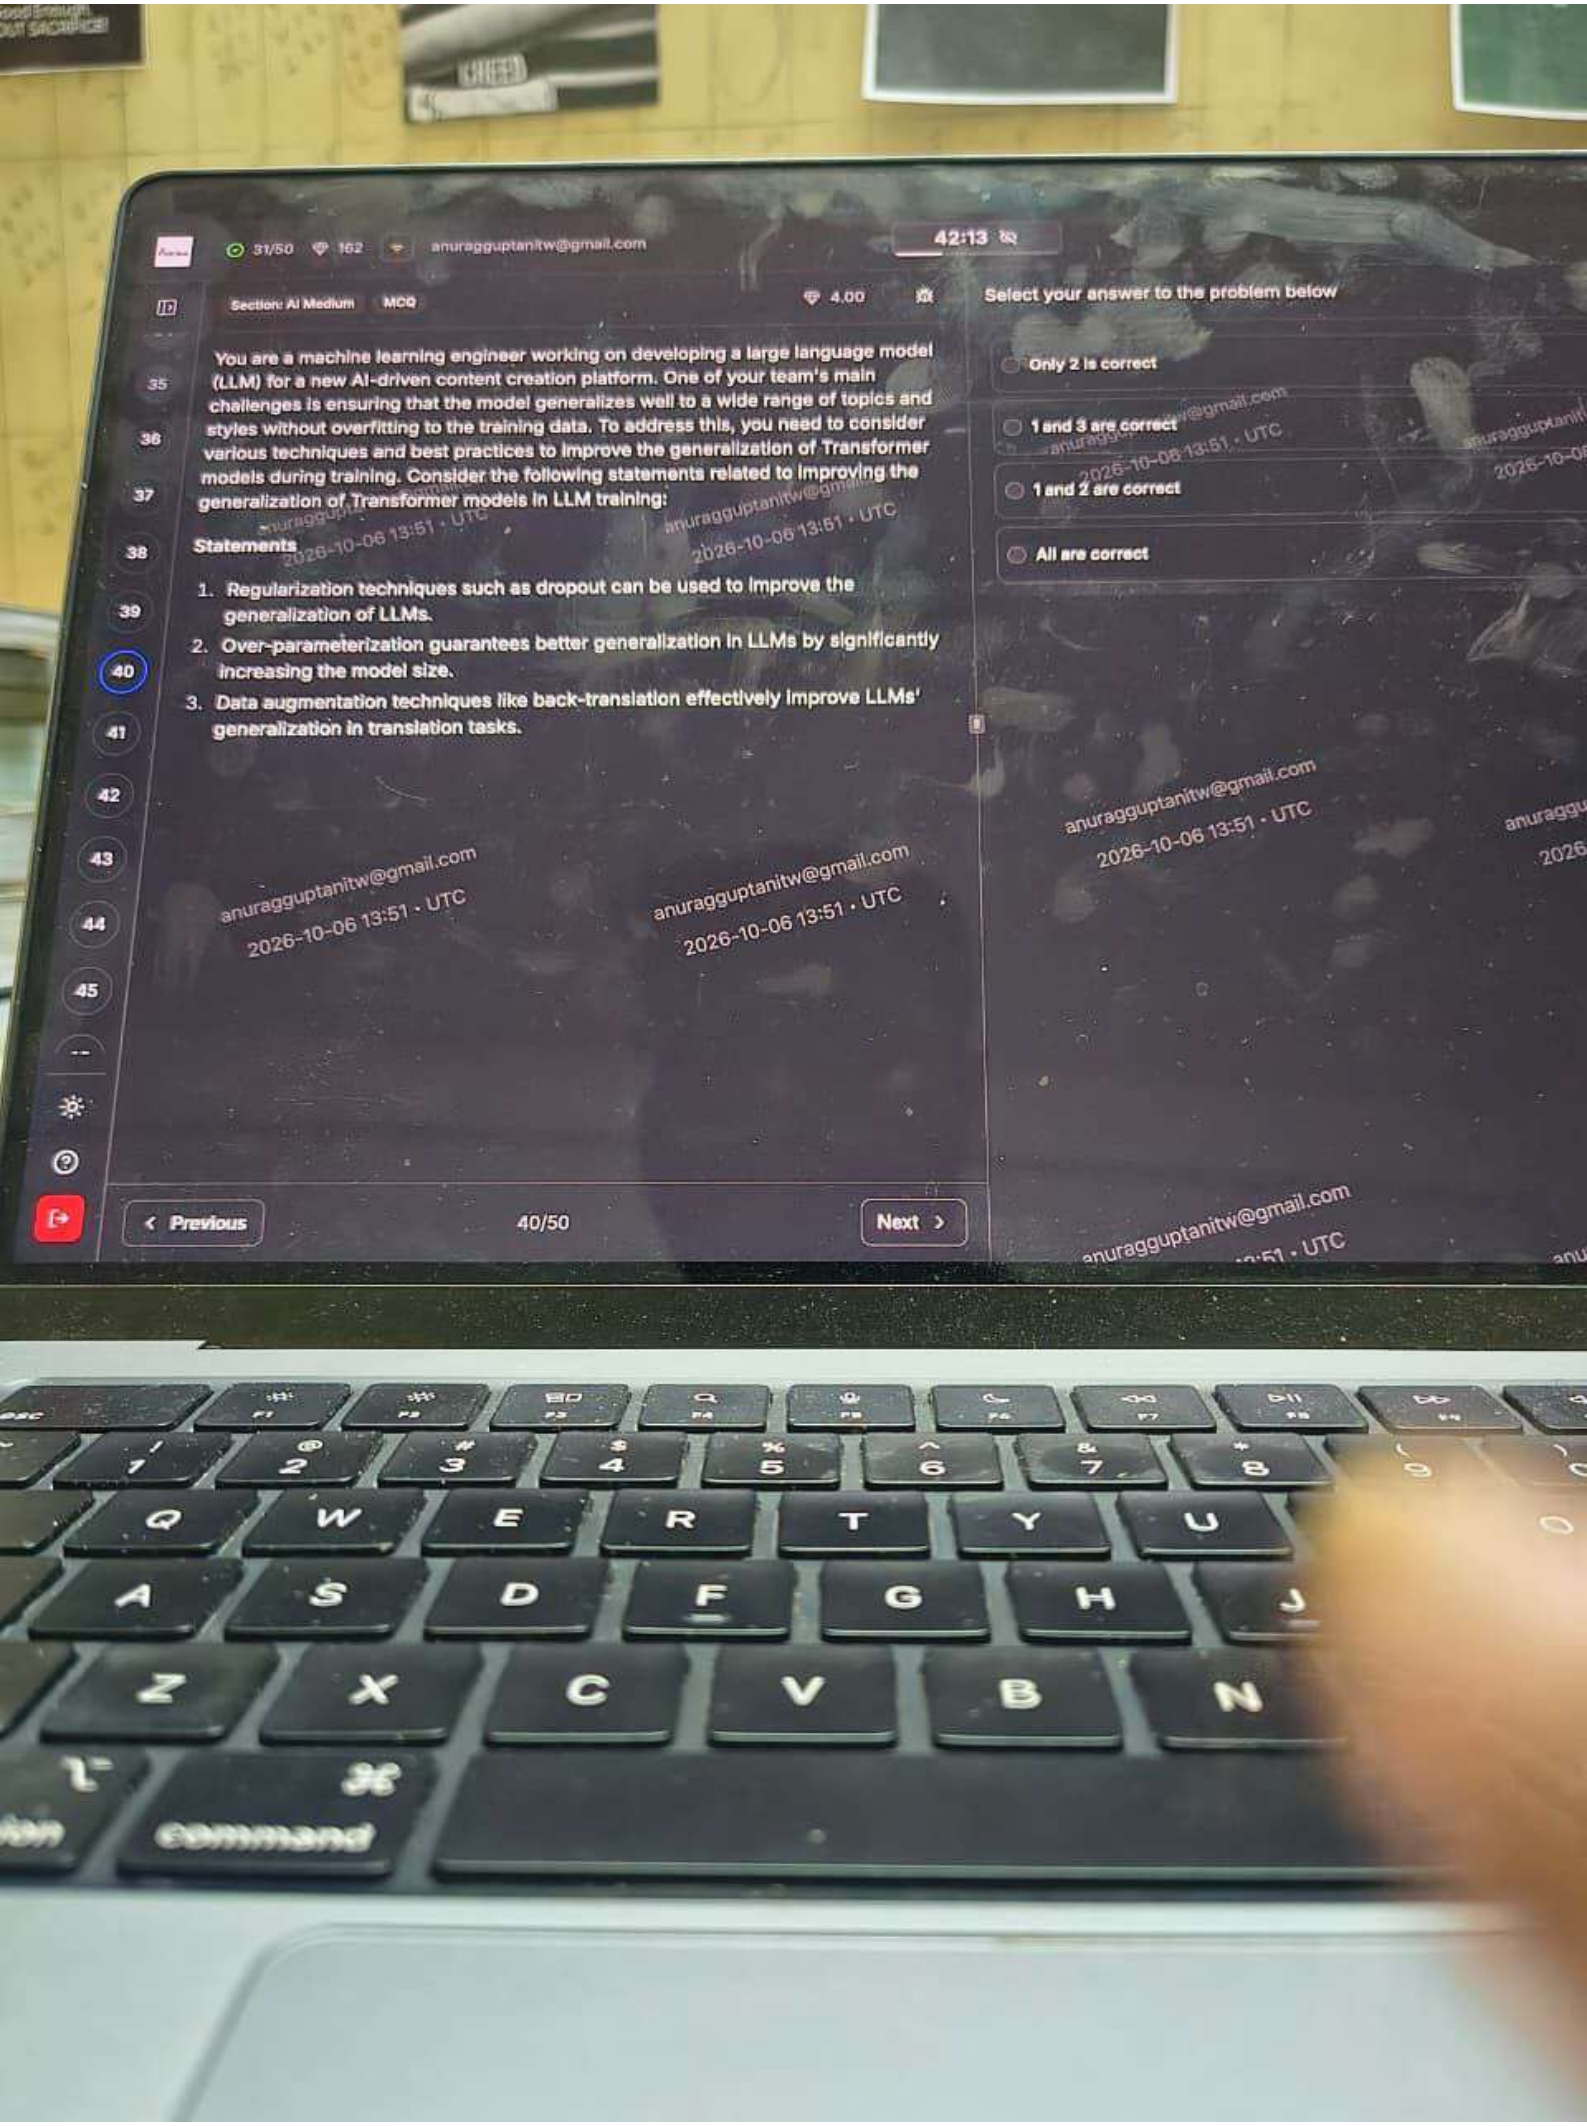

6/50
162
anuragguptanitw@gmail.com
56:21
Section: Networking Easy
MCQ
2.00
In networking, which of the following CAN protocol nodes can access the request transmission rights:
1. Classical CAN
2. CAN FD
Select your answer to the problem below
1
2
Both of these
None of these
anuragguptanitw@gmail.com
2026-10-06 13:36 • UTC
Previous
7/50
Next
command


31/50
162
anuragguptanitw@gmail.com
42:17
Section: AI Medium
MCQ
4.00
Select your answer to the problem below
In Machine Learning, Bob is working on a project using natural language processing. He wants to use probabilistic and statistical information to assign tags to words in a corpus. In this scenario, which of the following taggers will he select?
Stochastic
Sentiment
Statistical
None of these
34
35
36
37
38
39
40
41
42
43
44
Previous
39/50
Next
anuragguptanitw@gmail.com
2026-10-06 13:51 · UTC
command


41/50
162
anuragguptanitw@gmail.com
38:30
Section: Output of Code Snippet Medium
MCQ
4.00
Select your answer to the problem below
asyncio.run(main())
Output
1. 3 2 1 2 1
2. 3 2 2 1 1
3. 3 2 1 1 2
4. 3 1 2 1 2
1
2
3
4
anuragguptanitw@gmail.com
2026-10-06 13:54 • UTC
Previous
48/50
Next


6/50
162
anuragguptanitw@gmail.com
55:51
Section: OOPS Easy
MCQ
2.00
What is the output of the following Java code:
Code
10
11
12
13
14
15
public class Main {
public static void main(String[] args) {
Circle c = new Circle();
((Shape) c).draw();
}
}
class Shape {
void draw() {
System.out.println("Drawing a shape");
}
}
class Circle extends Shape {
void draw() {
System.out.println("Drawing a circle");
}
}
Select your answer to the problem below
Drawing a shape
Drawing a circle
Shape Circle
Compilation error
anuragguptanitw@gmail.com
2026-10-06 13:37 • UTC
Previous
15/50
Next
command


0/50
162
anuragguptanitw@gmail.com
58:32
Section: Networking Easy
MCQ
2.00
Select your answer to the problem below
In networking, Ben is required to use the Unified Diagnostic Services protocol to find the cause of a failure. The diagnostic tester sends a request that is sent to all the engine control units on the CAN network. Which of the following requests is sent by the diagnostic tester?
Functional UDS
Physical UDS
Frame UDS
Positive UDS
anuragguptanitw@gmail.com
2026-10-06 13:34 • UTC
5/50
Next


31/50
162
anuragguptanitw@gmail.com
42:13
Section: AI Medium
MCQ
4.00
Select your answer to the problem below
You are a machine learning engineer working on developing a large language model (LLM) for a new AI-driven content creation platform. One of your team's main challenges is ensuring that the model generalizes well to a wide range of topics and styles without overfitting to the training data. To address this, you need to consider various techniques and best practices to improve the generalization of Transformer models during training. Consider the following statements related to improving the generalization of Transformer models in LLM training:
Statements
1. Regularization techniques such as dropout can be used to improve the generalization of LLMs.
2. Over-parameterization guarantees better generalization in LLMs by significantly increasing the model size.
3. Data augmentation techniques like back-translation effectively improve LLMs' generalization in translation tasks.
Only 2 is correct
1 and 3 are correct
1 and 2 are correct
All are correct
35
36
37
38
39
40
41
42
43
44
45
anuragguptanitw@gmail.com
2026-10-06 13:51 · UTC
Previous
40/50
Next
command

25/50 162 anuragguptanitw@gmail.com

47:01

Section: Computer Language Easy MCQ 2.00

Which of these options describes the line A in the following Android code:

```
public class MainActivity extends Activity {

  .....
  ListView simpleList;
  String animalList[] = {"Lion","Tiger","Monkey","Elephant",
"Dog","Cat","Camel"};
  @Override
  protected void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(....);
    simpleList = (ListView) findViewById(.....);

    ArrayAdapter<String>arrayAdapter = new ArrayAdapter<String>(this, R.layout.acti
vity_list_view,
R.id.textView, animalList);

    /**Line A**/

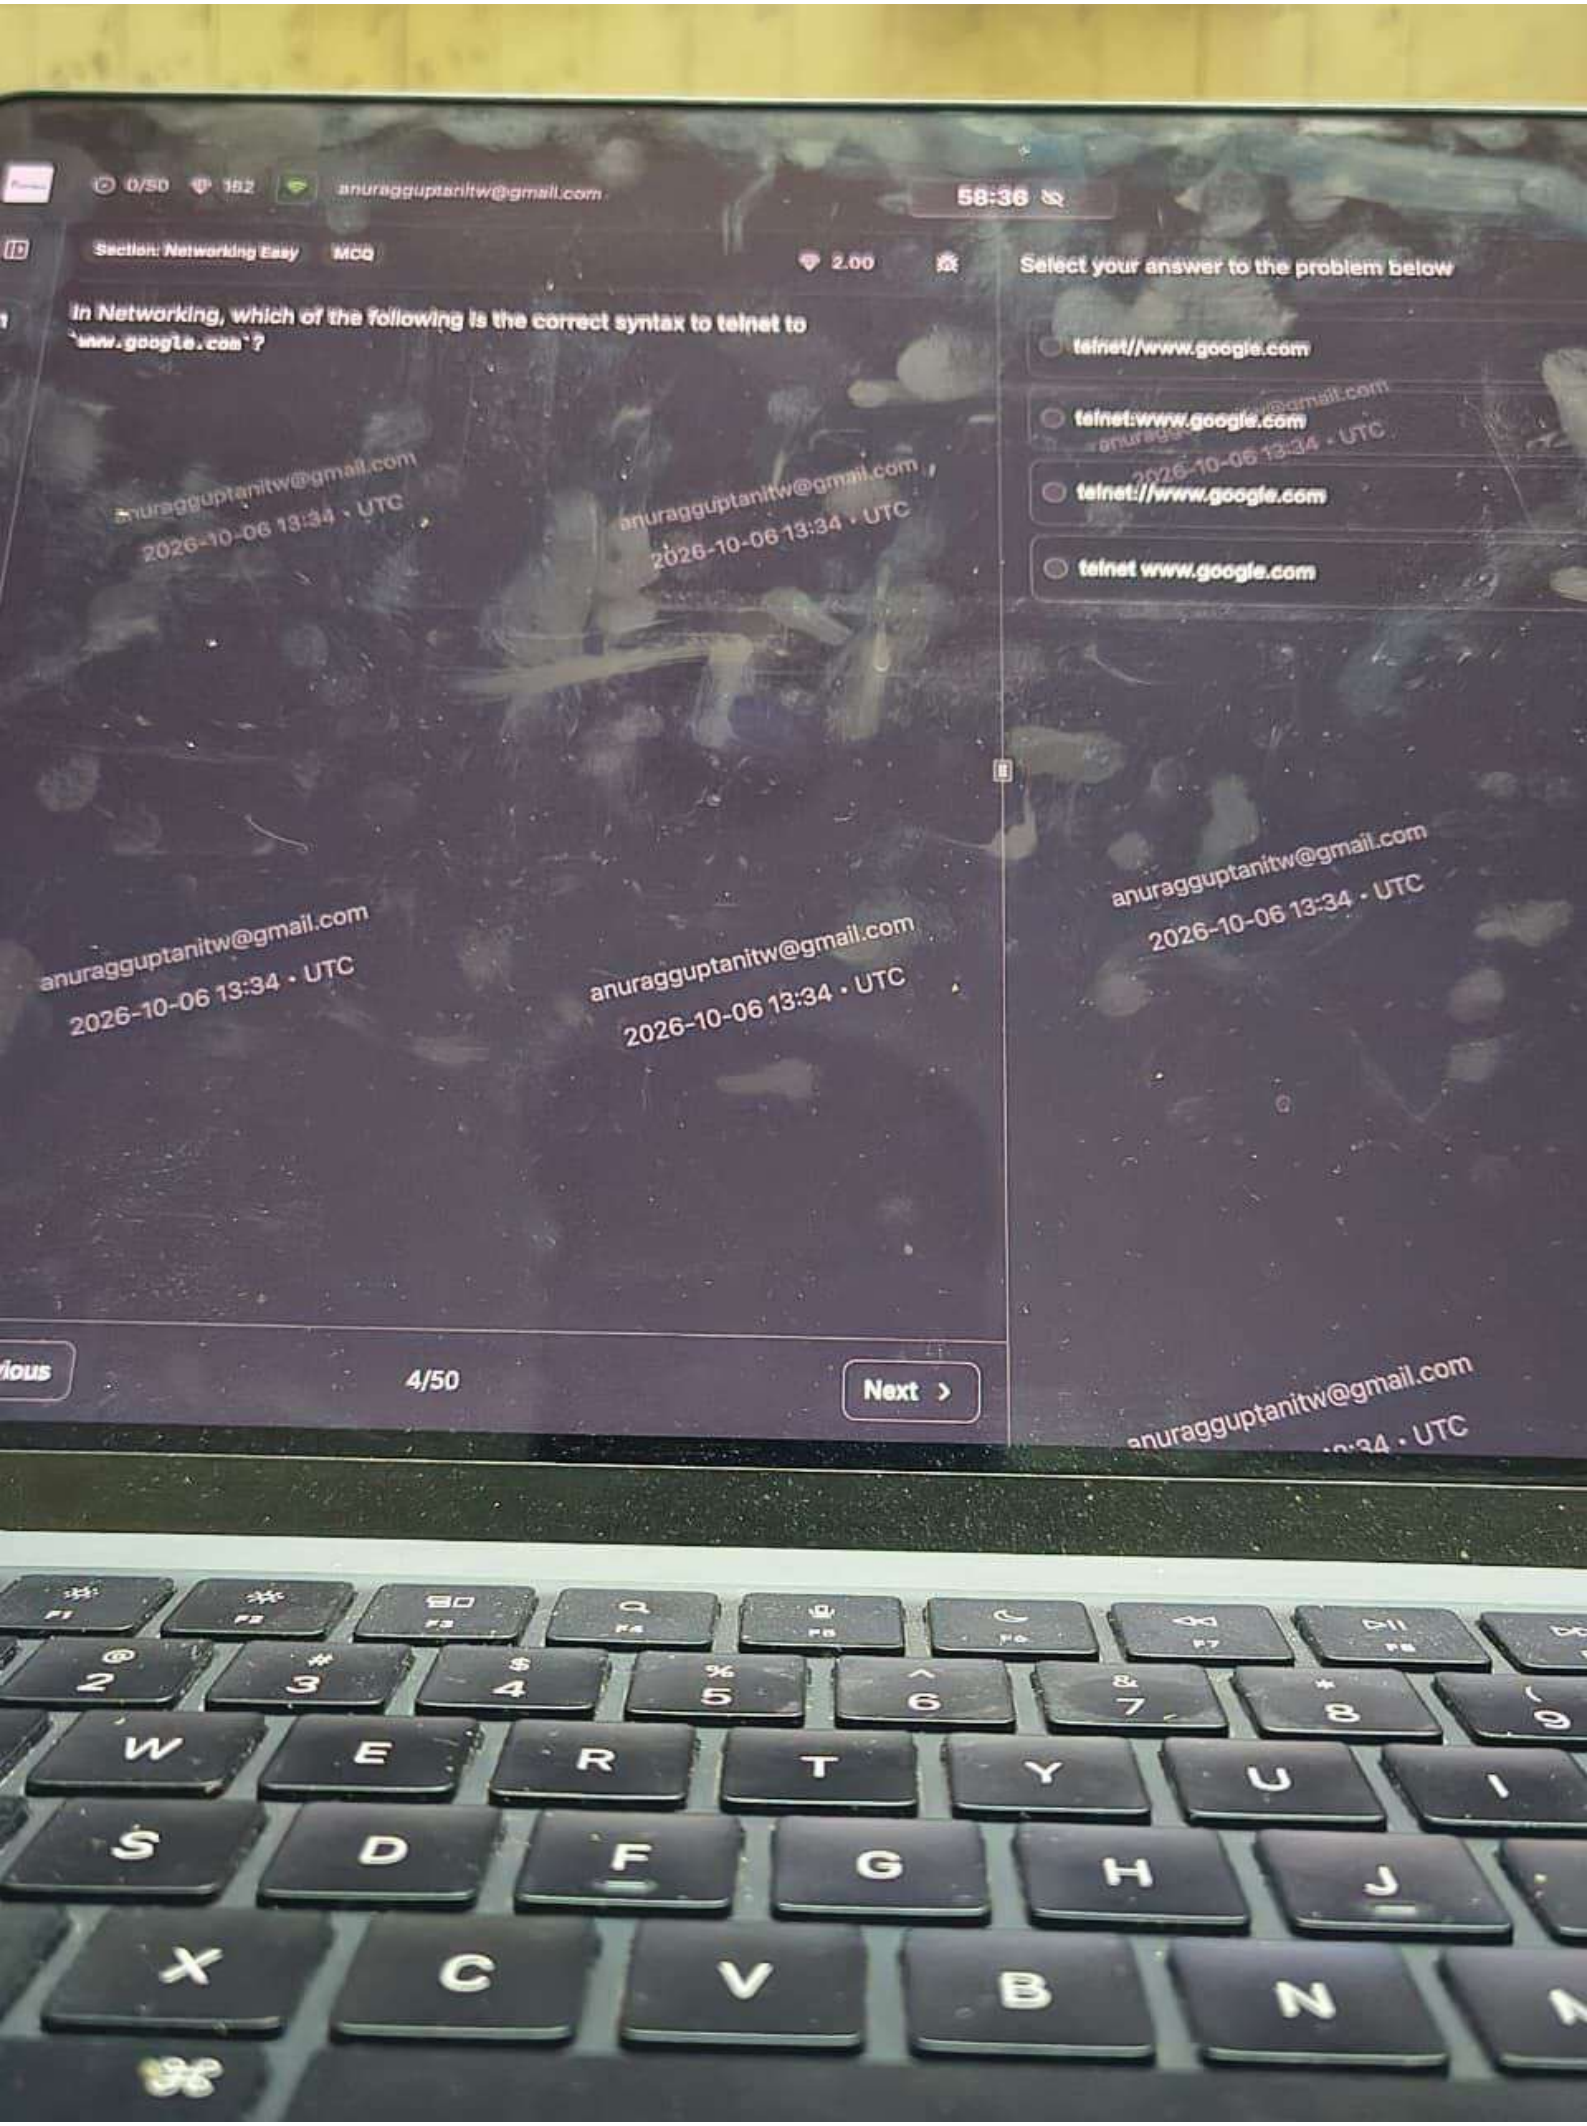
  }
  .....
}
```

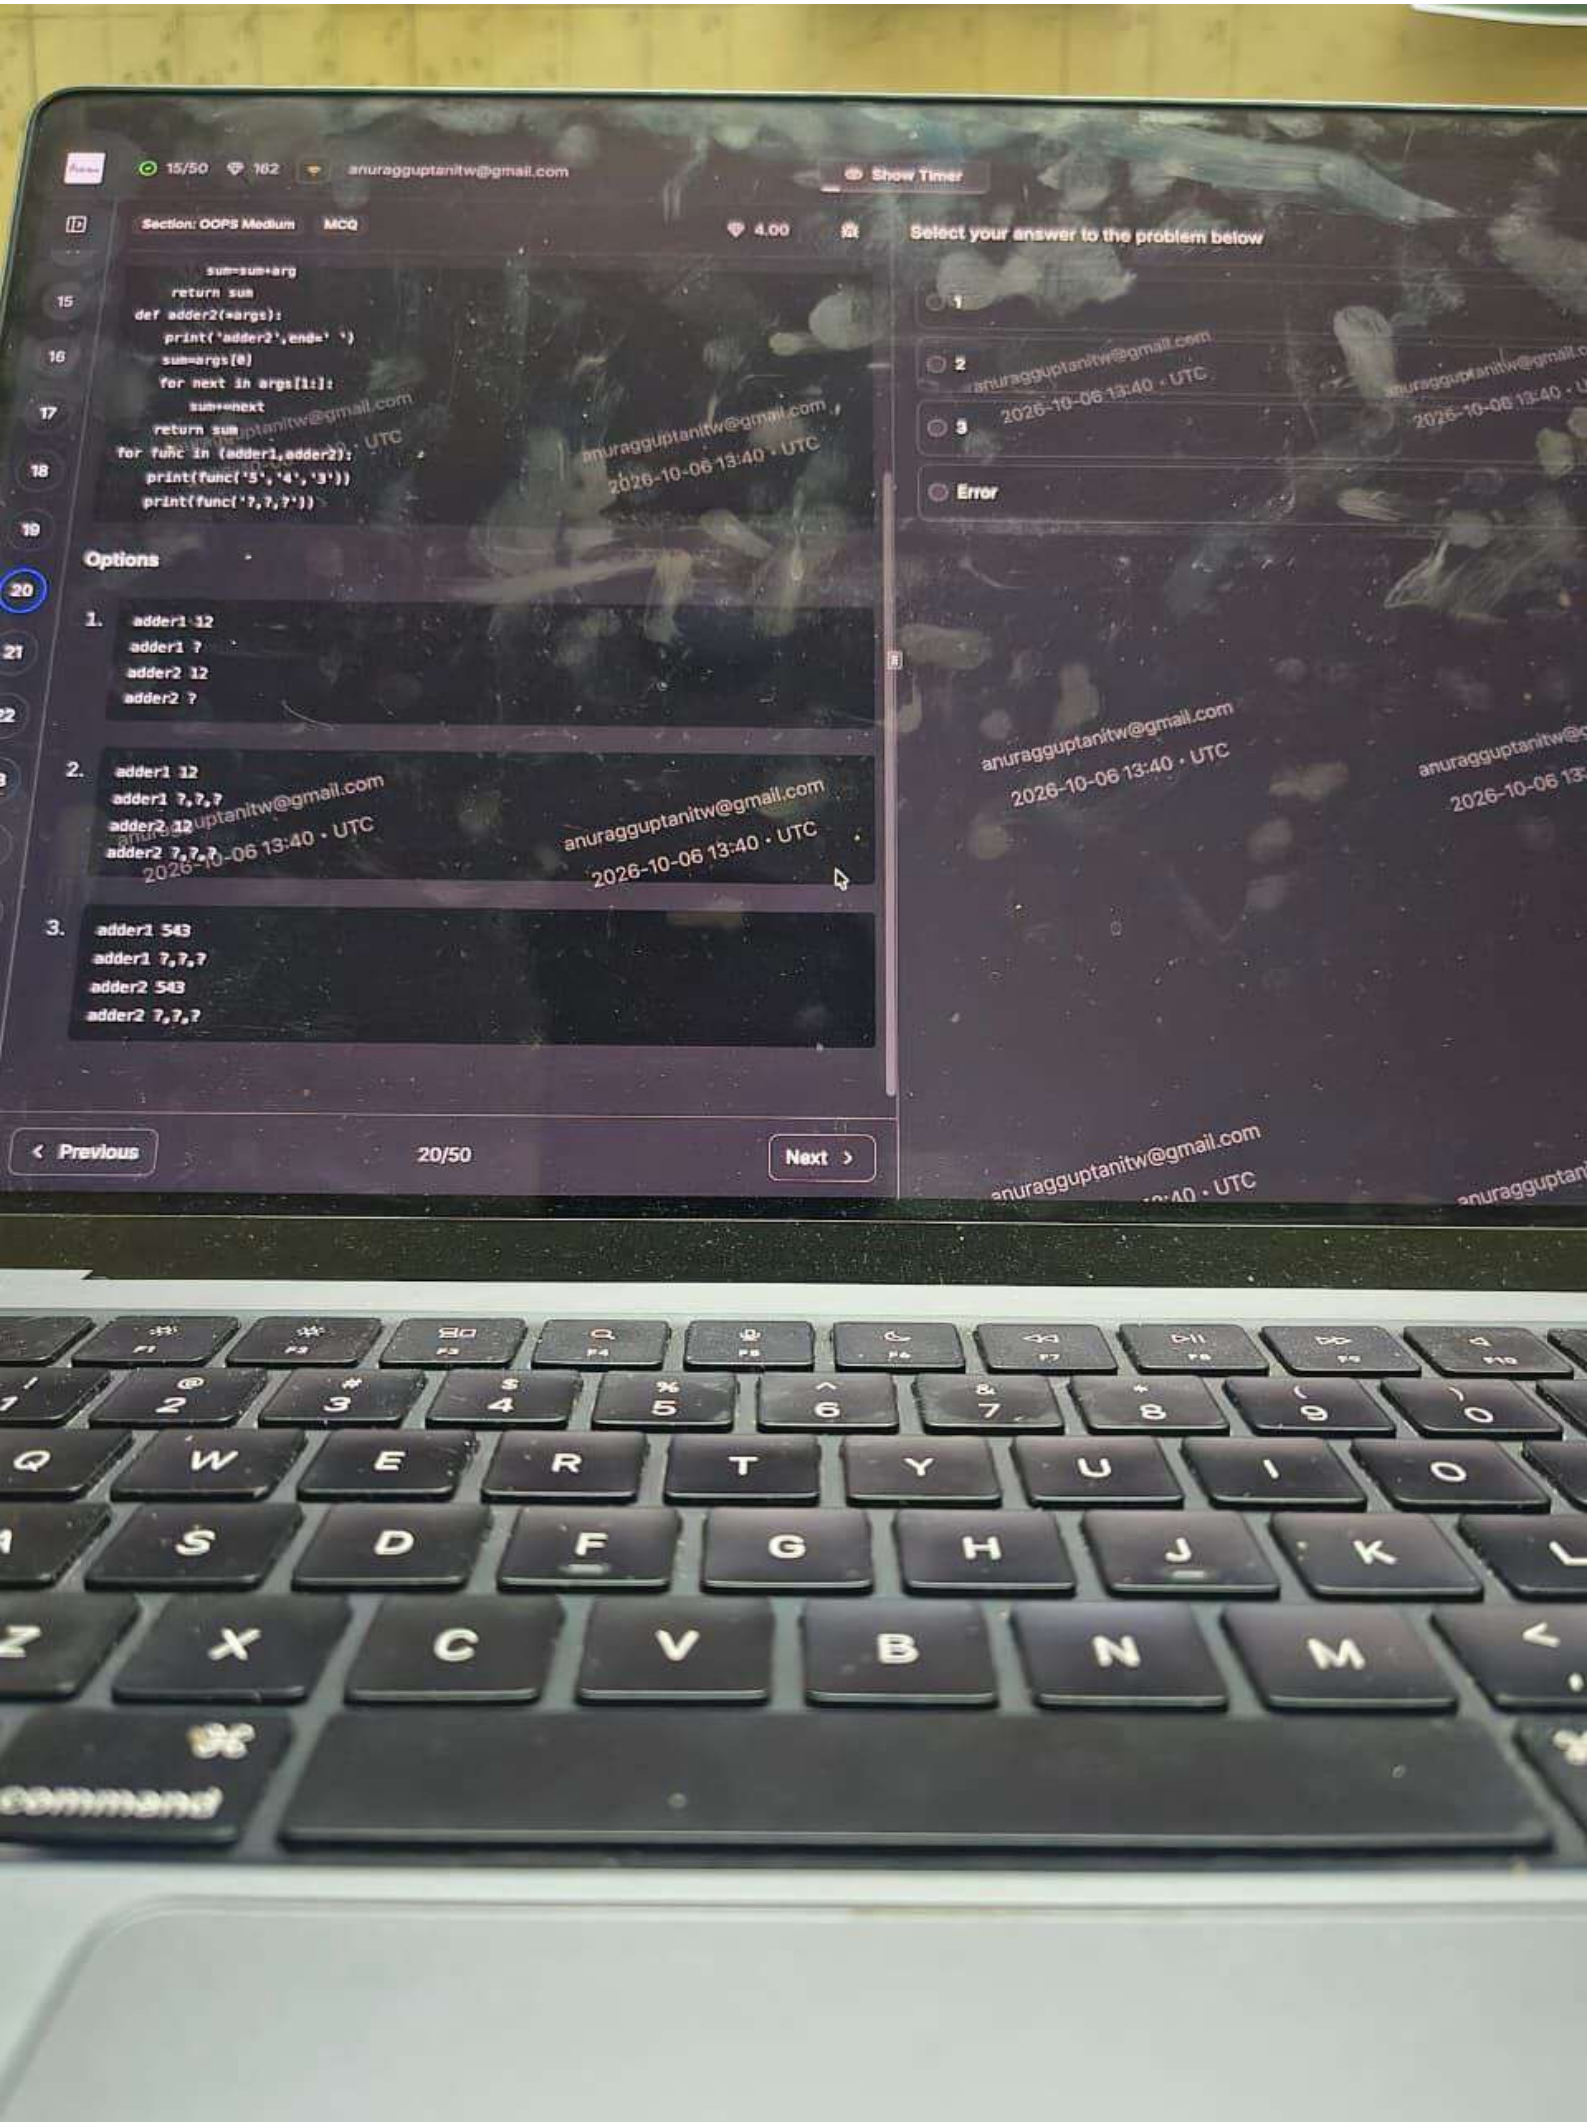
Select your answer to the problem below

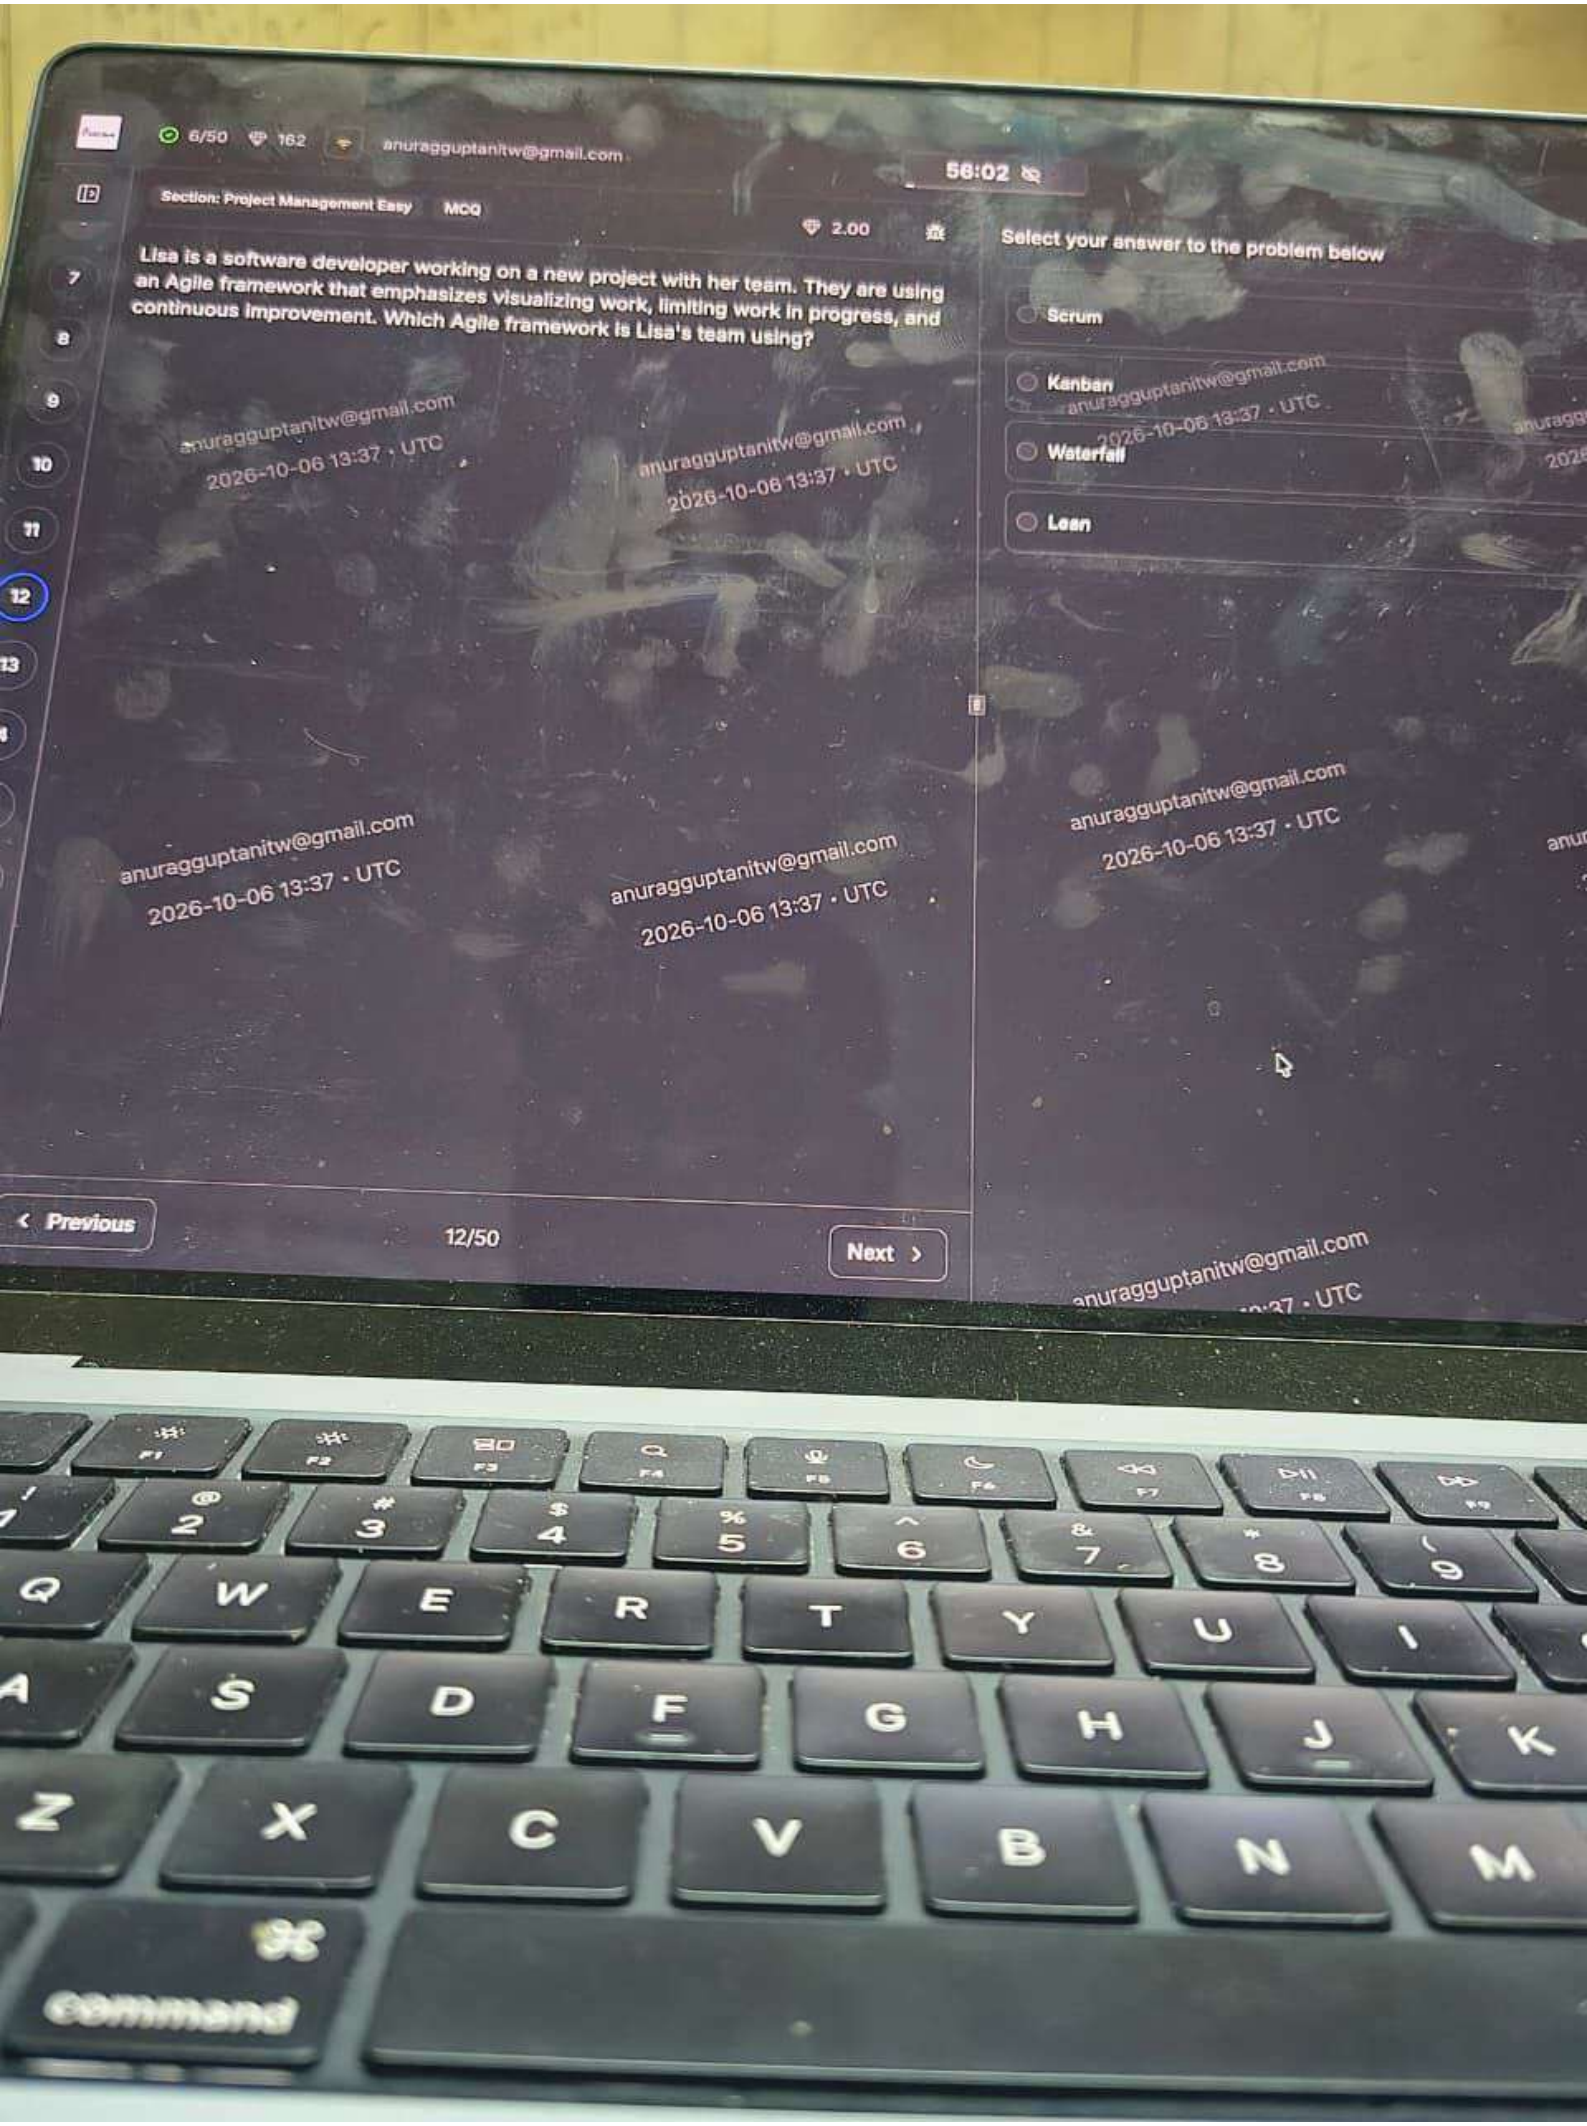
- simpleList.setActivated(arrayAdapter)
- simpleList.setEnabled(arrayAdapter)
- simpleList.setAdapter(arrayAdapter)
- simpleList.setListAdapter(arrayAdapter)

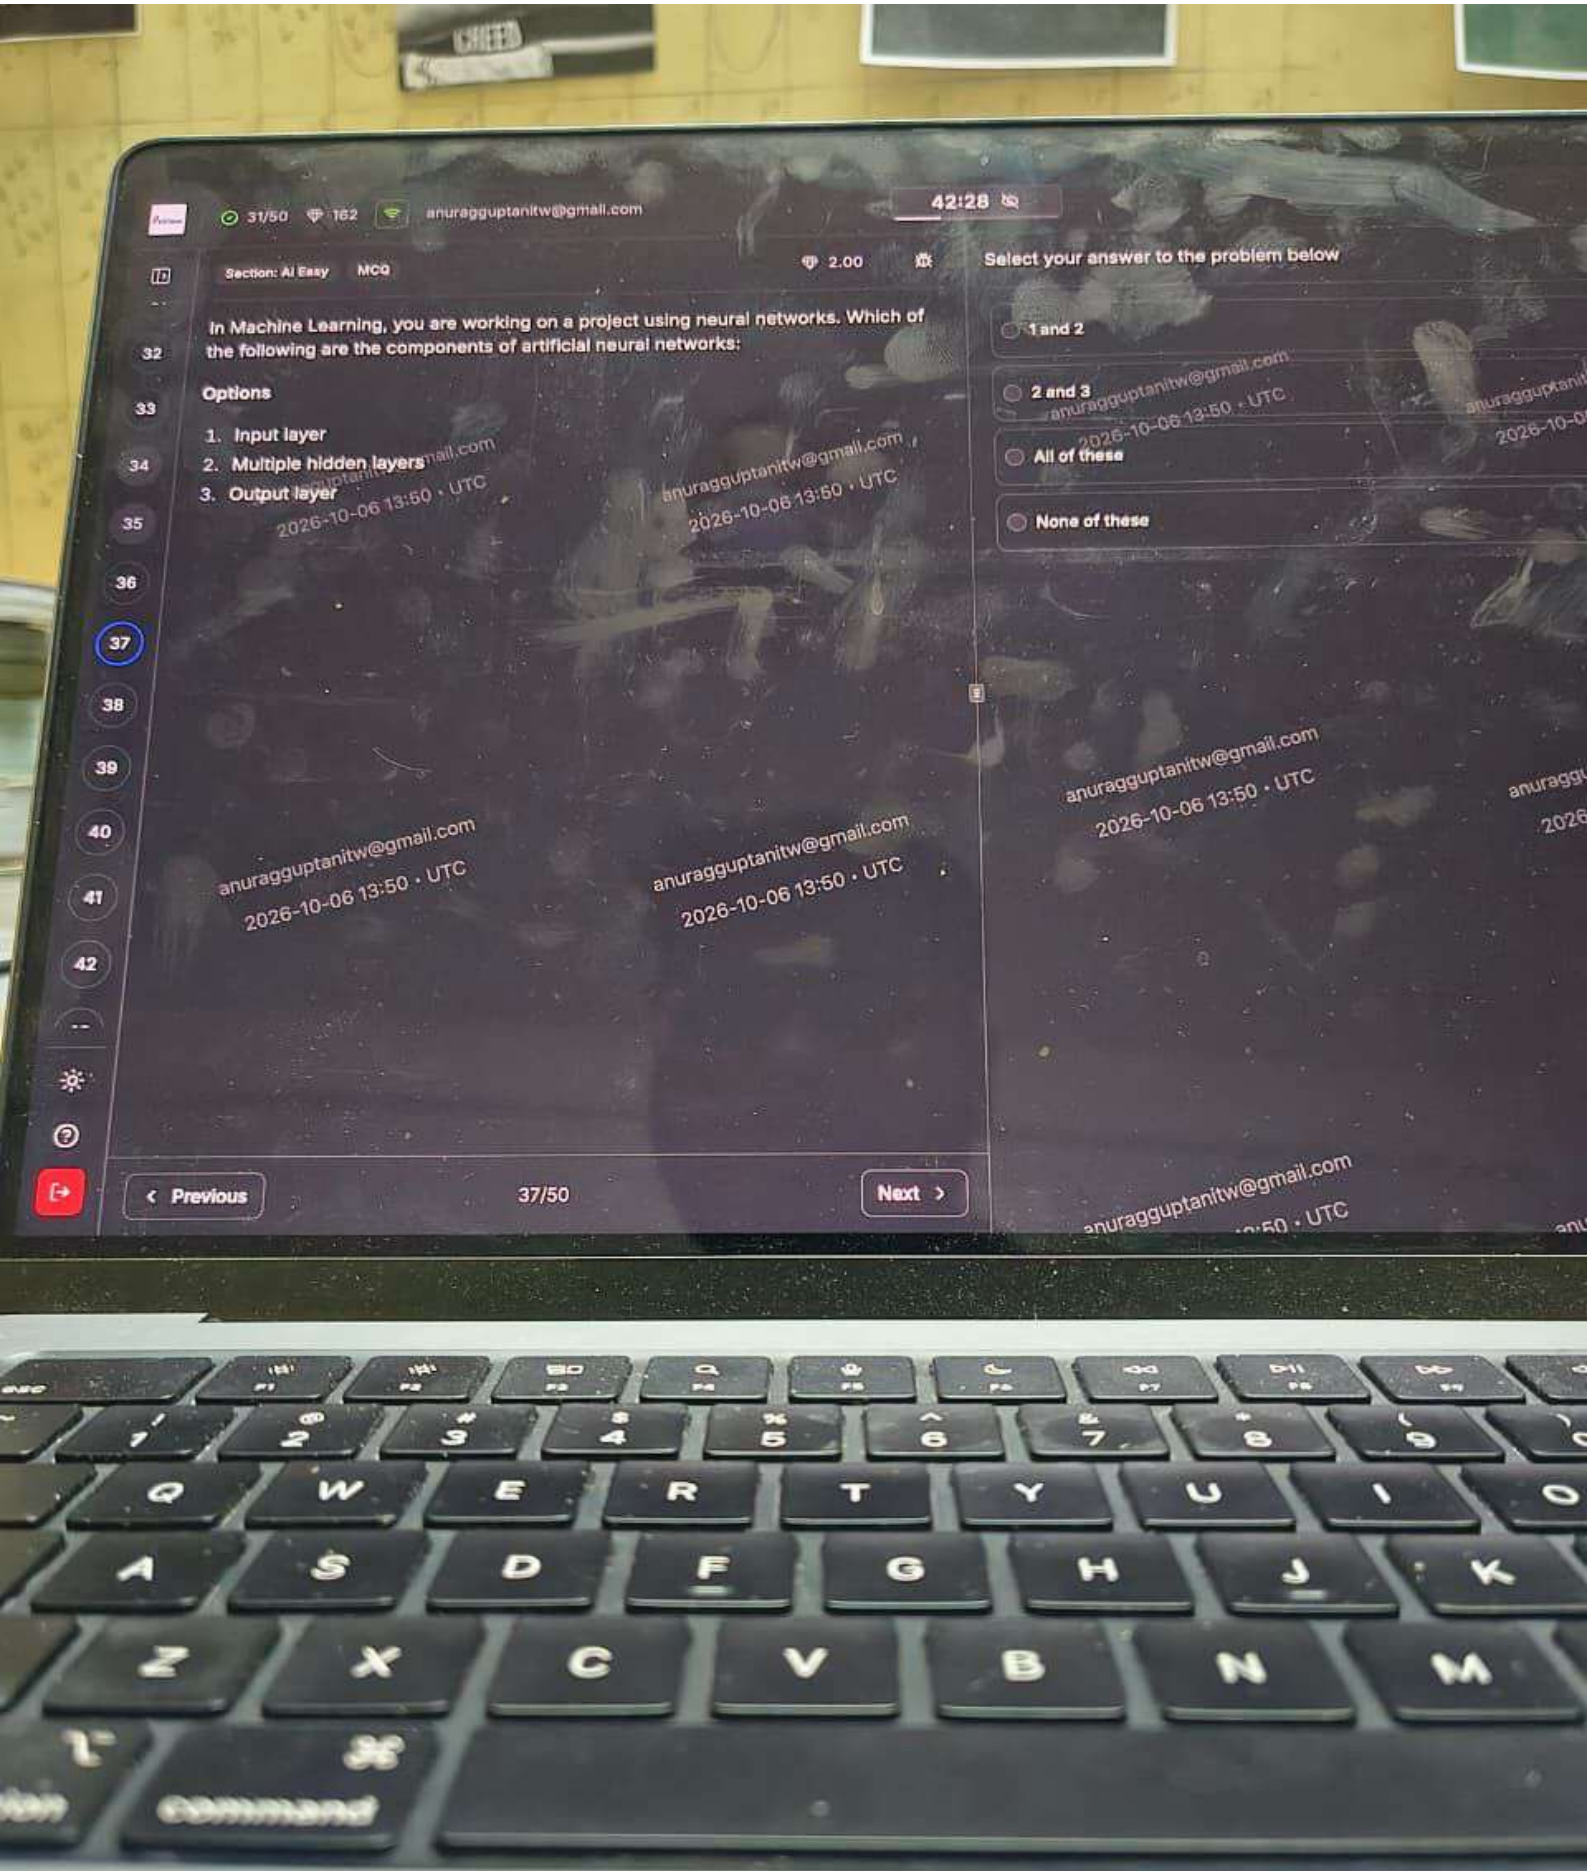
anuragguptanitw@gmail.com 2026-10-06 13:46 · UTC

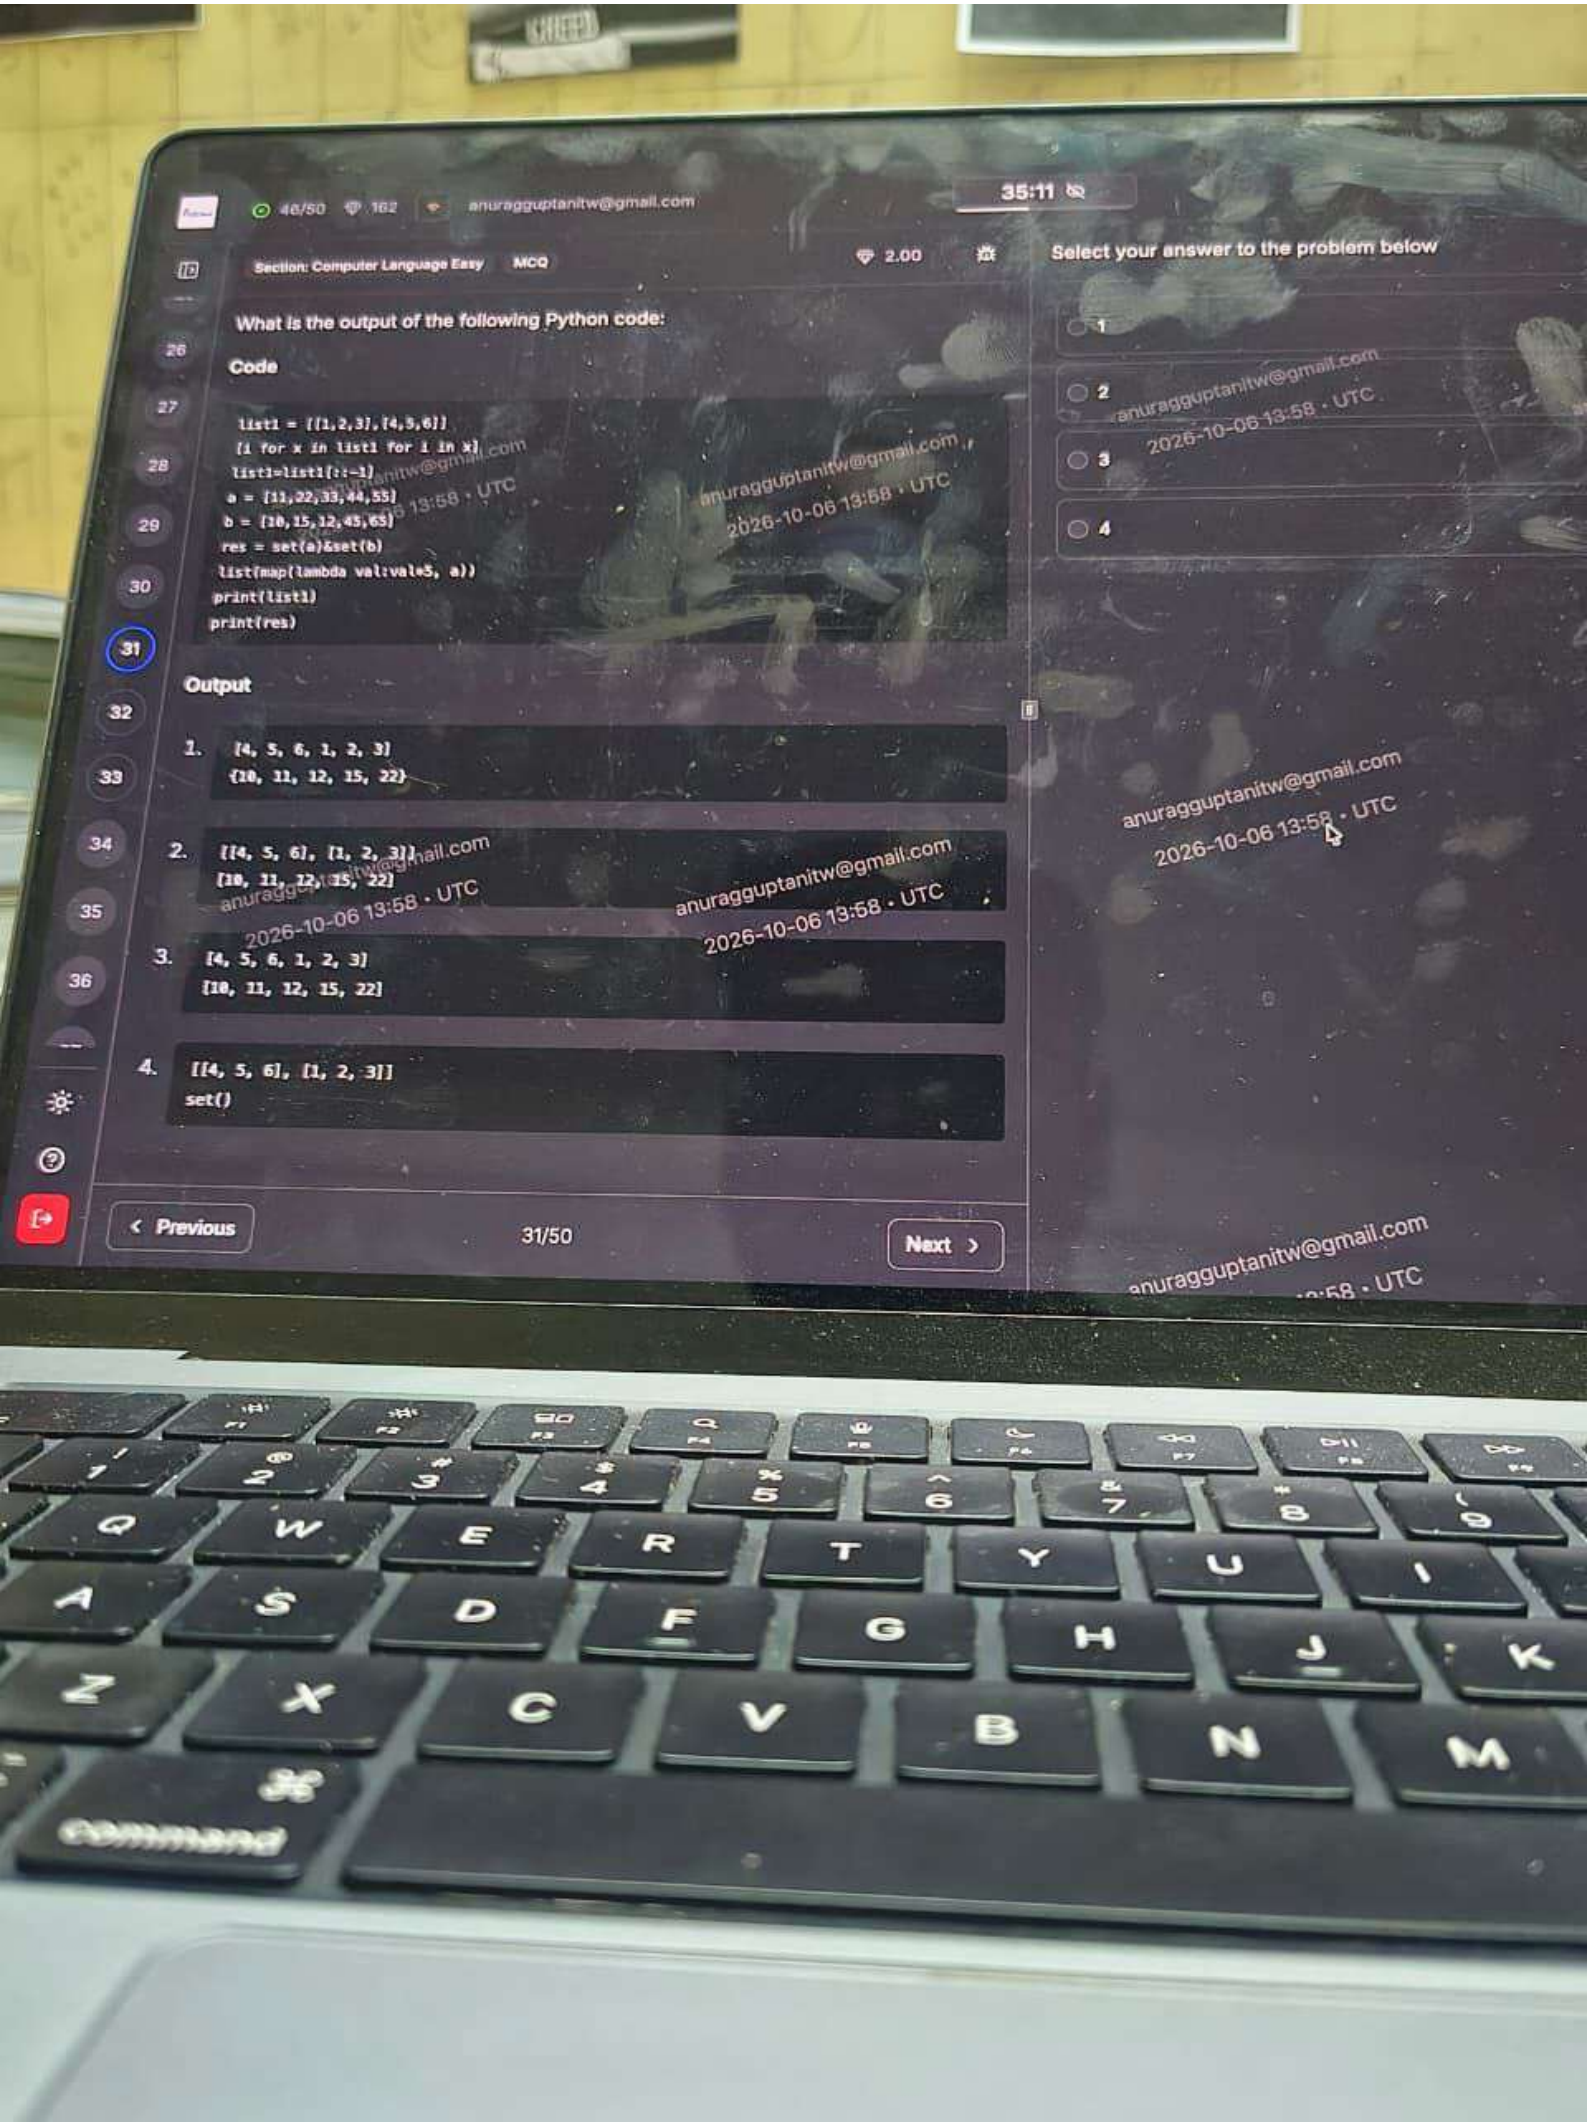
‹ Previous 32/50 Next ›

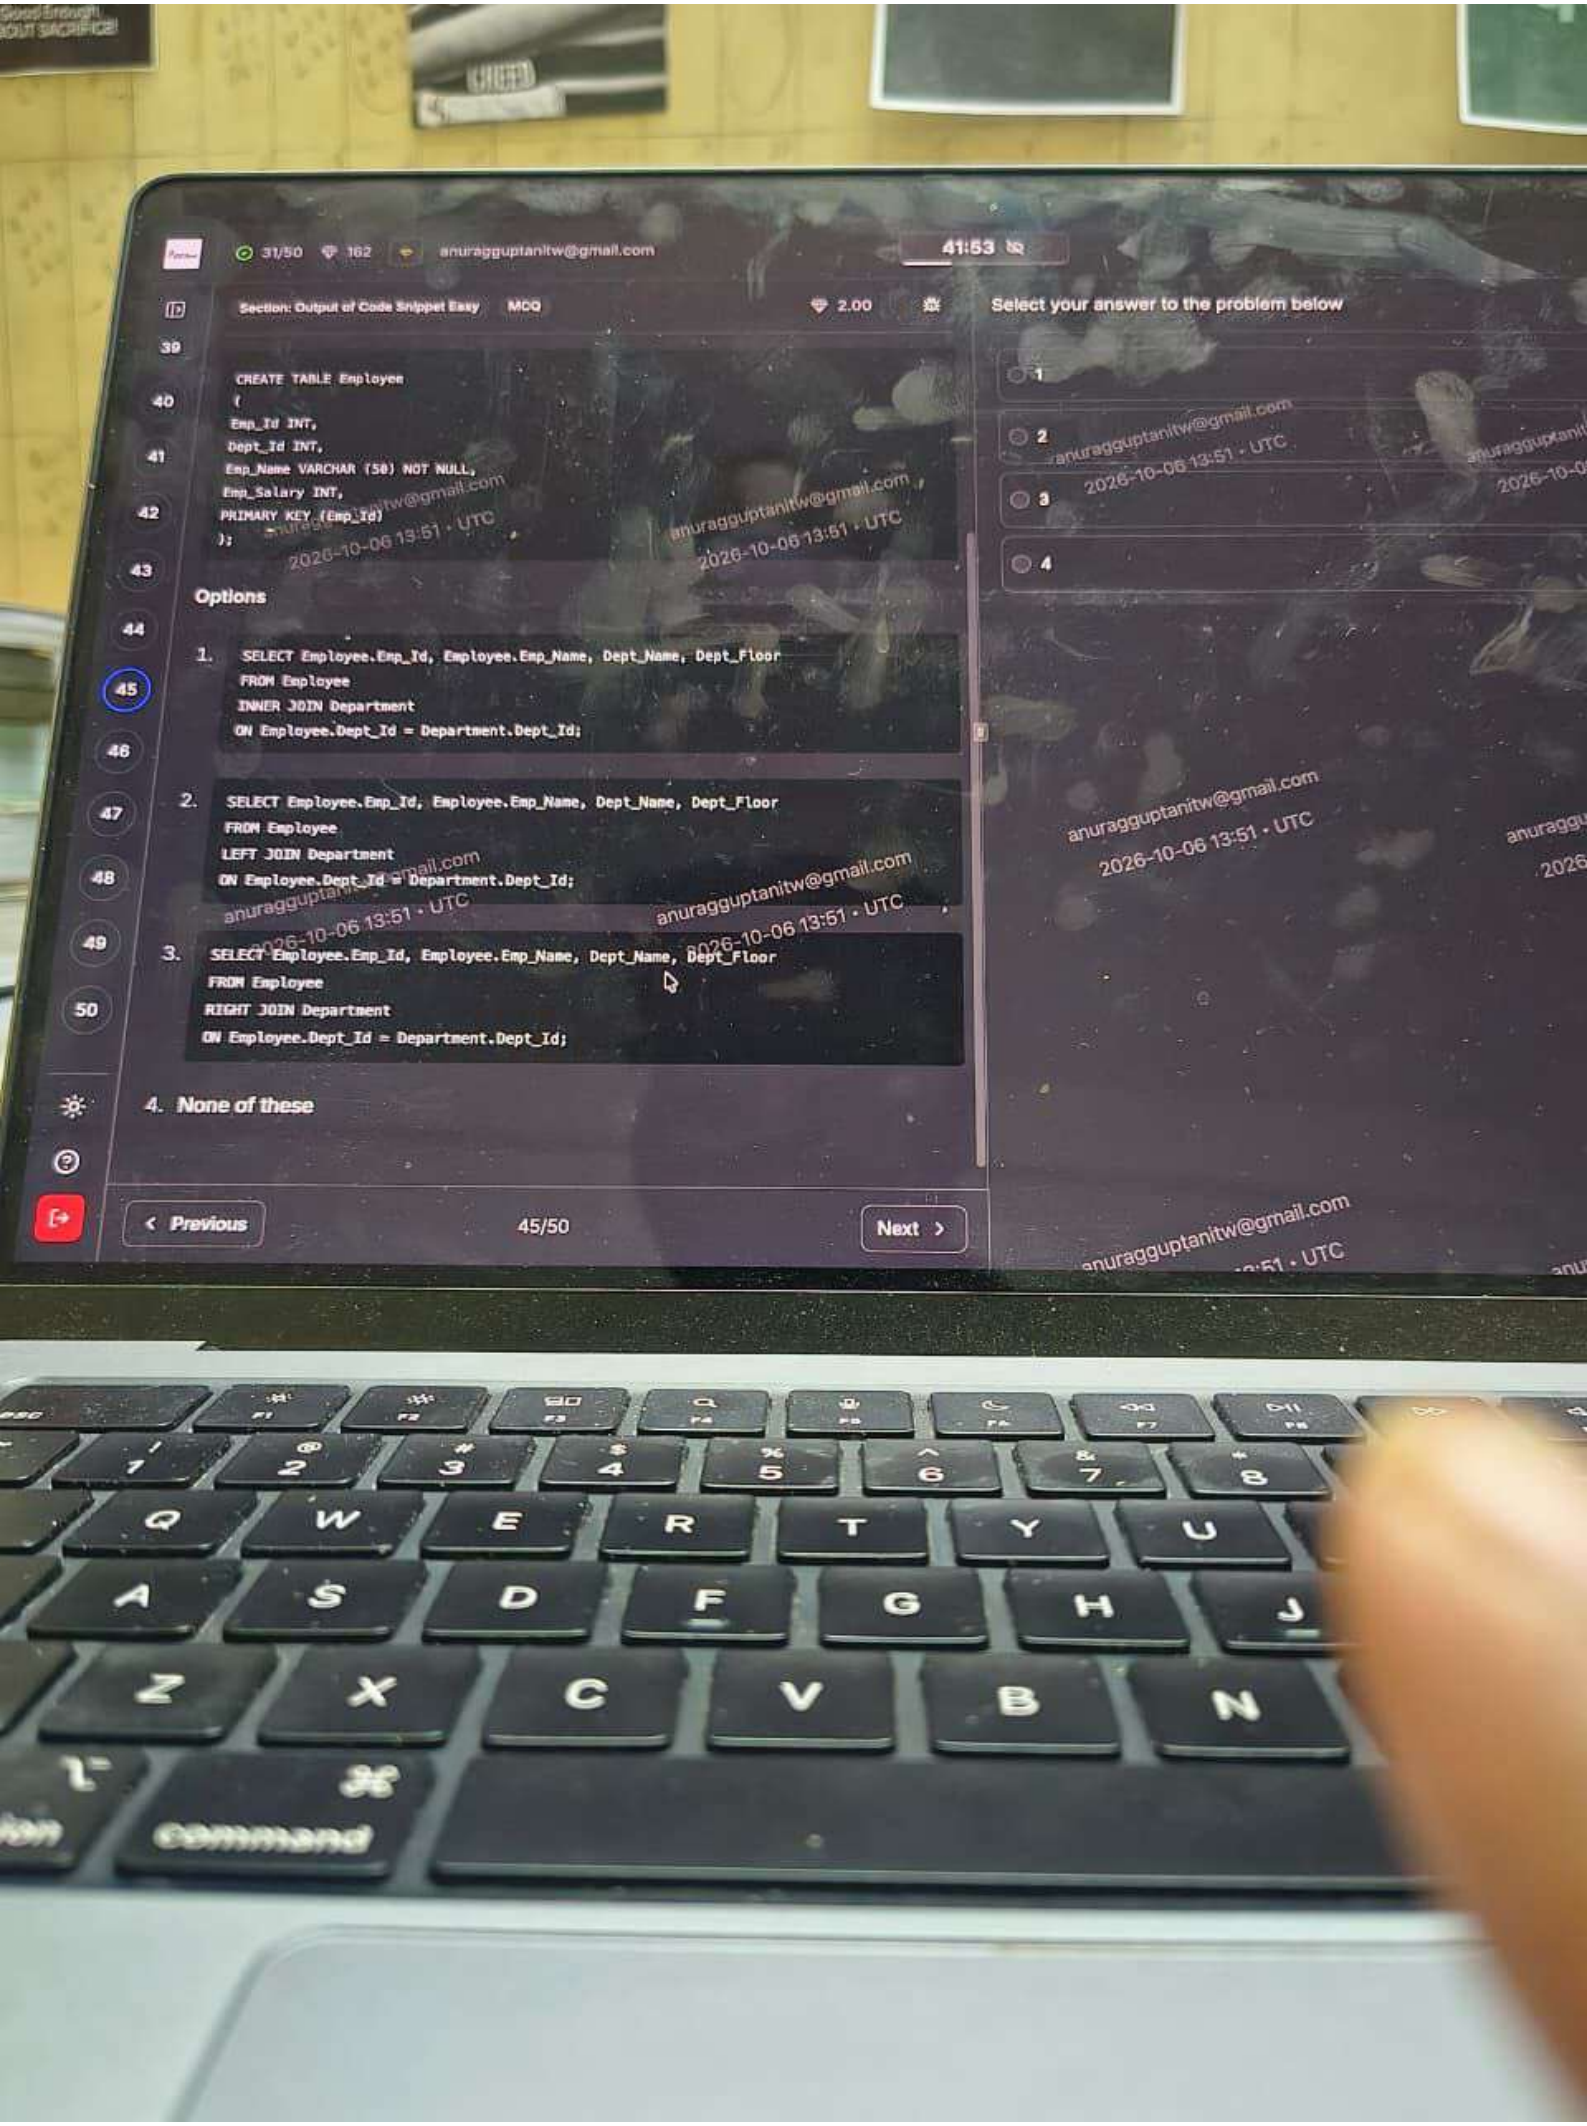

0/50
182
anuraggupta nitw@gmail.com
58:36
Section: Networking Easy
MCQ
2.00
In Networking, which of the following is the correct syntax to telnet to `www.google.com`?
Select your answer to the problem below
telnet//www.google.com
telnet:www.google.com
telnet://www.google.com
telnet www.google.com
anuragguptanitw@gmail.com
2026-10-06 13:34 • UTC
4/50
Next

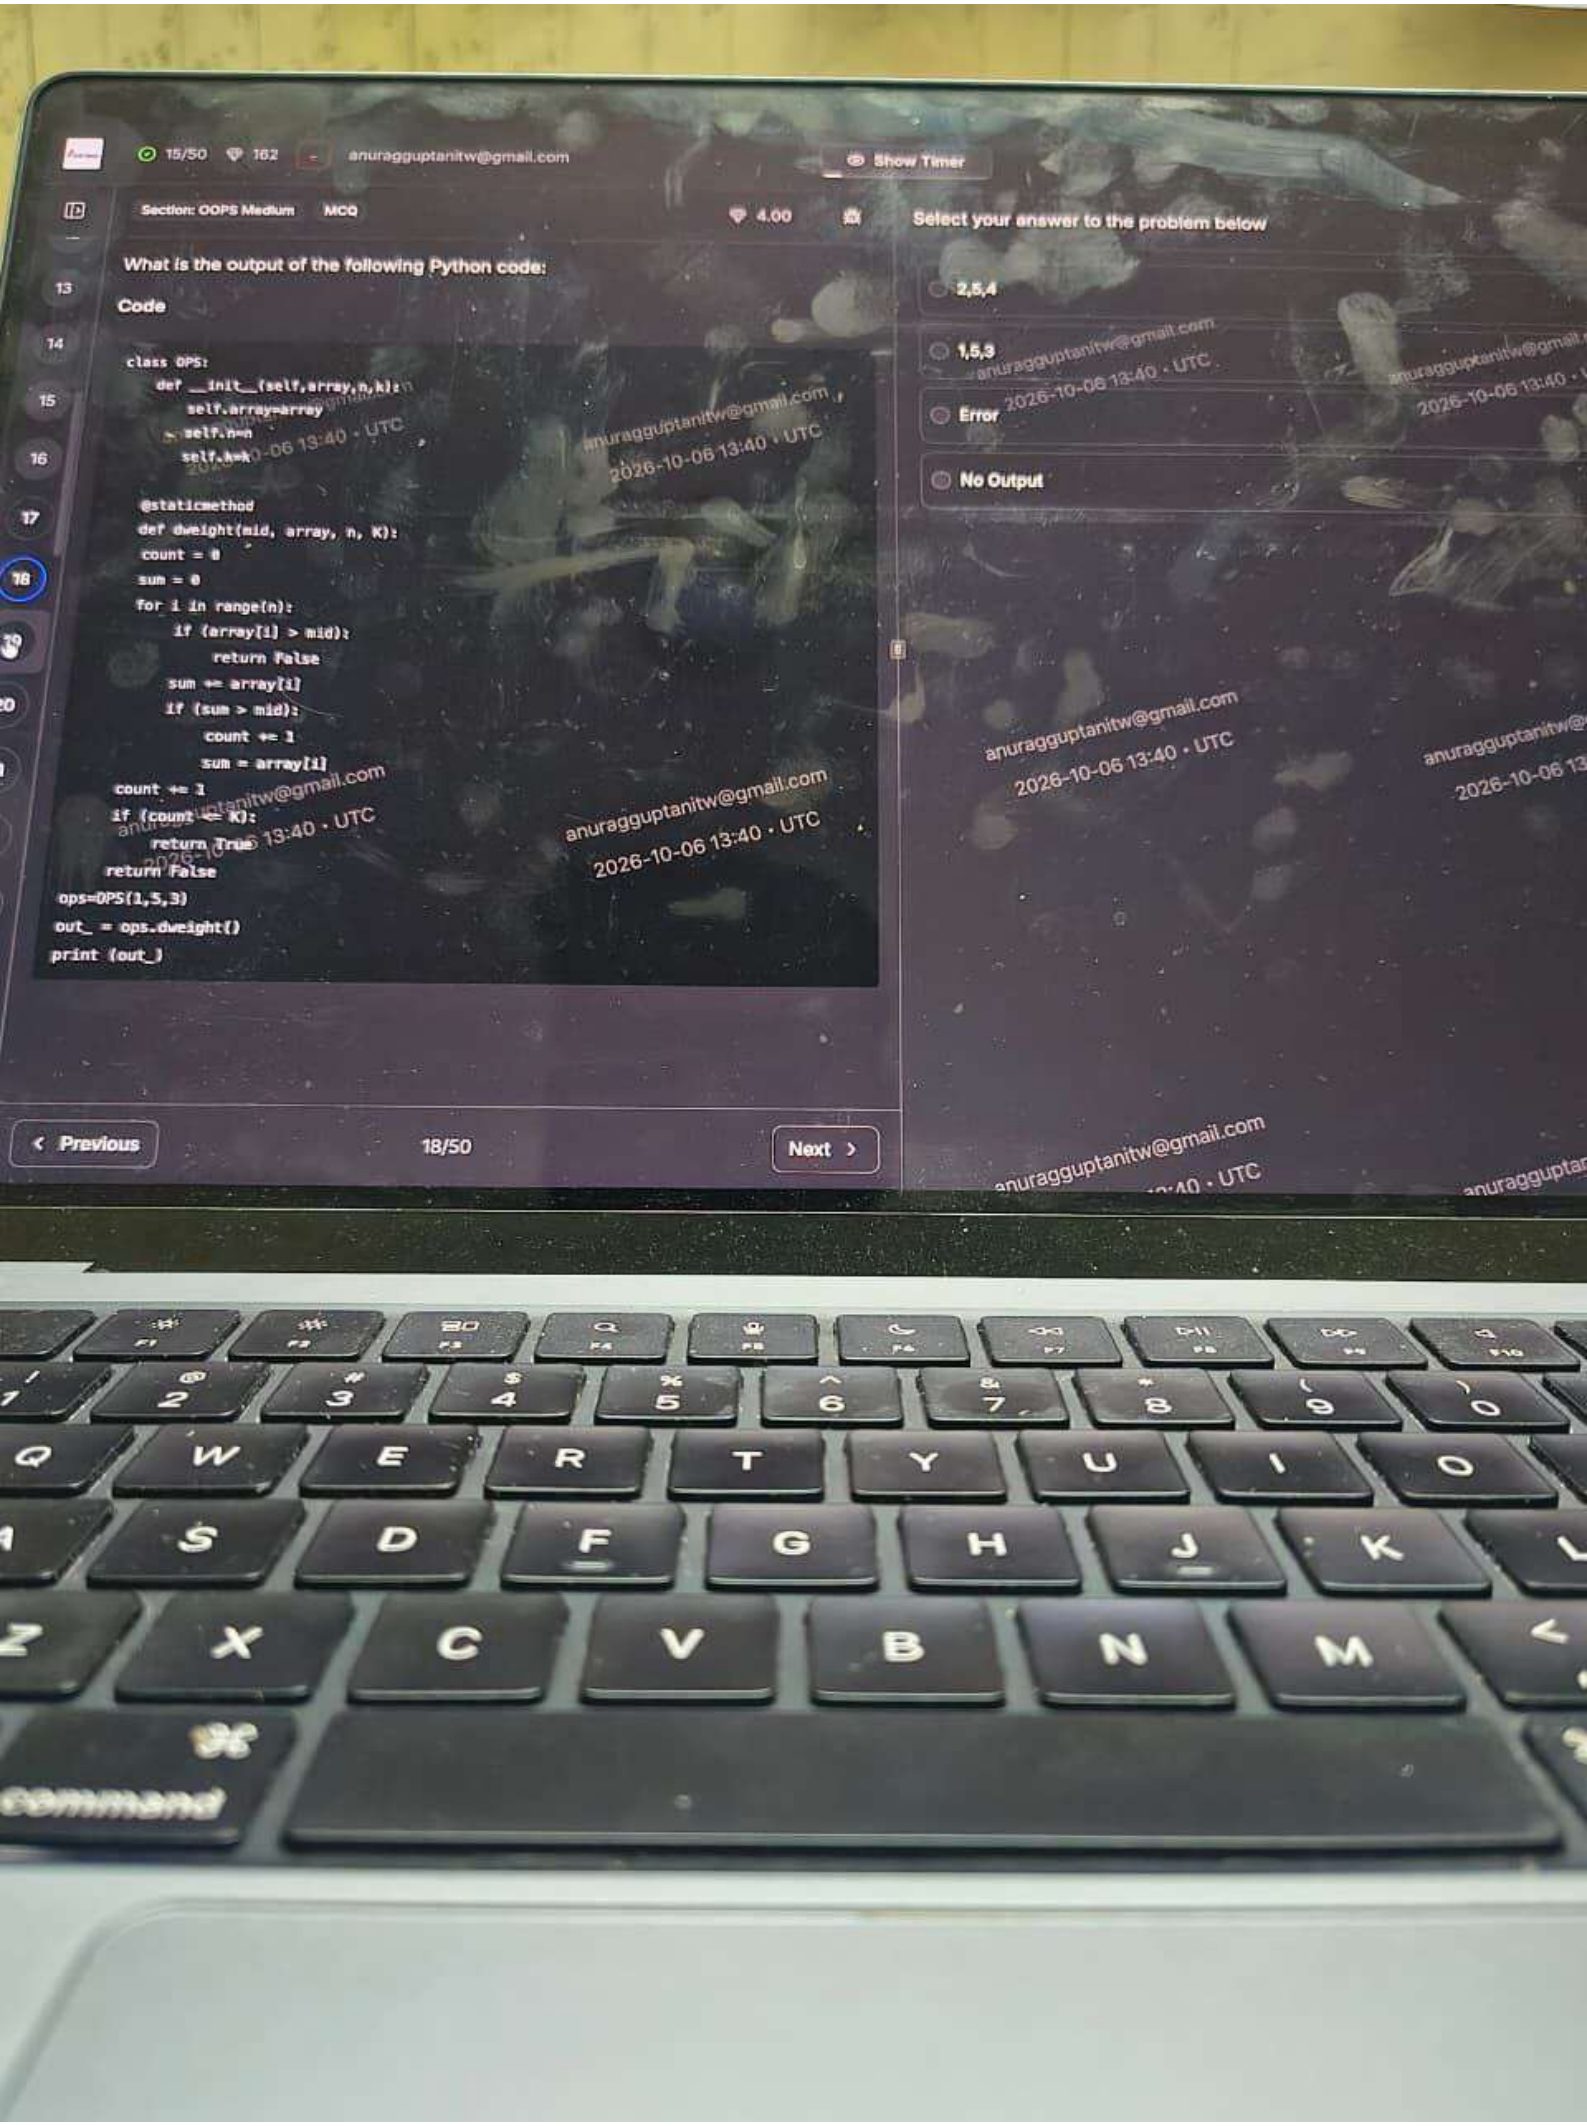

15/50
162
anuragguptanitw@gmail.com
Show Timer
Section: OOPS Medium
MCQ
4.00
Select your answer to the problem below
sum=sum+arg
return sum
def adder2(*args):
print('adder2',end=' ')
sum=args[0]
for next in args[1:]:
sum+=next
return sum
for func in (adder1,adder2):
print(func('5','4','3'))
print(func('?,?,?'))
1
2
3
Error
Options
1. adder1 12
adder1 ?
adder2 12
adder2 ?
2. adder1 12
adder1 ?,?,?
adder2 12
adder2 ?,?,?
3. adder1 543
adder1 ?,?,?
adder2 543
adder2 ?,?,?
anuragguptanitw@gmail.com
2026-10-06 13:40 • UTC
Previous
20/50
Next

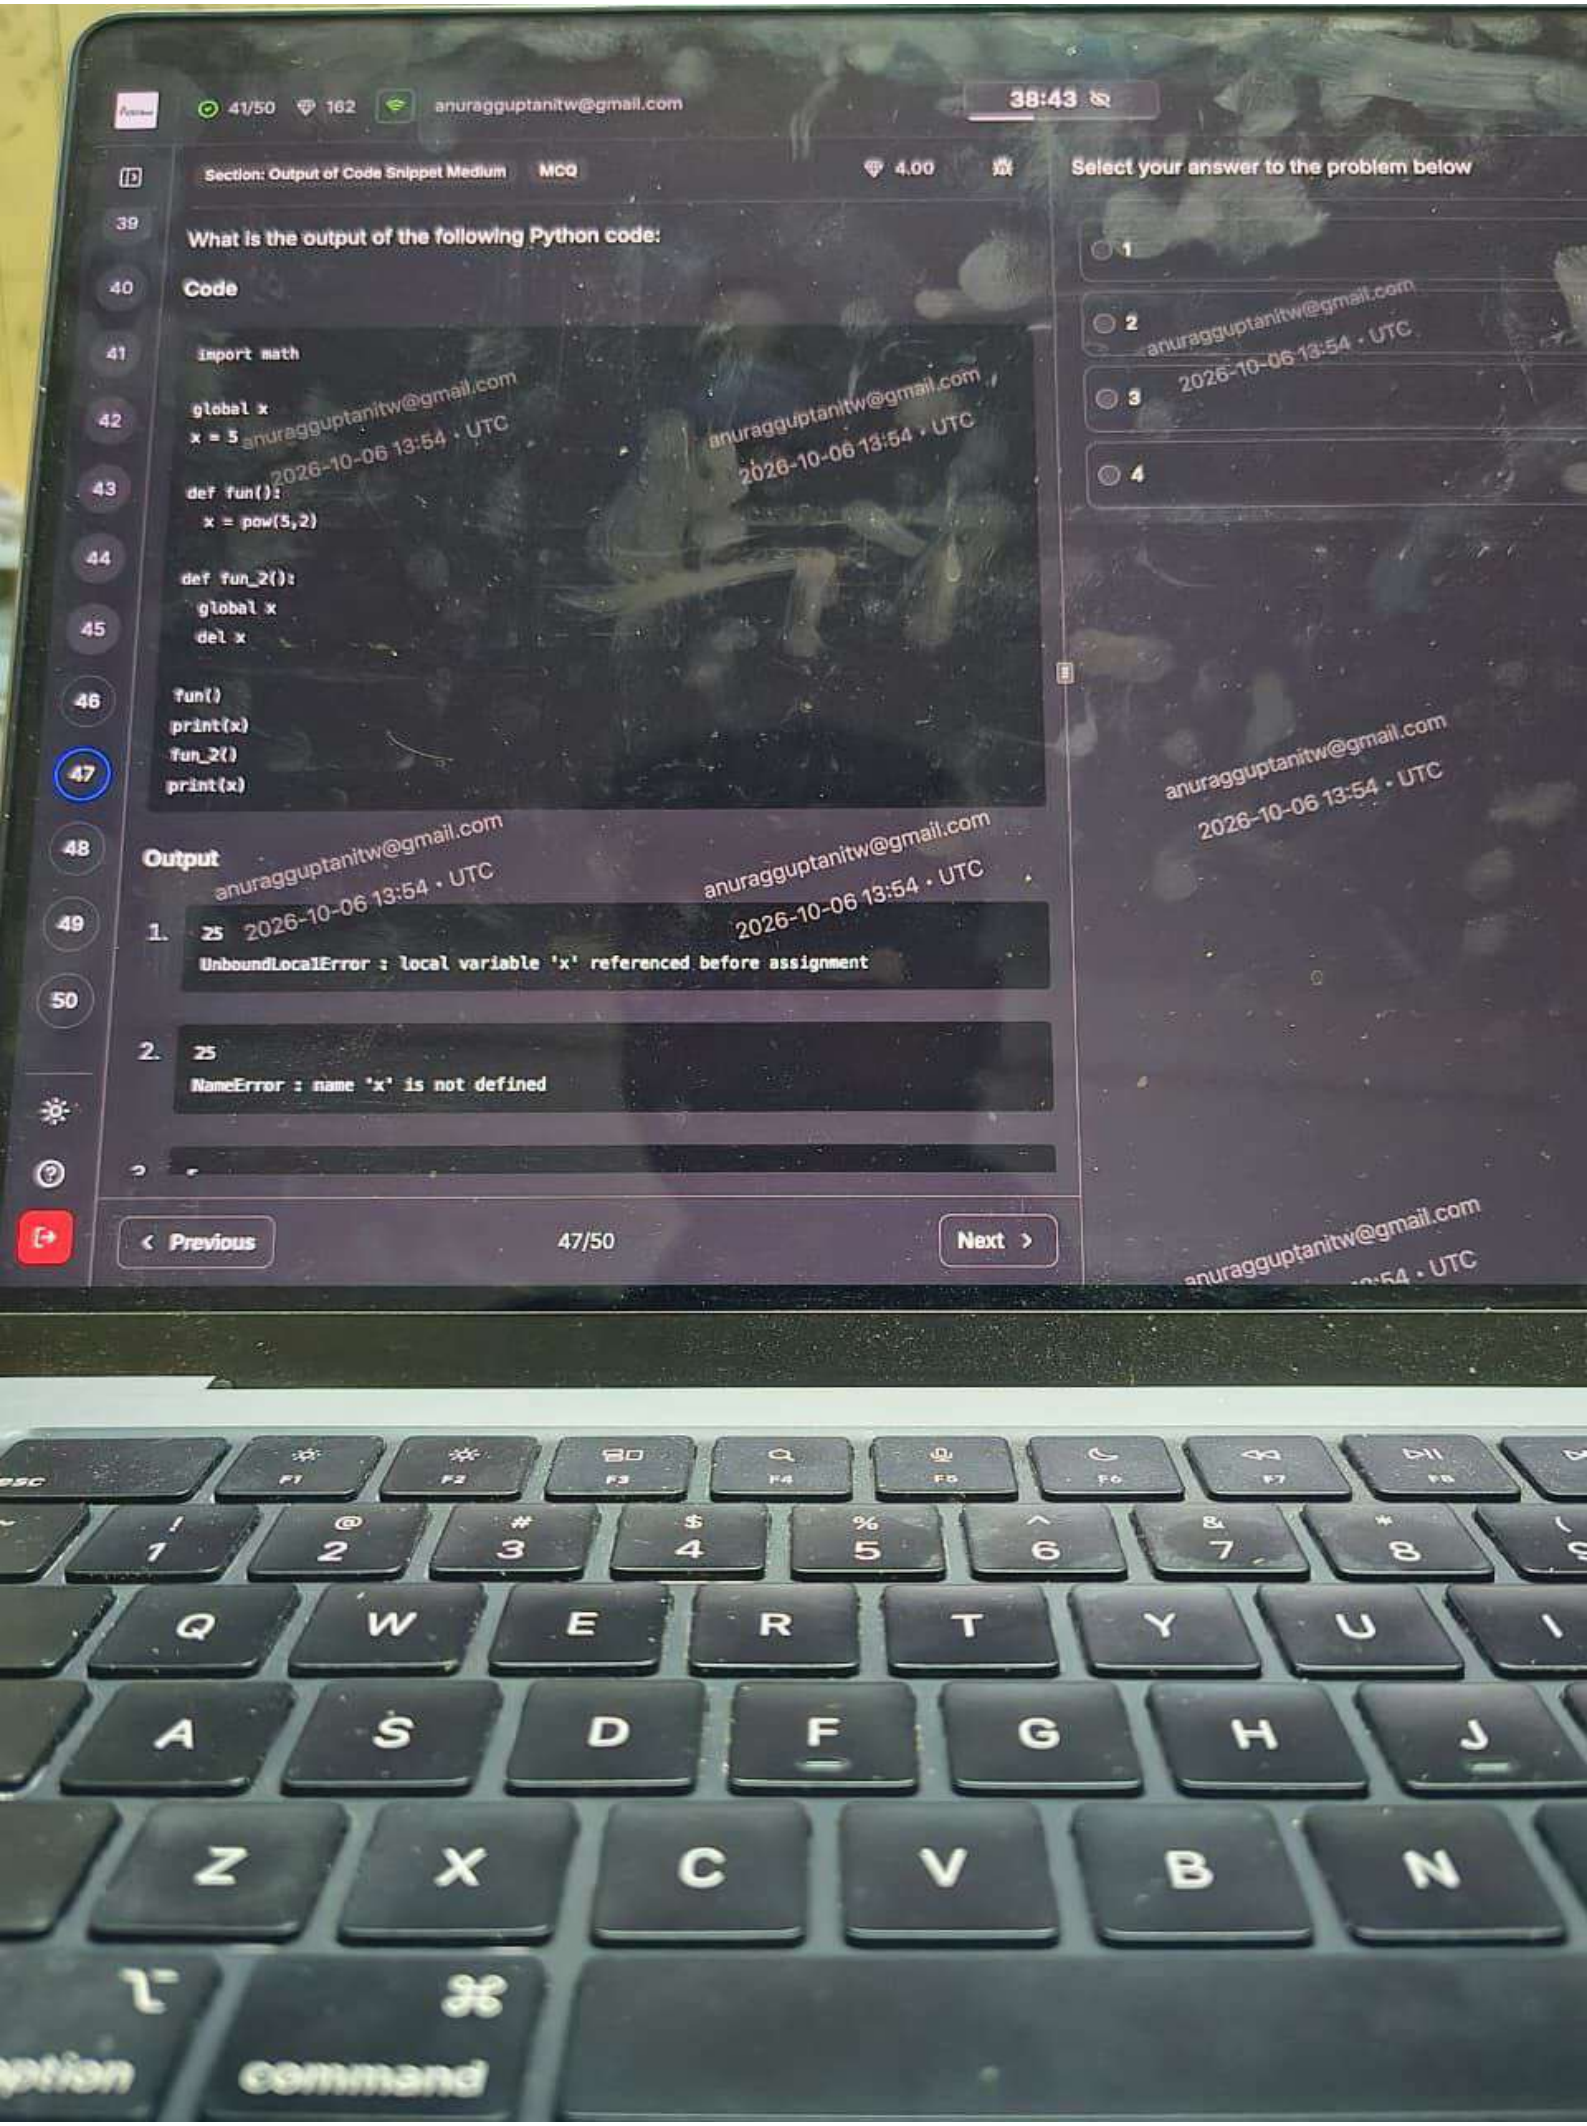

6/50
162
anuragguptanitw@gmail.com
56:02
Section: Project Management Easy
MCQ
2.00
Lisa is a software developer working on a new project with her team. They are using an Agile framework that emphasizes visualizing work, limiting work in progress, and continuous improvement. Which Agile framework is Lisa's team using?
Select your answer to the problem below
Scrum
Kanban
Waterfall
Lean
anuragguptanitw@gmail.com
2026-10-06 13:37 · UTC
Previous
12/50
Next
command

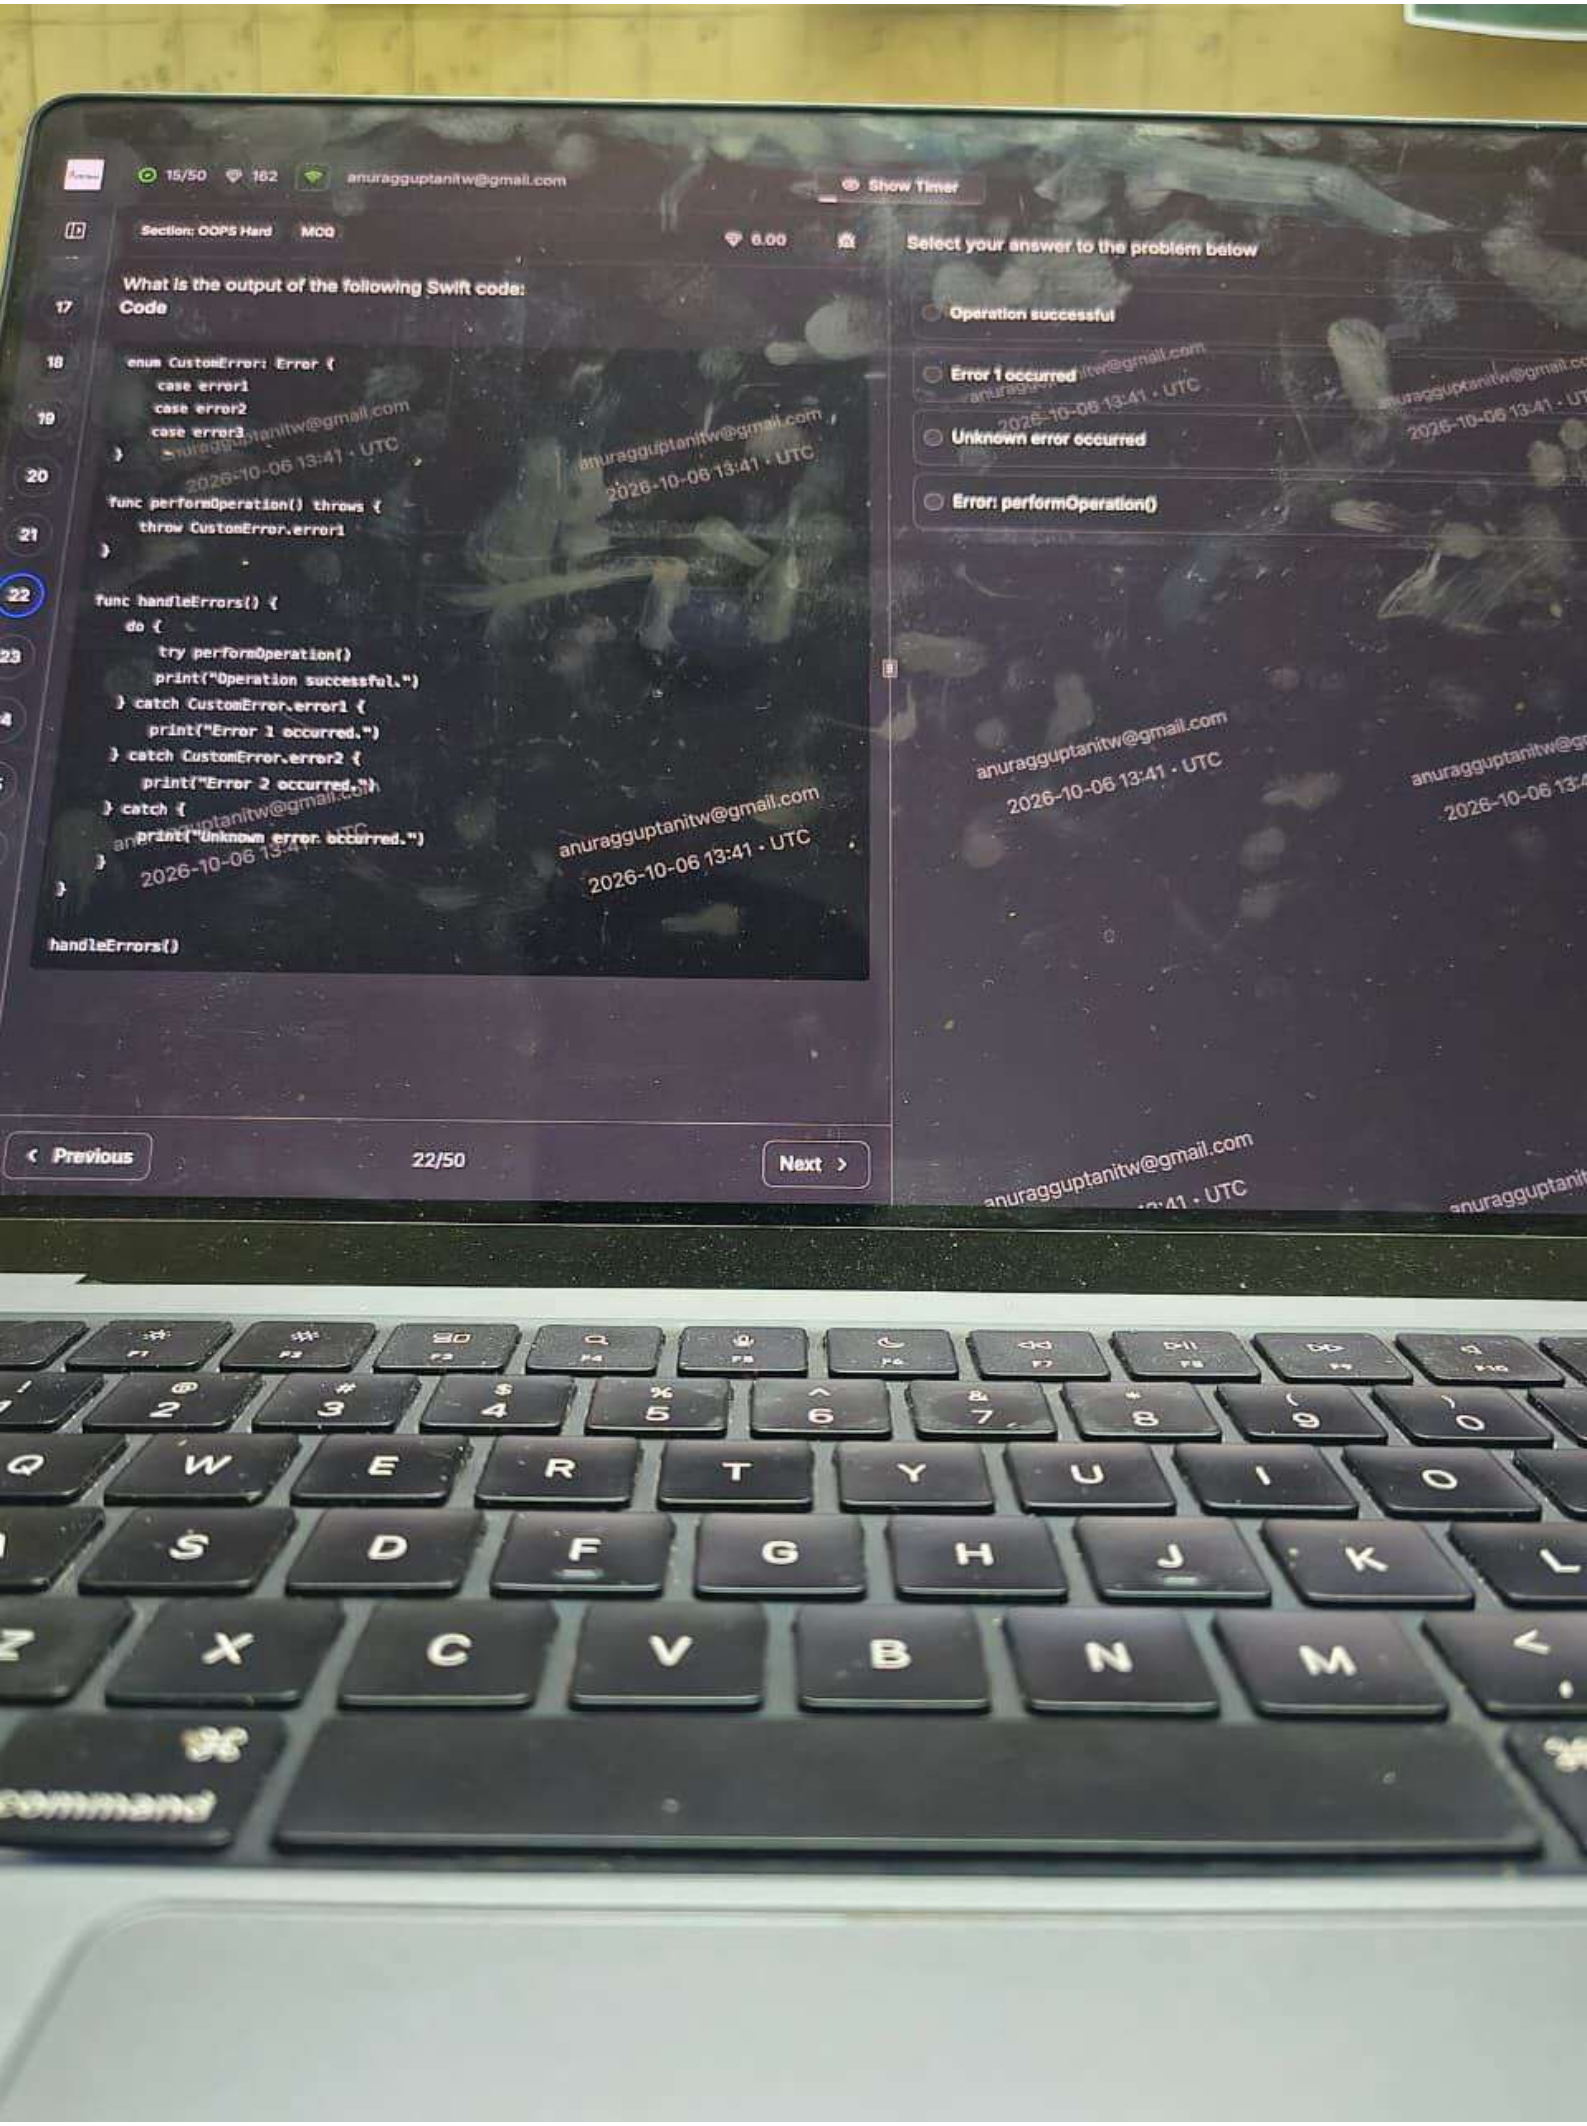

31/50
162
anuragguptanitw@gmail.com
42:28
Section: AI Easy
MCQ
2.00
In Machine Learning, you are working on a project using neural networks. Which of the following are the components of artificial neural networks:
Options
1. Input layer
2. Multiple hidden layers
3. Output layer
Select your answer to the problem below
1 and 2
2 and 3
All of these
None of these
32
33
34
35
36
37
38
39
40
41
42
Previous
37/50
Next

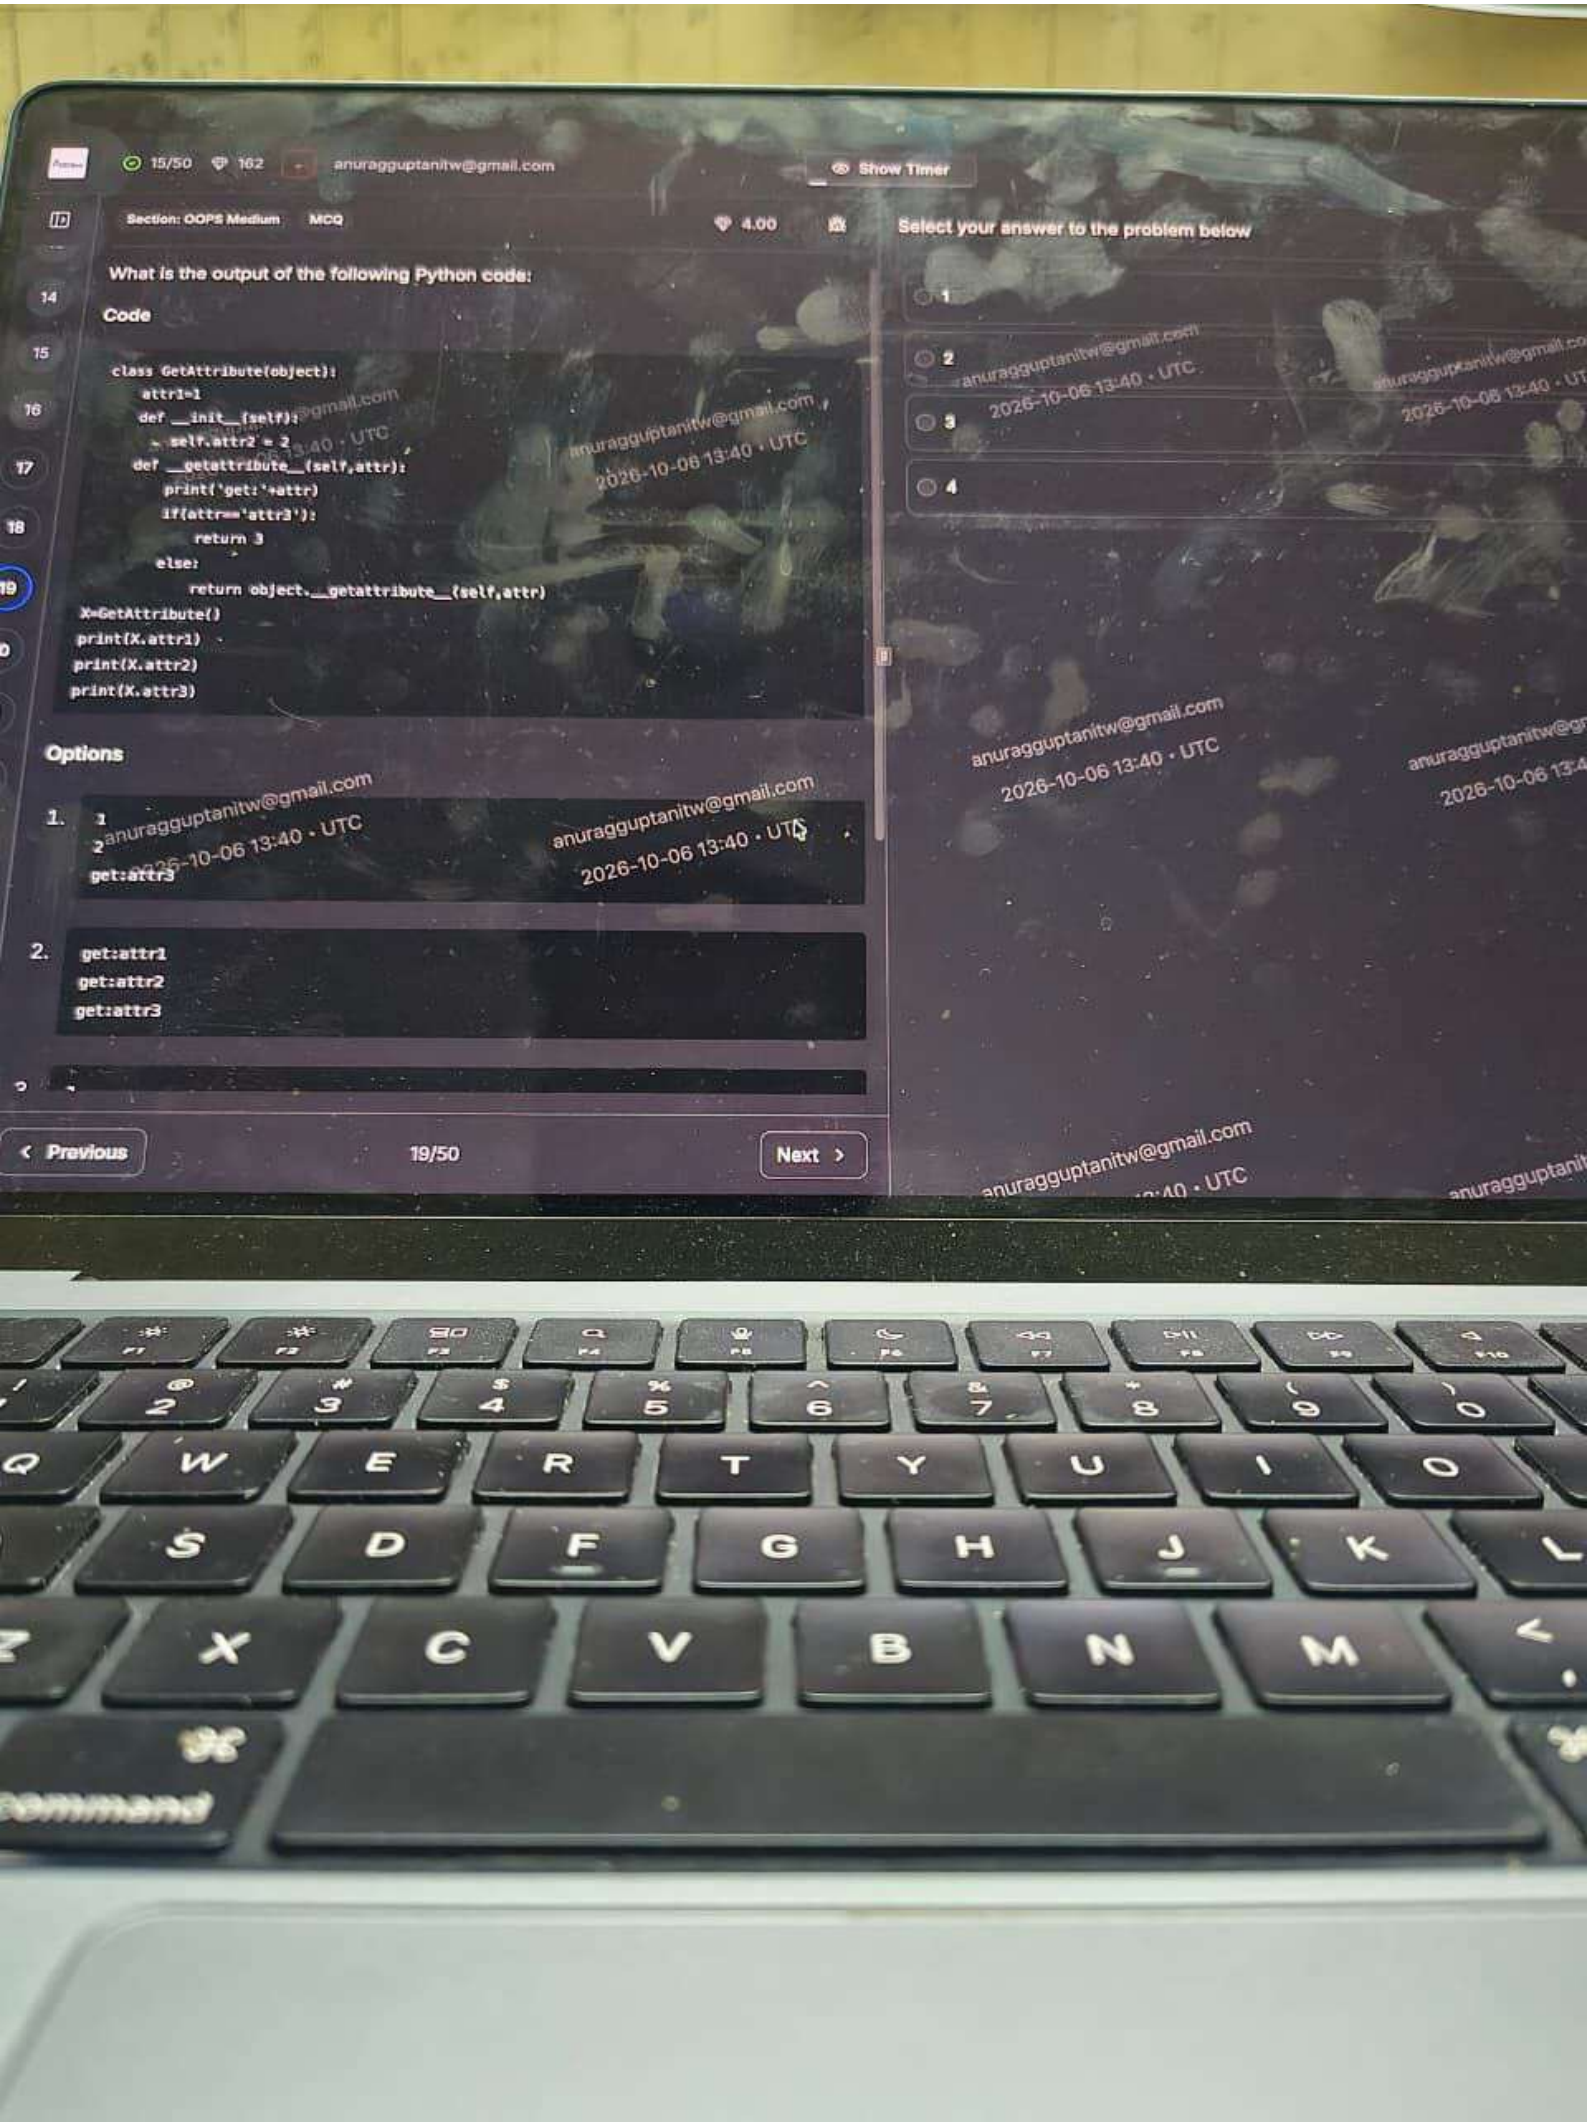

46/50
162
anuraggguptanitw@gmail.com
35:11
Section: Computer Language Easy
MCQ
2.00
Select your answer to the problem below
What is the output of the following Python code:
Code
list1 = [[1,2,3],[4,5,6]]
[i for x in list1 for i in x]
list1=list1[::-1]
a = [11,22,33,44,55]
b = [10,15,12,45,65]
res = set(a)&set(b)
list(map(lambda val:val*5, a))
print(list1)
print(res)
1
2
3
4
Output
1. [4, 5, 6, 1, 2, 3]
{10, 11, 12, 15, 22}
2. [[4, 5, 6], [1, 2, 3]]
[10, 11, 12, 15, 22]
3. [4, 5, 6, 1, 2, 3]
[10, 11, 12, 15, 22]
4. [[4, 5, 6], [1, 2, 3]]
set()
2026-10-06 13:58 • UTC
Previous
31/50
Next

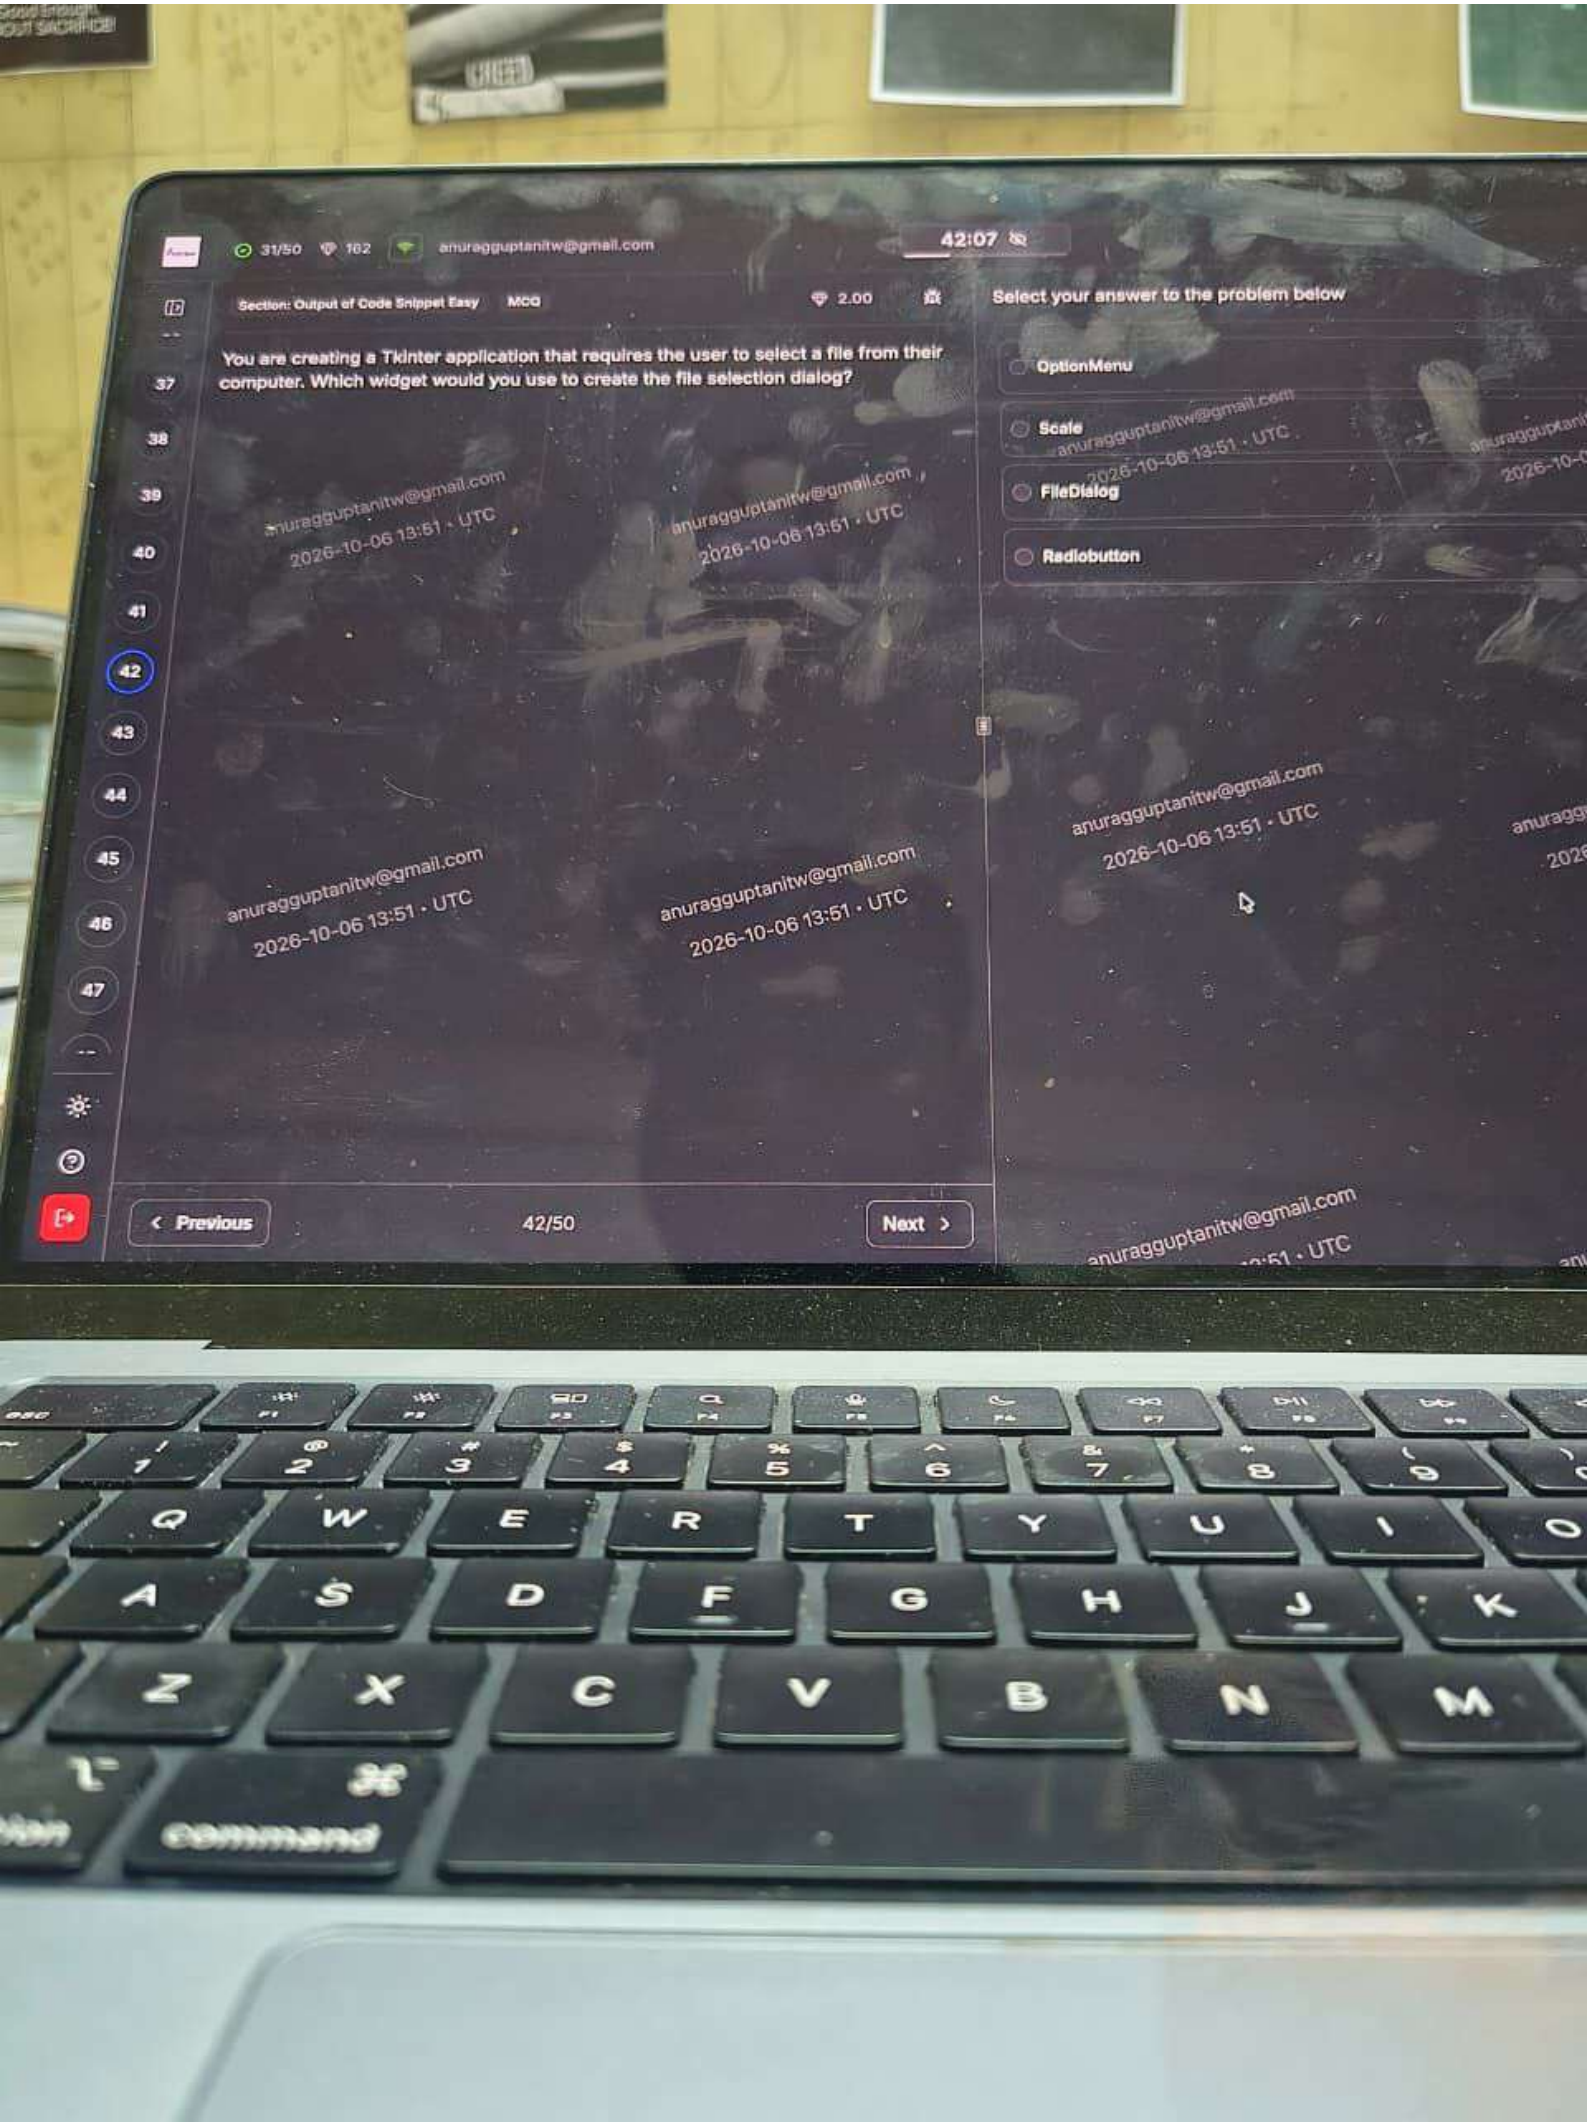

31/50
162
anuragguptanitw@gmail.com
41:53
Section: Output of Code Snippet Easy
MCQ
2.00
Select your answer to the problem below
CREATE TABLE Employee
(
Emp_Id INT,
Dept_Id INT,
Emp_Name VARCHAR (50) NOT NULL,
Emp_Salary INT,
PRIMARY KEY (Emp_Id)
);
Options
1. SELECT Employee.Emp_Id, Employee.Emp_Name, Dept_Name, Dept_Floor
FROM Employee
INNER JOIN Department
ON Employee.Dept_Id = Department.Dept_Id;
2. SELECT Employee.Emp_Id, Employee.Emp_Name, Dept_Name, Dept_Floor
FROM Employee
LEFT JOIN Department
ON Employee.Dept_Id = Department.Dept_Id;
3. SELECT Employee.Emp_Id, Employee.Emp_Name, Dept_Name, Dept_Floor
FROM Employee
RIGHT JOIN Department
ON Employee.Dept_Id = Department.Dept_Id;
4. None of these
1
2
3
4
Previous
45/50
Next
anuragguptanitw@gmail.com
2026-10-06 13:51 • UTC

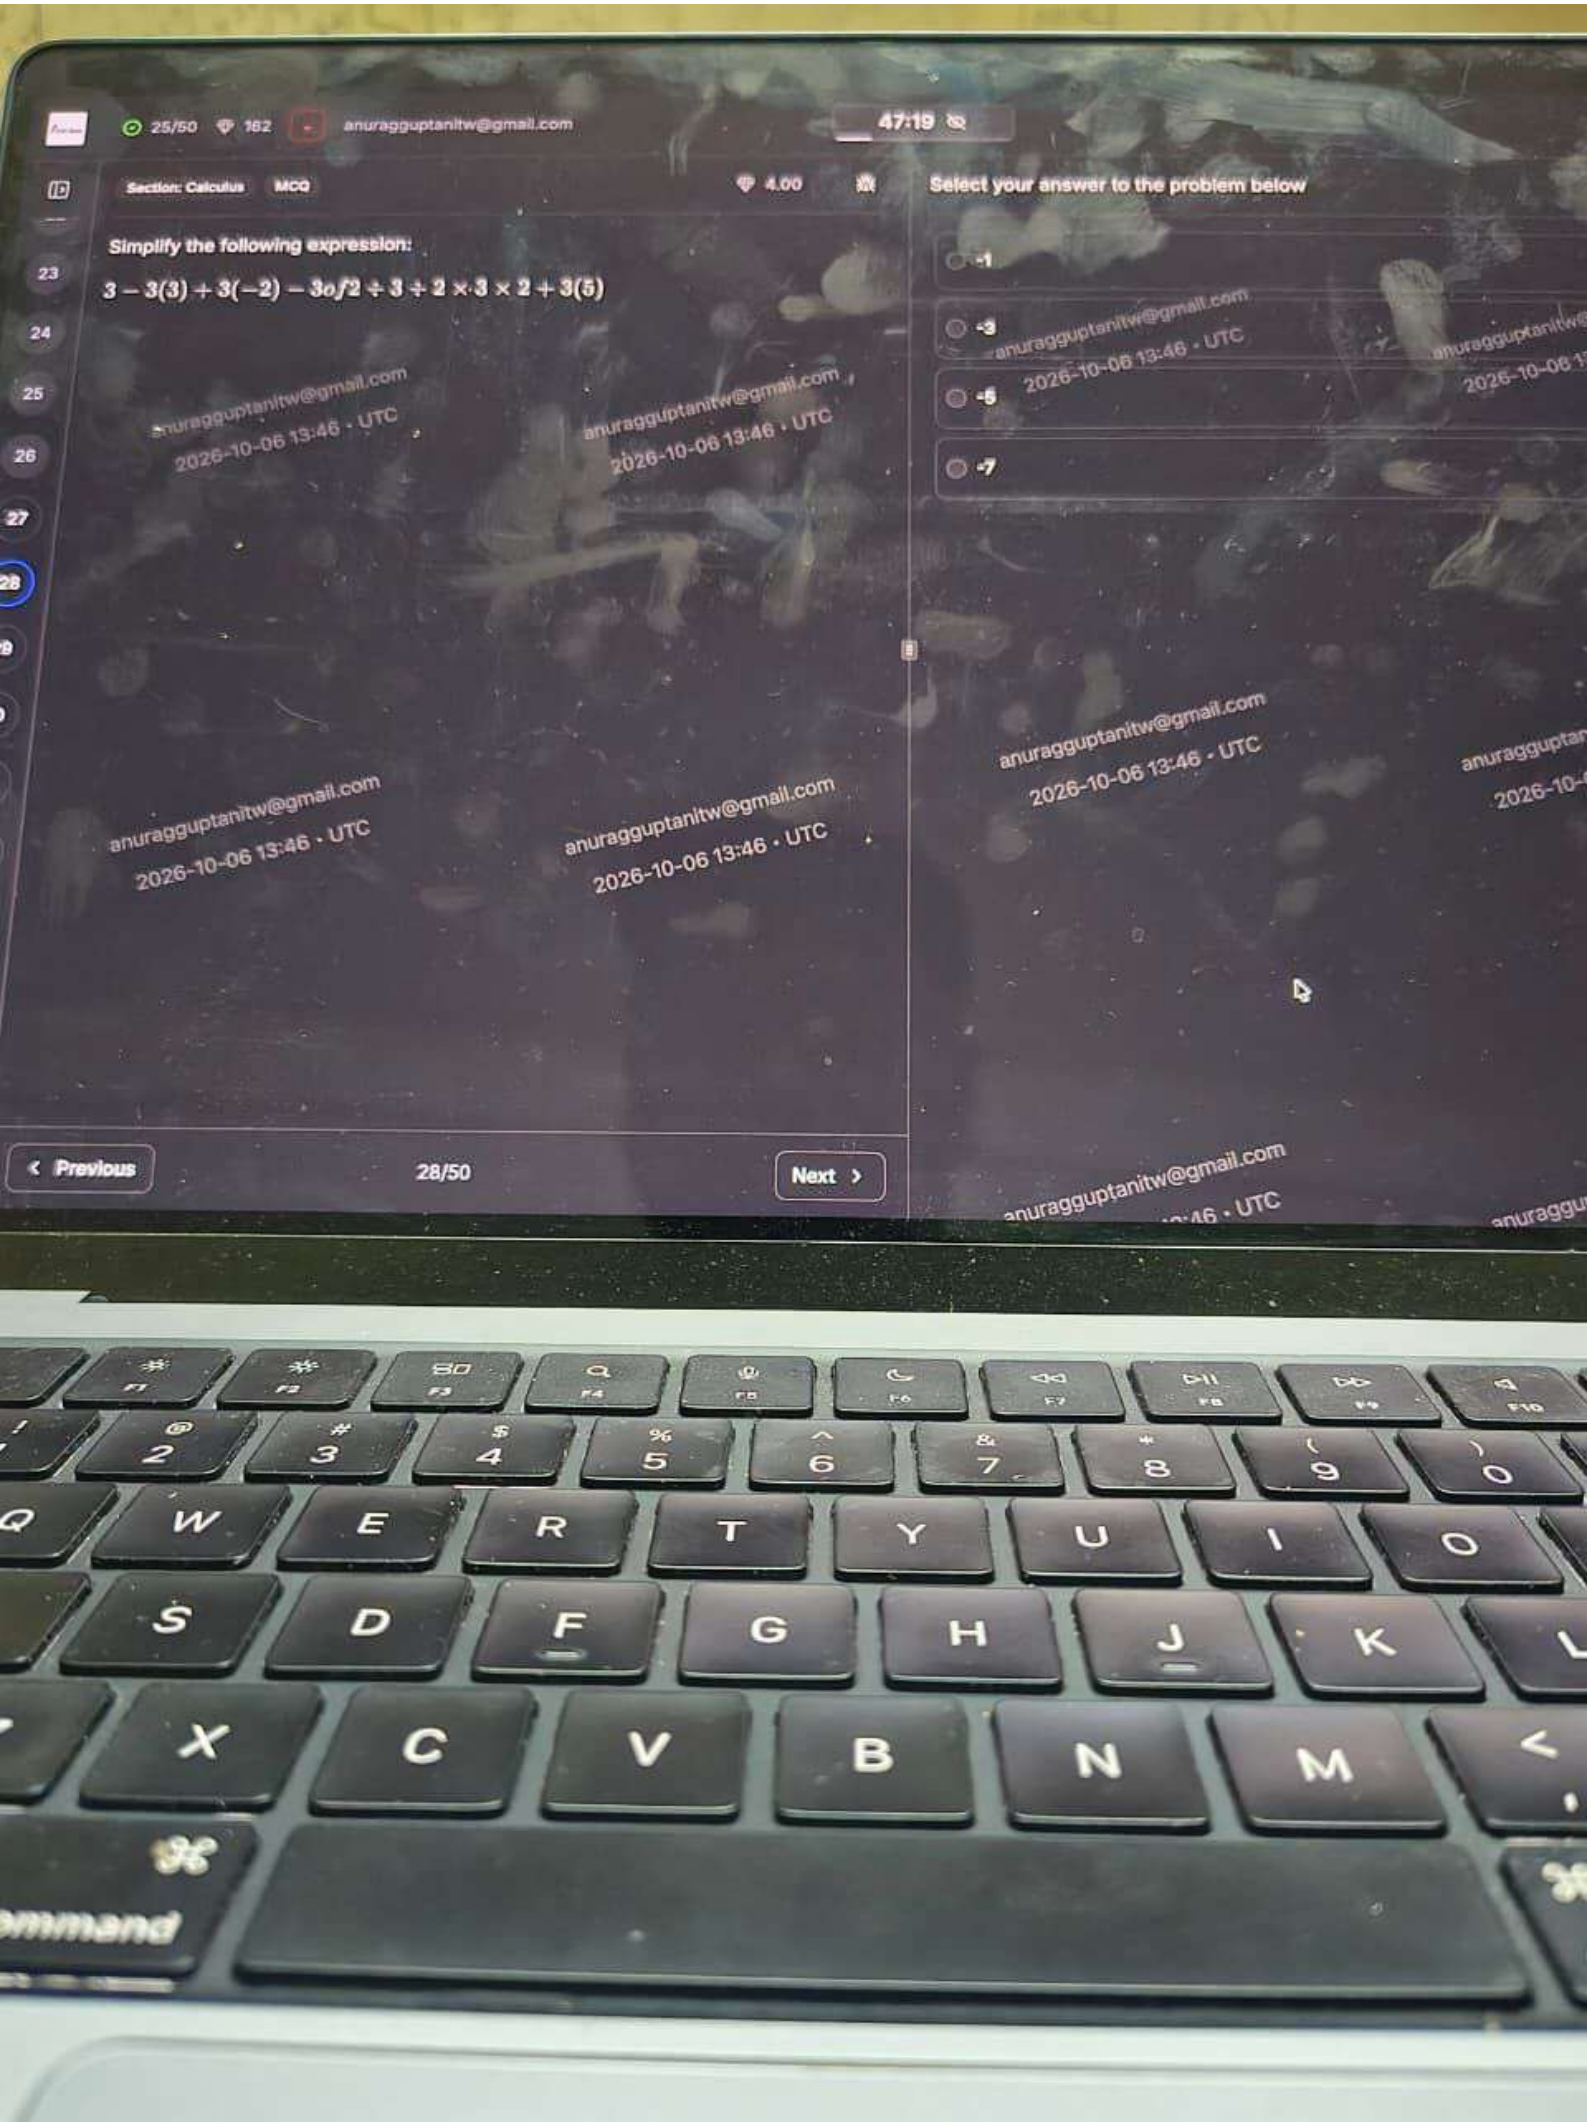

15/50
162
anuragguptanitw@gmail.com
Show Timer
Section: OOPS Medium
MCQ
4.00
What is the output of the following Python code:
Code
class OPS:
def __init__(self,array,n,k):
self.array=array
self.n=n
self.k=k
@staticmethod
def dweight(mid, array, n, K):
count = 0
sum = 0
for i in range(n):
if (array[i] > mid):
return False
sum += array[i]
if (sum > mid):
count += 1
sum = array[i]
count += 1
if (count <= K):
return True
return False
ops=OPS(1,5,3)
out_ = ops.dweight()
print (out_)
Select your answer to the problem below
2,5,4
1,5,3
Error
No Output
anuragguptanitw@gmail.com
2026-10-06 13:40 • UTC
Previous
18/50
Next

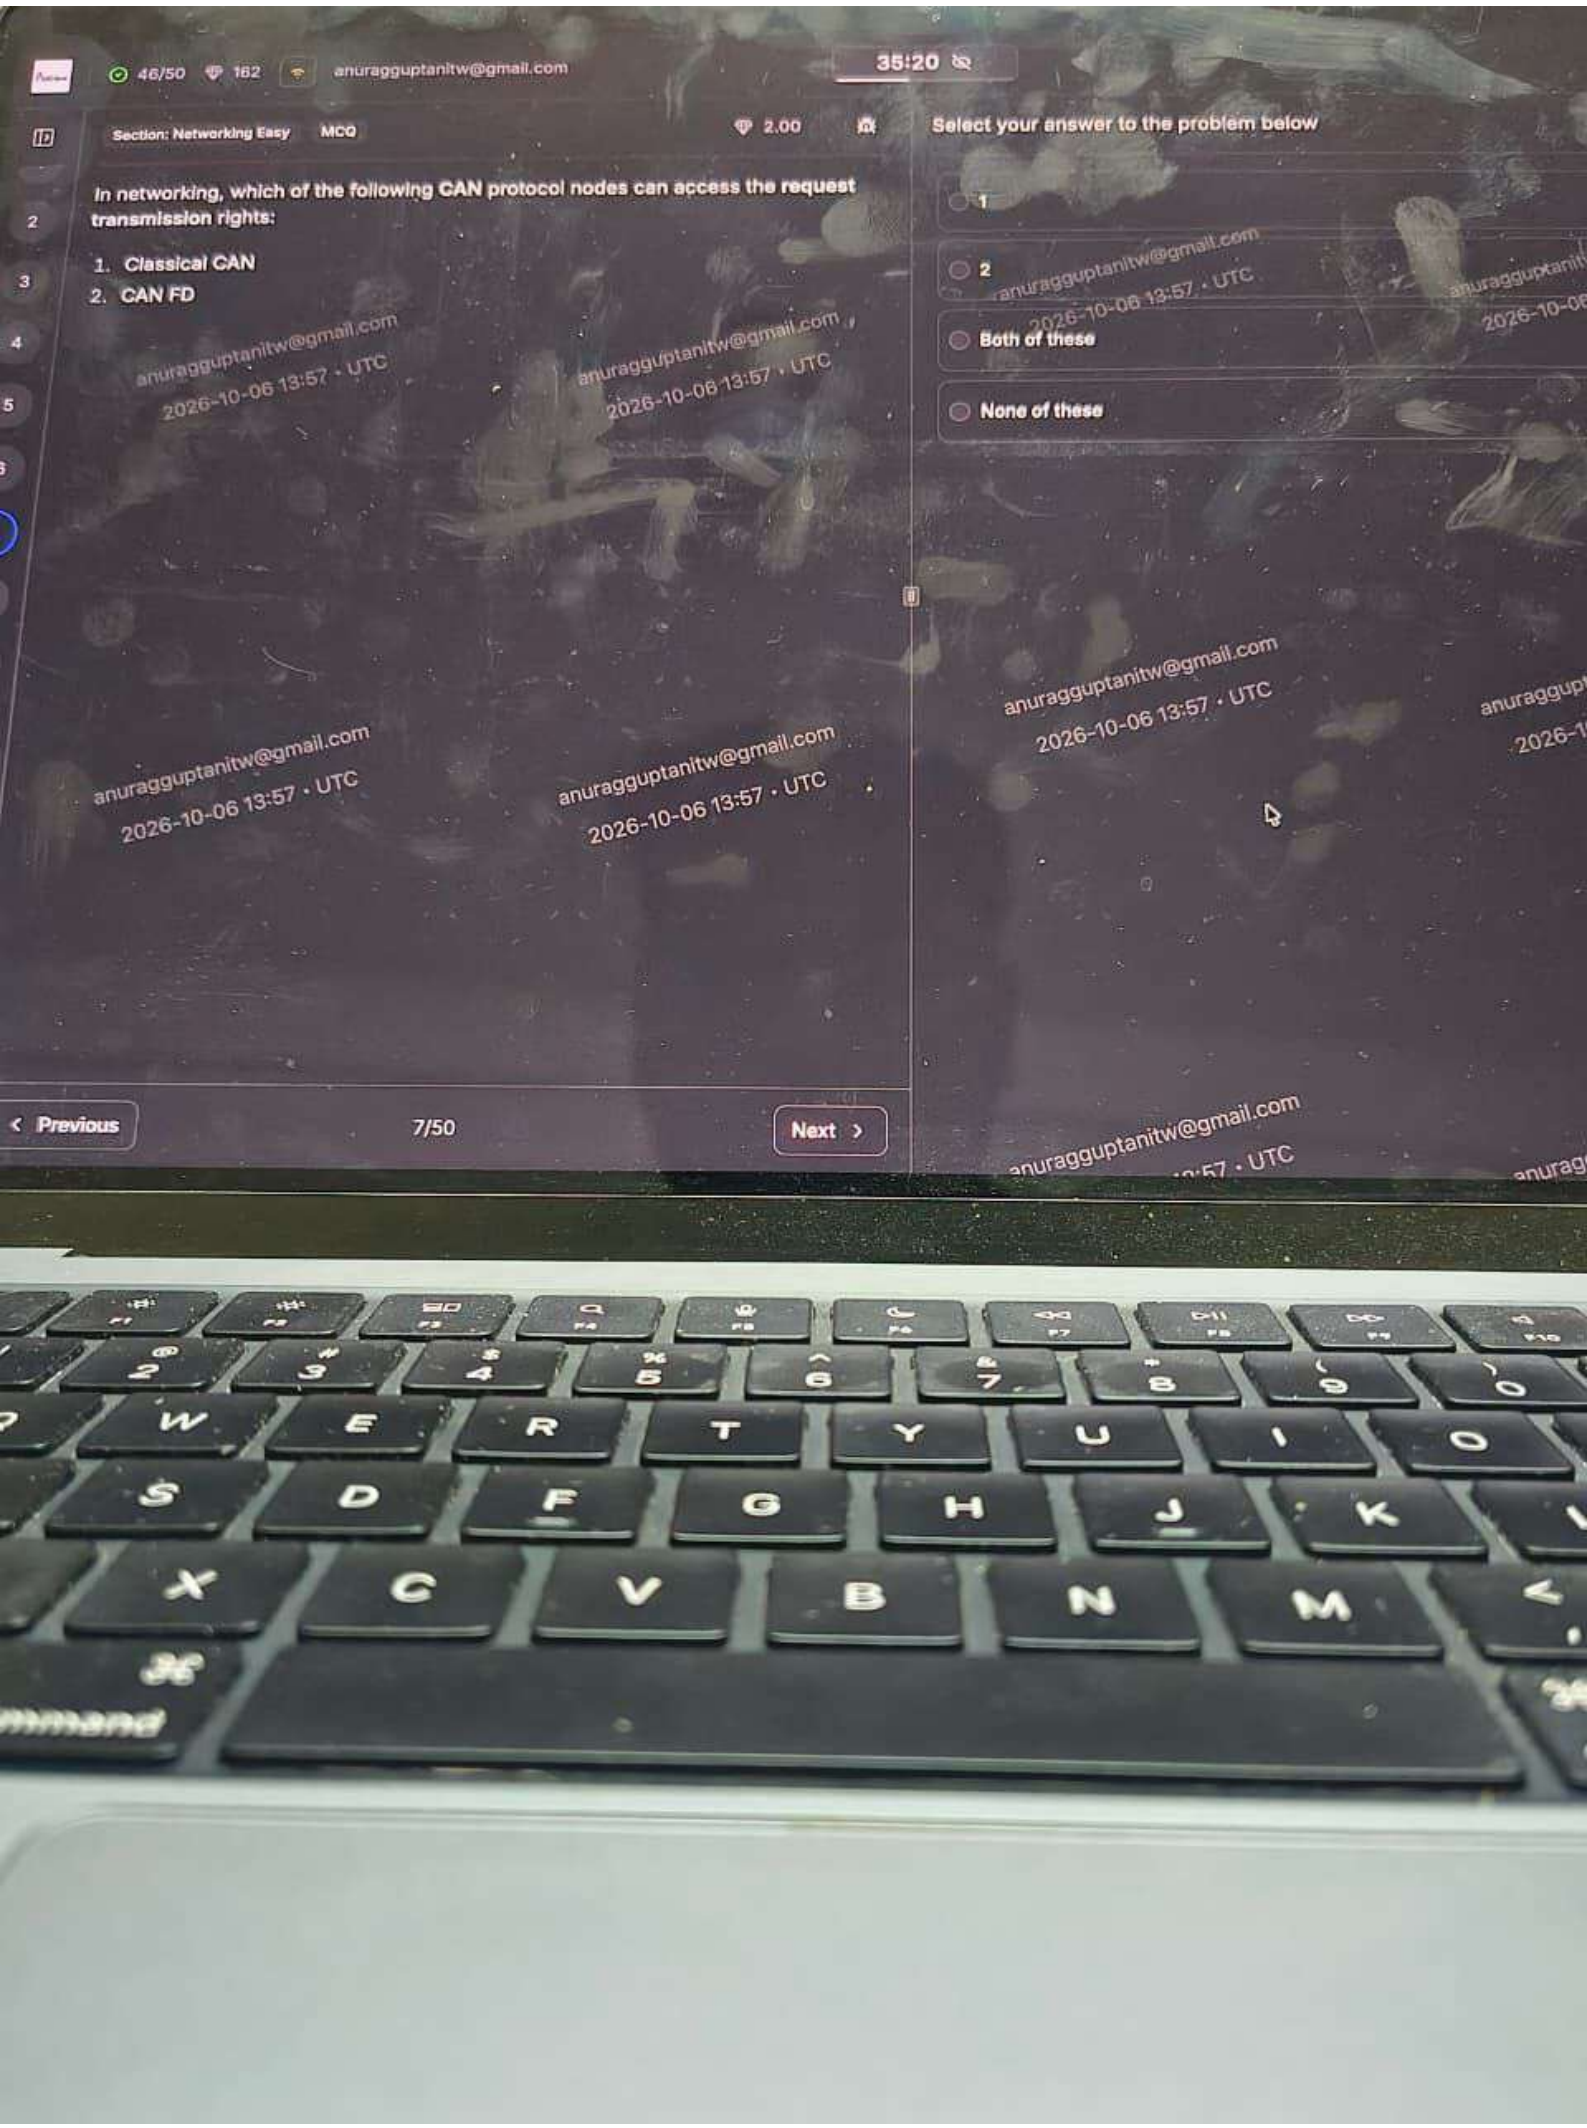

41/50
162
anuragguptanitw@gmail.com
38:43
Section: Output of Code Snippet Medium
MCQ
4.00
Select your answer to the problem below
What is the output of the following Python code:
Code
import math
global x
x = 5
def fun():
x = pow(5,2)
def fun_2():
global x
del x
fun()
print(x)
fun_2()
print(x)
1
2
3
4
Output
1. 25
UnboundLocalError : local variable 'x' referenced before assignment
2. 25
NameError : name 'x' is not defined
Previous
47/50
Next
anuragguptanitw@gmail.com
2026-10-06 13:54 • UTC

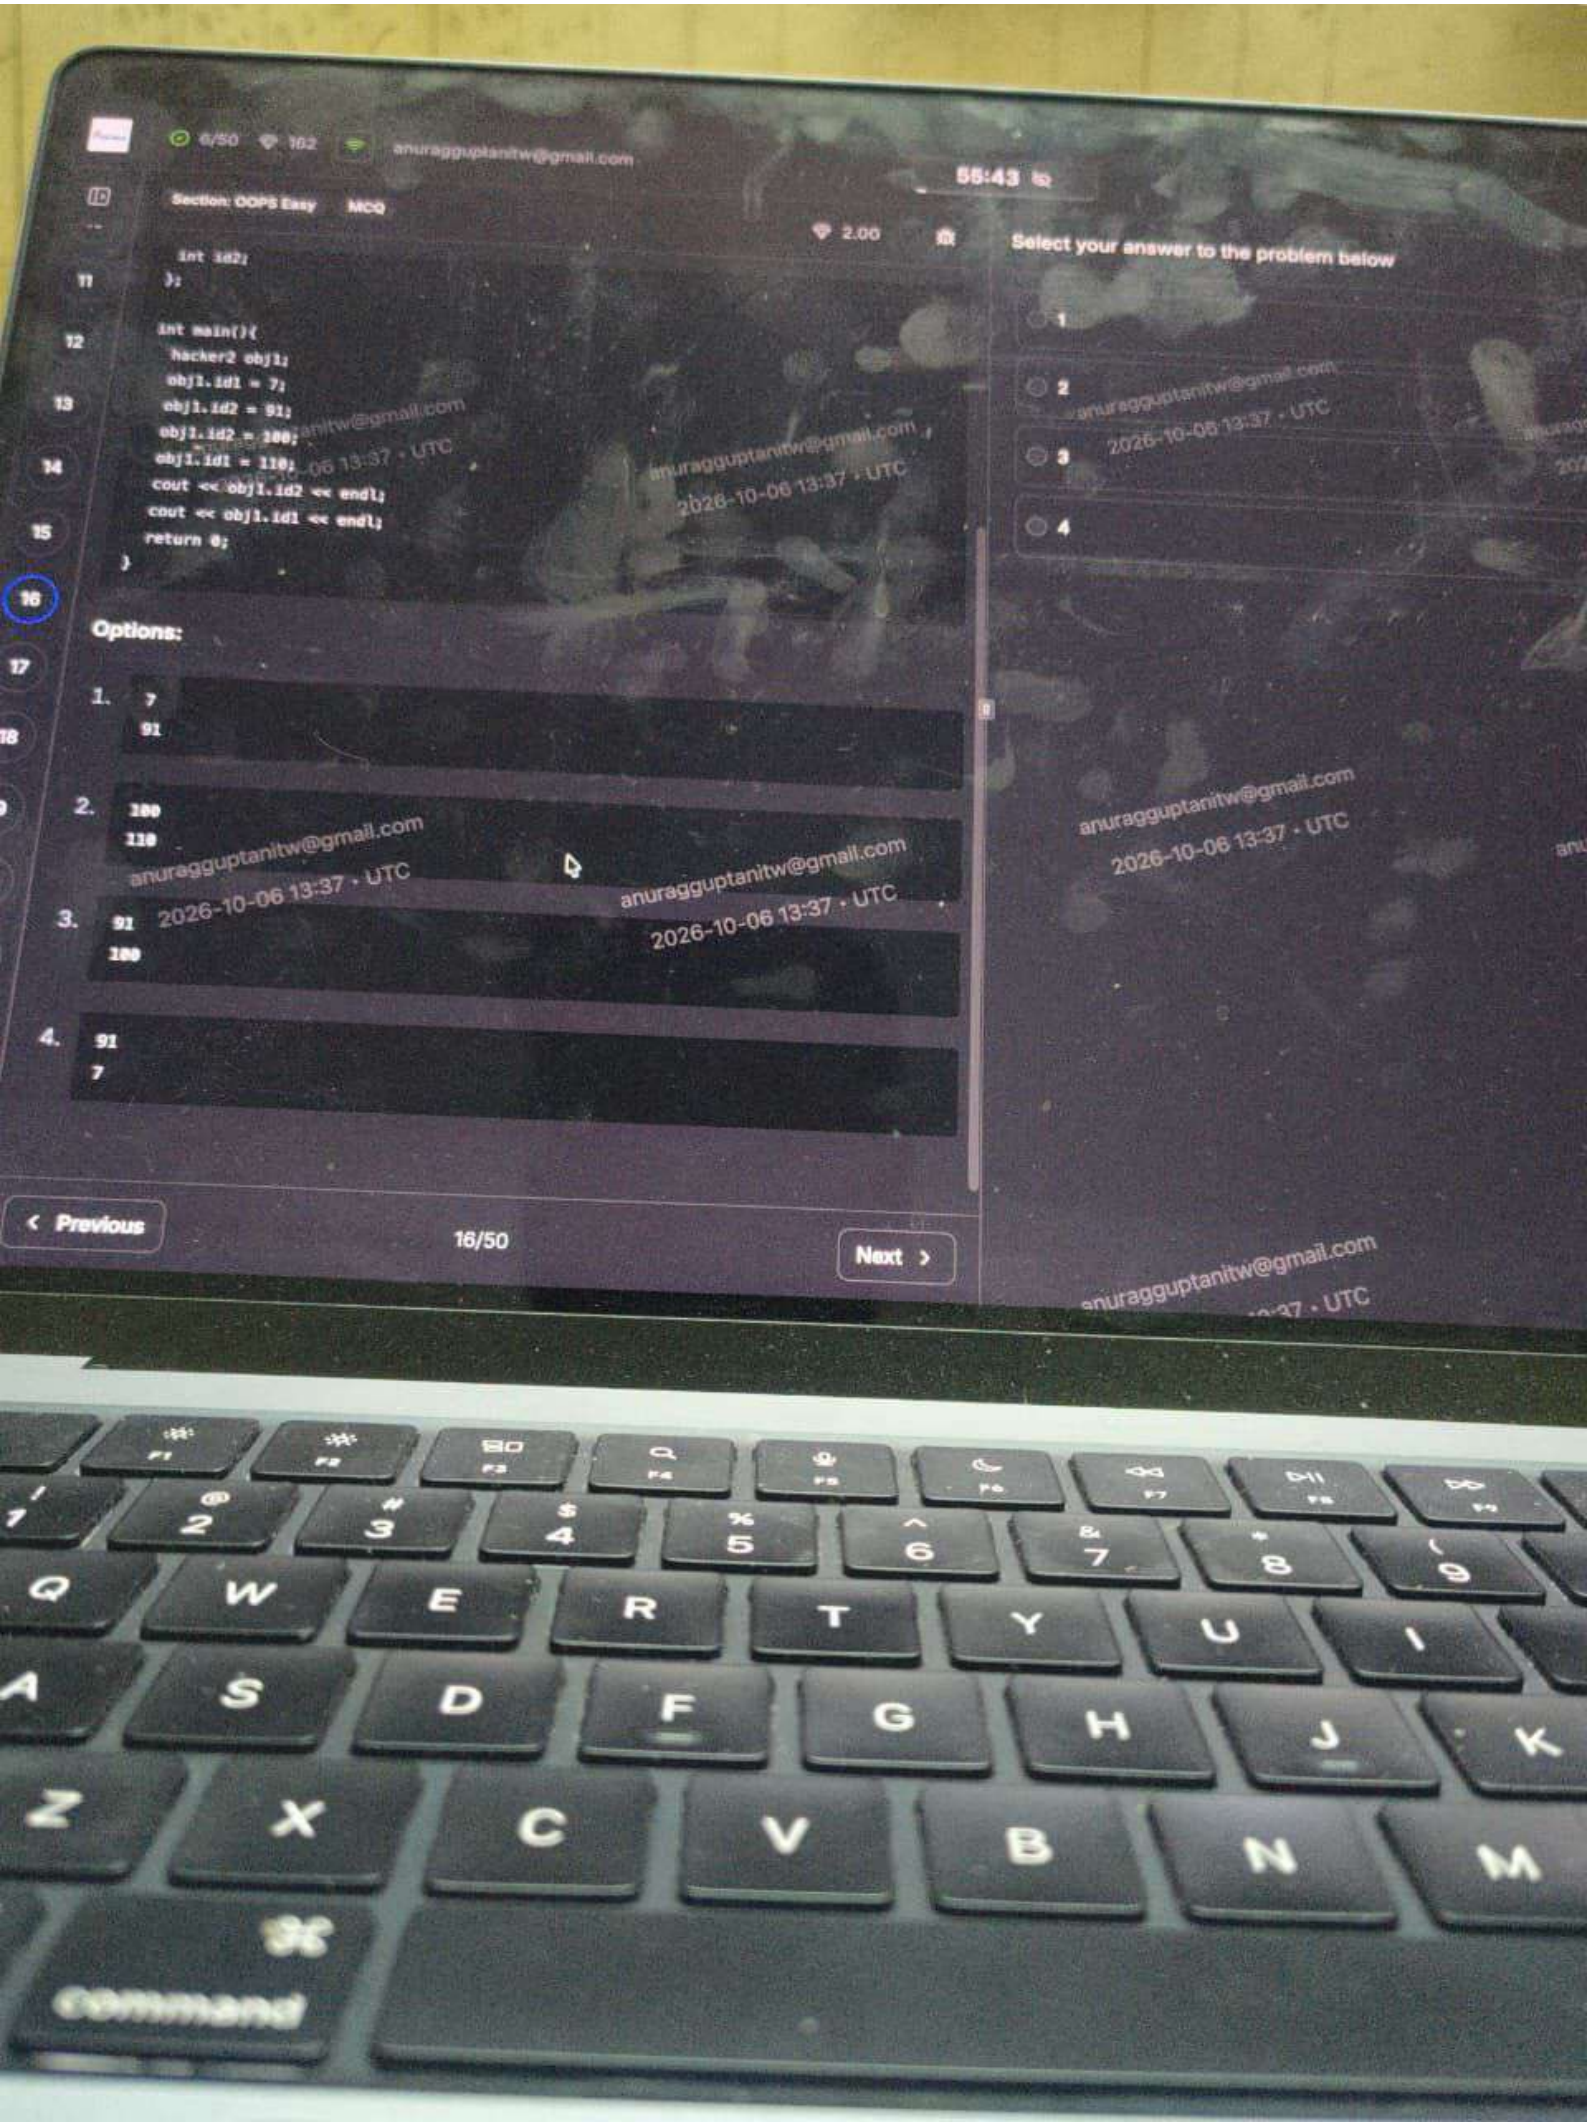

15/50
162
anuragguptanitw@gmail.com
Show Timer
Section: OOPS Hard
MCQ
6.00
What is the output of the following Swift code:
Code
17
18
19
20
21
22
23
enum CustomError: Error {
case error1
case error2
case error3
}
func performOperation() throws {
throw CustomError.error1
}
func handleErrors() {
do {
try performOperation()
print("Operation successful.")
} catch CustomError.error1 {
print("Error 1 occurred.")
} catch CustomError.error2 {
print("Error 2 occurred.")
} catch {
print("Unknown error occurred.")
}
}
handleErrors()
anuragguptanitw@gmail.com
2026-10-06 13:41 · UTC
Select your answer to the problem below
Operation successful
Error 1 occurred
Unknown error occurred
Error: performOperation()
Previous
22/50
Next

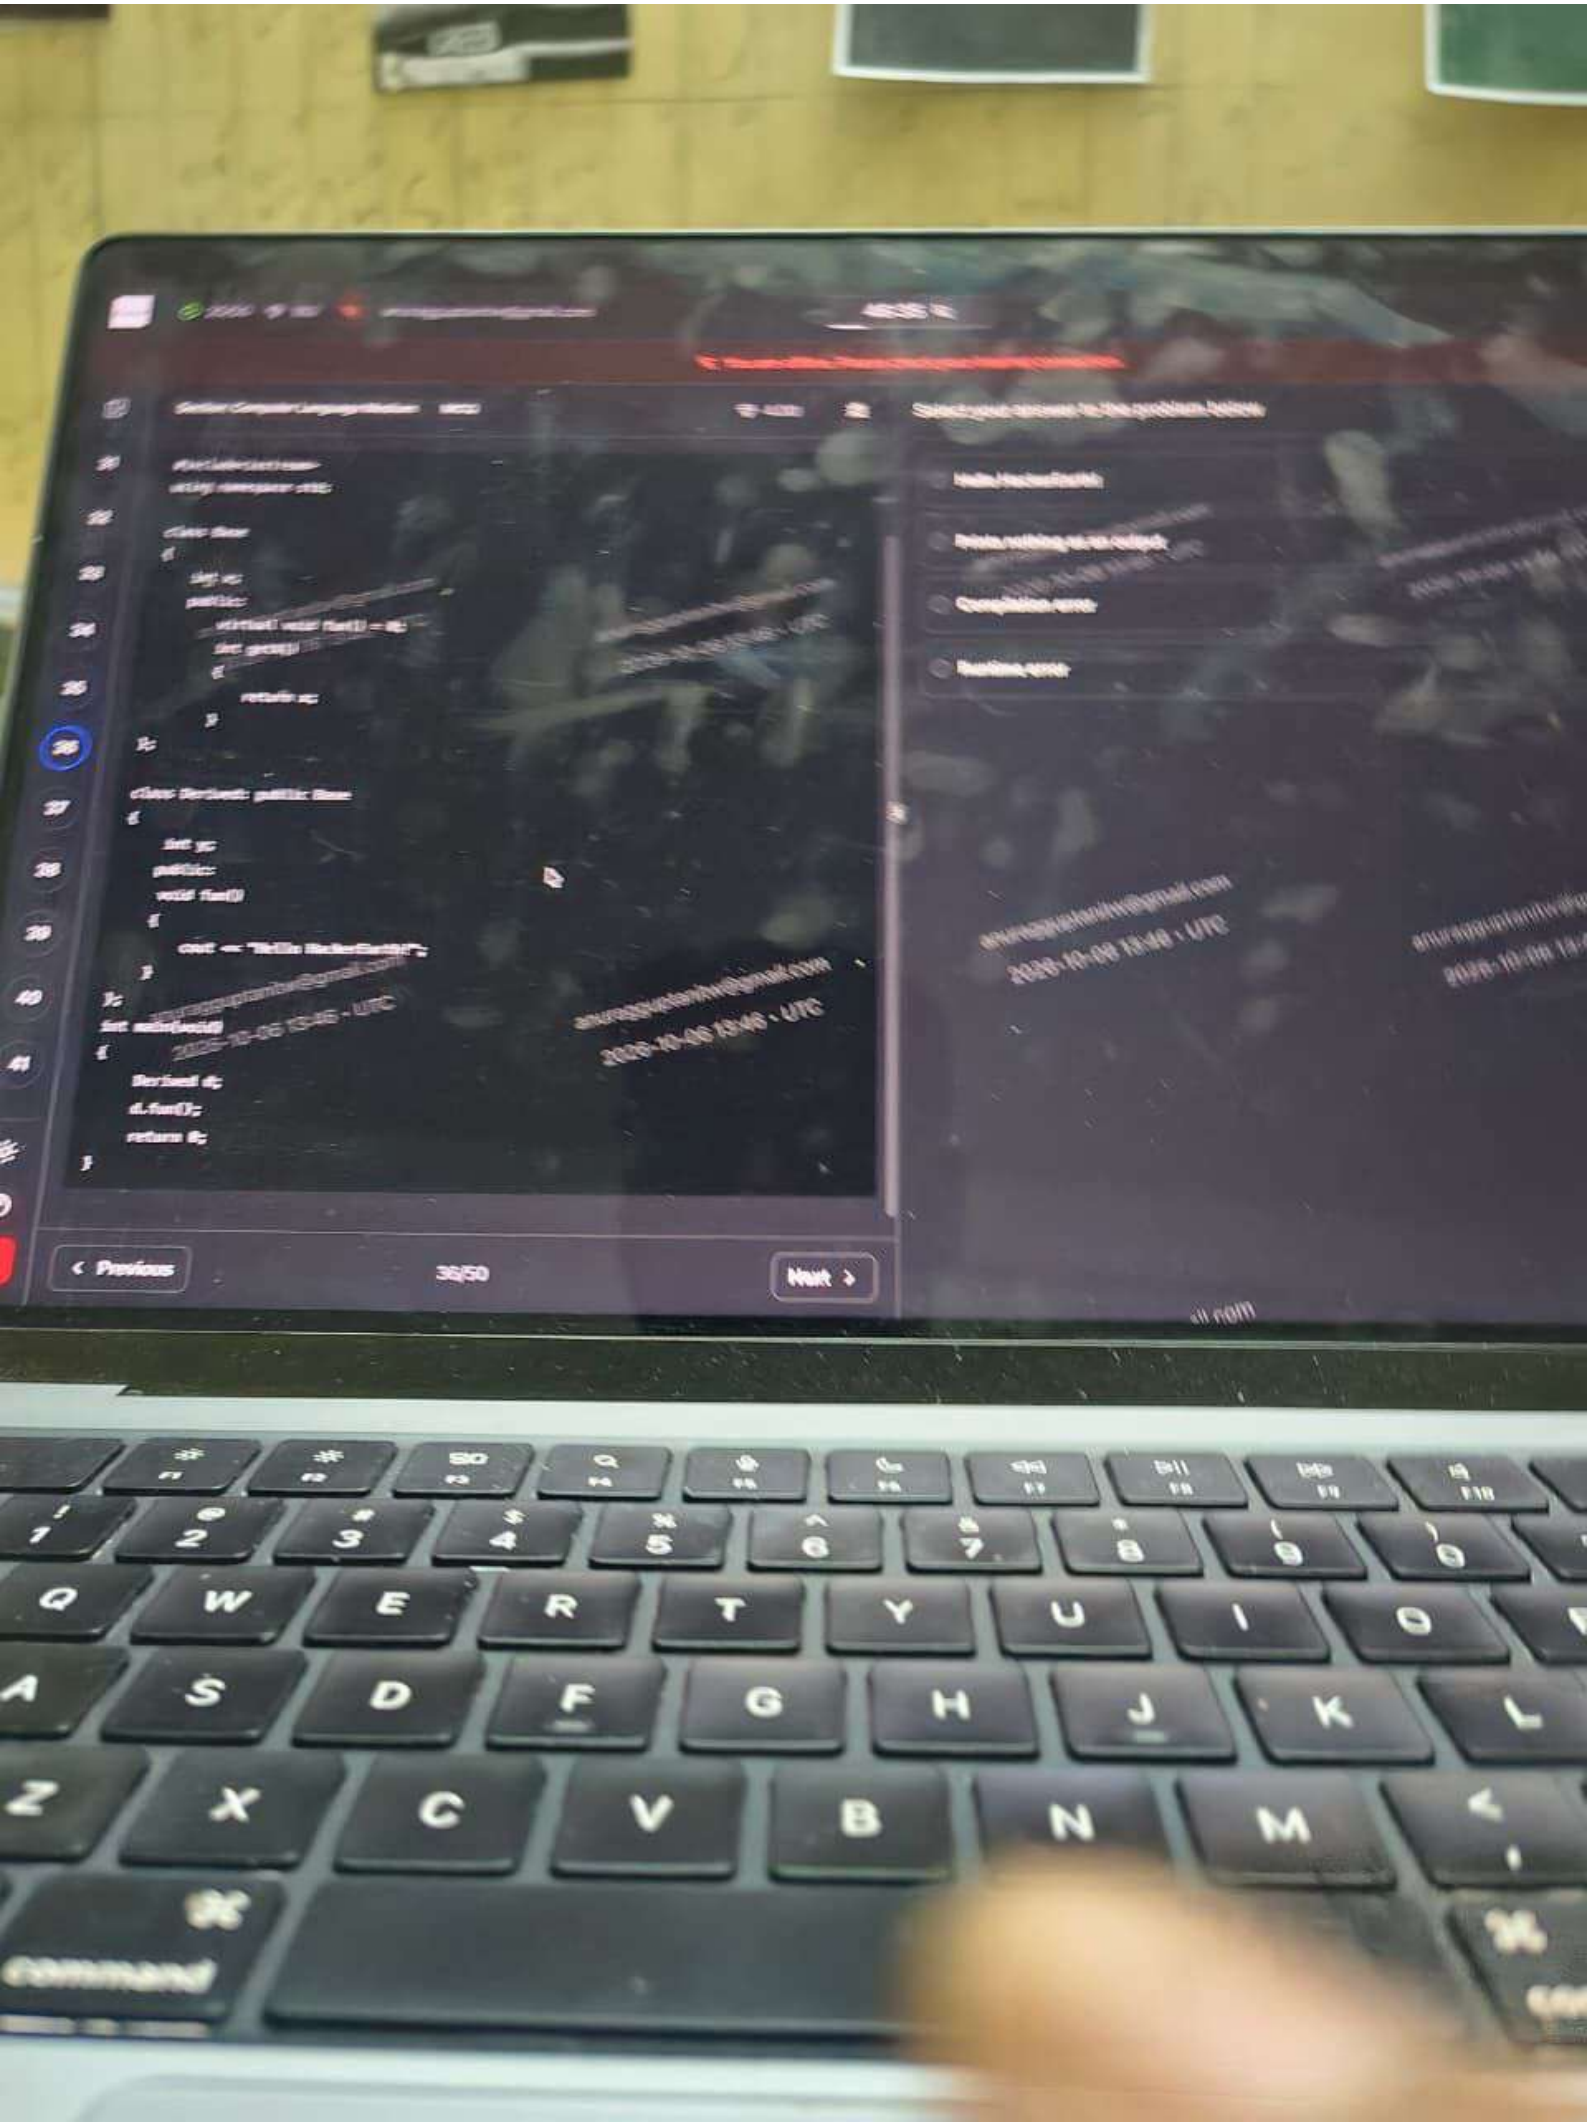

15/50
102
anuragguptanitw@gmail.com
Show Timer
Section: OOPS Medium
MCQ
4.00
Select your answer to the problem below
What is the output of the following Python code:
Code
class GetAttribute(object):
attr1=1
def __init__(self):
self.attr2 = 2
def __getattribute__(self,attr):
print('get:'+attr)
if(attr=='attr3'):
return 3
else:
return object.__getattribute__(self,attr)
X=GetAttribute()
print(X.attr1)
print(X.attr2)
print(X.attr3)
1
2
3
4
Options
1.
1
2
get:attr3
2.
get:attr1
get:attr2
get:attr3
Previous
19/50
Next

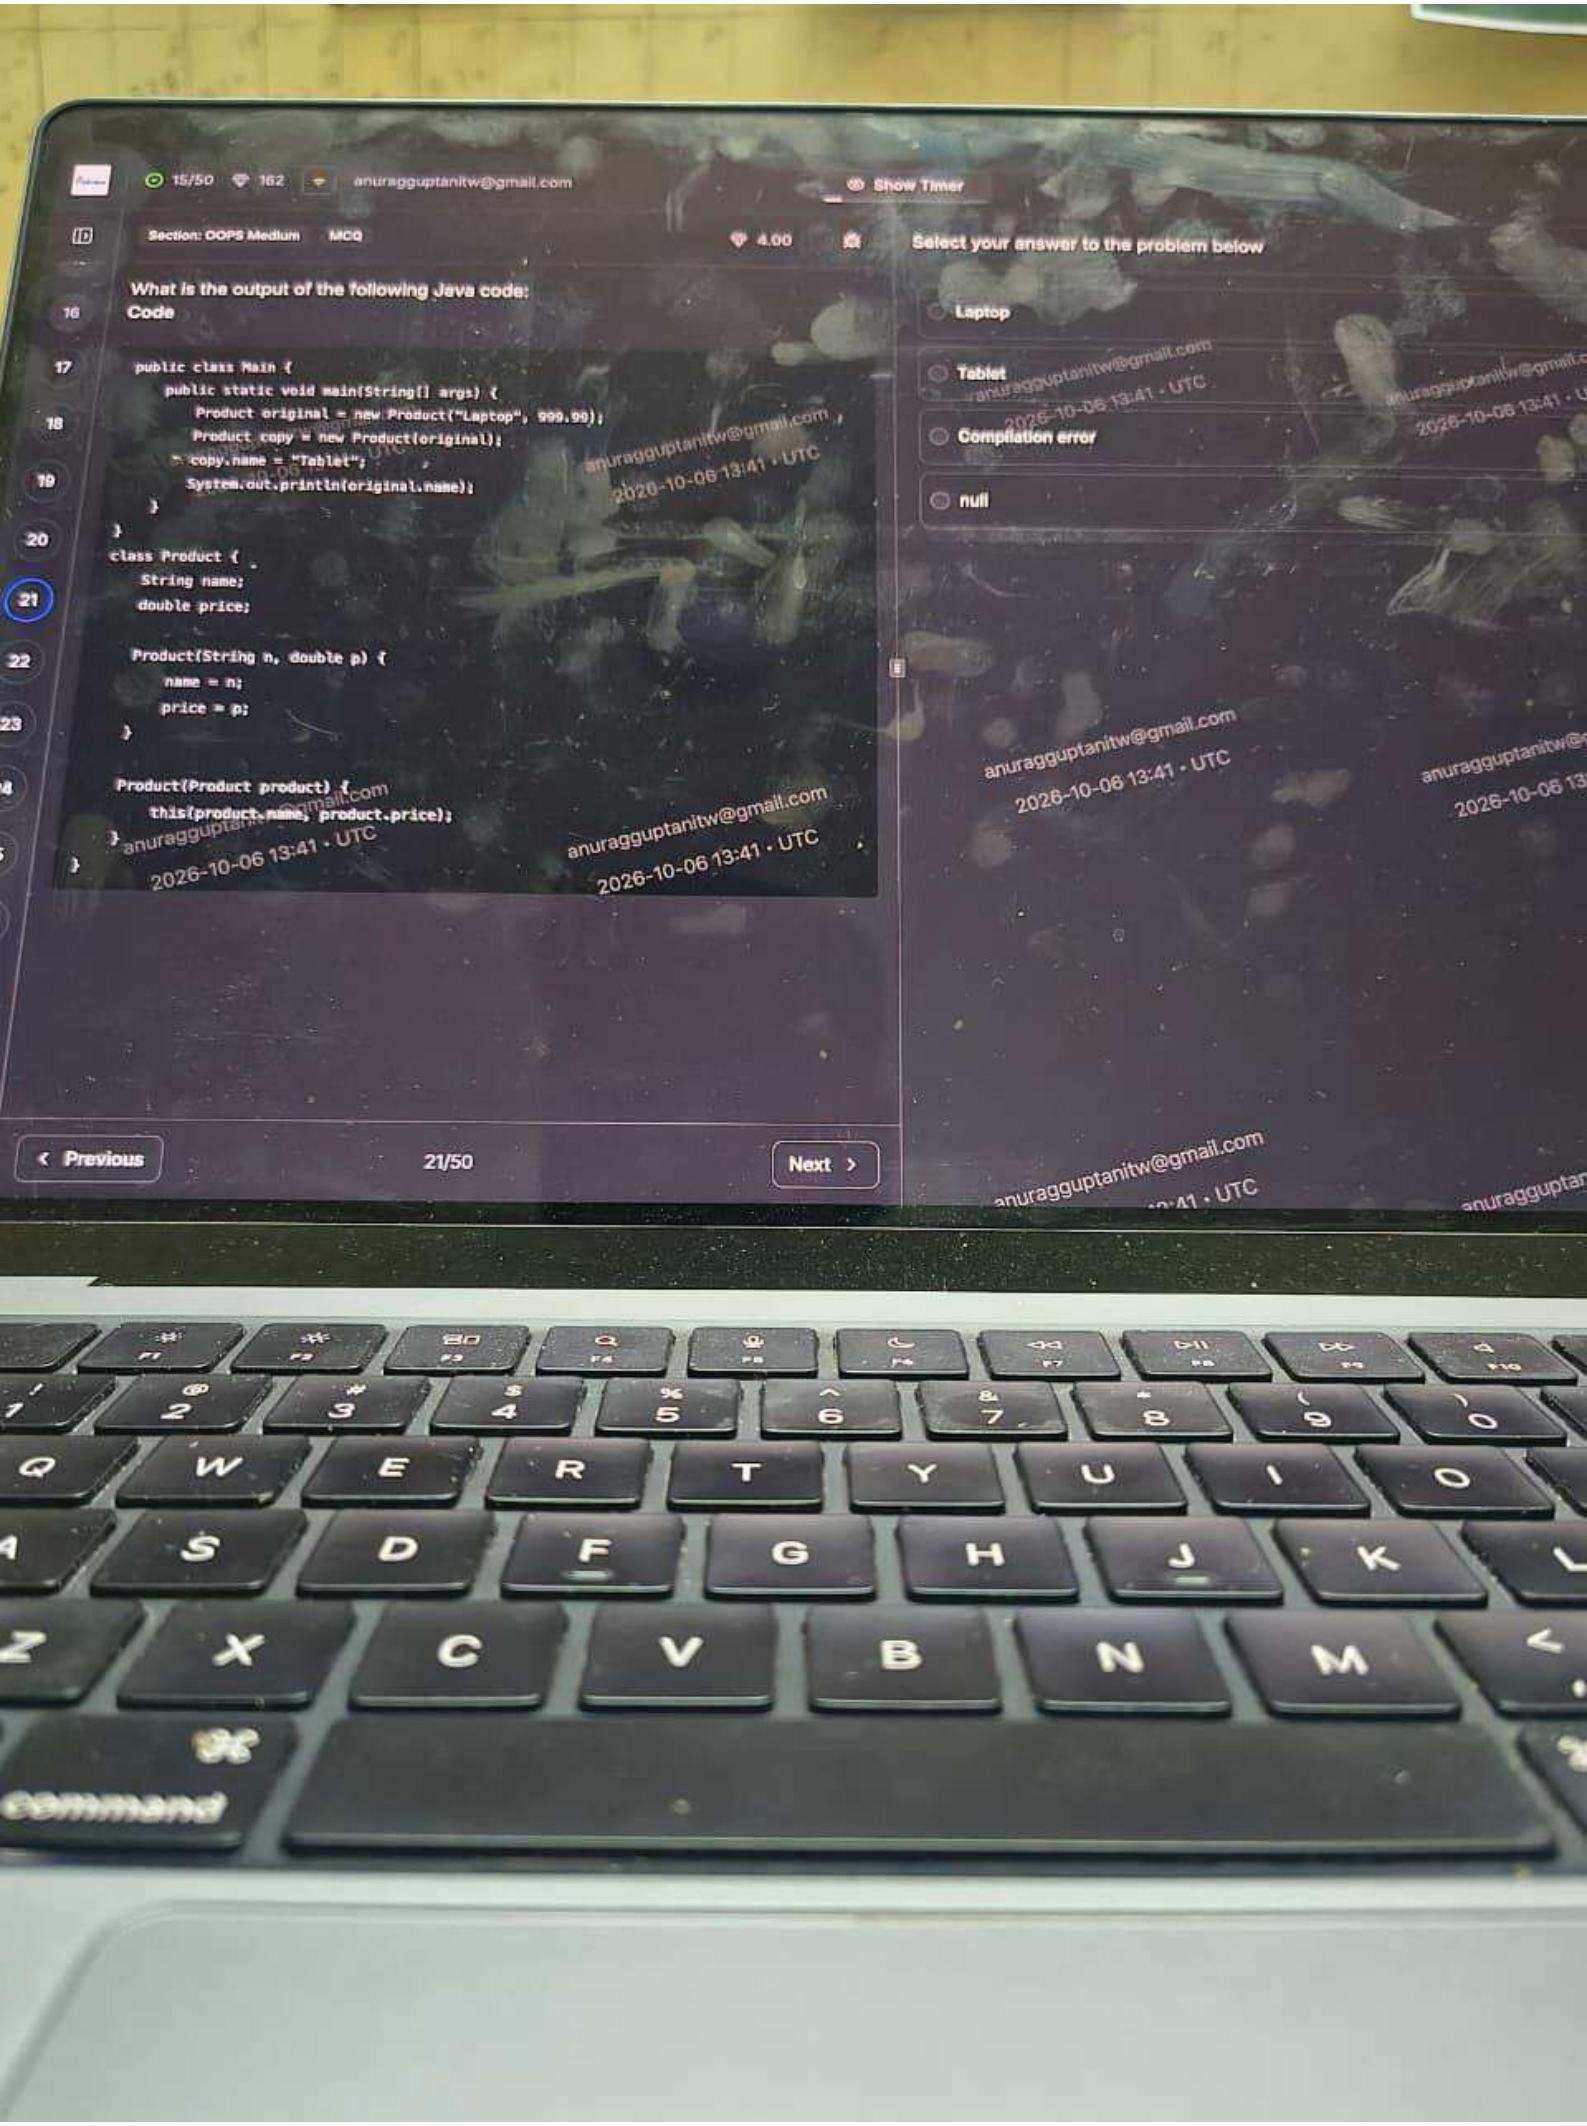

31/50
102
anuragguptanitw@gmail.com
42:07
Section: Output of Code Snippet Easy
MCQ
2.00
Select your answer to the problem below
You are creating a Tkinter application that requires the user to select a file from their computer. Which widget would you use to create the file selection dialog?
OptionMenu
Scale
FileDialog
Radiobutton
anuragguptanitw@gmail.com
2026-10-06 13:51 · UTC
Previous
42/50
Next

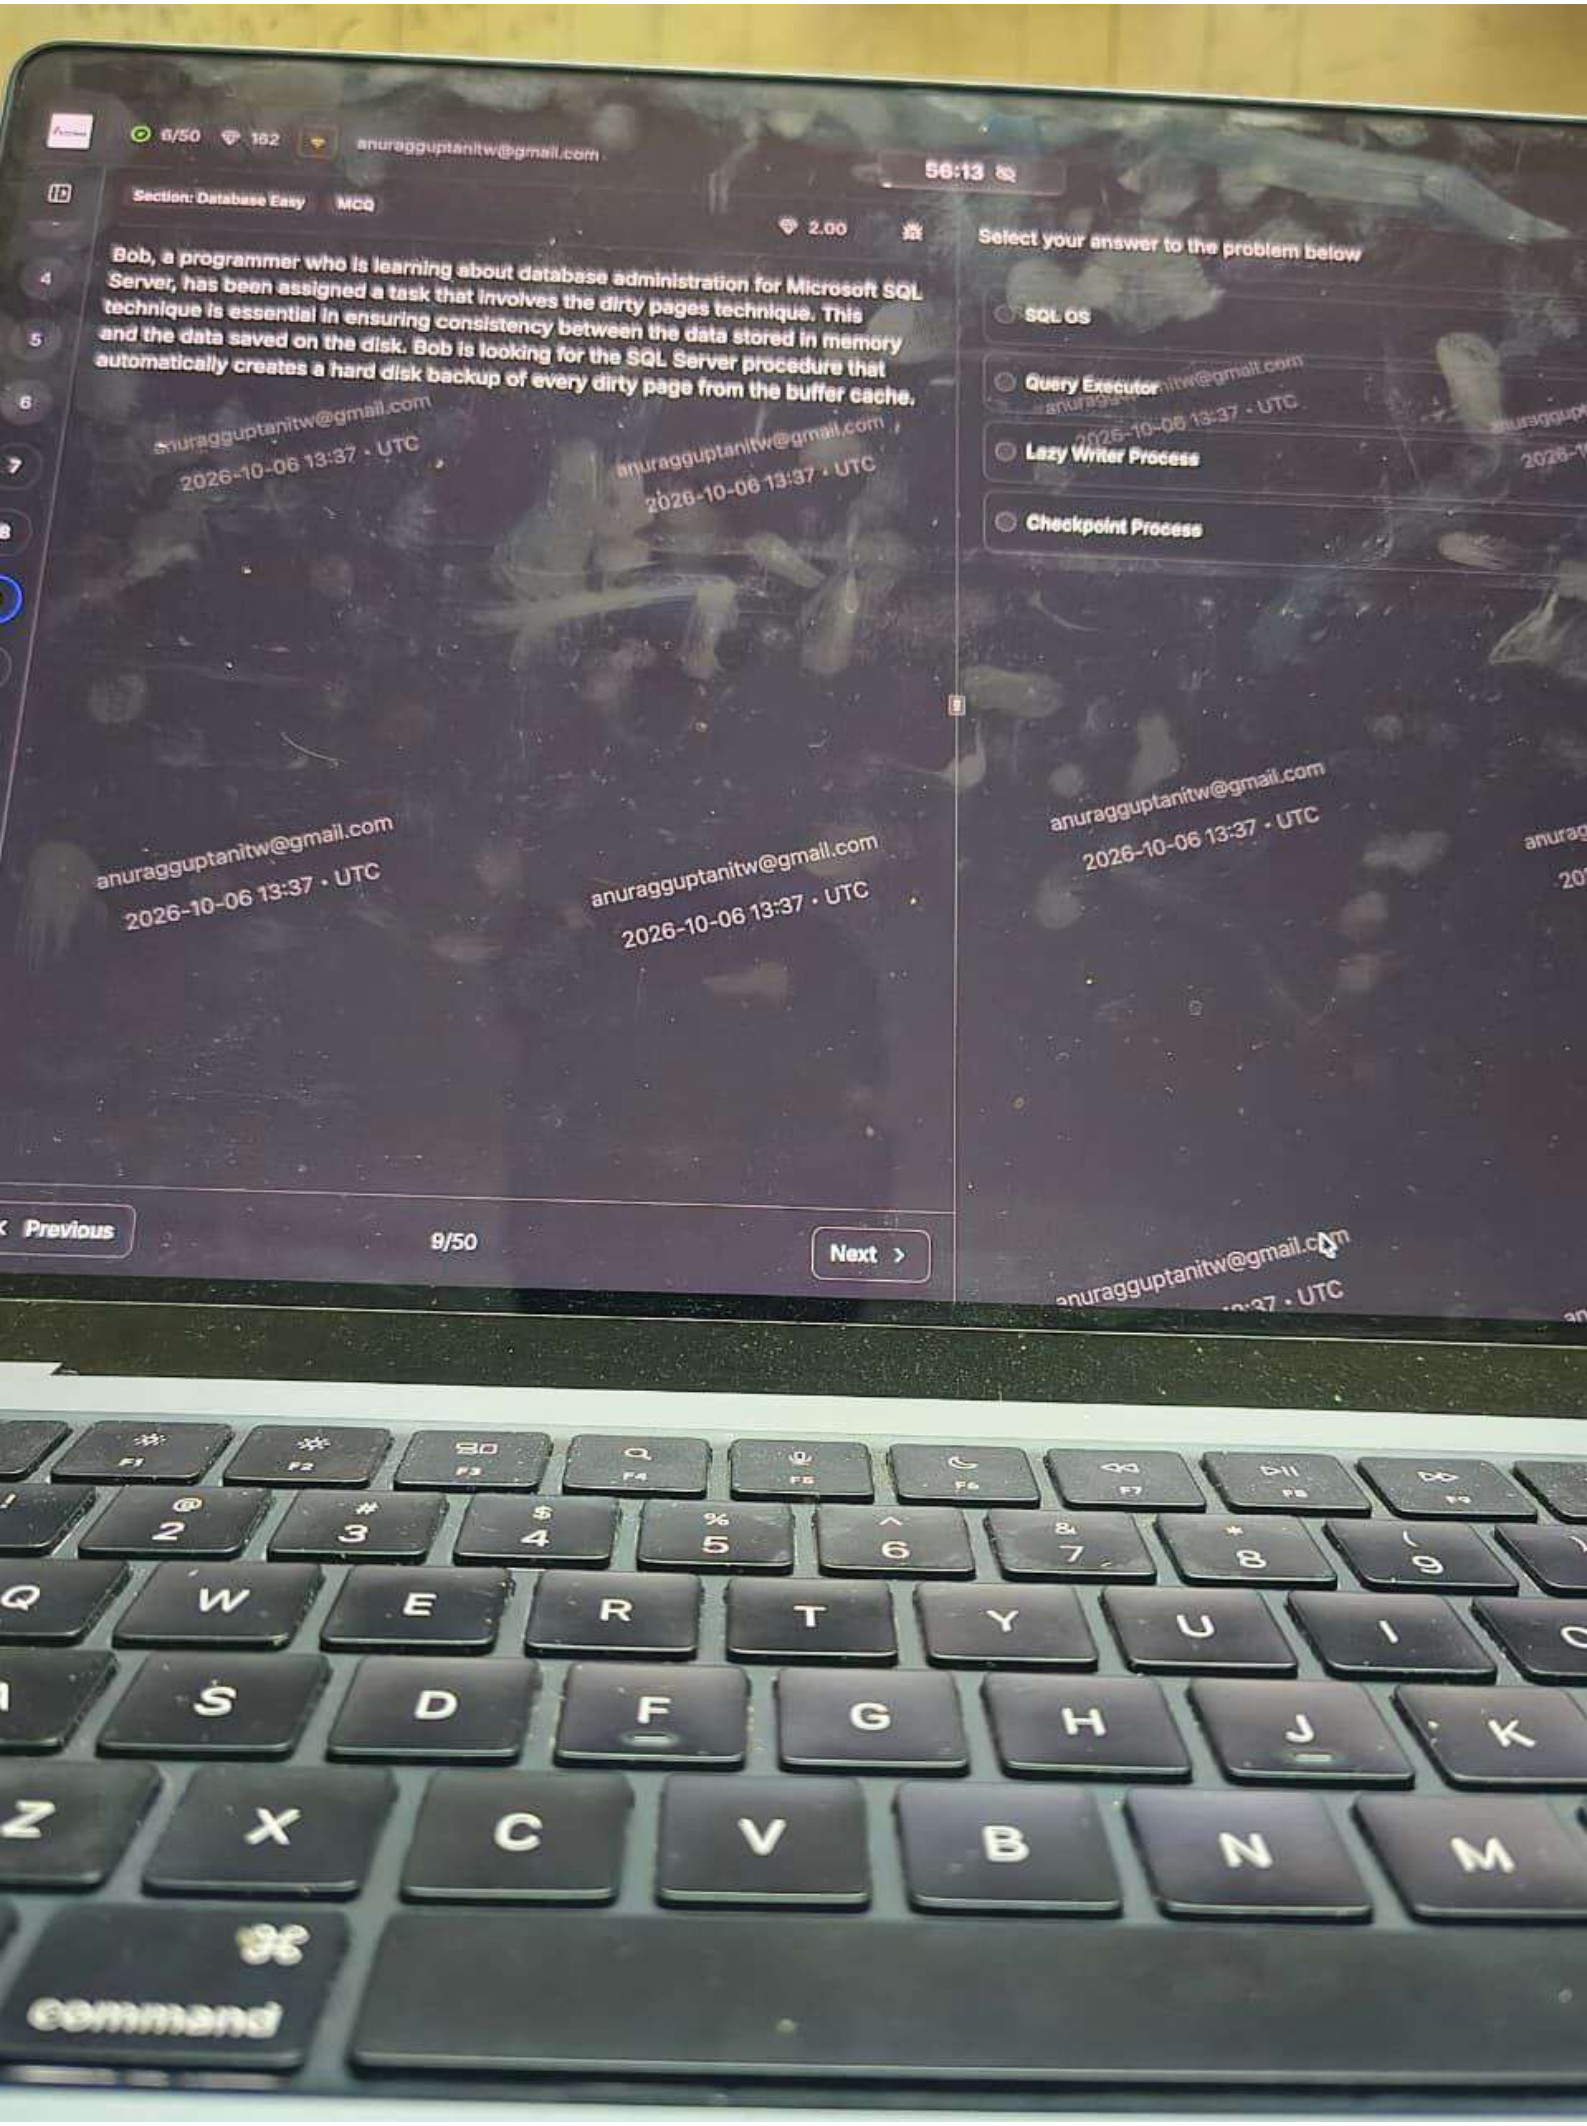

25/50
162
anuragguptanitw@gmail.com
47:19
Section: Calculus
MCQ
4.00
Select your answer to the problem below
Simplify the following expression:
$3-3(3)+3(-2)-3o/2\div3\div2\times3\times2+3(5)$
-1
-3
-5
-7
anuragguptanitw@gmail.com
2026-10-06 13:46 · UTC
Previous
28/50
Next

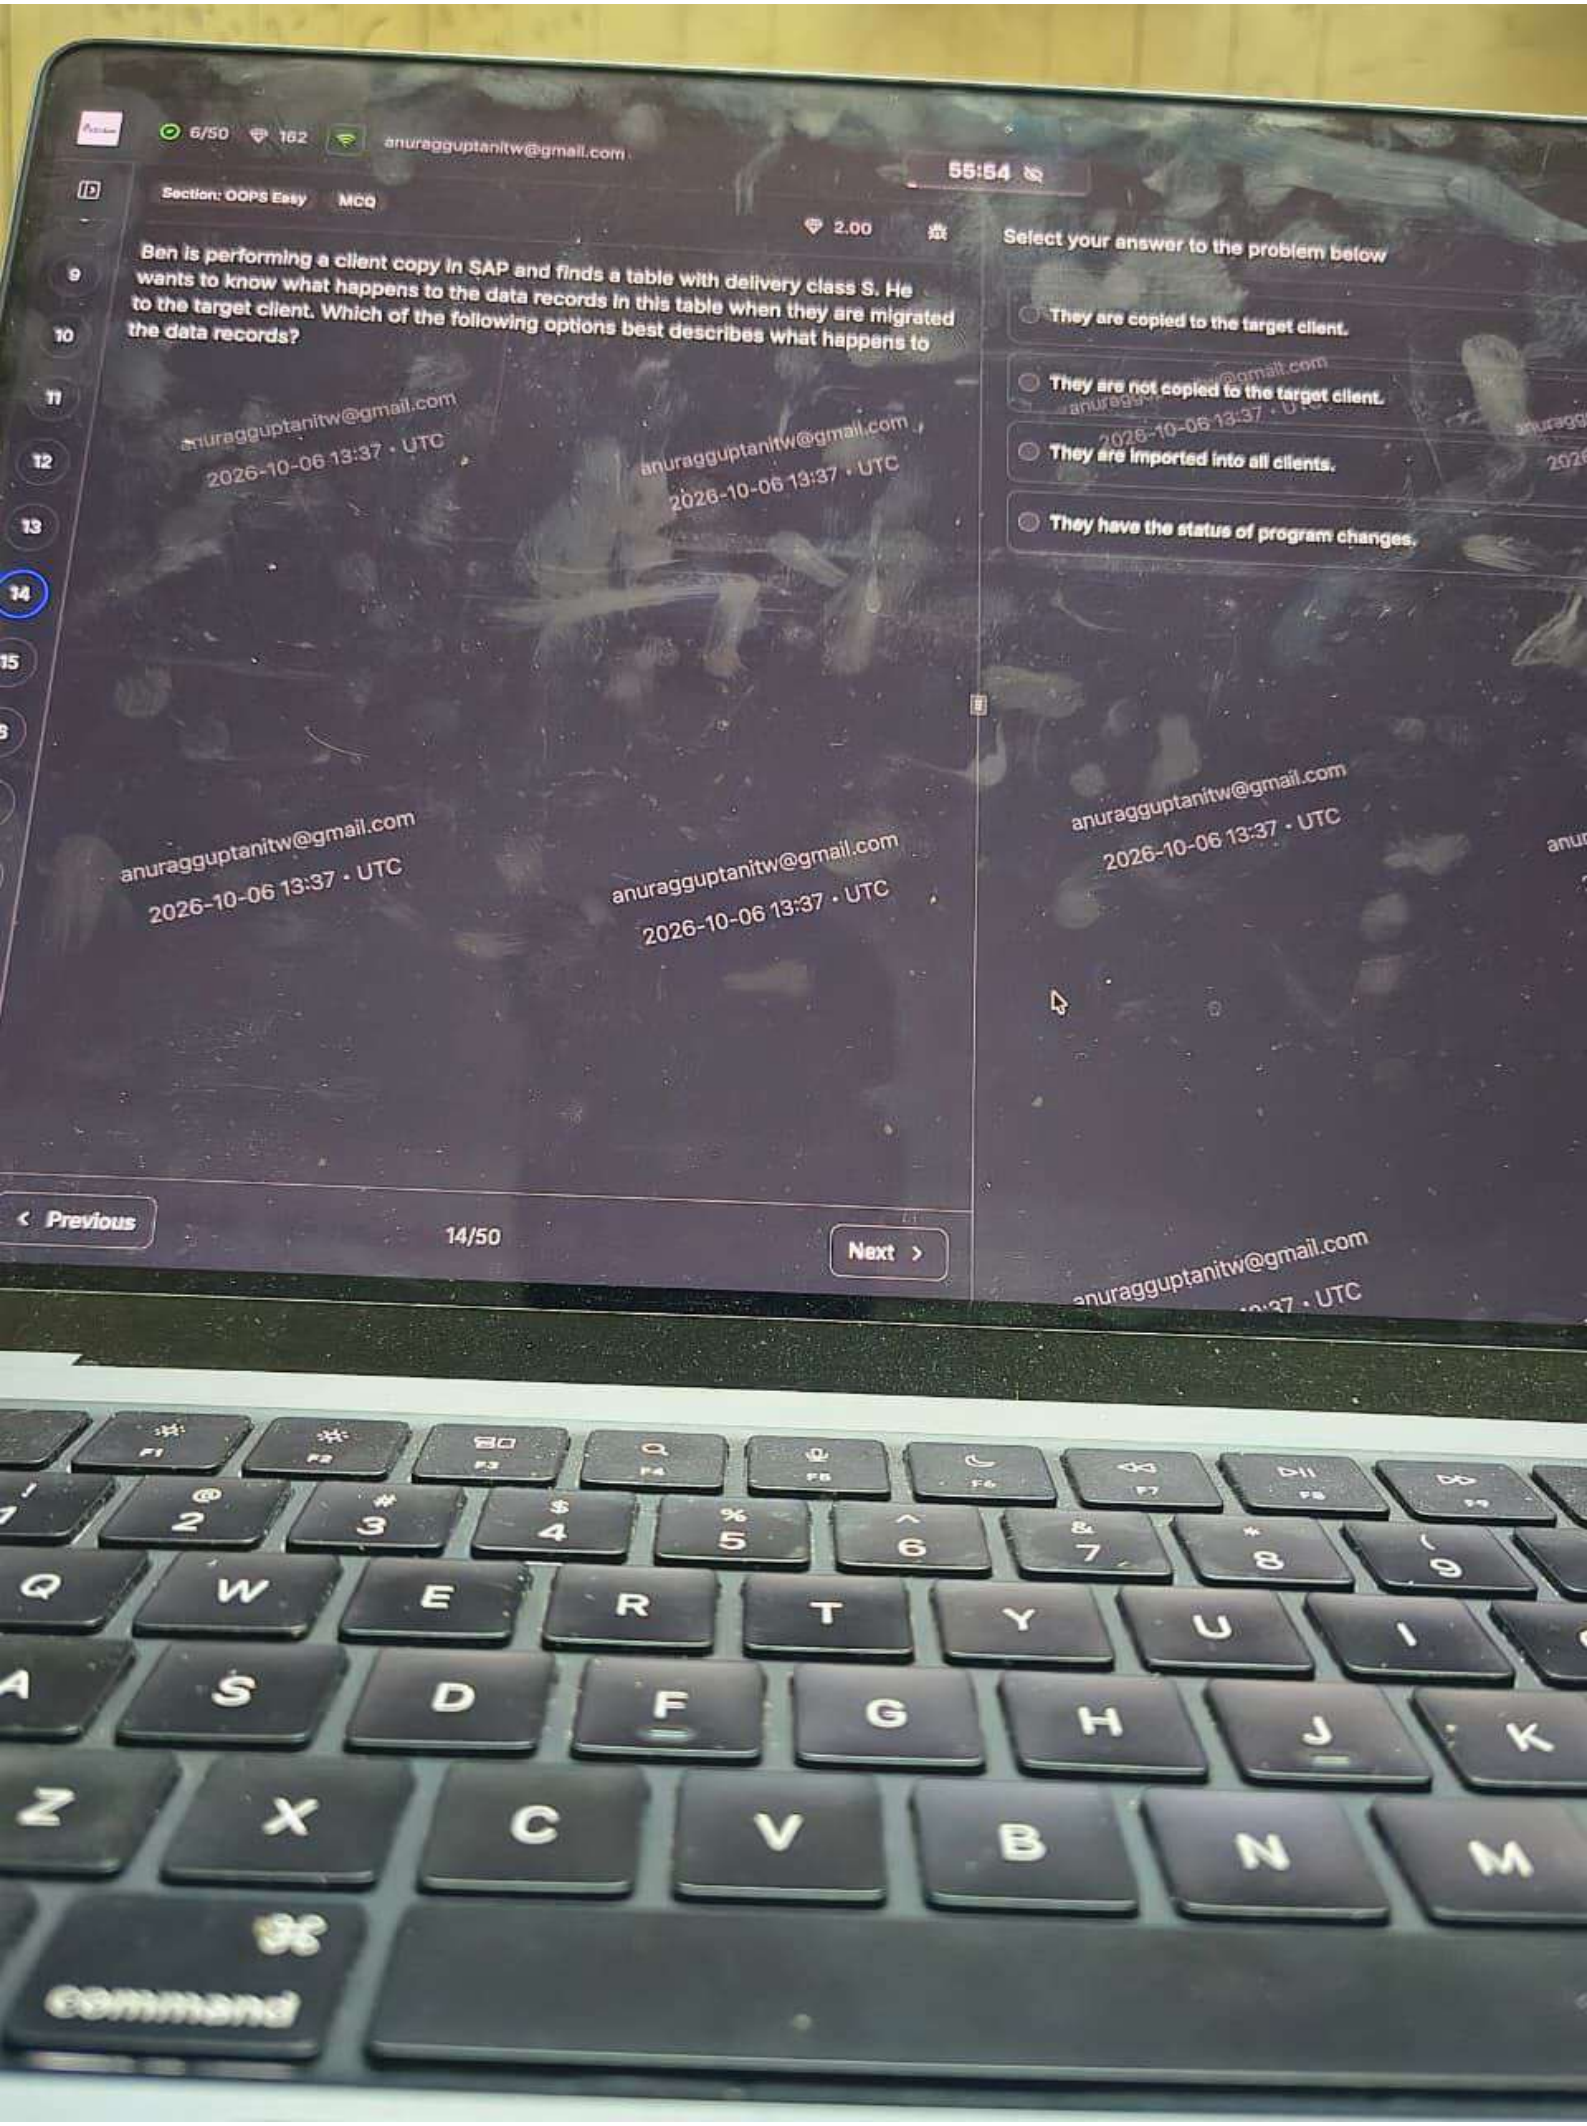

46/50
182
anuragguptanitw@gmail.com
35:20
Section: Networking Easy
MCQ
2.00
In networking, which of the following CAN protocol nodes can access the request transmission rights:
1. Classical CAN
2. CAN FD
Select your answer to the problem below
1
2
Both of these
None of these
anuragguptanitw@gmail.com
2026-10-06 13:57 • UTC
Previous
7/50
Next

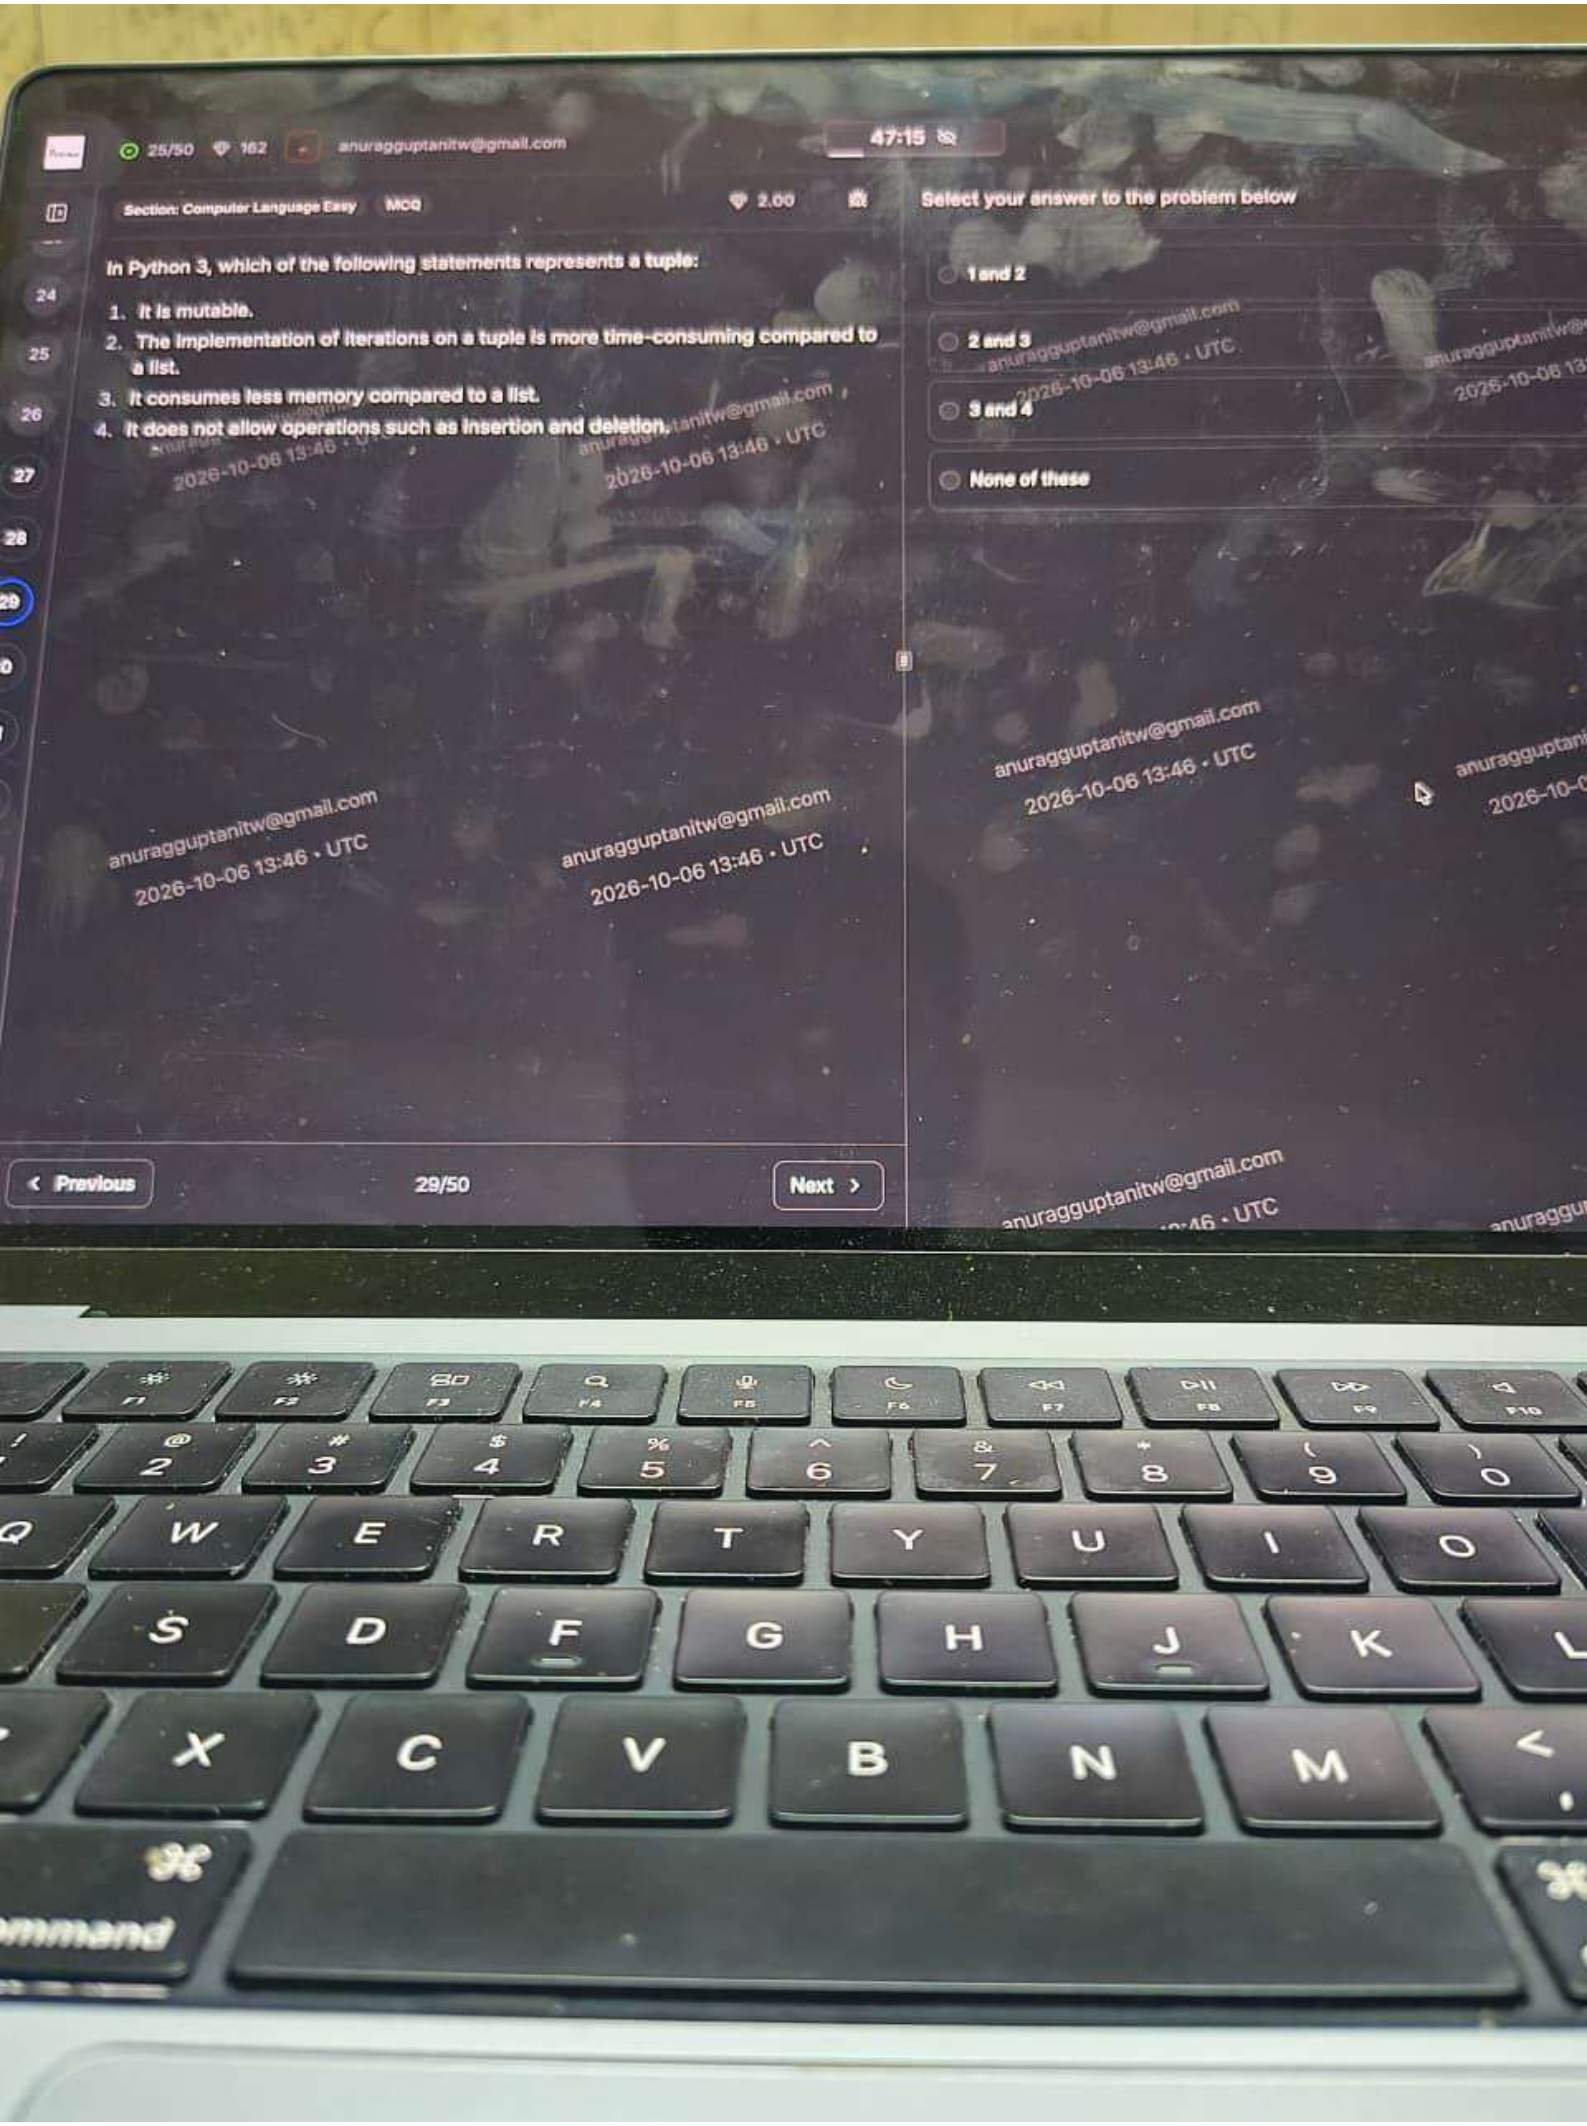

6/50
162
anuragguptanitw@gmail.com
55:43
Section: OOPS Easy
MCQ
2.00
Select your answer to the problem below
int id2;
};
int main(){
hacker2 obj1;
obj1.id1 = 7;
obj1.id2 = 91;
obj1.id2 = 100;
obj1.id1 = 110;
cout << obj1.id2 << endl;
cout << obj1.id1 << endl;
return 0;
}
Options:
1. 7
91
2. 100
110
3. 91
100
4. 91
7
1
2
3
4
anuragguptanitw@gmail.com
2026-10-06 13:37 · UTC
Previous
16/50
Next
command

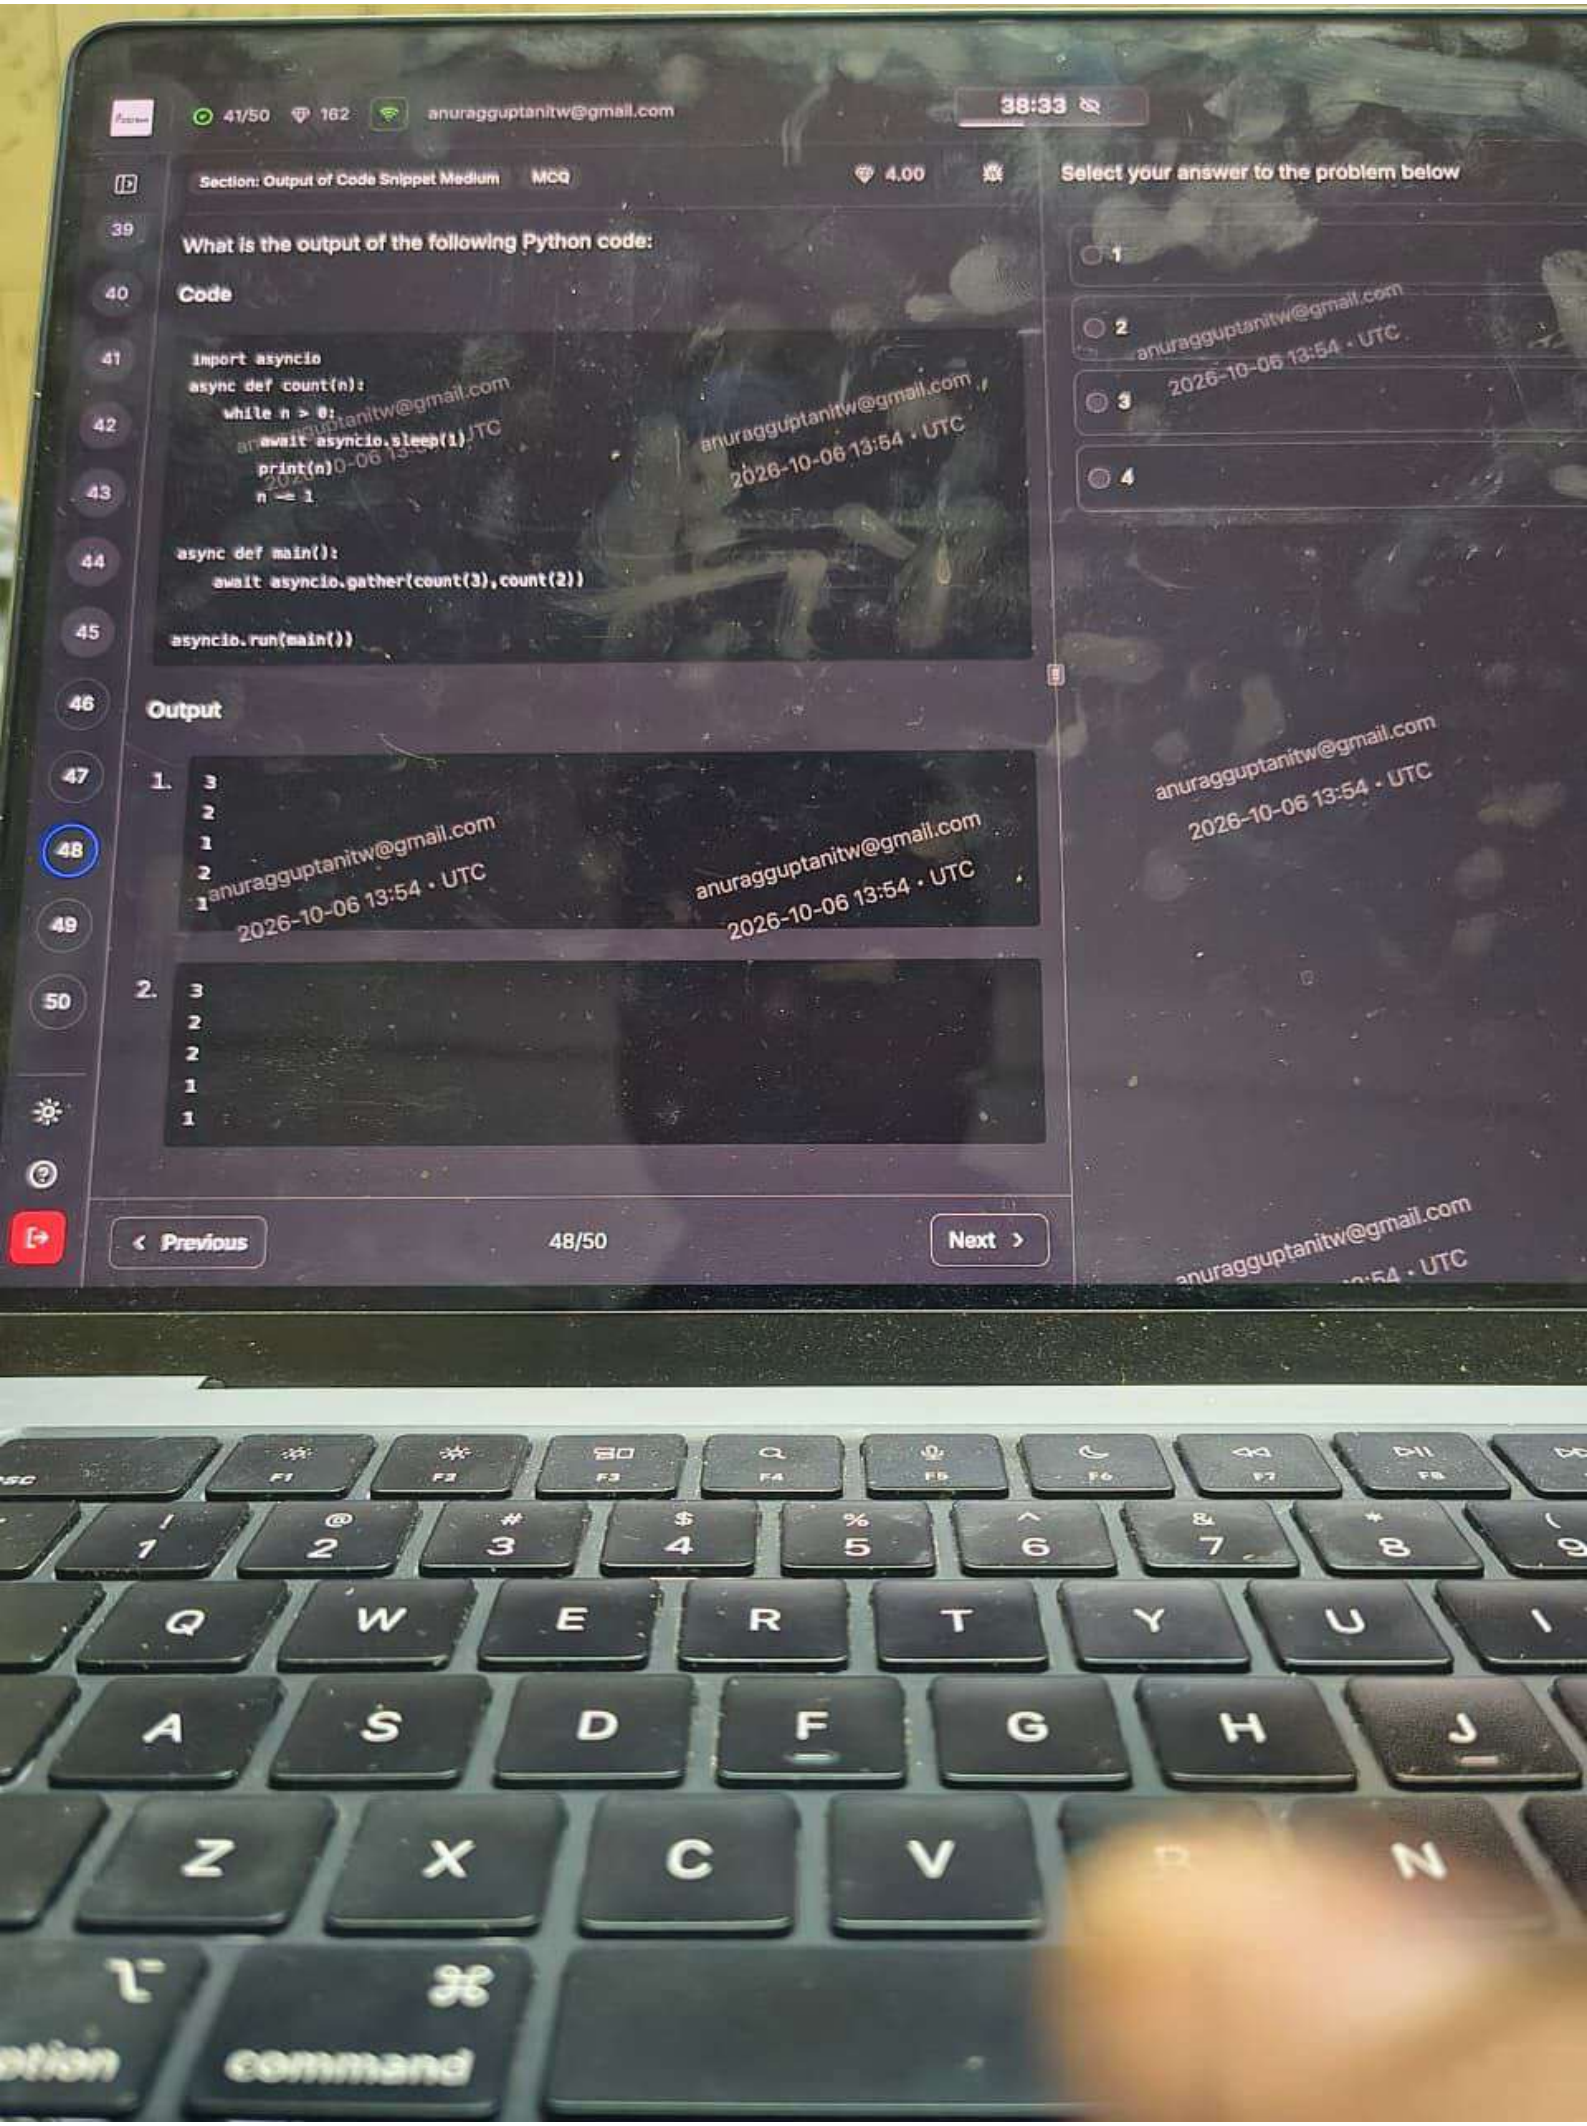

‹ Previous
36/50
Next ›

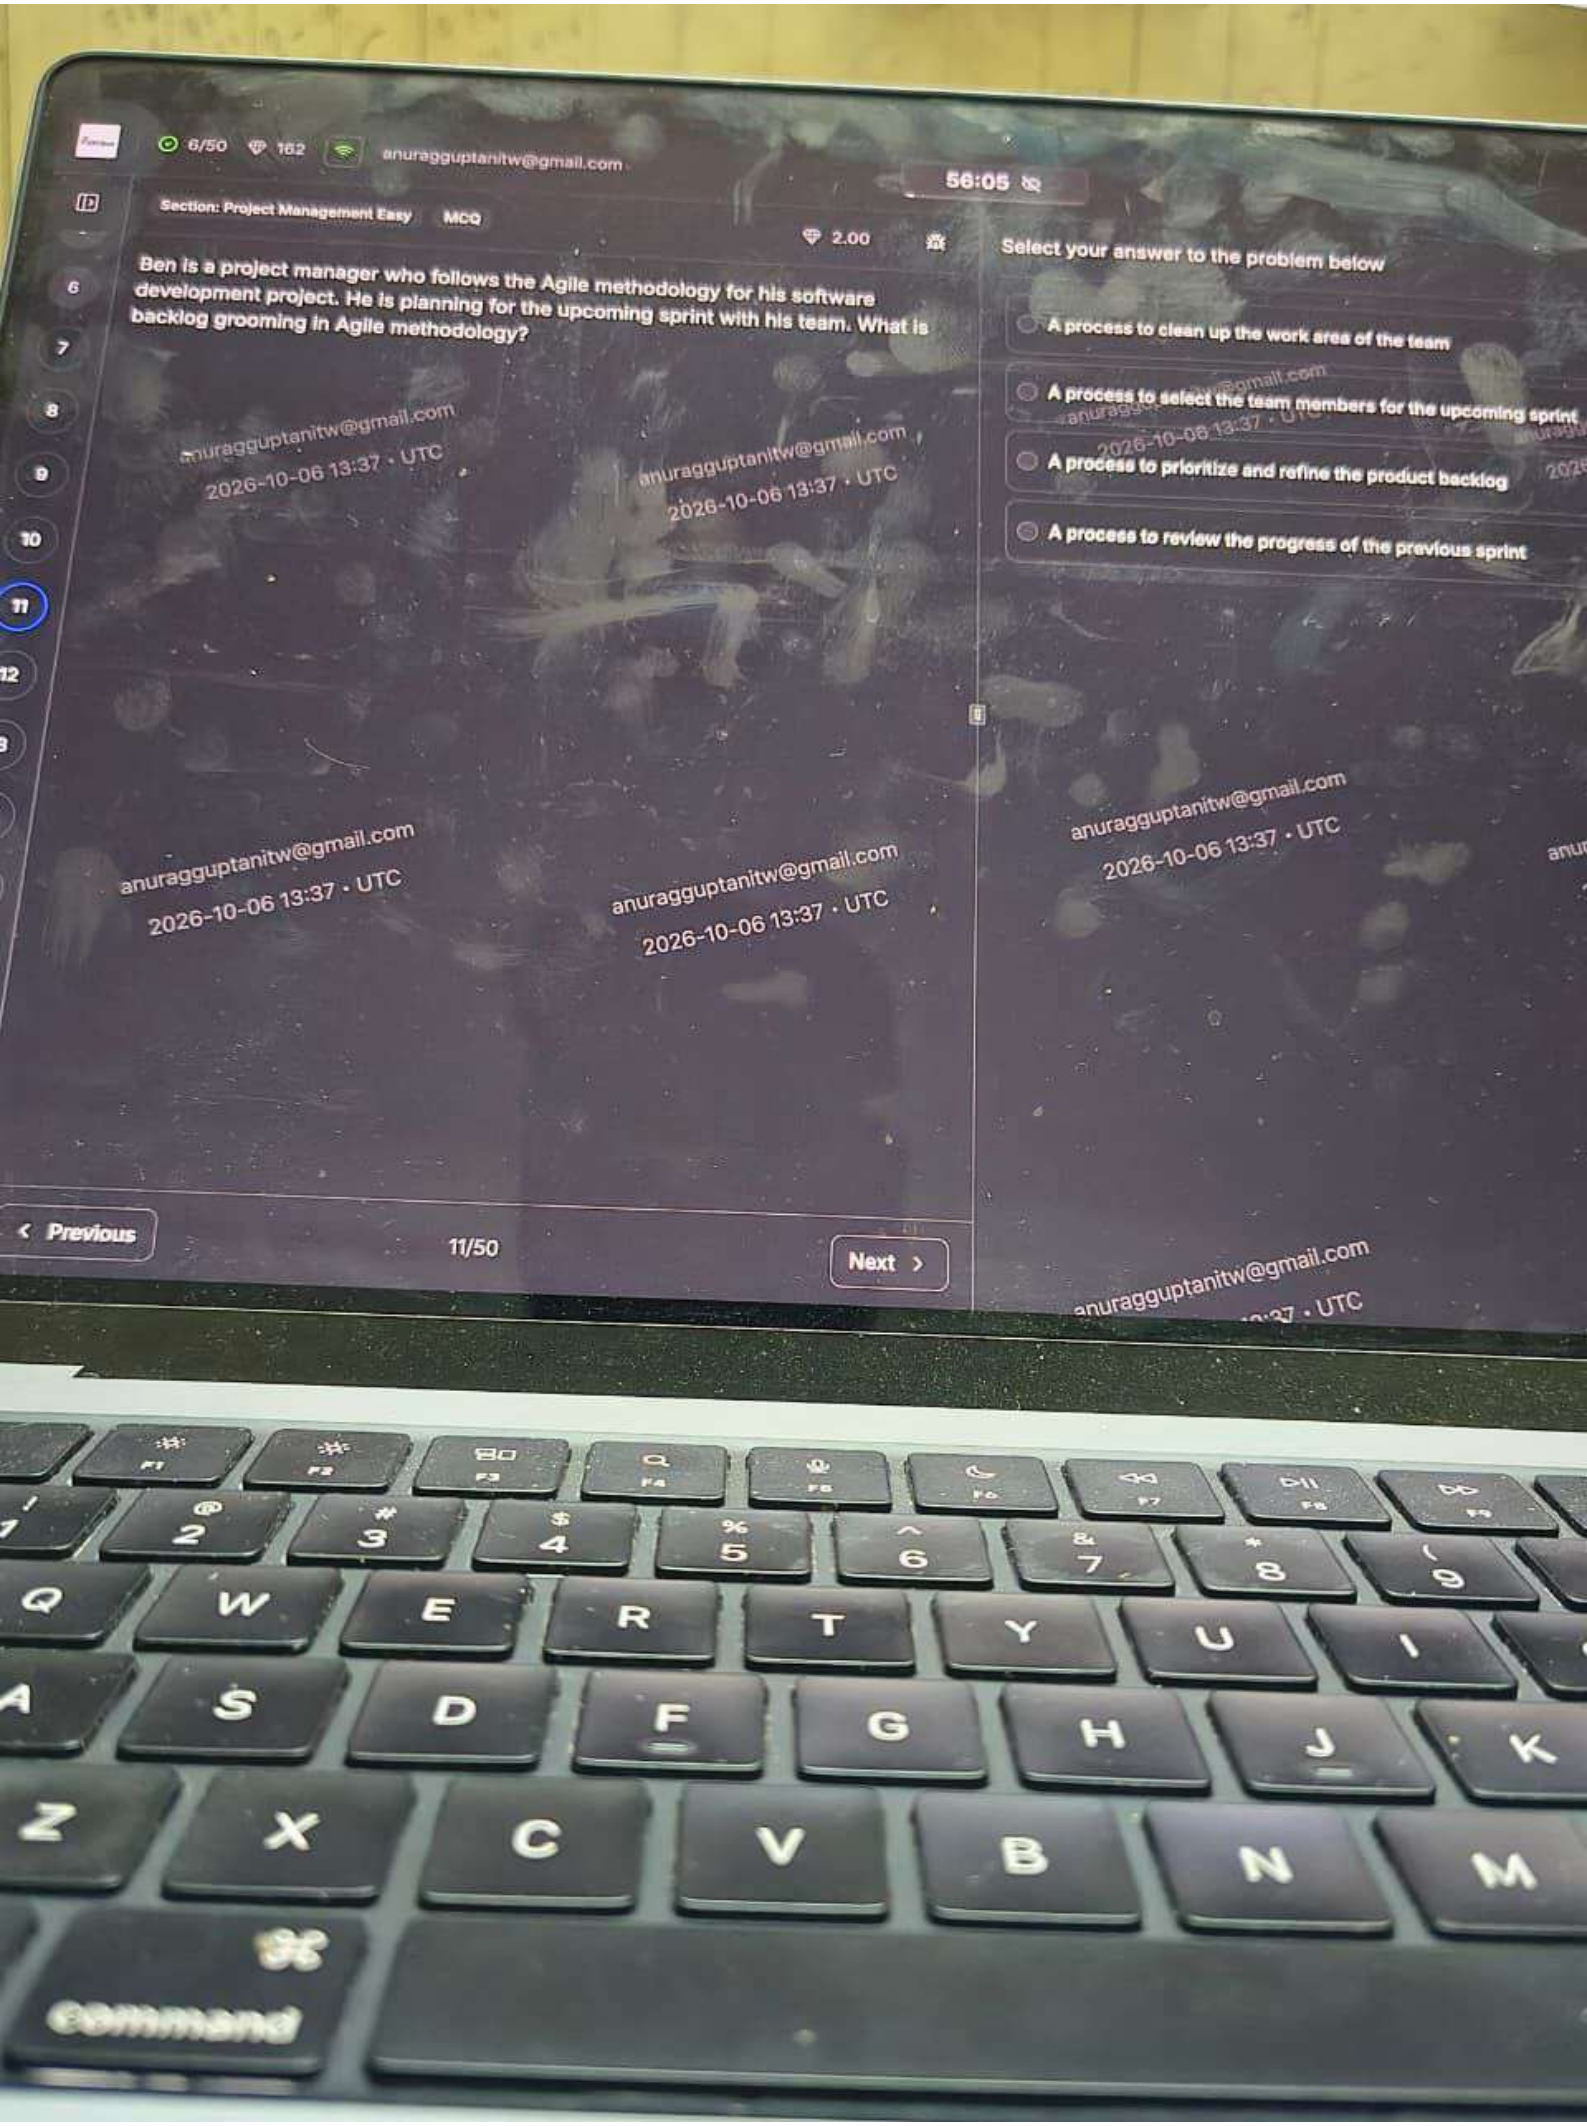

15/50
162
anuragguptanitw@gmail.com
Show Timer
Section: OOPS Medium
MCQ
4.00
What is the output of the following Java code:
Code
16
17
18
19
20
21
22
23
public class Main {
public static void main(String[] args) {
Product original = new Product("Laptop", 999.99);
Product copy = new Product(original);
copy.name = "Tablet";
System.out.println(original.name);
}
}
class Product {
String name;
double price;
Product(String n, double p) {
name = n;
price = p;
}
Product(Product product) {
this(product.name, product.price);
}
}
Select your answer to the problem below
Laptop
Tablet
Compilation error
null
anuragguptanitw@gmail.com
2026-10-06 13:41 • UTC
Previous
21/50
Next

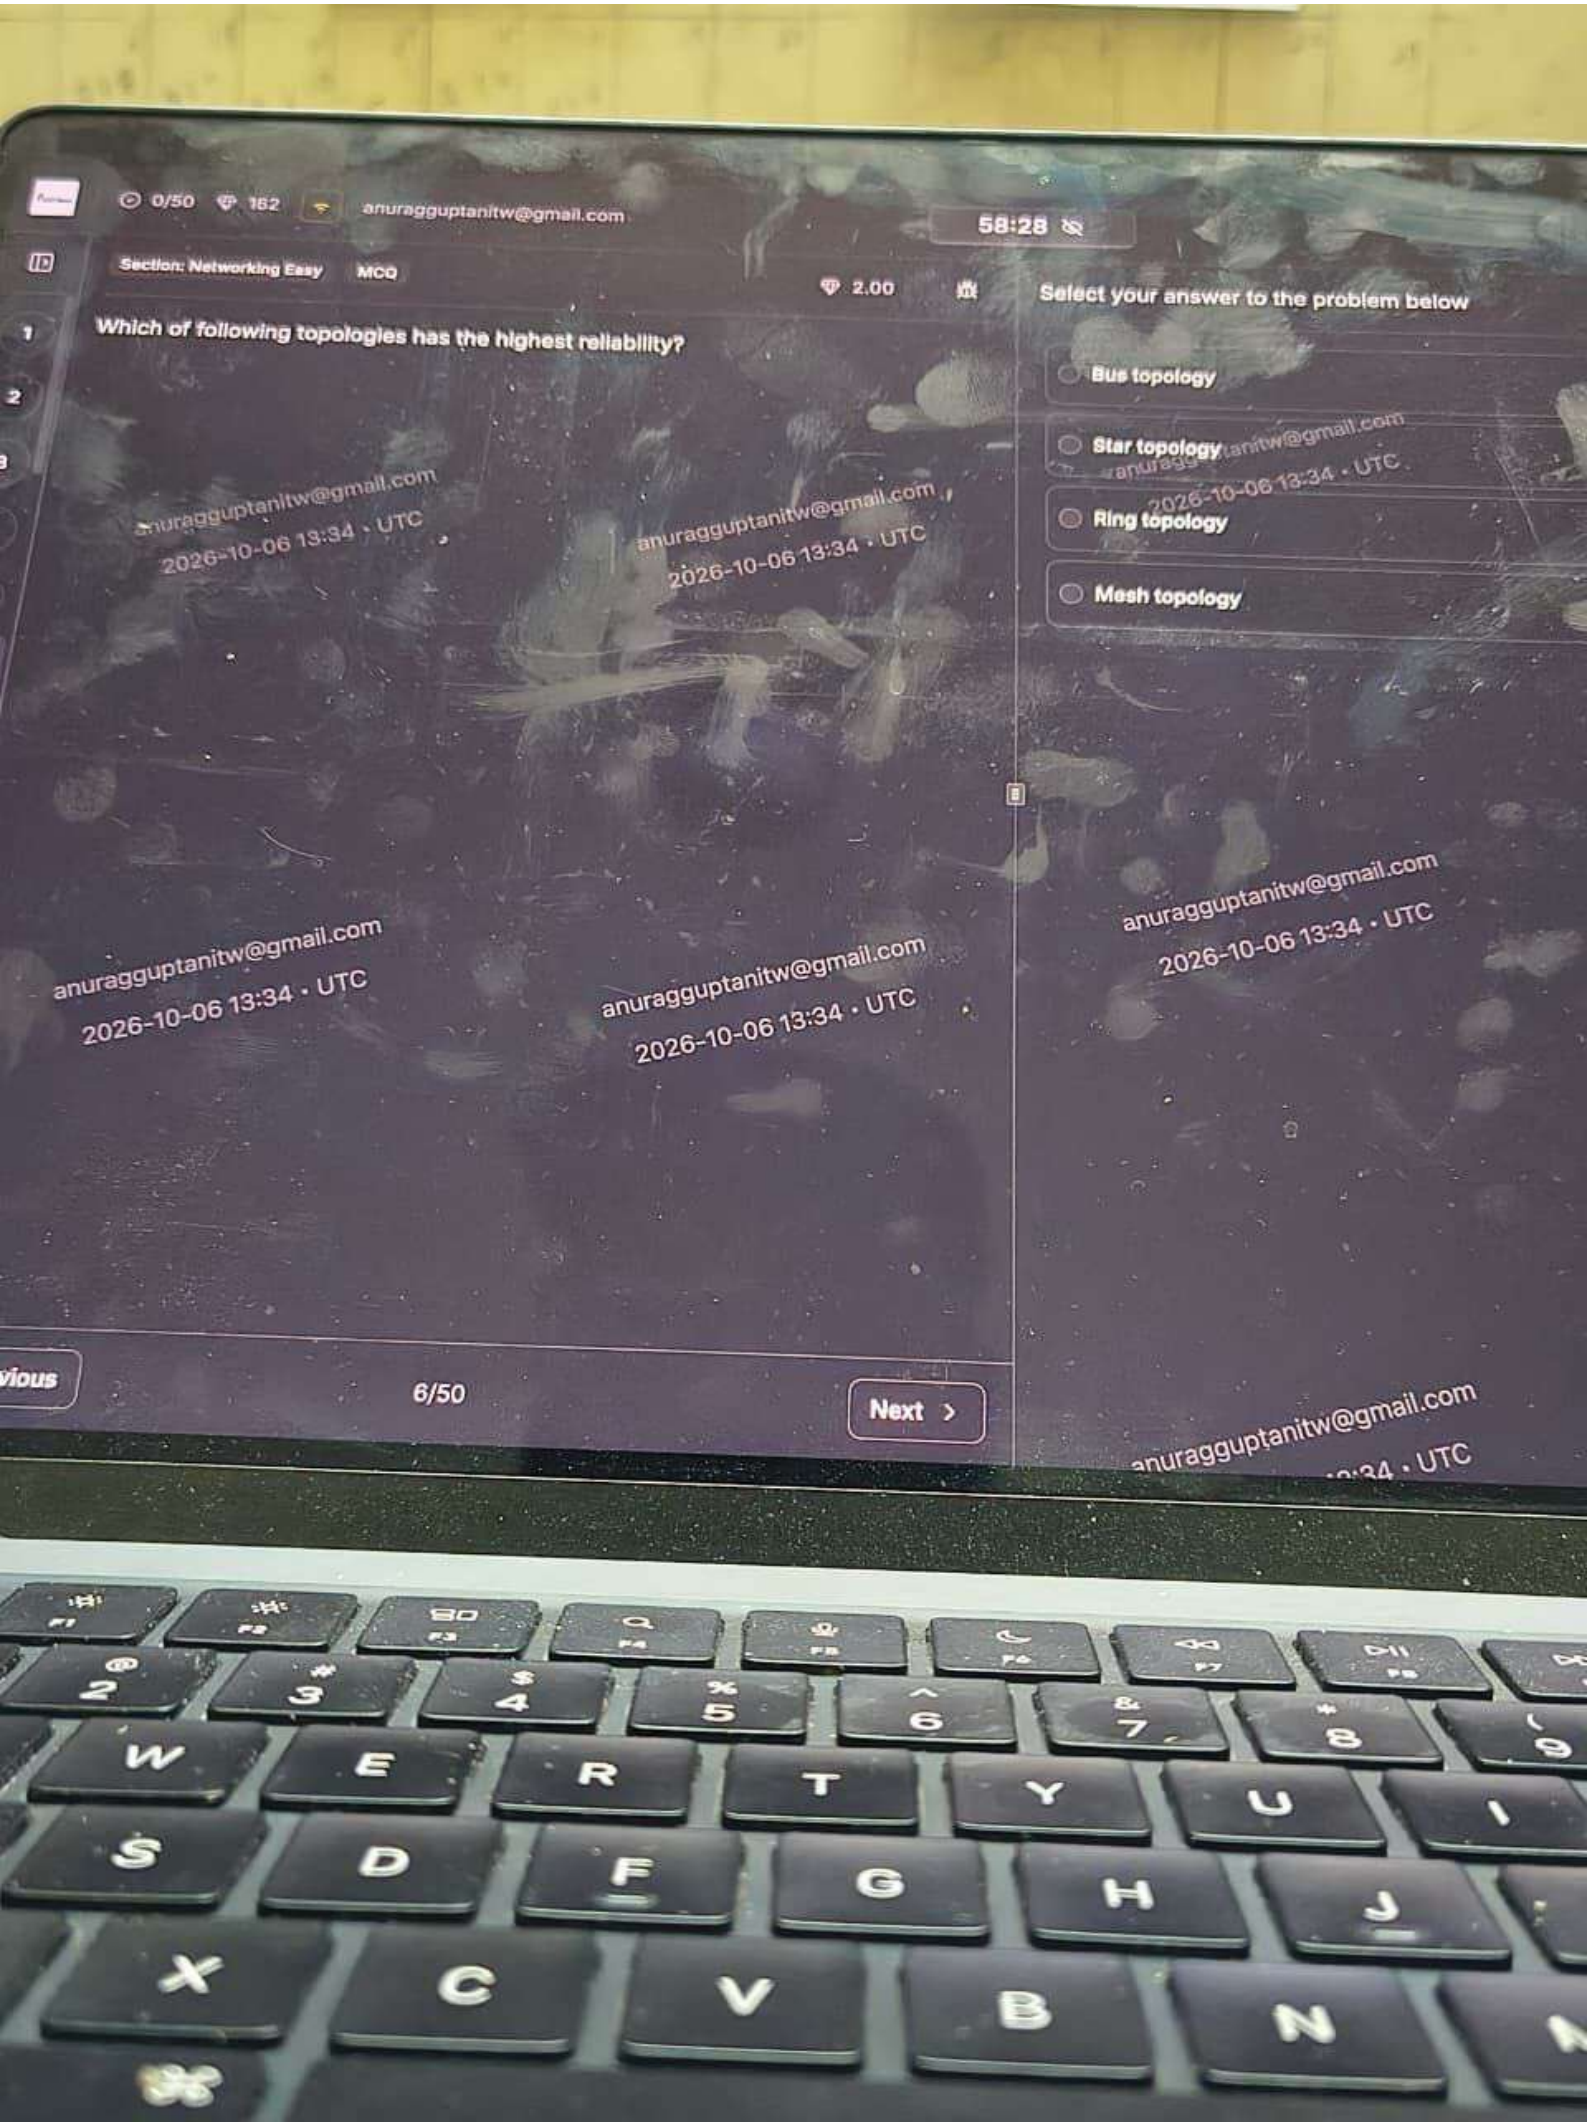

6/50
182
anuragguptanitw@gmail.com
56:13
Section: Database Easy
MCQ
2.00
Bob, a programmer who is learning about database administration for Microsoft SQL Server, has been assigned a task that involves the dirty pages technique. This technique is essential in ensuring consistency between the data stored in memory and the data saved on the disk. Bob is looking for the SQL Server procedure that automatically creates a hard disk backup of every dirty page from the buffer cache.
Select your answer to the problem below
SQL OS
Query Executor
Lazy Writer Process
Checkpoint Process
anuragguptanitw@gmail.com
2026-10-06 13:37 • UTC
Previous
9/50
Next

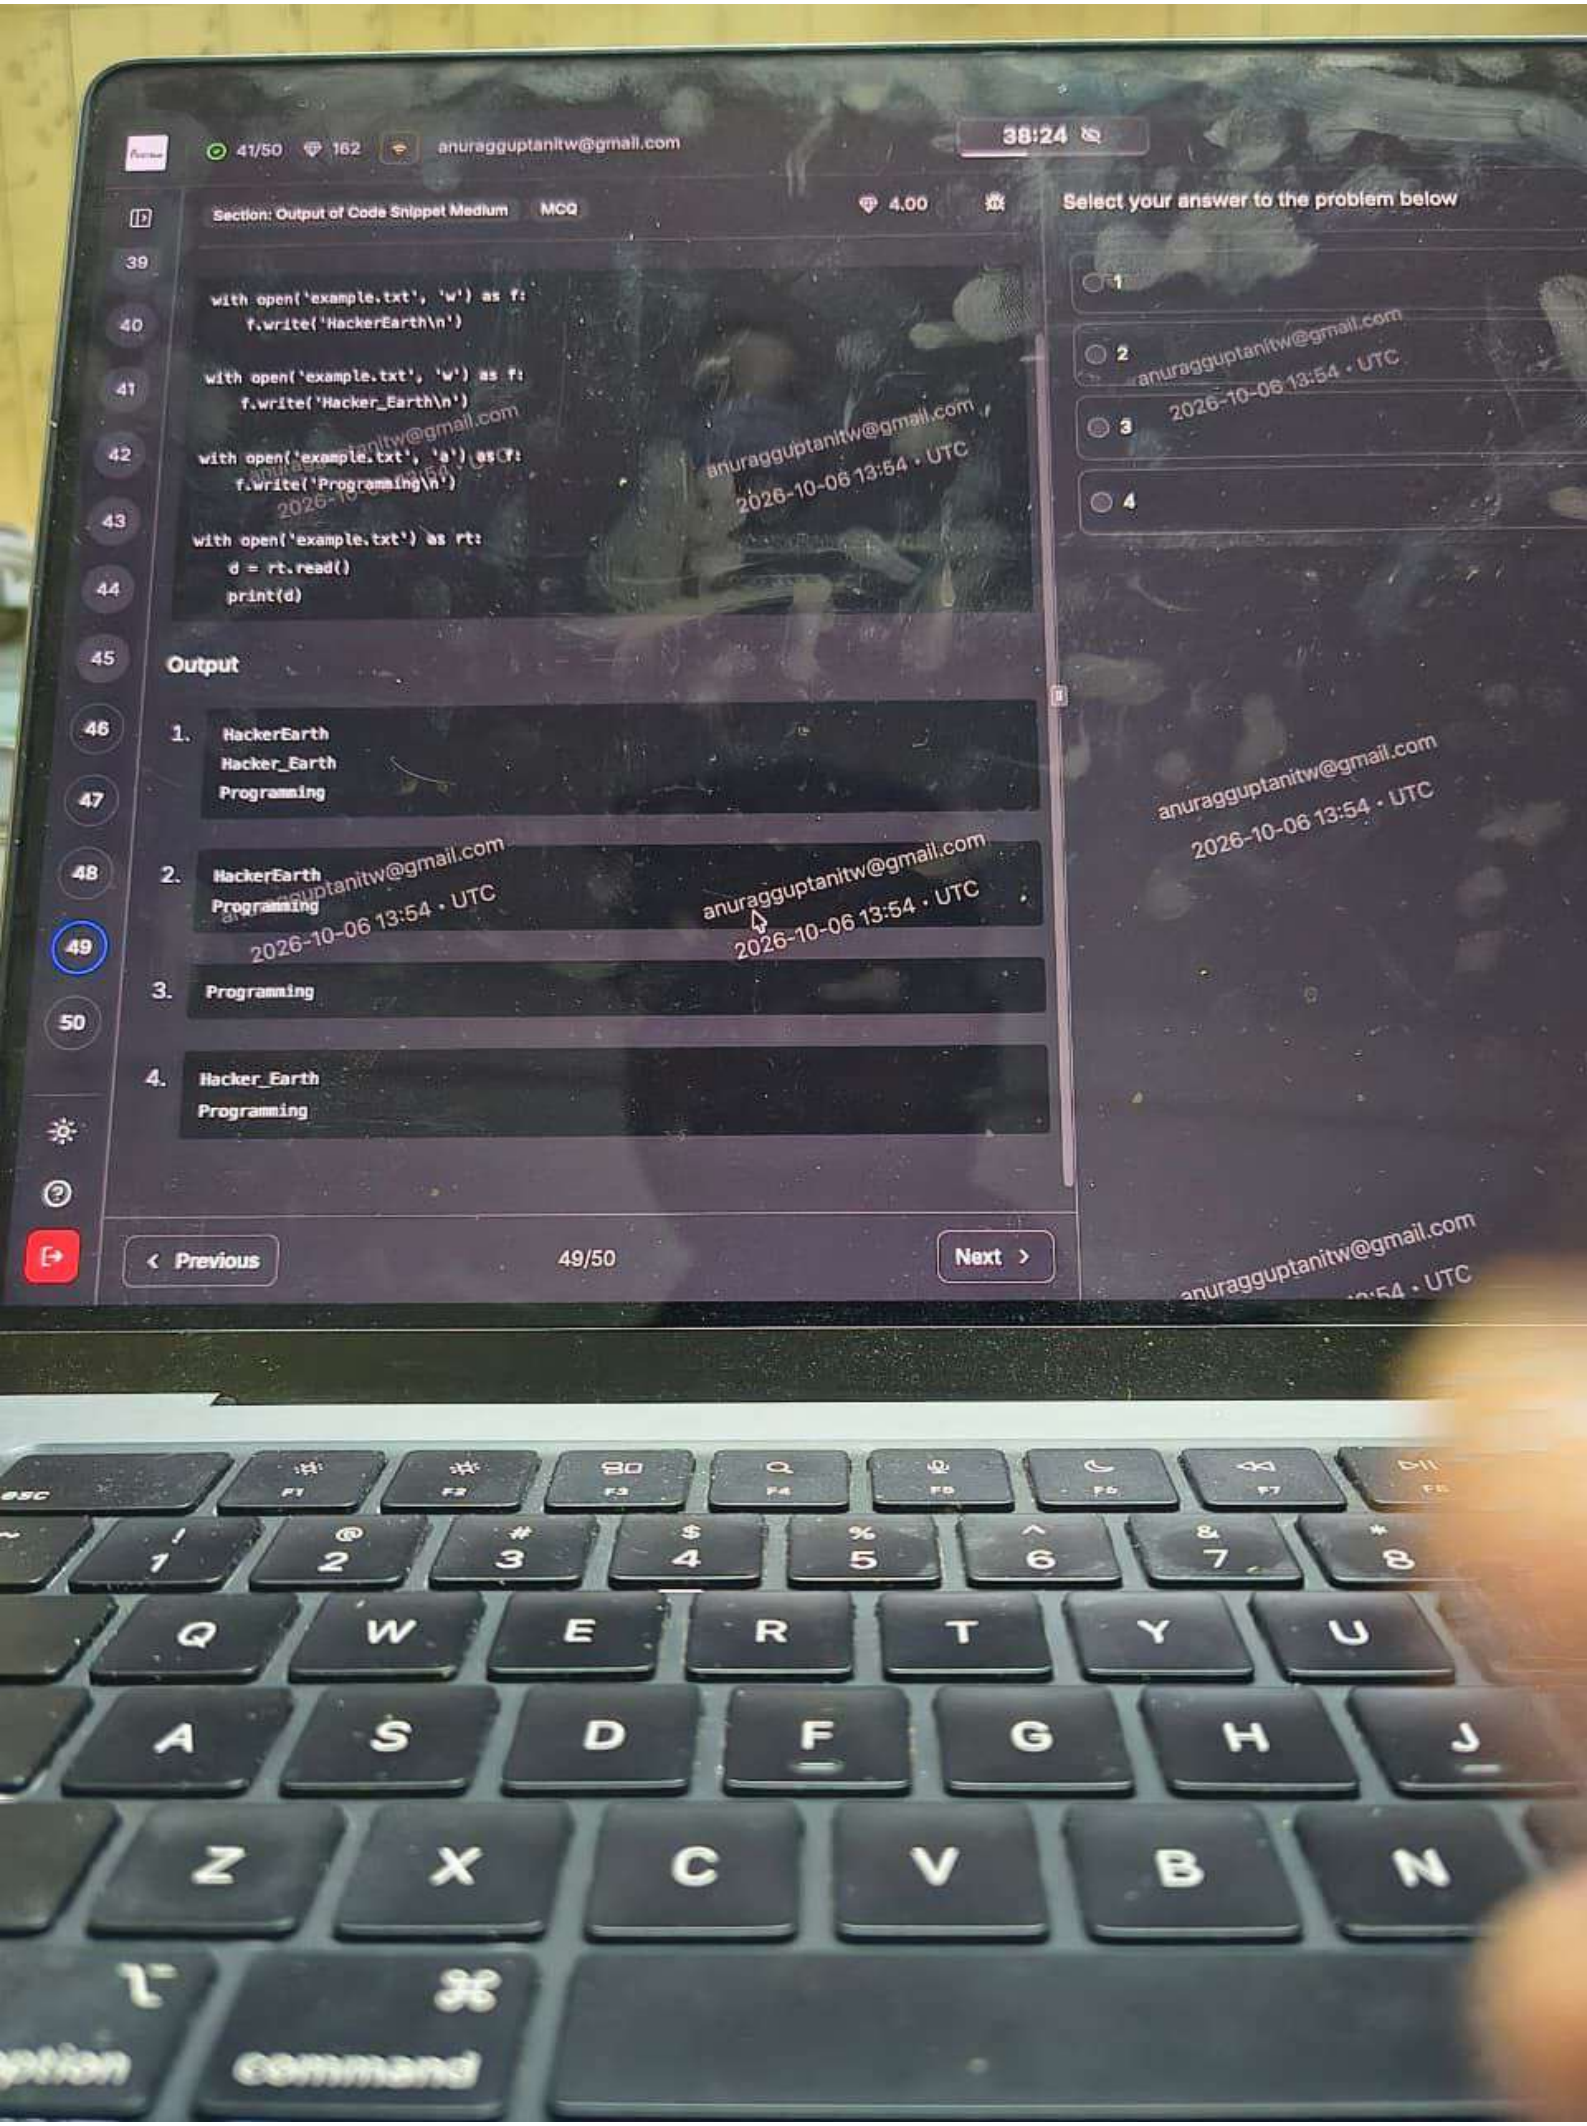

6/50
182
anuragguptanitw@gmail.com
55:54
Section: OOPS Easy
MCQ
2.00
Ben is performing a client copy in SAP and finds a table with delivery class S. He wants to know what happens to the data records in this table when they are migrated to the target client. Which of the following options best describes what happens to the data records?
Select your answer to the problem below
They are copied to the target client.
They are not copied to the target client.
They are imported into all clients.
They have the status of program changes.
anuragguptanitw@gmail.com
2026-10-06 13:37 • UTC
Previous
14/50
Next

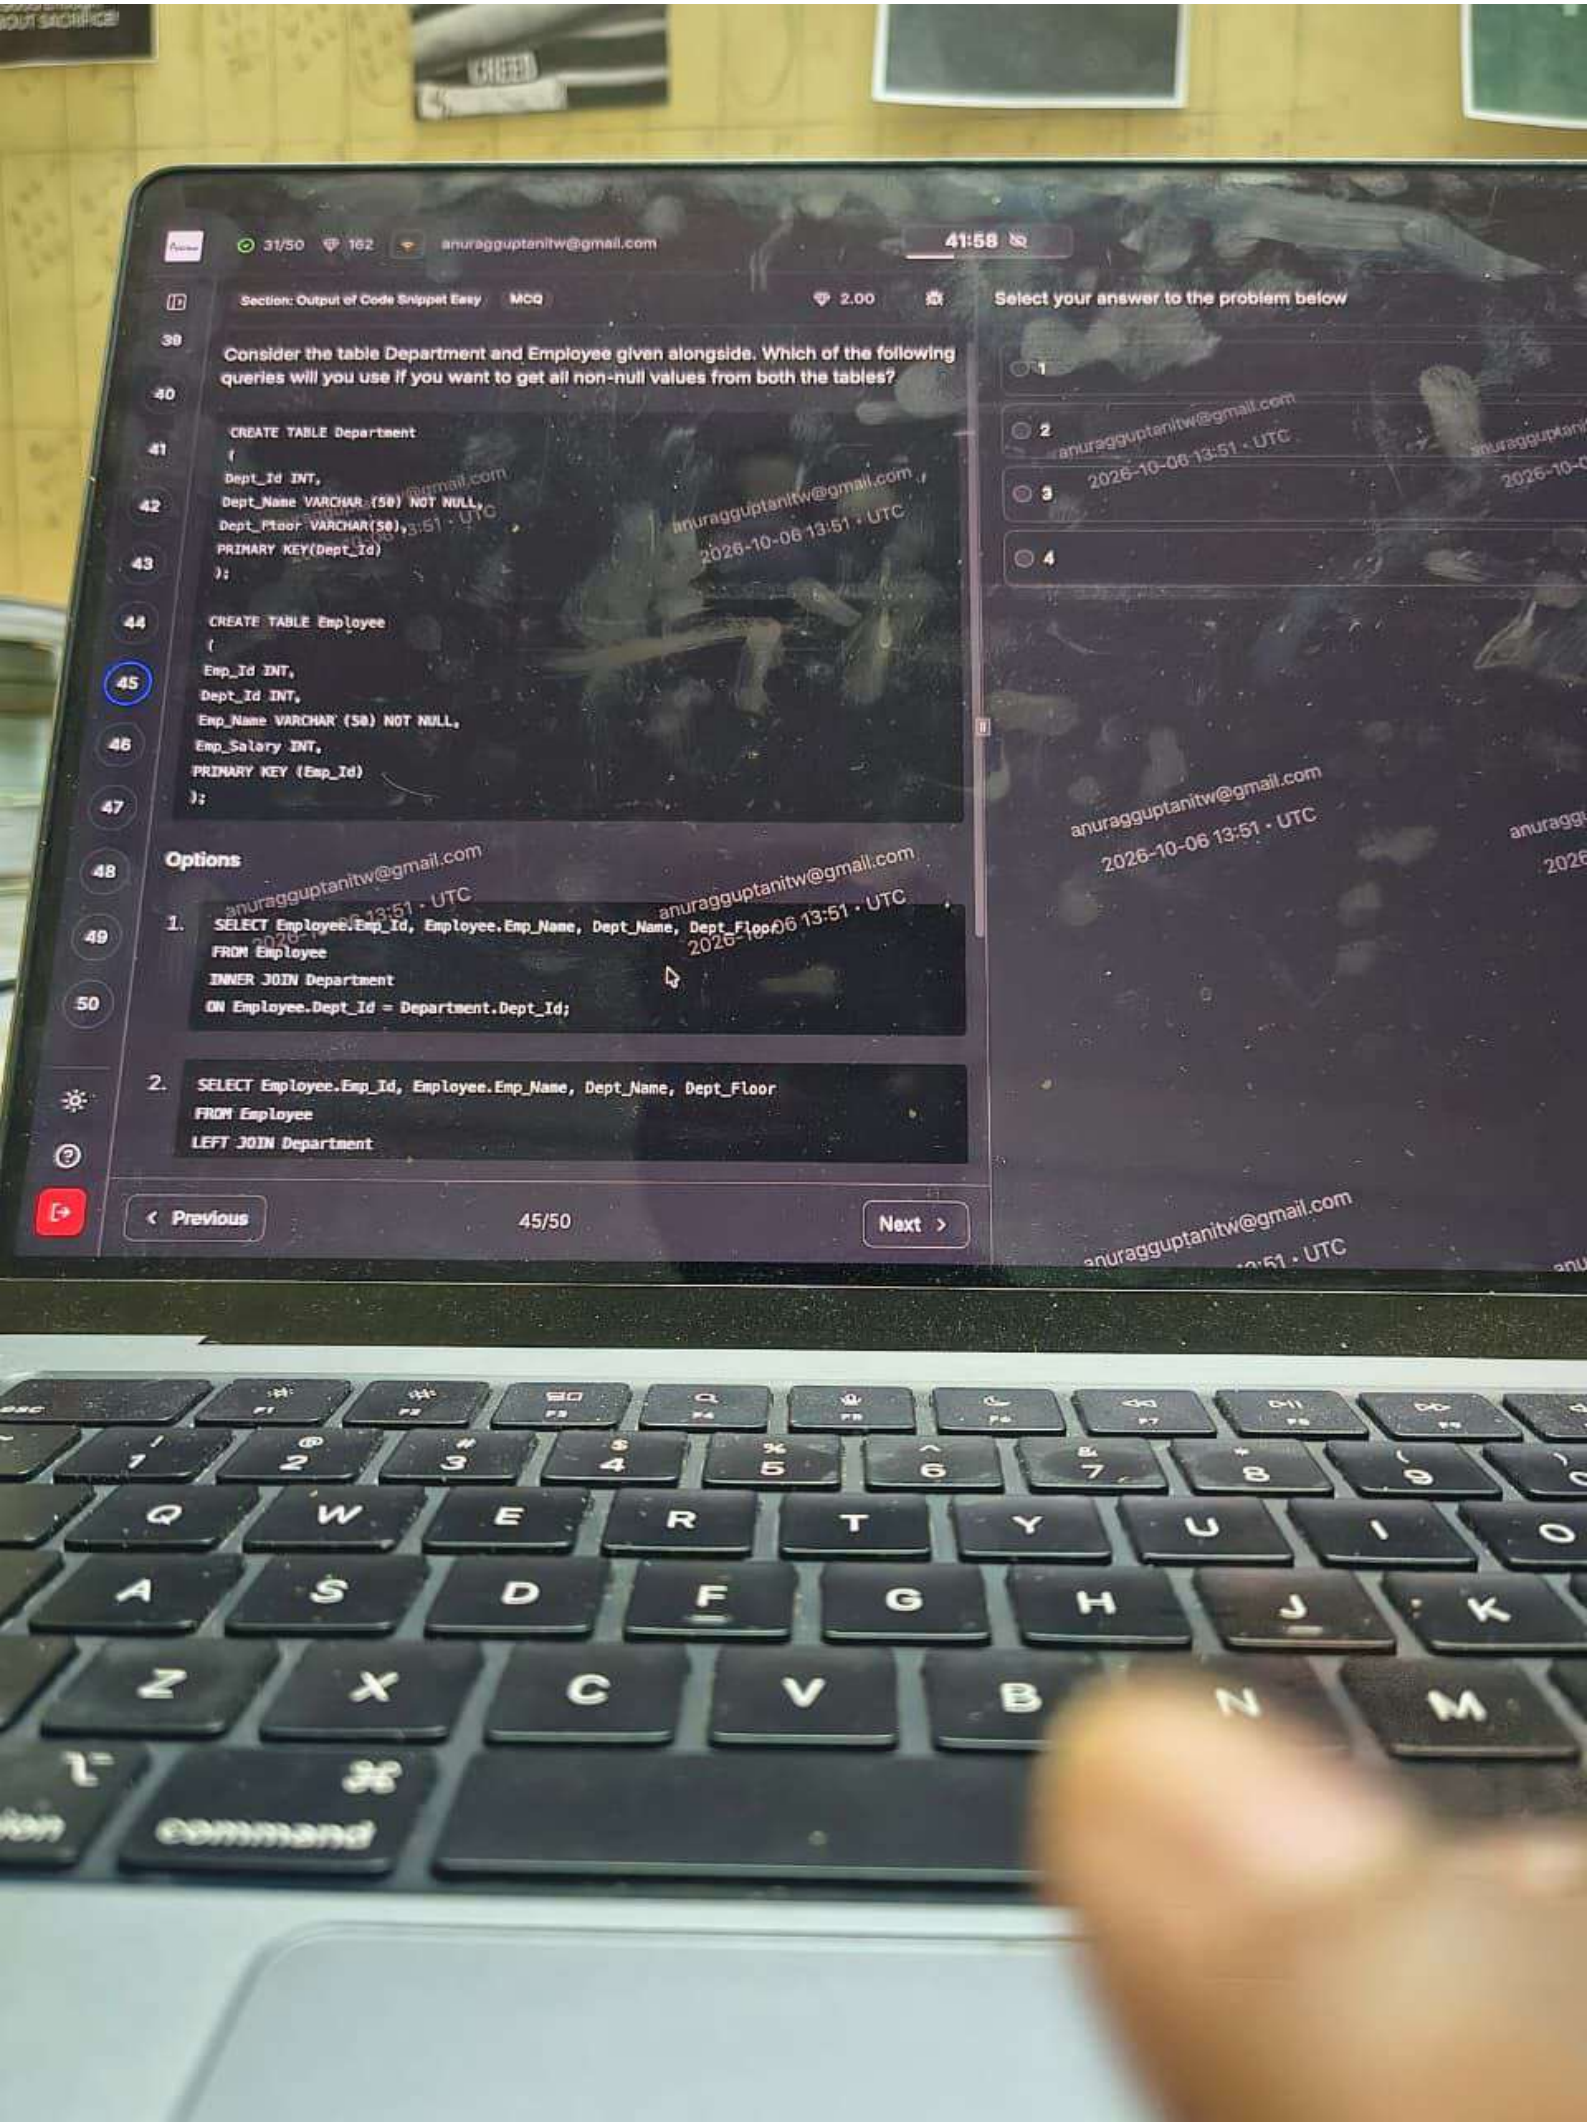

25/50
162
anuragguptanitw@gmail.com
47:15
Section: Computer Language Easy
MCQ
2.00
Select your answer to the problem below
In Python 3, which of the following statements represents a tuple:
1. It is mutable.
2. The implementation of iterations on a tuple is more time-consuming compared to a list.
3. It consumes less memory compared to a list.
4. It does not allow operations such as insertion and deletion.
1 and 2
2 and 3
3 and 4
None of these
anuragguptanitw@gmail.com
2026-10-06 13:46 • UTC
Previous
29/50
Next

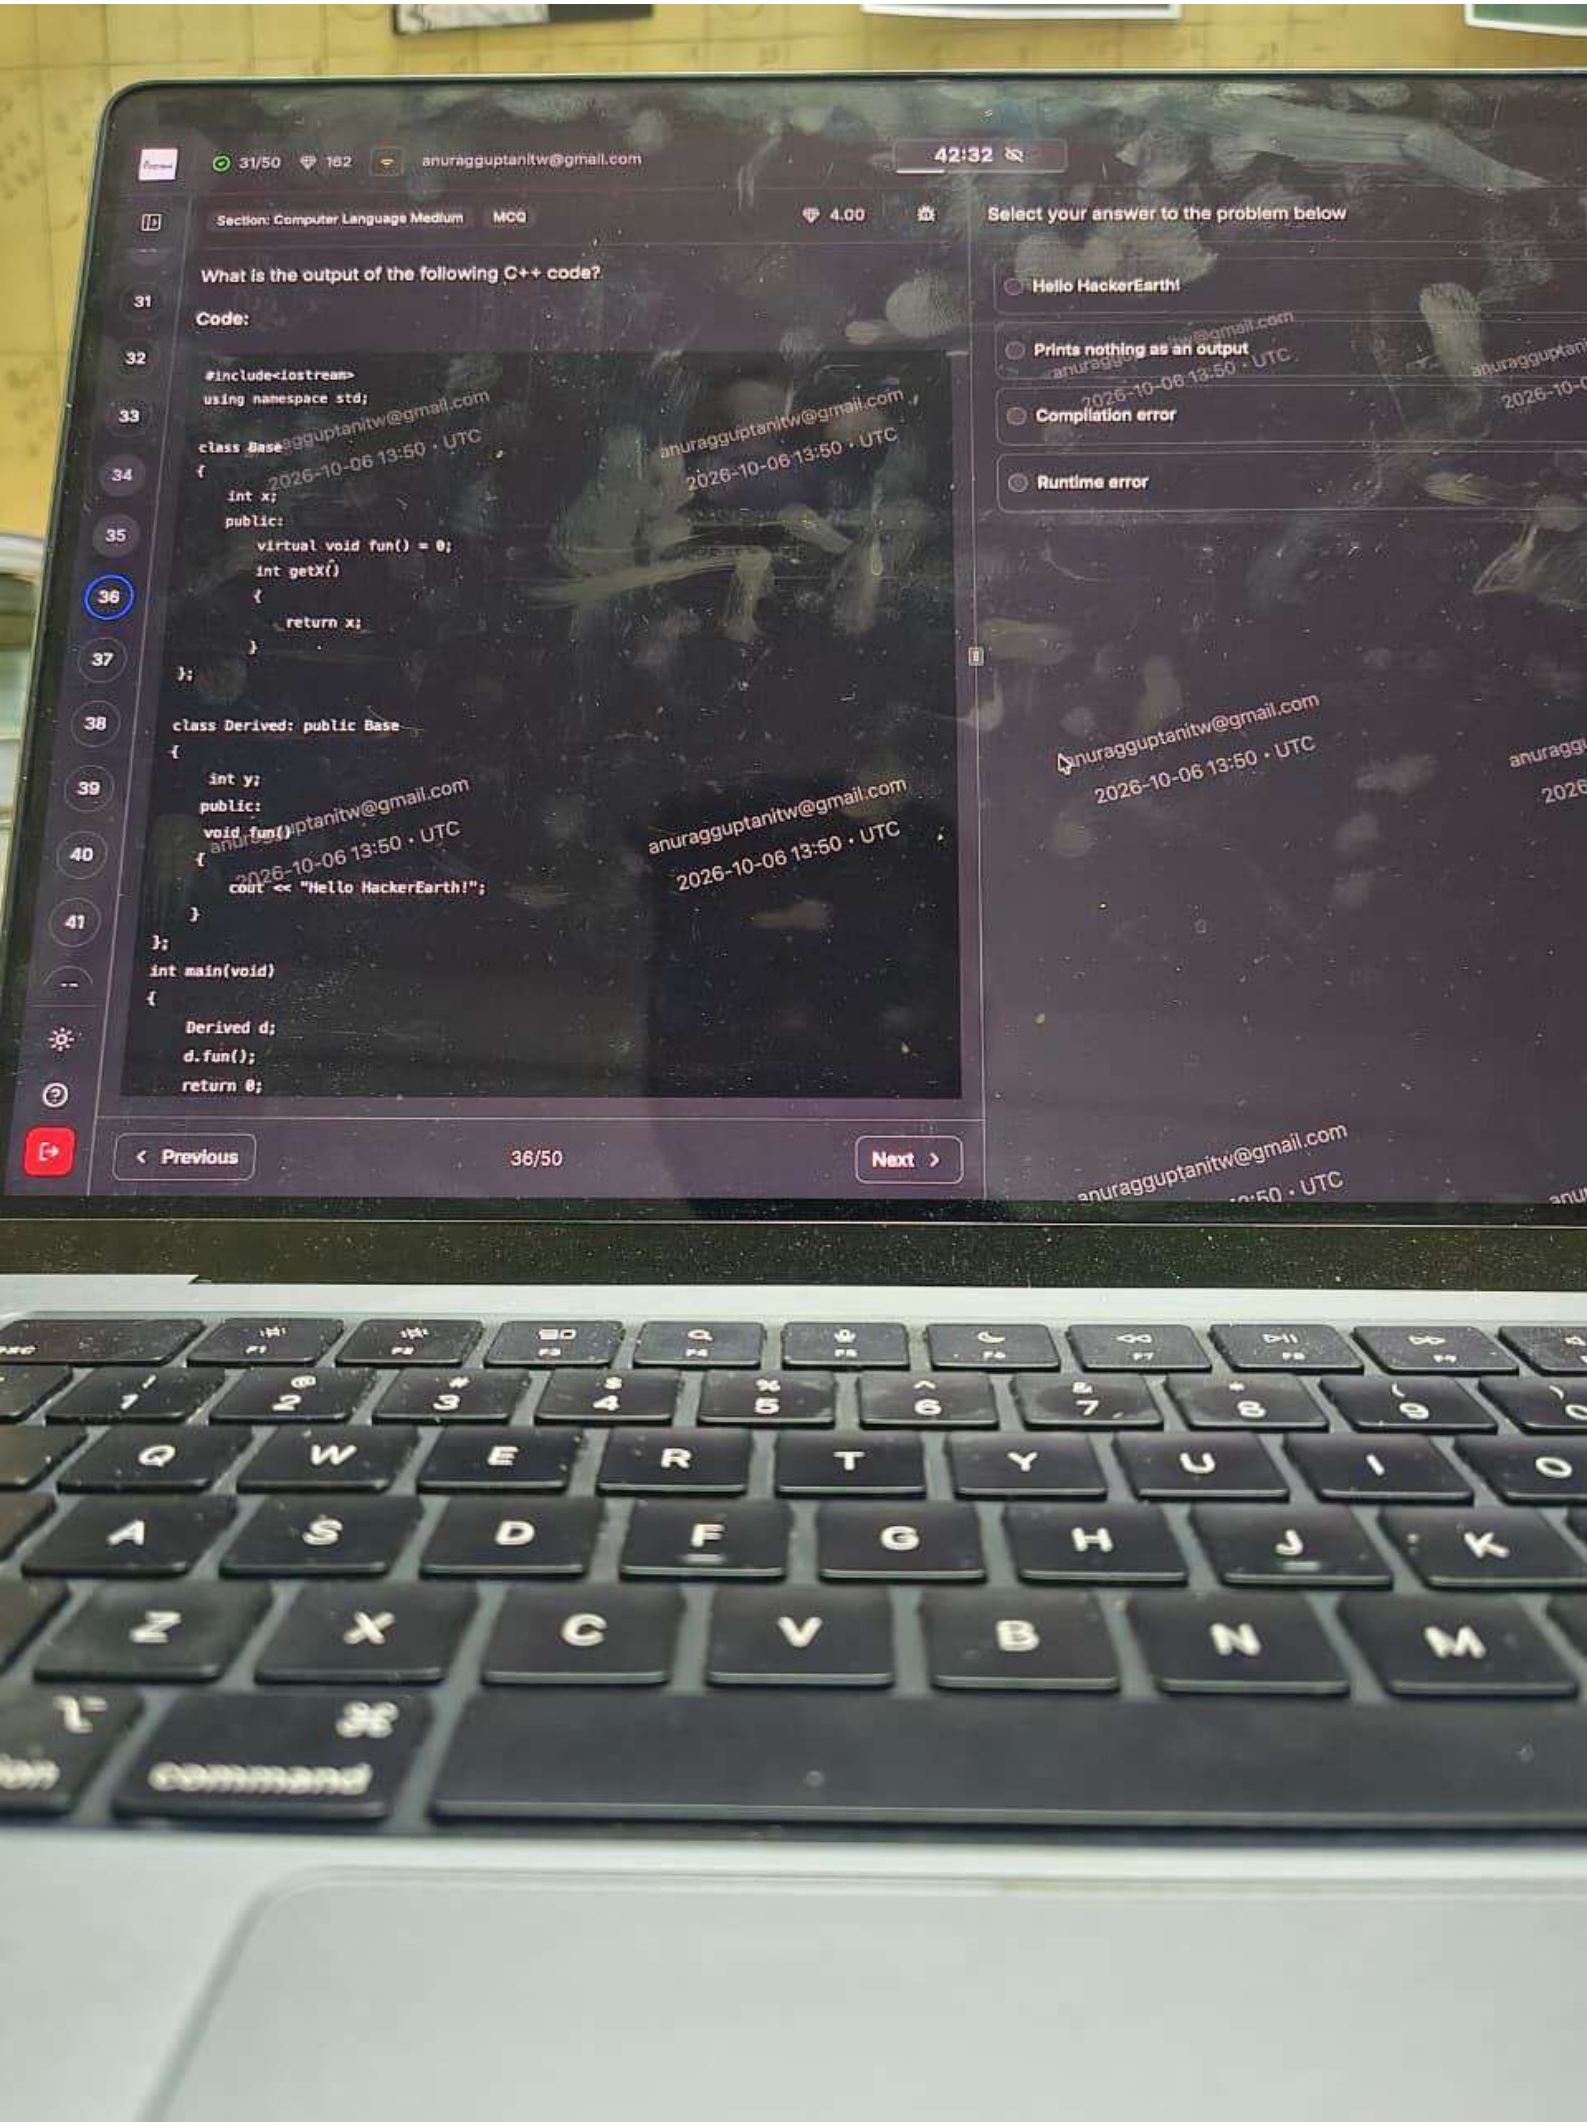

41/50
162
anuragguptanitw@gmail.com
38:33
Section: Output of Code Snippet Medium
MCQ
4.00
Select your answer to the problem below
What is the output of the following Python code:
Code
import asyncio
async def count(n):
while n > 0:
await asyncio.sleep(1)
print(n)
n -= 1
async def main():
await asyncio.gather(count(3),count(2))
asyncio.run(main())
1
2
3
4
Output
1.
3
2
1
2
1
2.
3
2
2
1
1
Previous
48/50
Next
anuragguptanitw@gmail.com
2026-10-06 13:54 · UTC

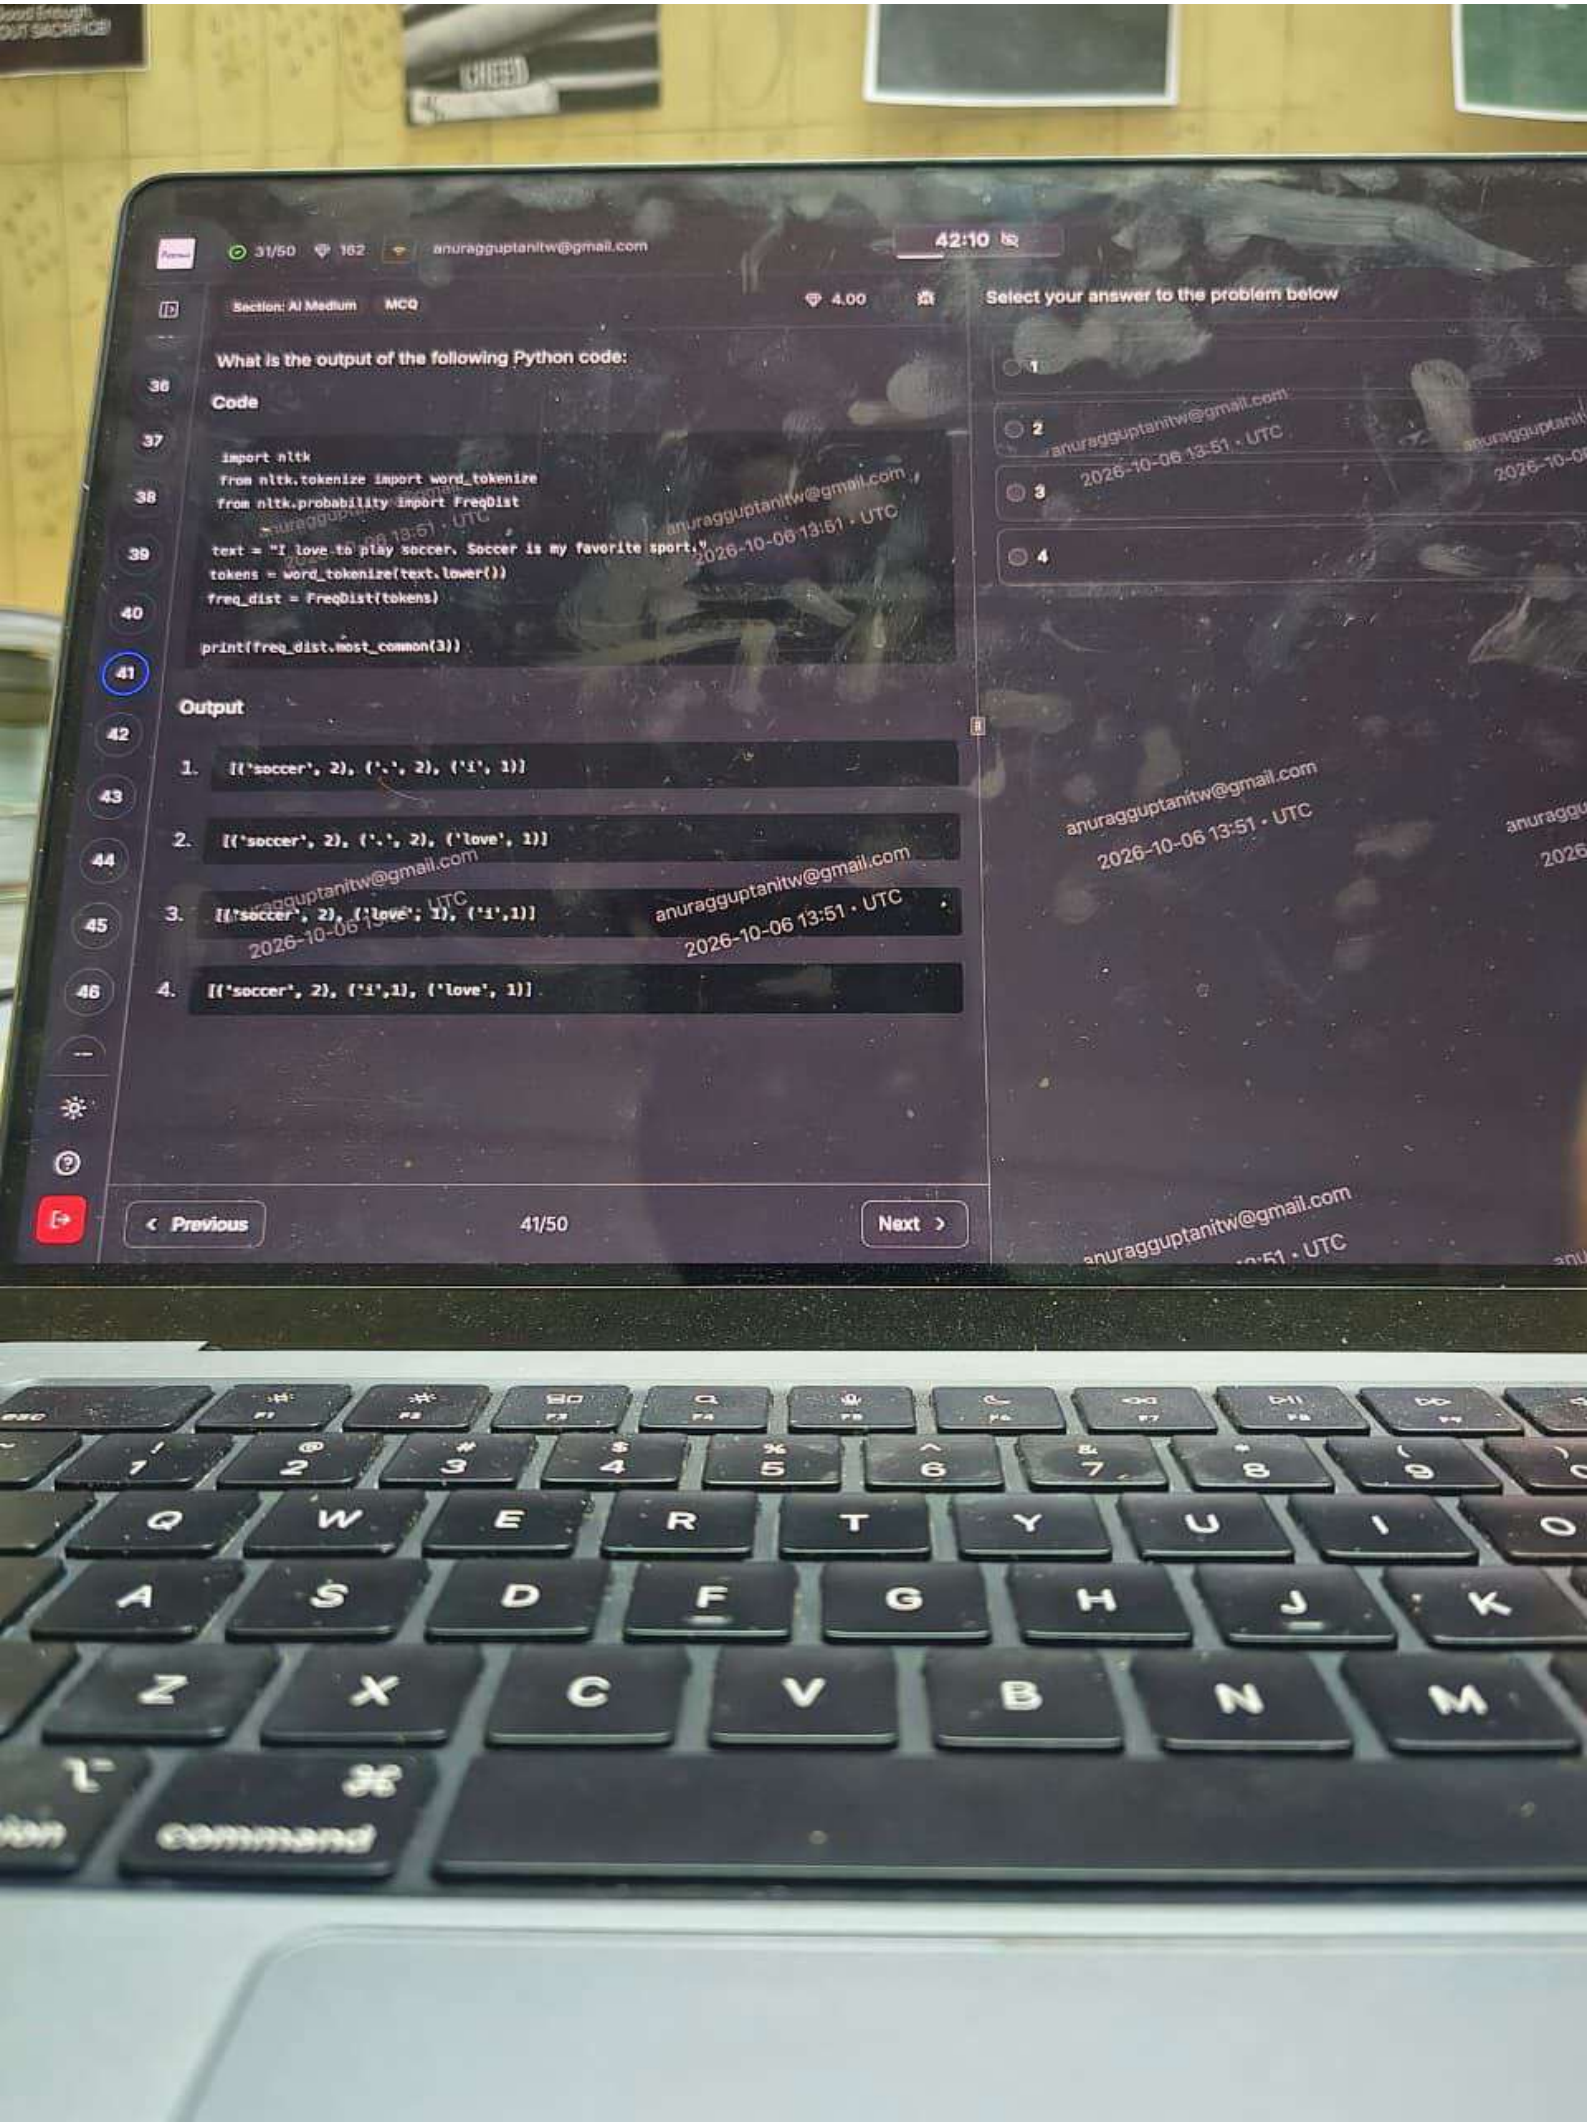

6/50
162
anuragguptanitw@gmail.com
56:05
Section: Project Management Easy
MCQ
2.00
Ben is a project manager who follows the Agile methodology for his software development project. He is planning for the upcoming sprint with his team. What is backlog grooming in Agile methodology?
Select your answer to the problem below
A process to clean up the work area of the team
A process to select the team members for the upcoming sprint
A process to prioritize and refine the product backlog
A process to review the progress of the previous sprint
anuragguptanitw@gmail.com
2026-10-06 13:37 · UTC
Previous
11/50
Next

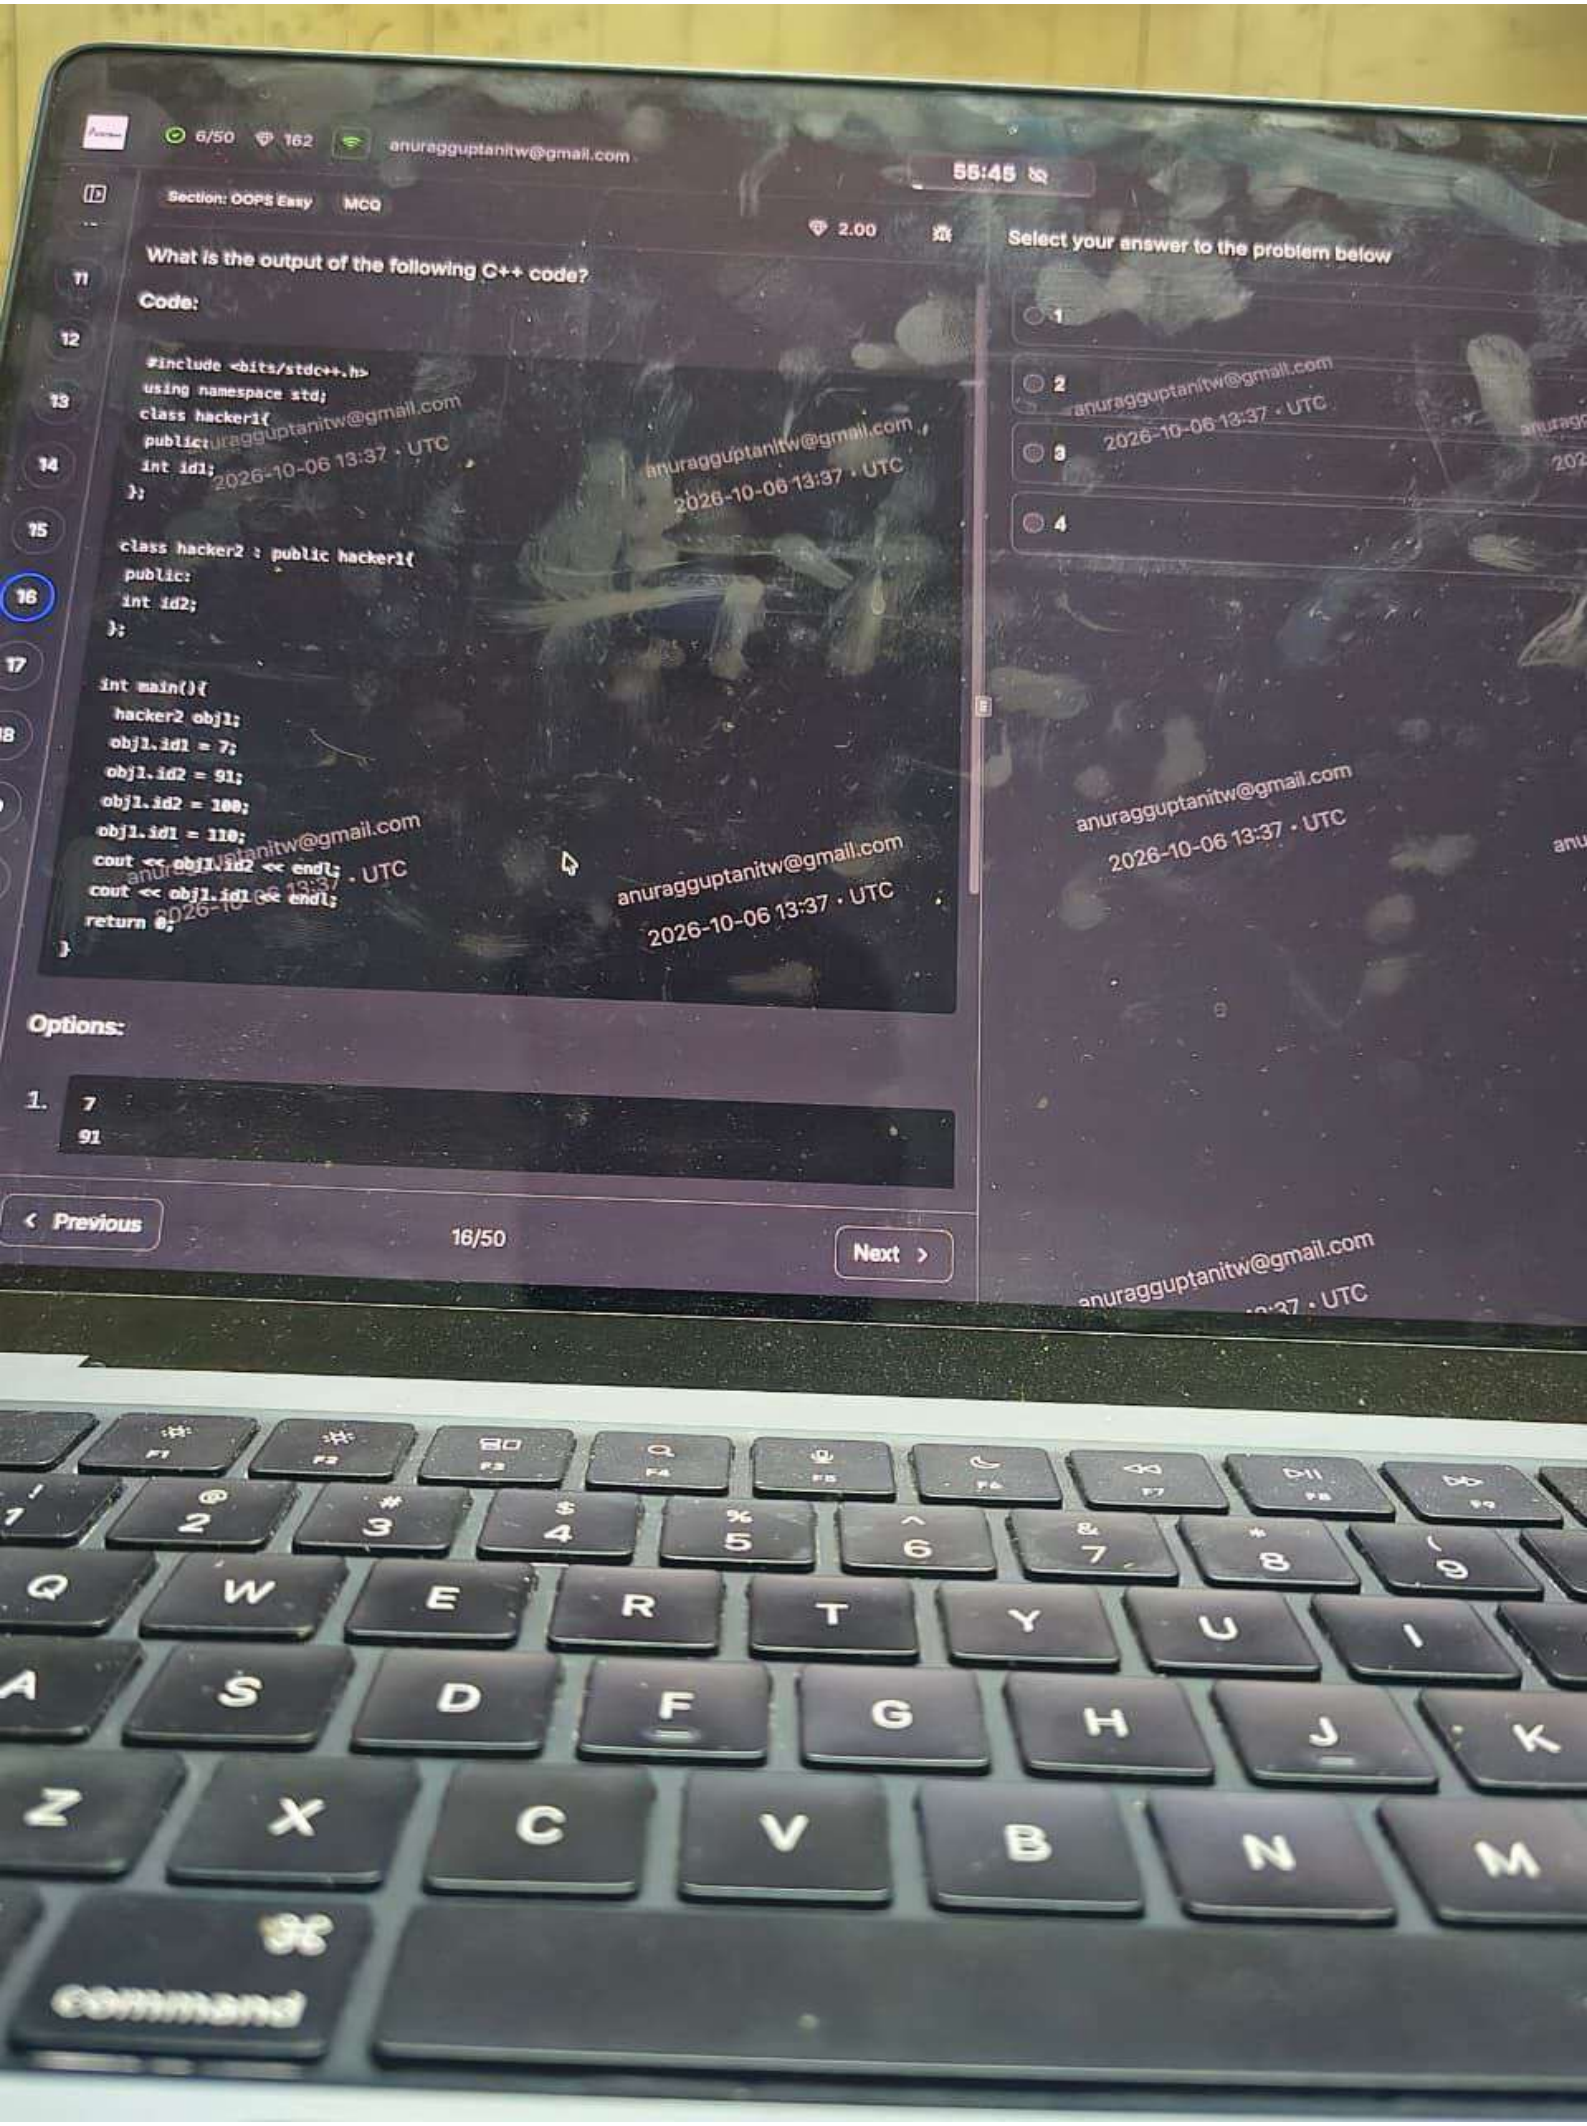

0/50
162
anuragguptanitw@gmail.com
58:28
Section: Networking Easy
MCQ
2.00
Select your answer to the problem below
Which of following topologies has the highest reliability?
Bus topology
Star topology
Ring topology
Mesh topology
anuragguptanitw@gmail.com
2026-10-06 13:34 • UTC
6/50
Next

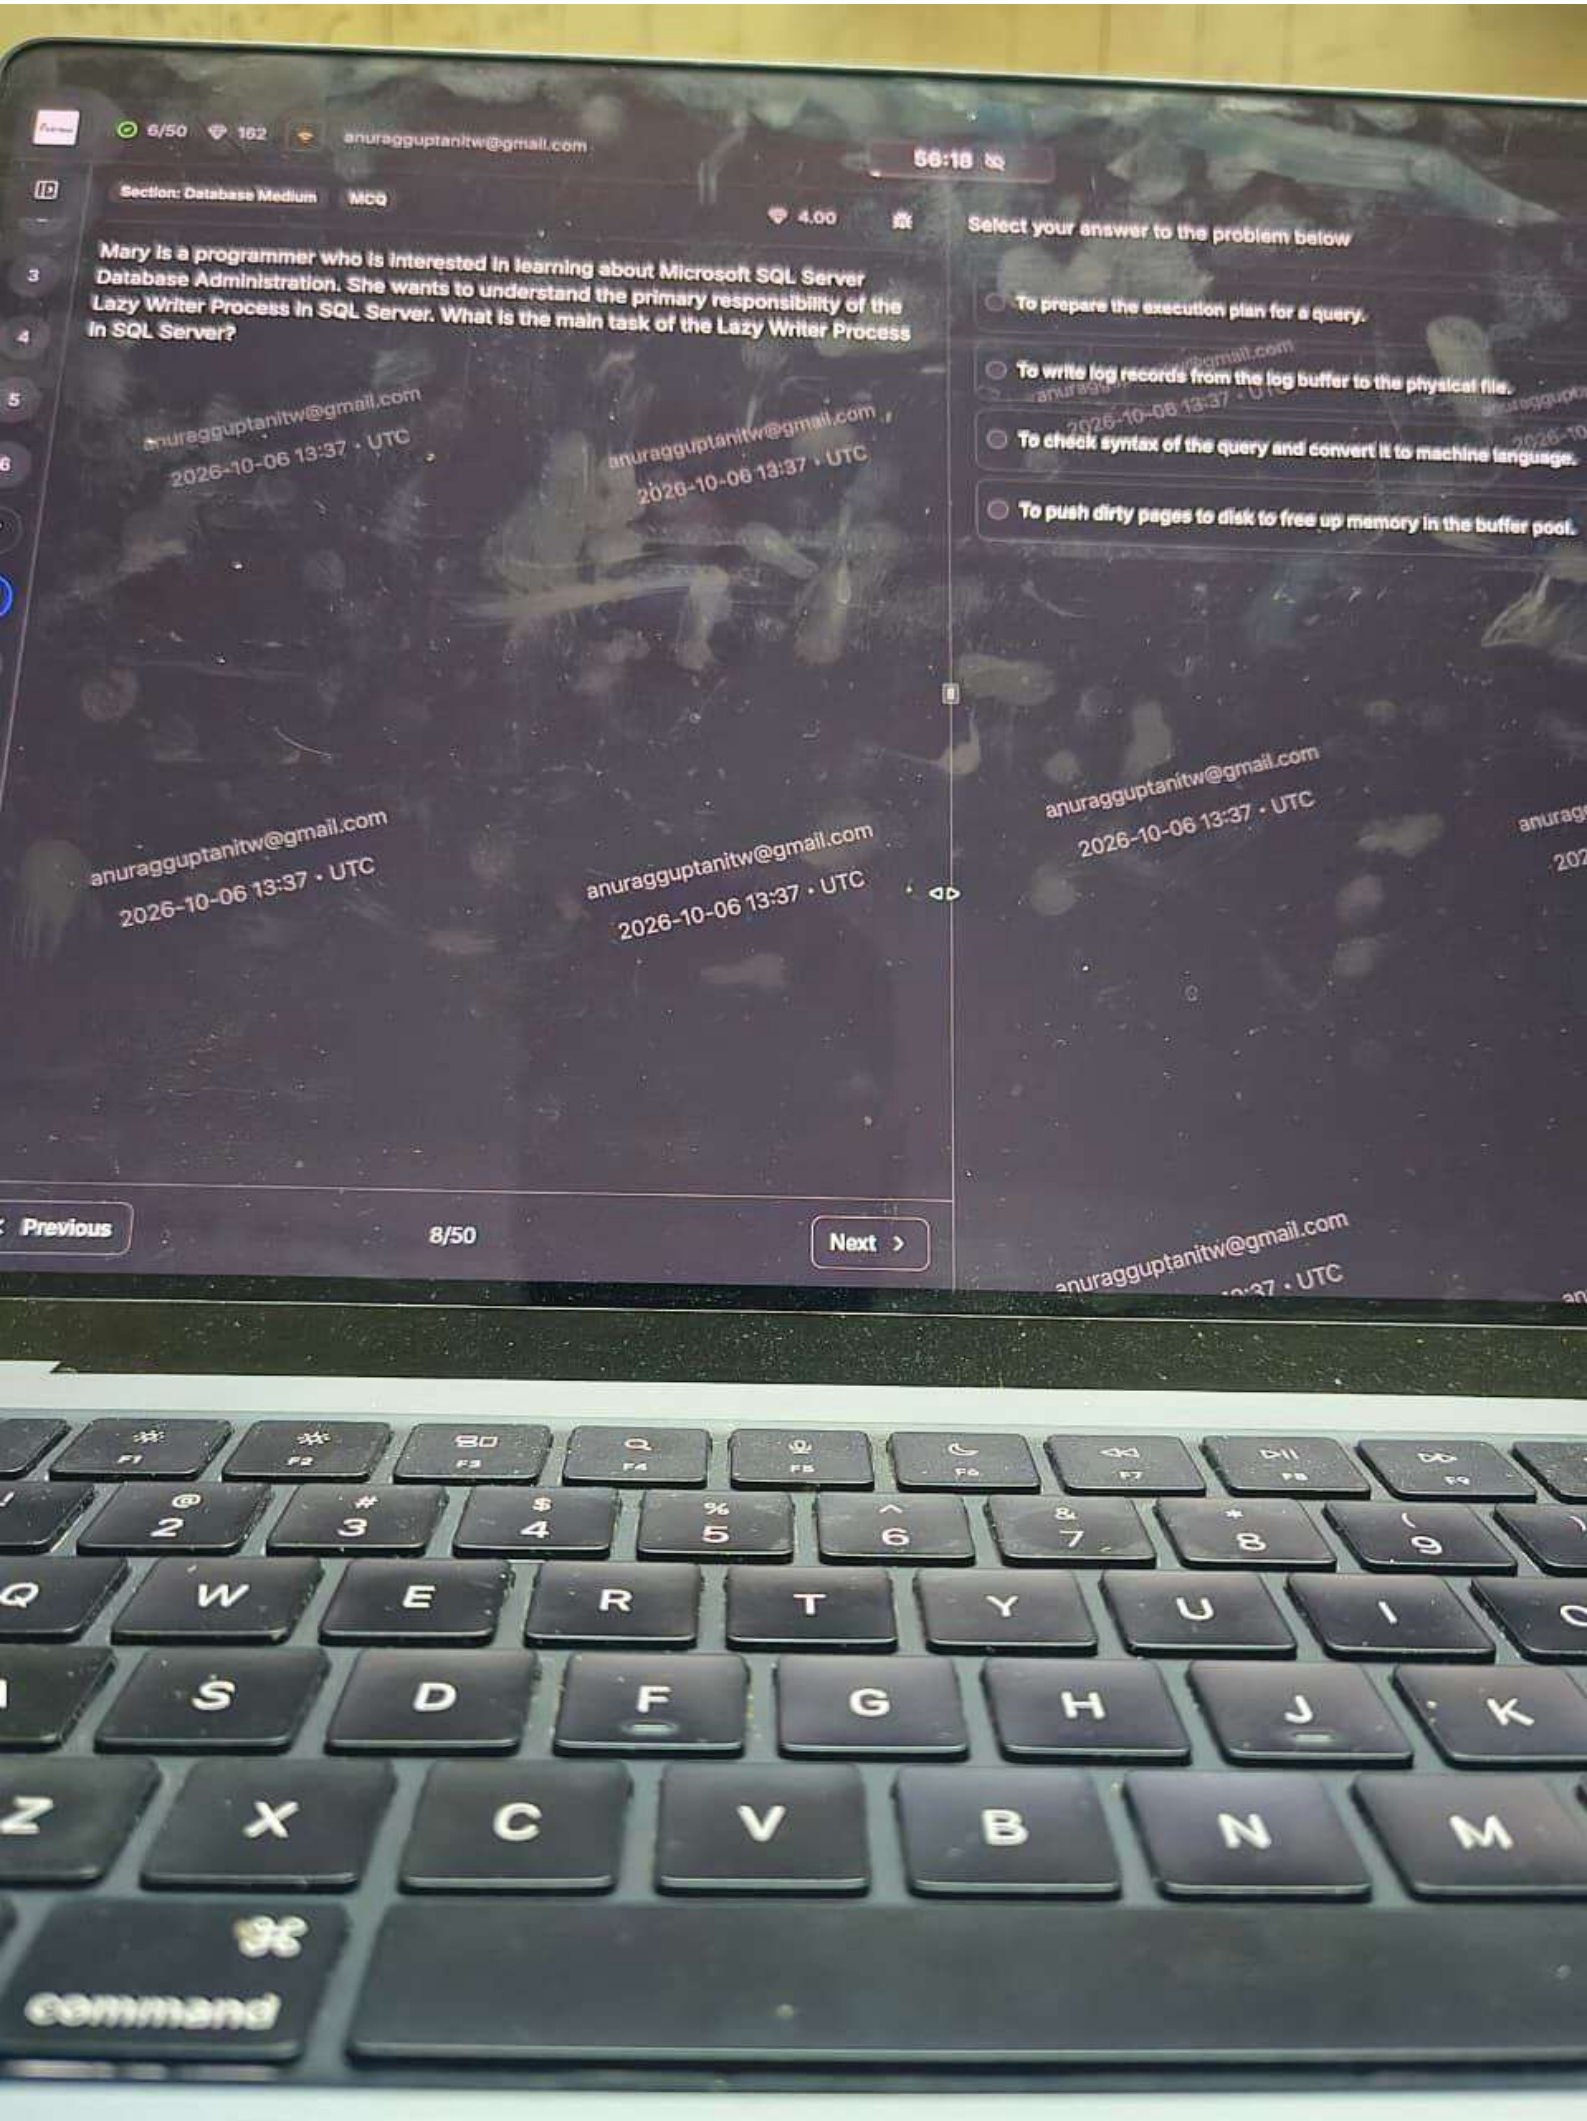

41/50
162
anuraggguptanitw@gmail.com
38:24
Section: Output of Code Snippet Medium
MCQ
4.00
Select your answer to the problem below
with open('example.txt', 'w') as f:
f.write('HackerEarth\n')
with open('example.txt', 'w') as f:
f.write('Hacker_Earth\n')
with open('example.txt', 'a') as f:
f.write('Programming\n')
with open('example.txt') as rt:
d = rt.read()
print(d)
Output
1. HackerEarth
Hacker_Earth
Programming
2. HackerEarth
Programming
3. Programming
4. Hacker_Earth
Programming
1
2
3
4
anuraggguptanitw@gmail.com
2026-10-06 13:54 • UTC
Previous
49/50
Next

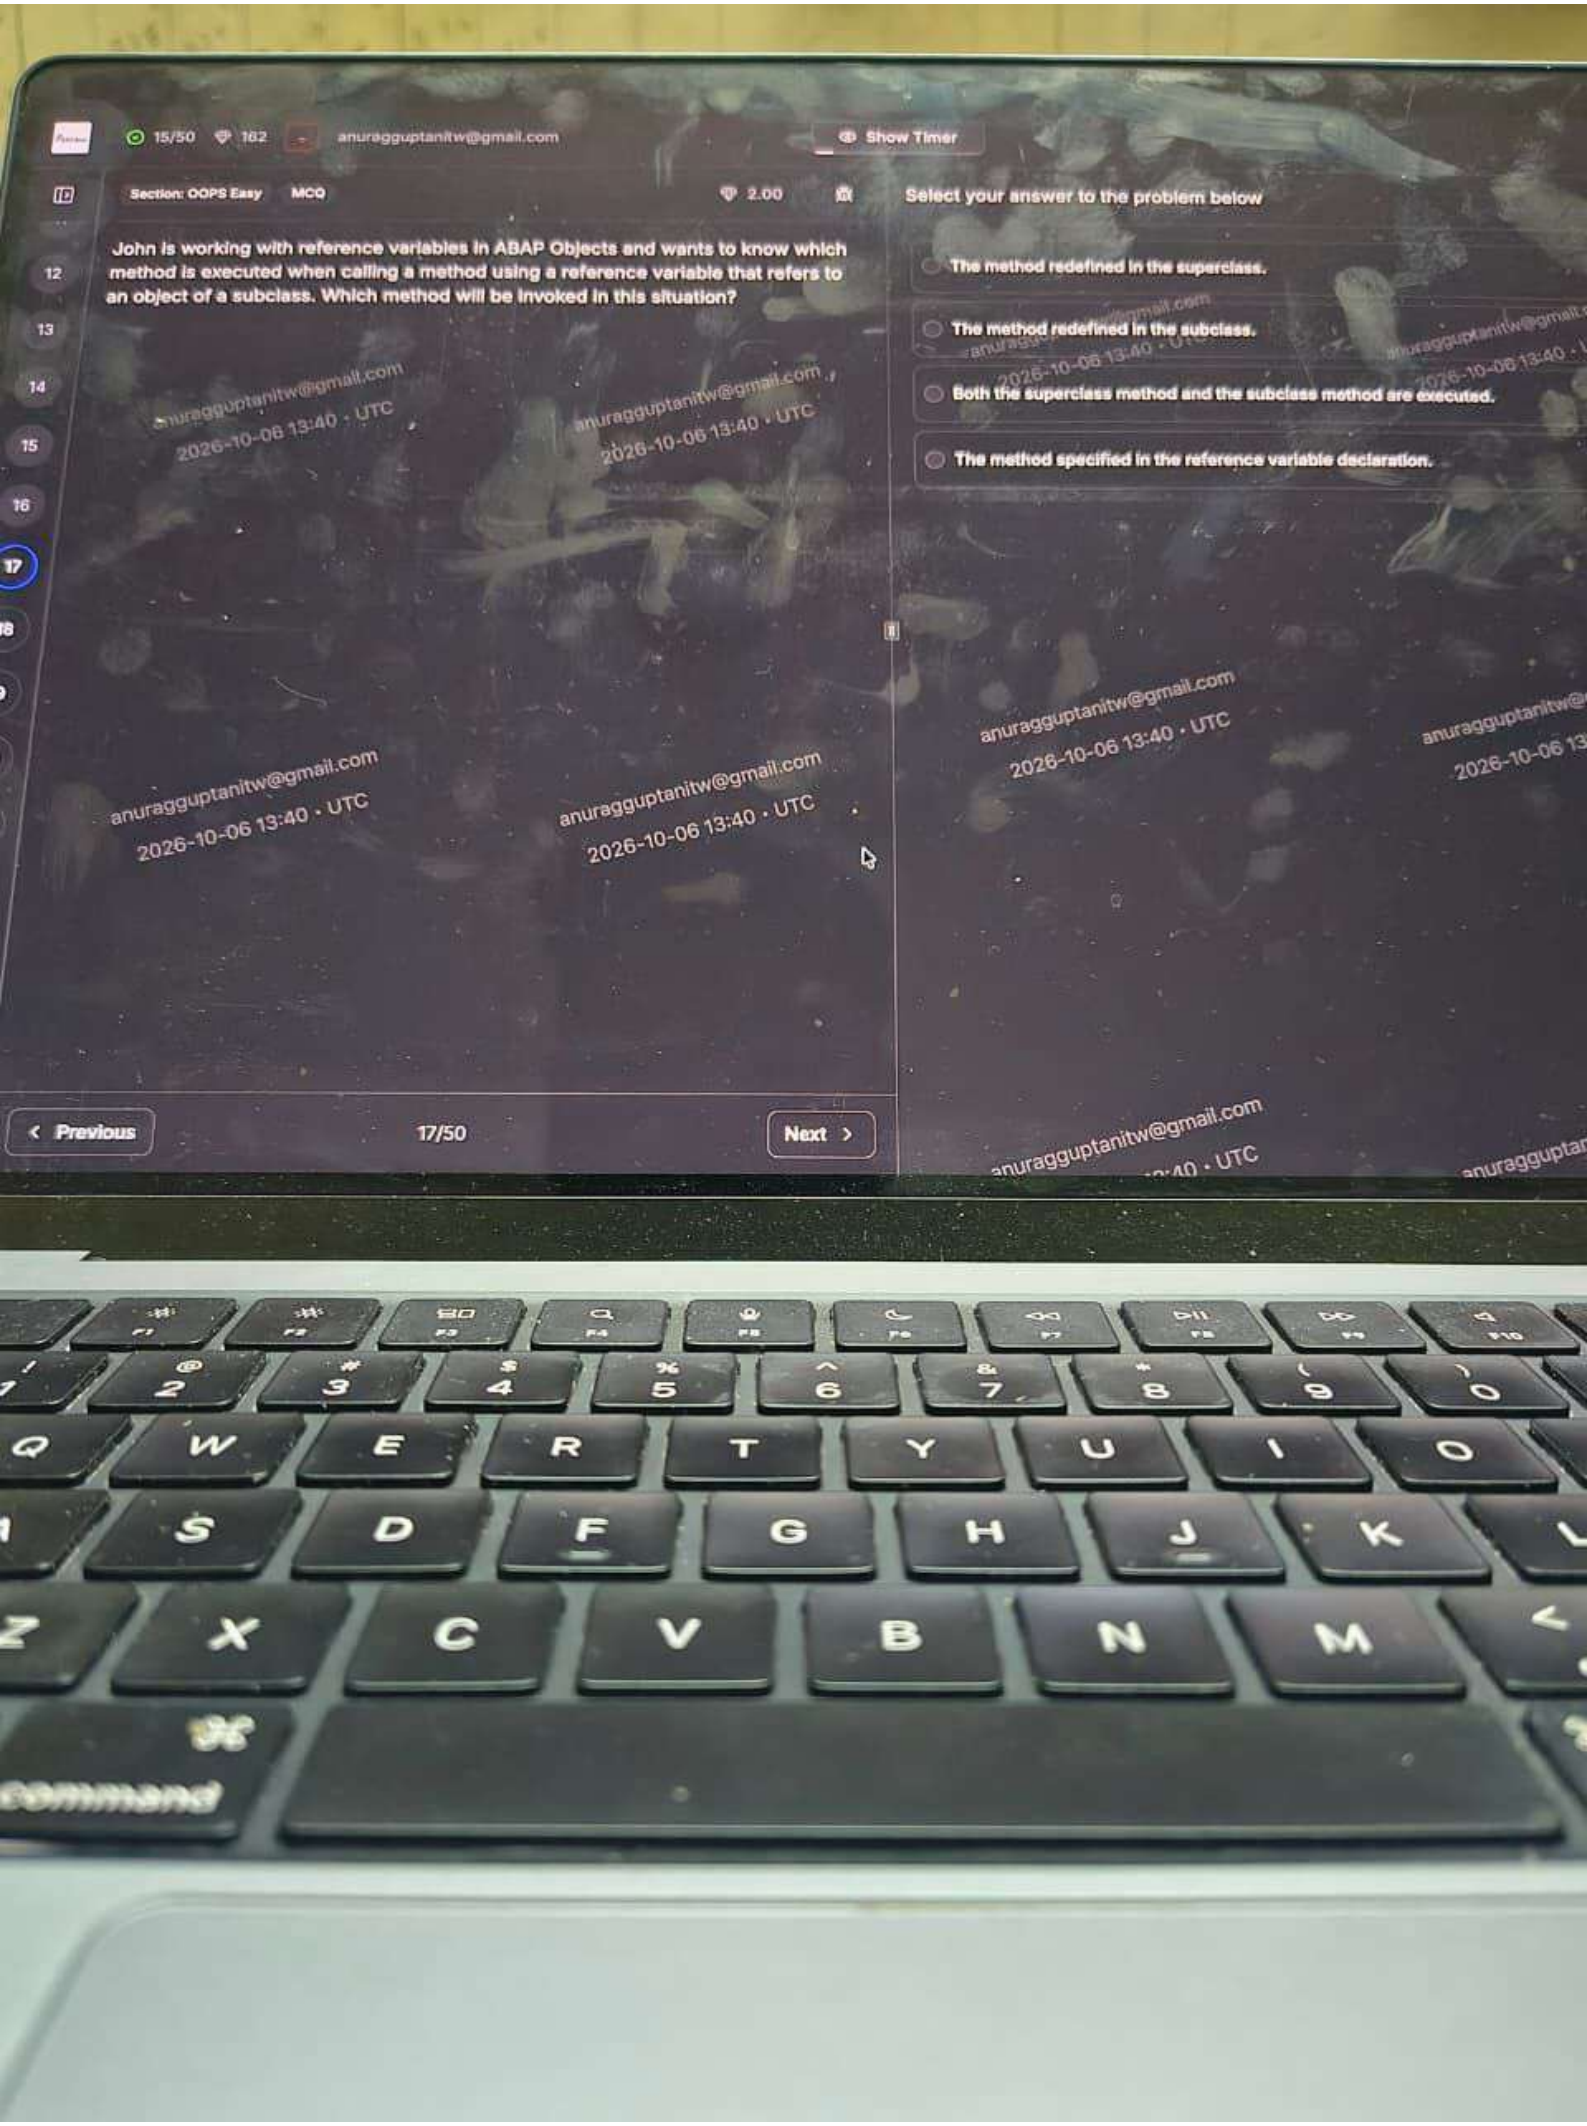

31/50
162
anuragguptanitw@gmail.com
41:58
Section: Output of Code Snippet Easy
MCQ
2.00
Select your answer to the problem below
Consider the table Department and Employee given alongside. Which of the following queries will you use if you want to get all non-null values from both the tables?
CREATE TABLE Department
(
Dept_Id INT,
Dept_Name VARCHAR (50) NOT NULL,
Dept_Floor VARCHAR(50),
PRIMARY KEY(Dept_Id)
);
CREATE TABLE Employee
(
Emp_Id INT,
Dept_Id INT,
Emp_Name VARCHAR (50) NOT NULL,
Emp_Salary INT,
PRIMARY KEY (Emp_Id)
);
Options
1.
SELECT Employee.Emp_Id, Employee.Emp_Name, Dept_Name, Dept_Floor
FROM Employee
INNER JOIN Department
ON Employee.Dept_Id = Department.Dept_Id;
2.
SELECT Employee.Emp_Id, Employee.Emp_Name, Dept_Name, Dept_Floor
FROM Employee
LEFT JOIN Department
1
2
3
4
Previous
45/50
Next

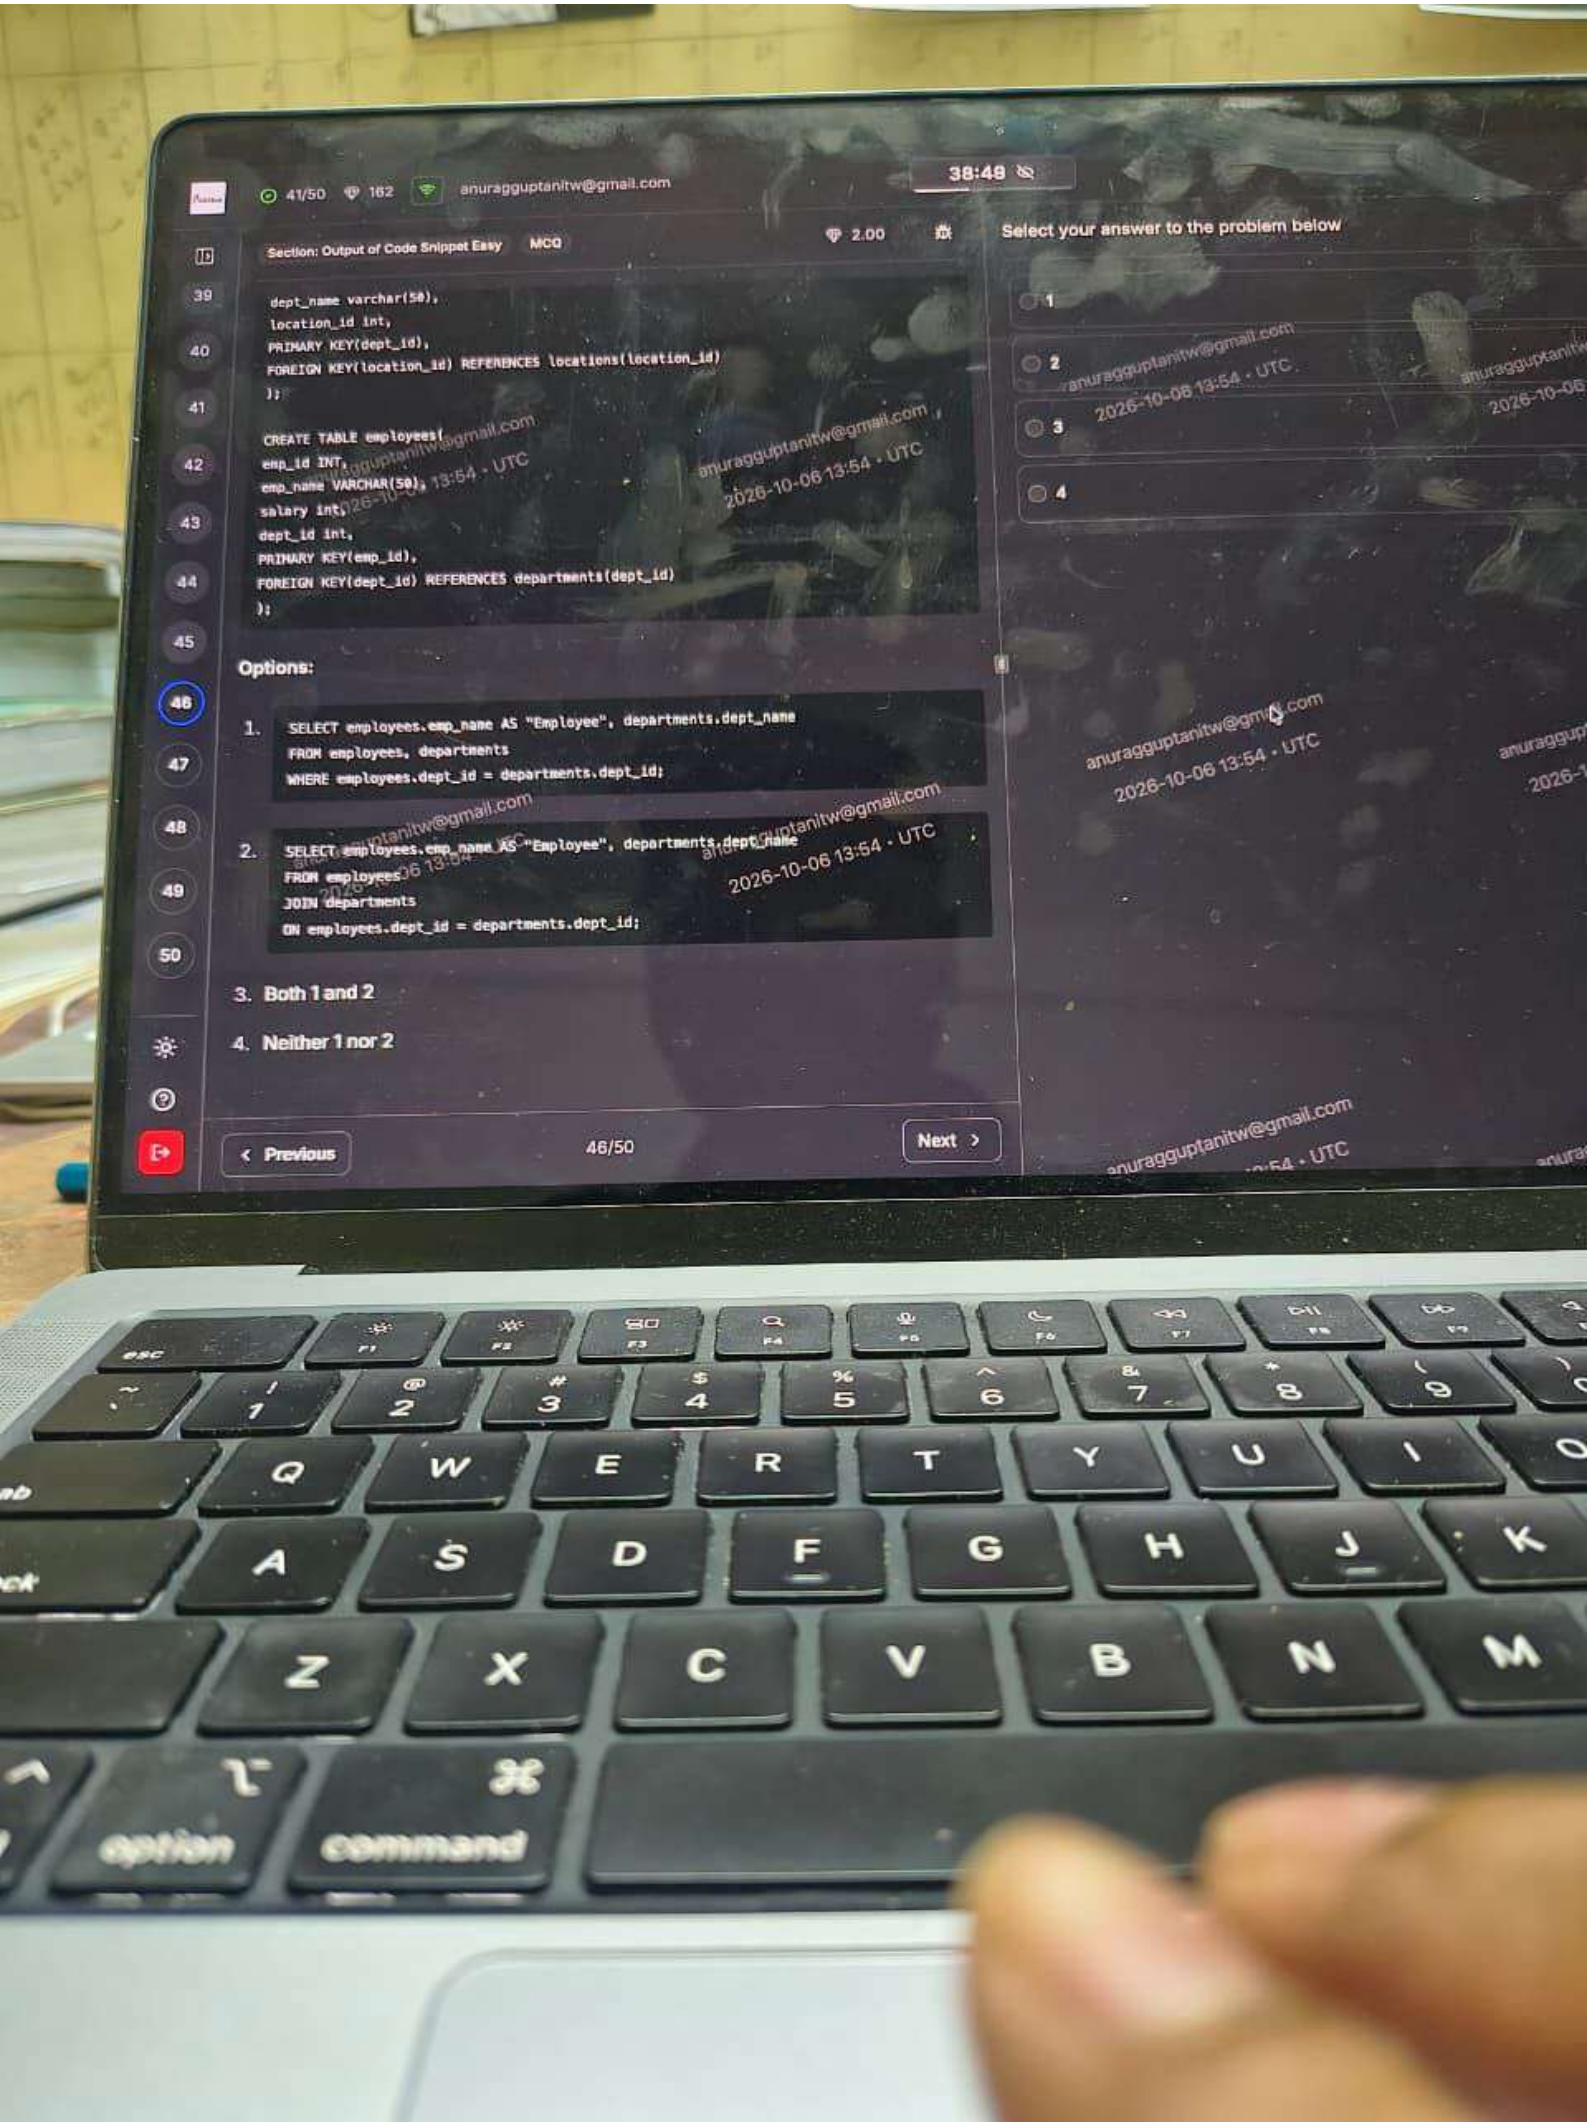

31/50
182
anuragguptanitw@gmail.com
42:32
Section: Computer Language Medium
MCQ
4.00
What is the output of the following C++ code?
Code:
#include<iostream>
using namespace std;
class Base
{
int x;
public:
virtual void fun() = 0;
int getX()
{
return x;
}
};
class Derived: public Base
{
int y;
public:
void fun()
{
cout << "Hello HackerEarth!";
}
};
int main(void)
{
Derived d;
d.fun();
return 0;
Select your answer to the problem below
Hello HackerEarth!
Prints nothing as an output
Compilation error
Runtime error
Previous
36/50
Next
anuragguptanitw@gmail.com
2026-10-06 13:50 • UTC

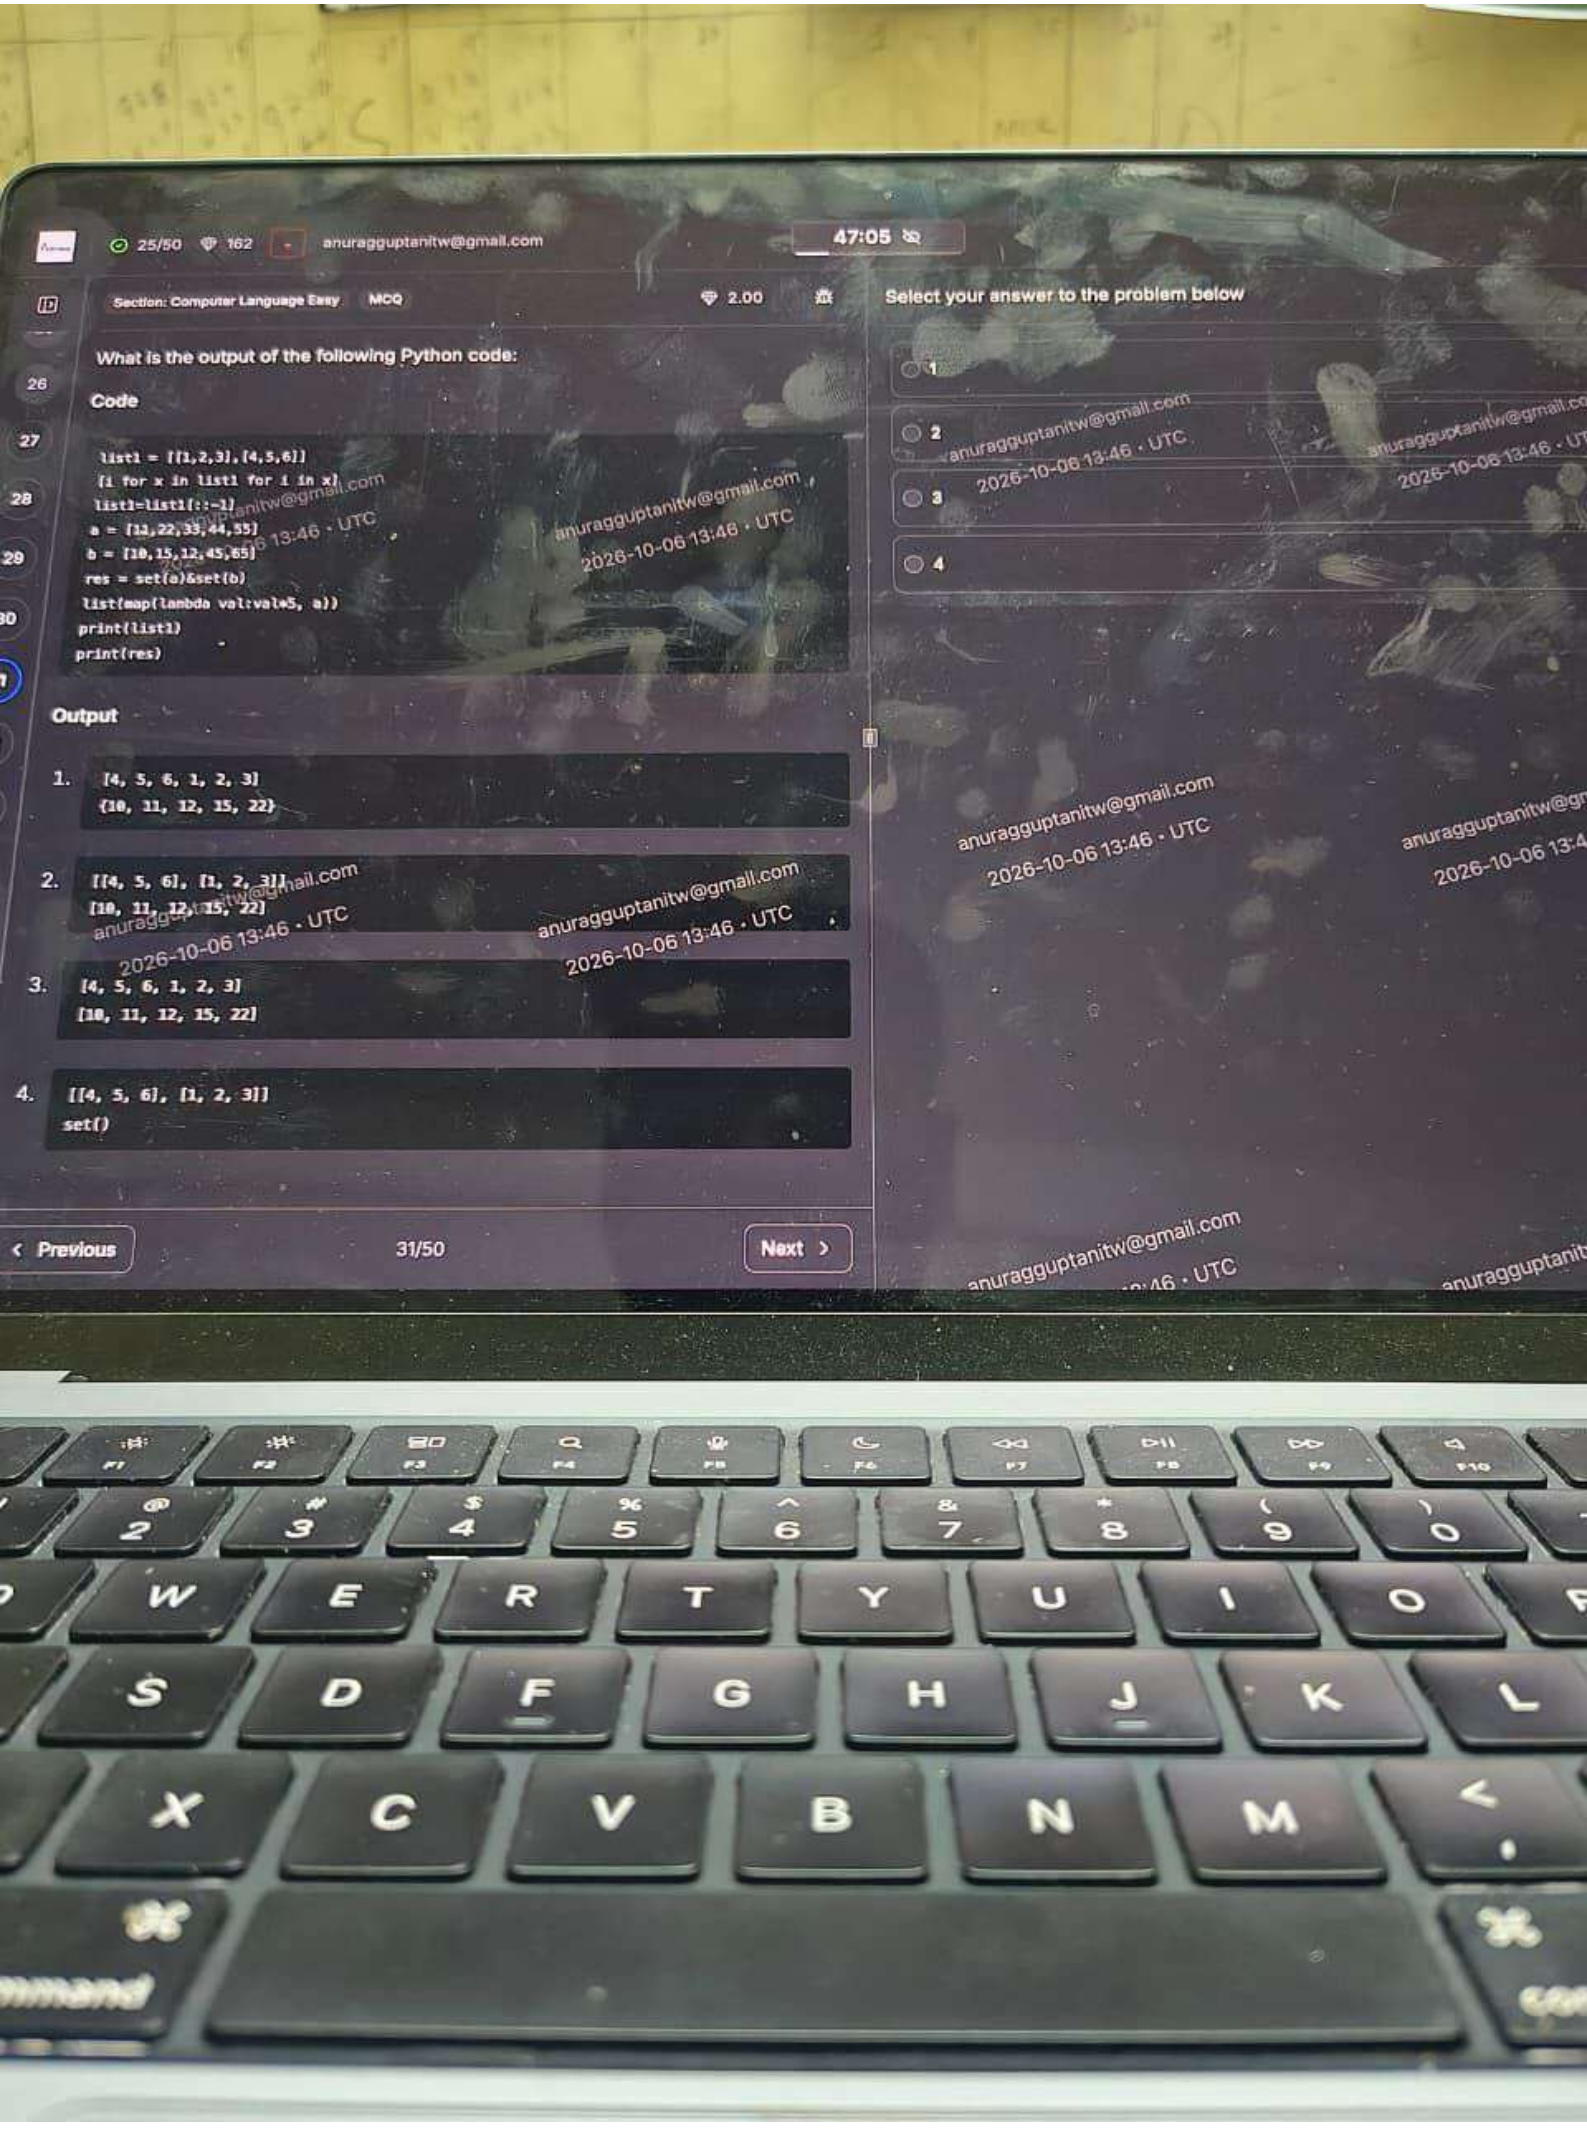

31/50
162
anuragguptanitw@gmail.com
42:10
Section: AI Medium
MCQ
4.00
Select your answer to the problem below
What is the output of the following Python code:
Code
import nltk
from nltk.tokenize import word_tokenize
from nltk.probability import FreqDist
text = "I love to play soccer. Soccer is my favorite sport."
tokens = word_tokenize(text.lower())
freq_dist = FreqDist(tokens)
print(freq_dist.most_common(3))
Output
1. [('soccer', 2), ('.', 2), ('i', 1)]
2. [('soccer', 2), ('.', 2), ('love', 1)]
3. [('soccer', 2), ('love', 1), ('i',1)]
4. [('soccer', 2), ('i',1), ('love', 1)]
1
2
3
4
Previous
41/50
Next

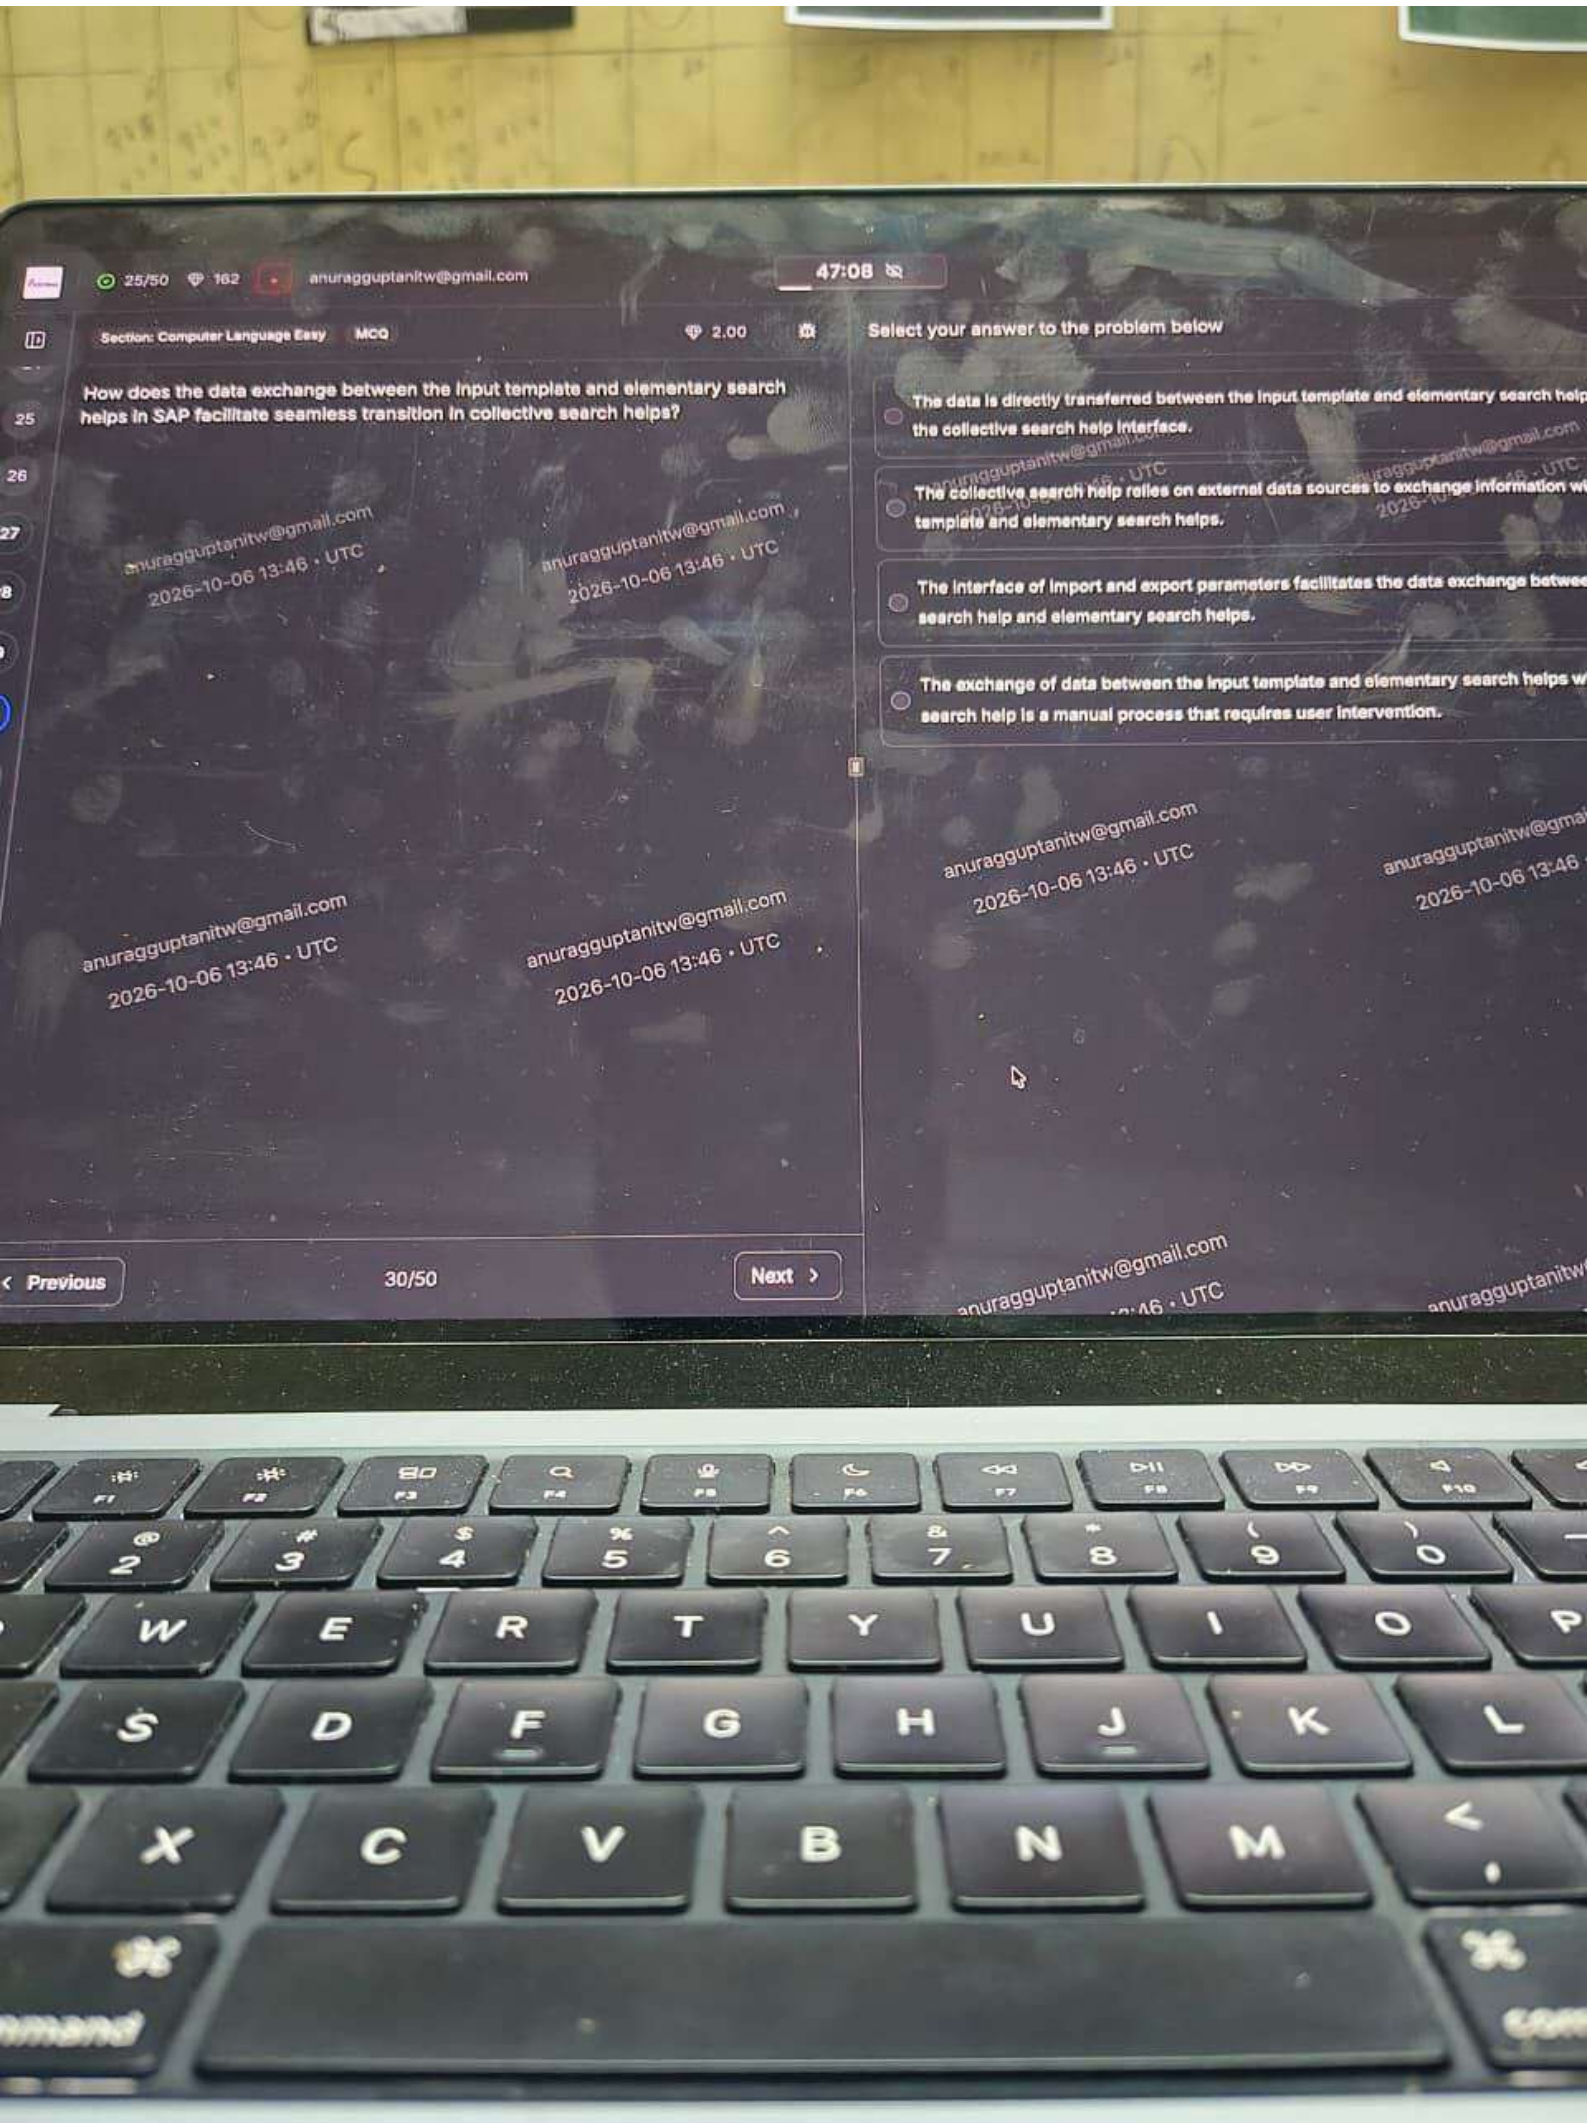

6/50
162
anuragguptanitw@gmail.com
55:45
Section: OOPS Easy
MCQ
2.00
What is the output of the following C++ code?
Code:
#include <bits/stdc++.h>
using namespace std;
class hacker1{
public:
int id1;
};
class hacker2 : public hacker1{
public:
int id2;
};
int main(){
hacker2 obj1;
obj1.id1 = 7;
obj1.id2 = 91;
obj1.id2 = 100;
obj1.id1 = 110;
cout << obj1.id2 << endl;
cout << obj1.id1 << endl;
return 0;
}
Options:
1. 7
91
Previous
16/50
Next
Select your answer to the problem below
1
2
3
4
anuragguptanitw@gmail.com
2026-10-06 13:37 · UTC


6/50
162
anuragguptanitw@gmail.com
56:18
Section: Database Medium
MCQ
4.00
Mary is a programmer who is interested in learning about Microsoft SQL Server Database Administration. She wants to understand the primary responsibility of the Lazy Writer Process in SQL Server. What is the main task of the Lazy Writer Process in SQL Server?
Select your answer to the problem below
To prepare the execution plan for a query.
To write log records from the log buffer to the physical file.
To check syntax of the query and convert it to machine language.
To push dirty pages to disk to free up memory in the buffer pool.
anuragguptanitw@gmail.com
2026-10-06 13:37 • UTC
Previous
8/50
Next


15/50
182
anuragguptanitw@gmail.com
Show Timer
Section: OOPS Easy
MCQ
2.00
Select your answer to the problem below
John is working with reference variables in ABAP Objects and wants to know which method is executed when calling a method using a reference variable that refers to an object of a subclass. Which method will be invoked in this situation?
The method redefined in the superclass.
The method redefined in the subclass.
Both the superclass method and the subclass method are executed.
The method specified in the reference variable declaration.
anuragguptanitw@gmail.com
2026-10-06 13:40 · UTC
Previous
17/50
Next


41/50
162
anuragguptanitw@gmail.com
38:48
Section: Output of Code Snippet Easy
MCQ
2.00
Select your answer to the problem below
dept_name varchar(50),
location_id int,
PRIMARY KEY(dept_id),
FOREIGN KEY(location_id) REFERENCES locations(location_id)
);
CREATE TABLE employees(
emp_id INT,
emp_name VARCHAR(50),
salary int,
dept_id int,
PRIMARY KEY(emp_id),
FOREIGN KEY(dept_id) REFERENCES departments(dept_id)
);
Options:
1. SELECT employees.emp_name AS "Employee", departments.dept_name
FROM employees, departments
WHERE employees.dept_id = departments.dept_id;
2. SELECT employees.emp_name AS "Employee", departments.dept_name
FROM employees
JOIN departments
ON employees.dept_id = departments.dept_id;
3. Both 1 and 2
4. Neither 1 nor 2
1
2
3
4
anuragguptanitw@gmail.com
2026-10-06 13:54 • UTC
Previous
46/50
Next


25/50 162 anuragguptanitw@gmail.com
47:05
Section: Computer Language Easy MCQ 2.00
Select your answer to the problem below
What is the output of the following Python code:
Code
list1 = [[1,2,3],[4,5,6]]
[i for x in list1 for i in x]
list1=list1[::-1]
a = [11,22,33,44,55]
b = [10,15,12,45,65]
res = set(a)&set(b)
list(map(lambda val:val+5, a))
print(list1)
print(res)
Output
1. [4, 5, 6, 1, 2, 3]
{10, 11, 12, 15, 22}
2. [[4, 5, 6], [1, 2, 3]]
[10, 11, 12, 15, 22]
3. [4, 5, 6, 1, 2, 3]
[10, 11, 12, 15, 22]
4. [[4, 5, 6], [1, 2, 3]]
set()
1
2
3
4
anuragguptanitw@gmail.com
2026-10-06 13:46 · UTC
Previous
31/50
Next


25/50
162
anuragguptanitw@gmail.com
47:08
Section: Computer Language Easy
MCQ
2.00
How does the data exchange between the input template and elementary search helps in SAP facilitate seamless transition in collective search helps?
Select your answer to the problem below
The data is directly transferred between the input template and elementary search help the collective search help interface.
The collective search help relies on external data sources to exchange information wi template and elementary search helps.
The interface of import and export parameters facilitates the data exchange betwee search help and elementary search helps.
The exchange of data between the input template and elementary search helps w search help is a manual process that requires user intervention.
anuragguptanitw@gmail.com
2026-10-06 13:46 • UTC
Previous
30/50
Next

41/50 162 anuragguptanitw@gmail.com

38:20

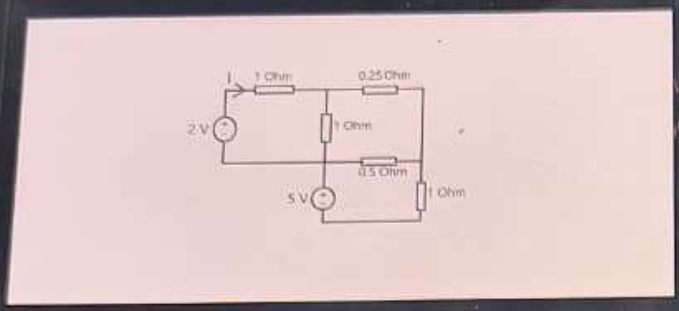
Section: Output of code snippet Hard MCQ

6.00

39
40
41
42
43
44
45
46
47
48
49
50

By Nodal Analysis, Find the 'I' in the Circuit shown below?

Circuit:



Select your answer to the problem below

- 2.33 A
- -2.3 A
- 1.77 A
- -1.77 A

anuragguptanitw@gmail.com
2026-10-06 13:55 · UTC

anuragguptanitw@gmail.com
2026-10-06 13:55 · UTC

anuragguptanitw@gmail.com
2026-10-06 13:55 · UTC

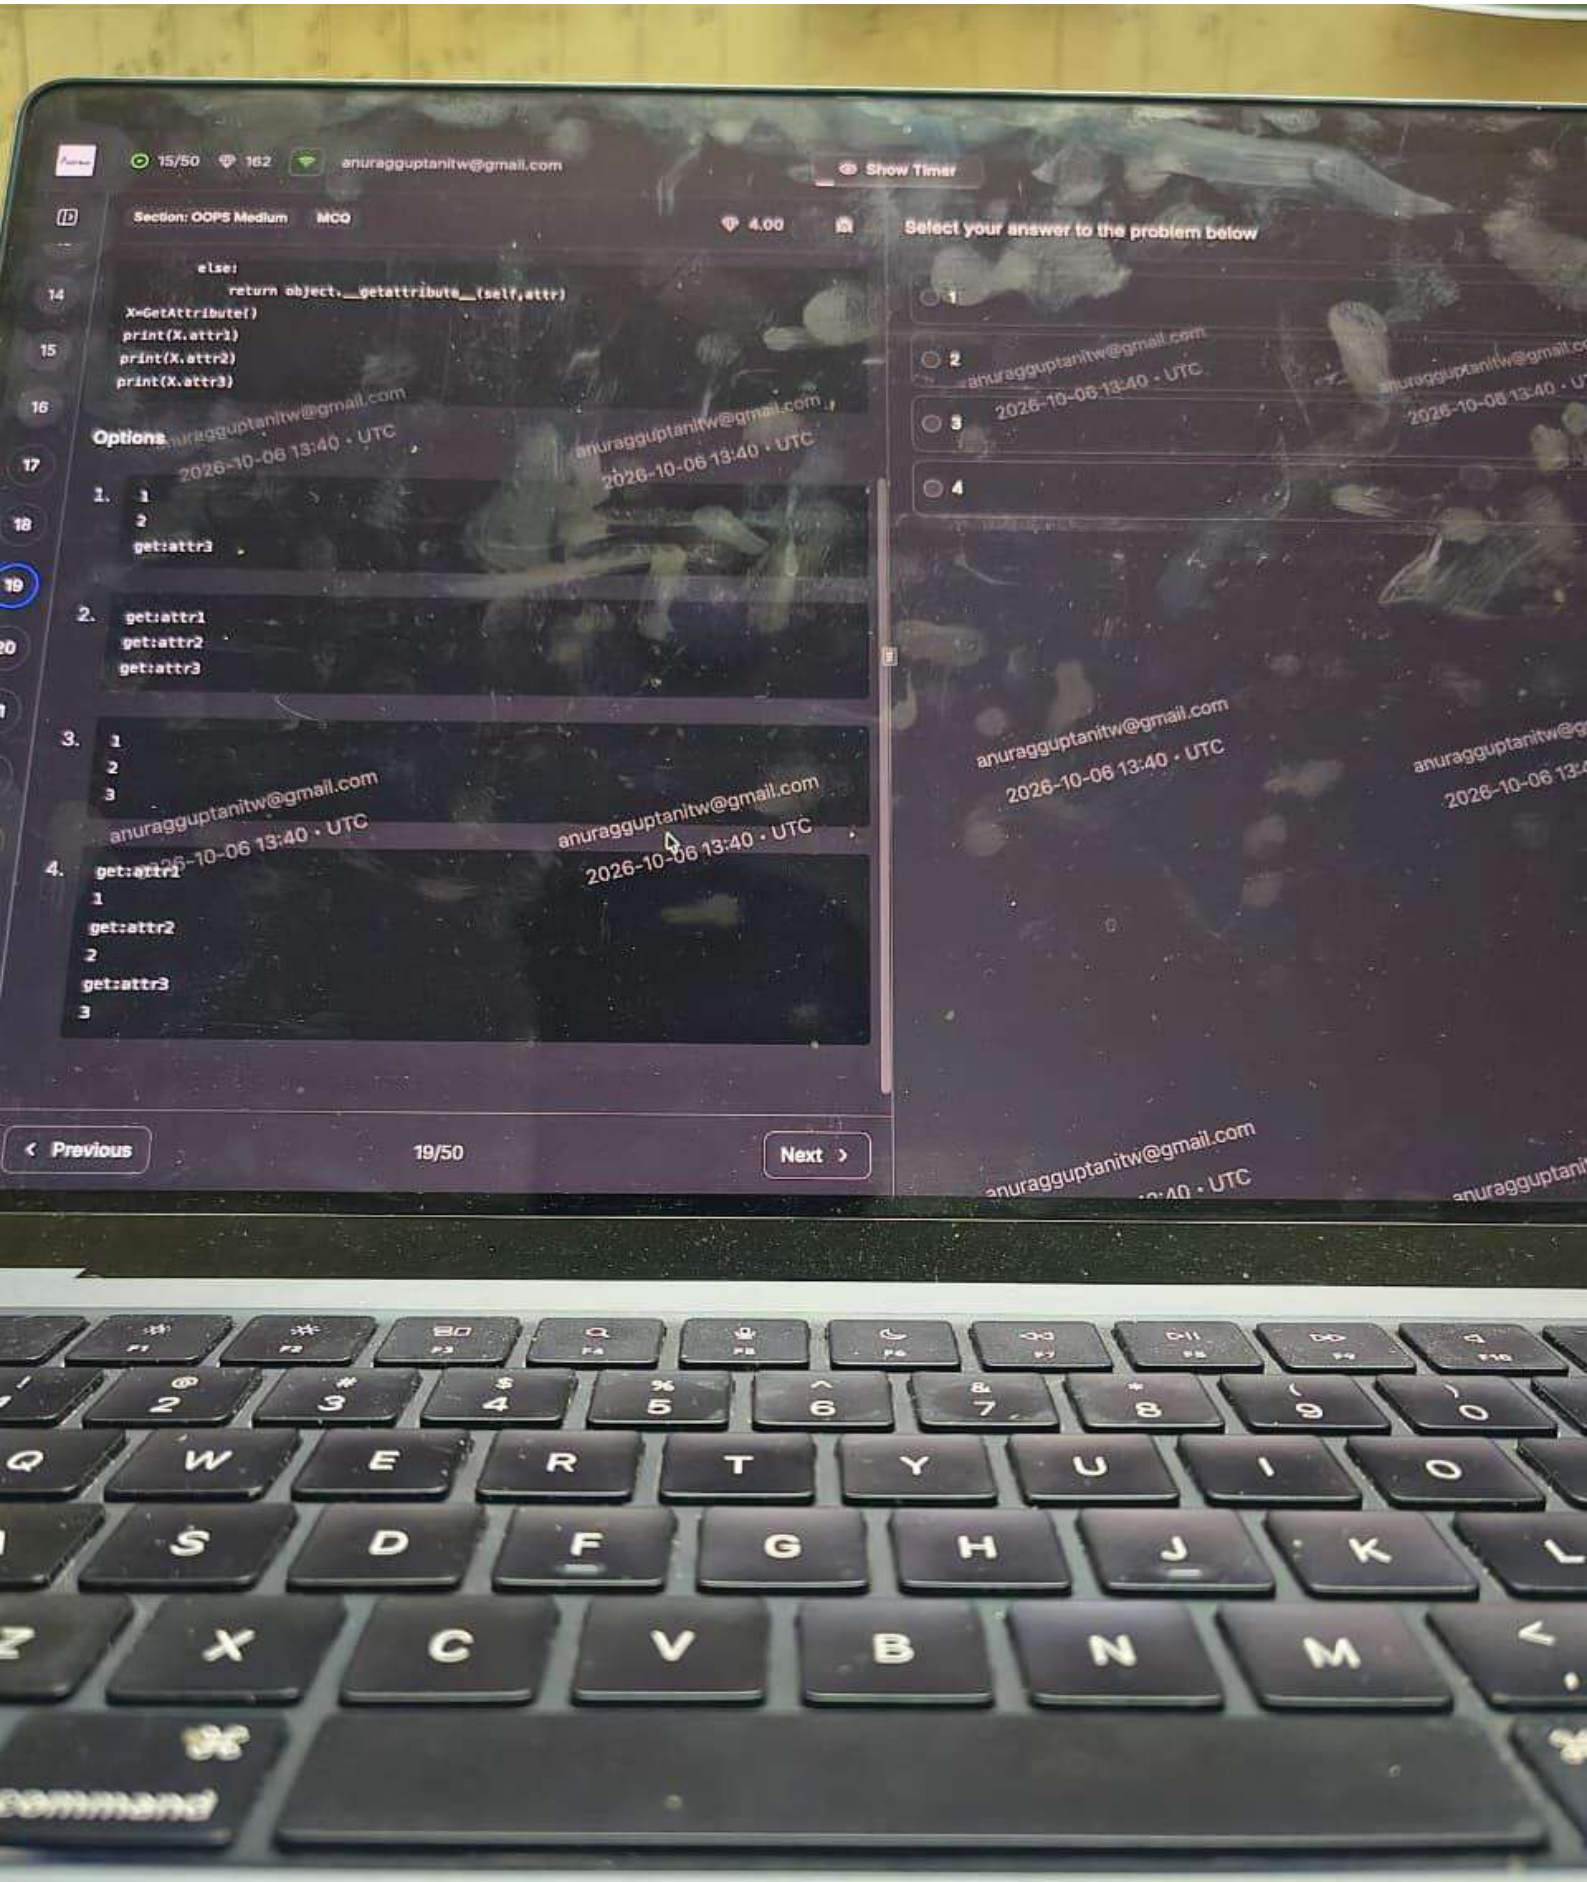
anuragguptanitw@gmail.com
2026-10-06 13:55 · UTC

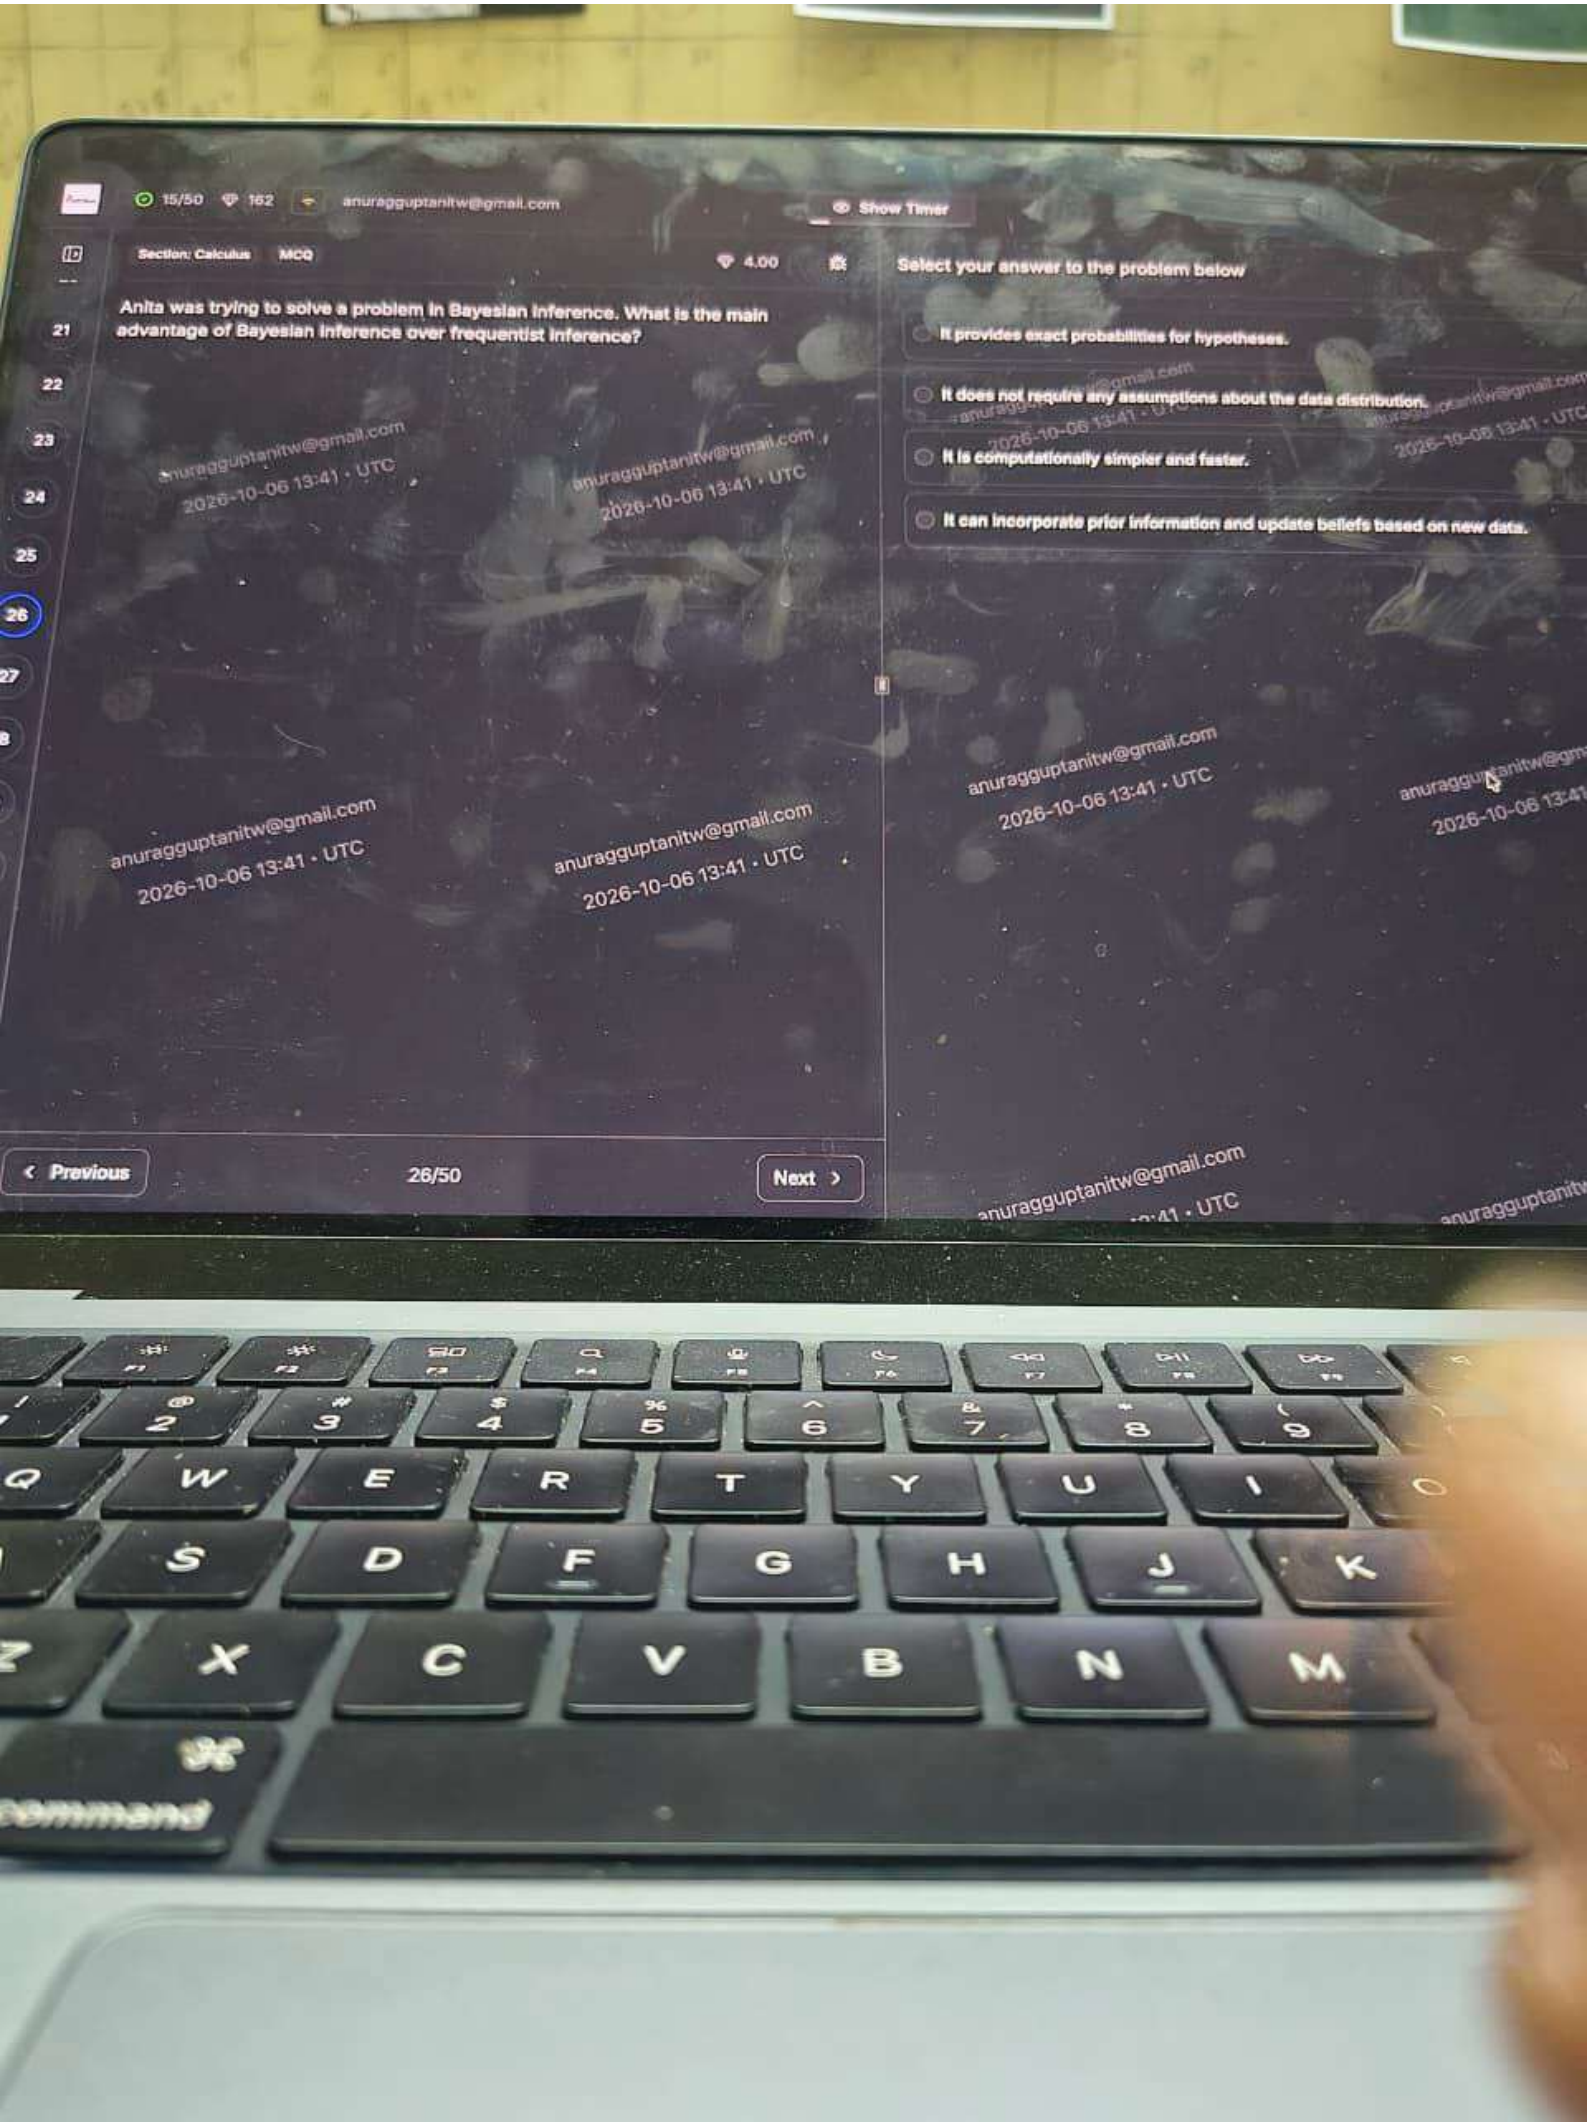
anuragguptanitw@gmail.com
2026-10-06 13:55 · UTC

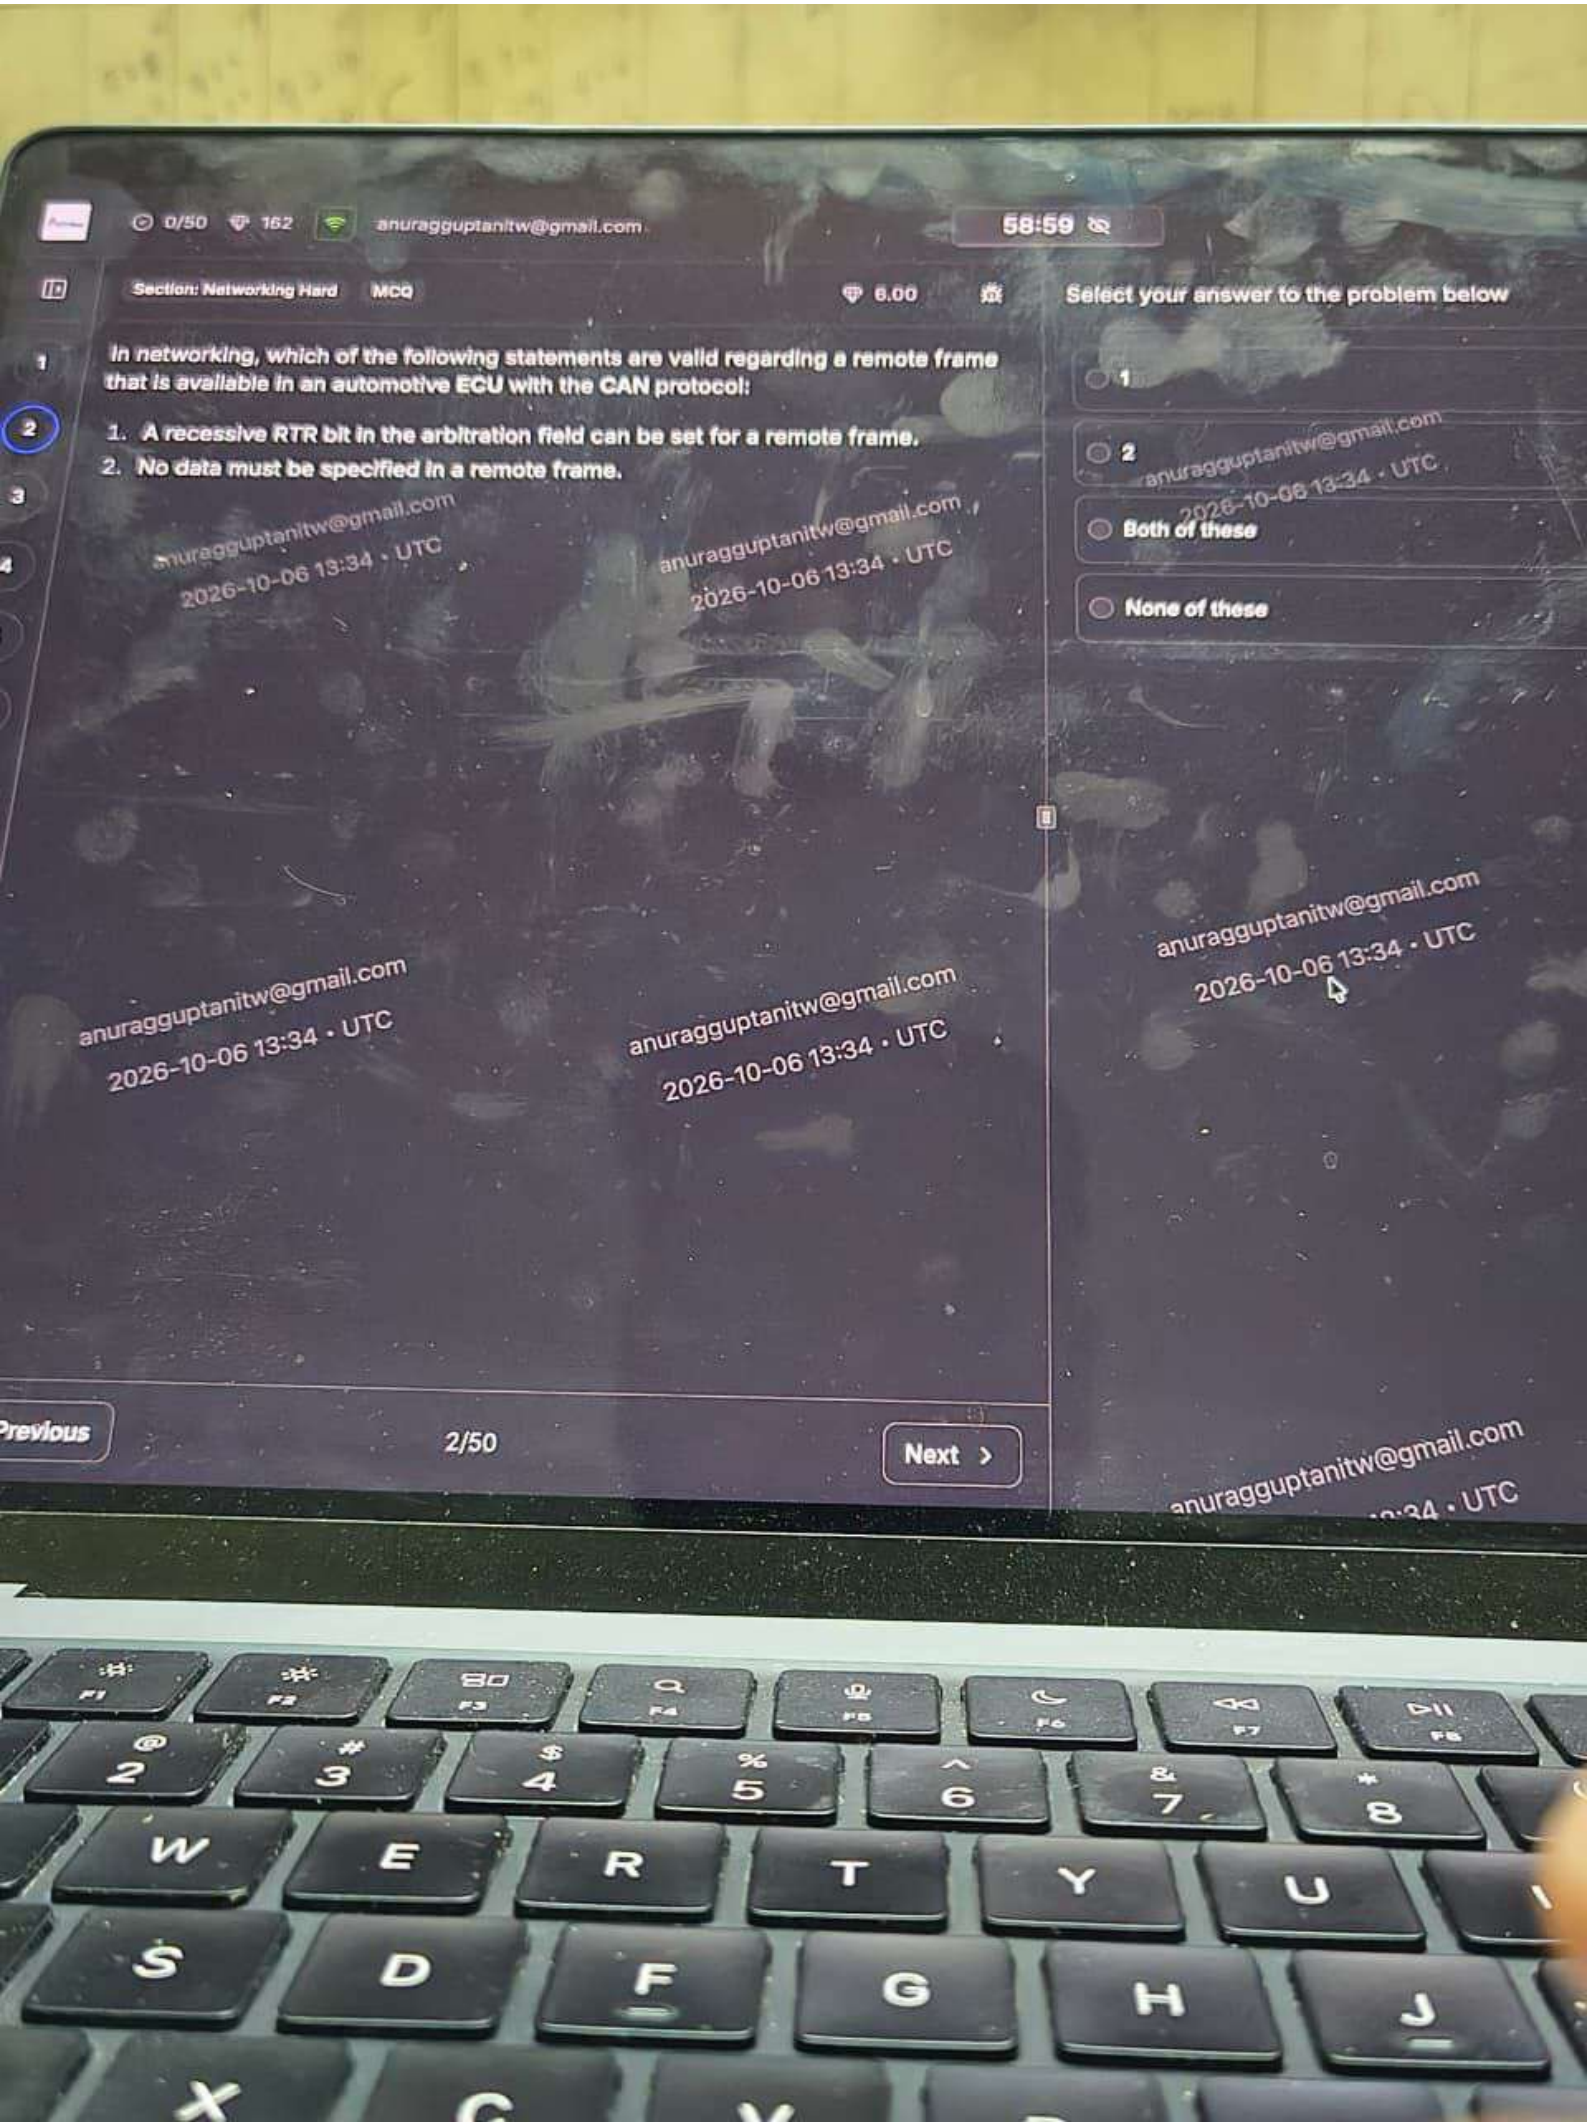
Previous 50/50 Next

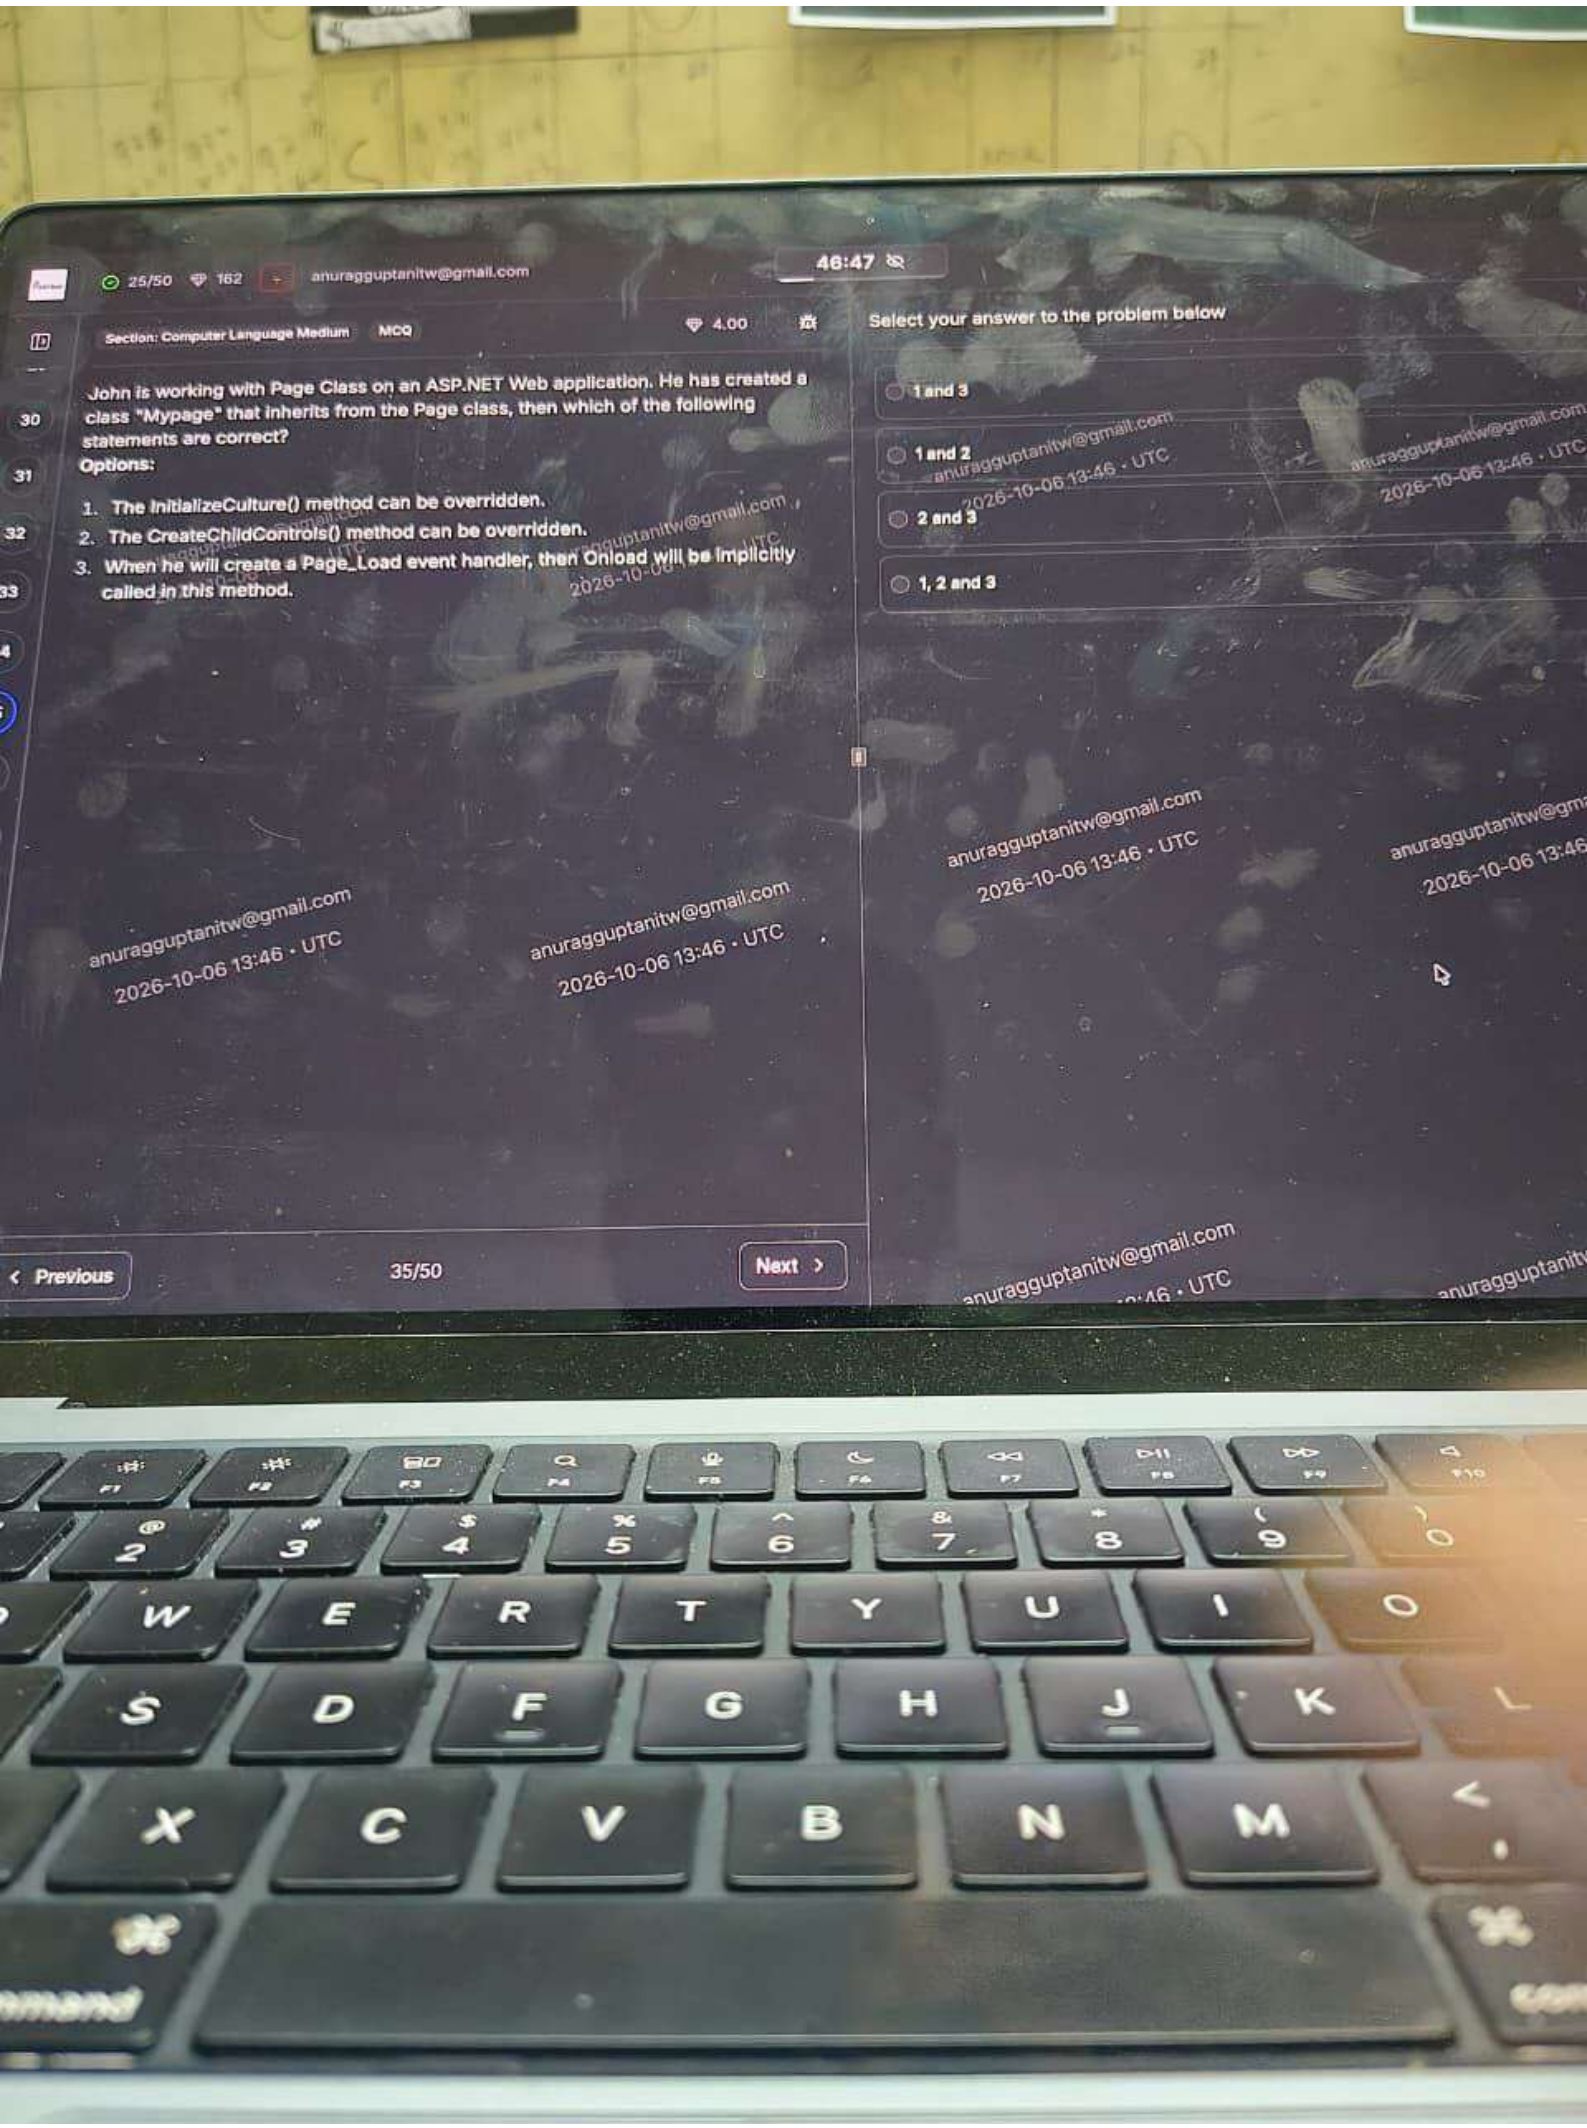
anuragguptanitw@gmail.com
2026-10-06 13:55 · UTC

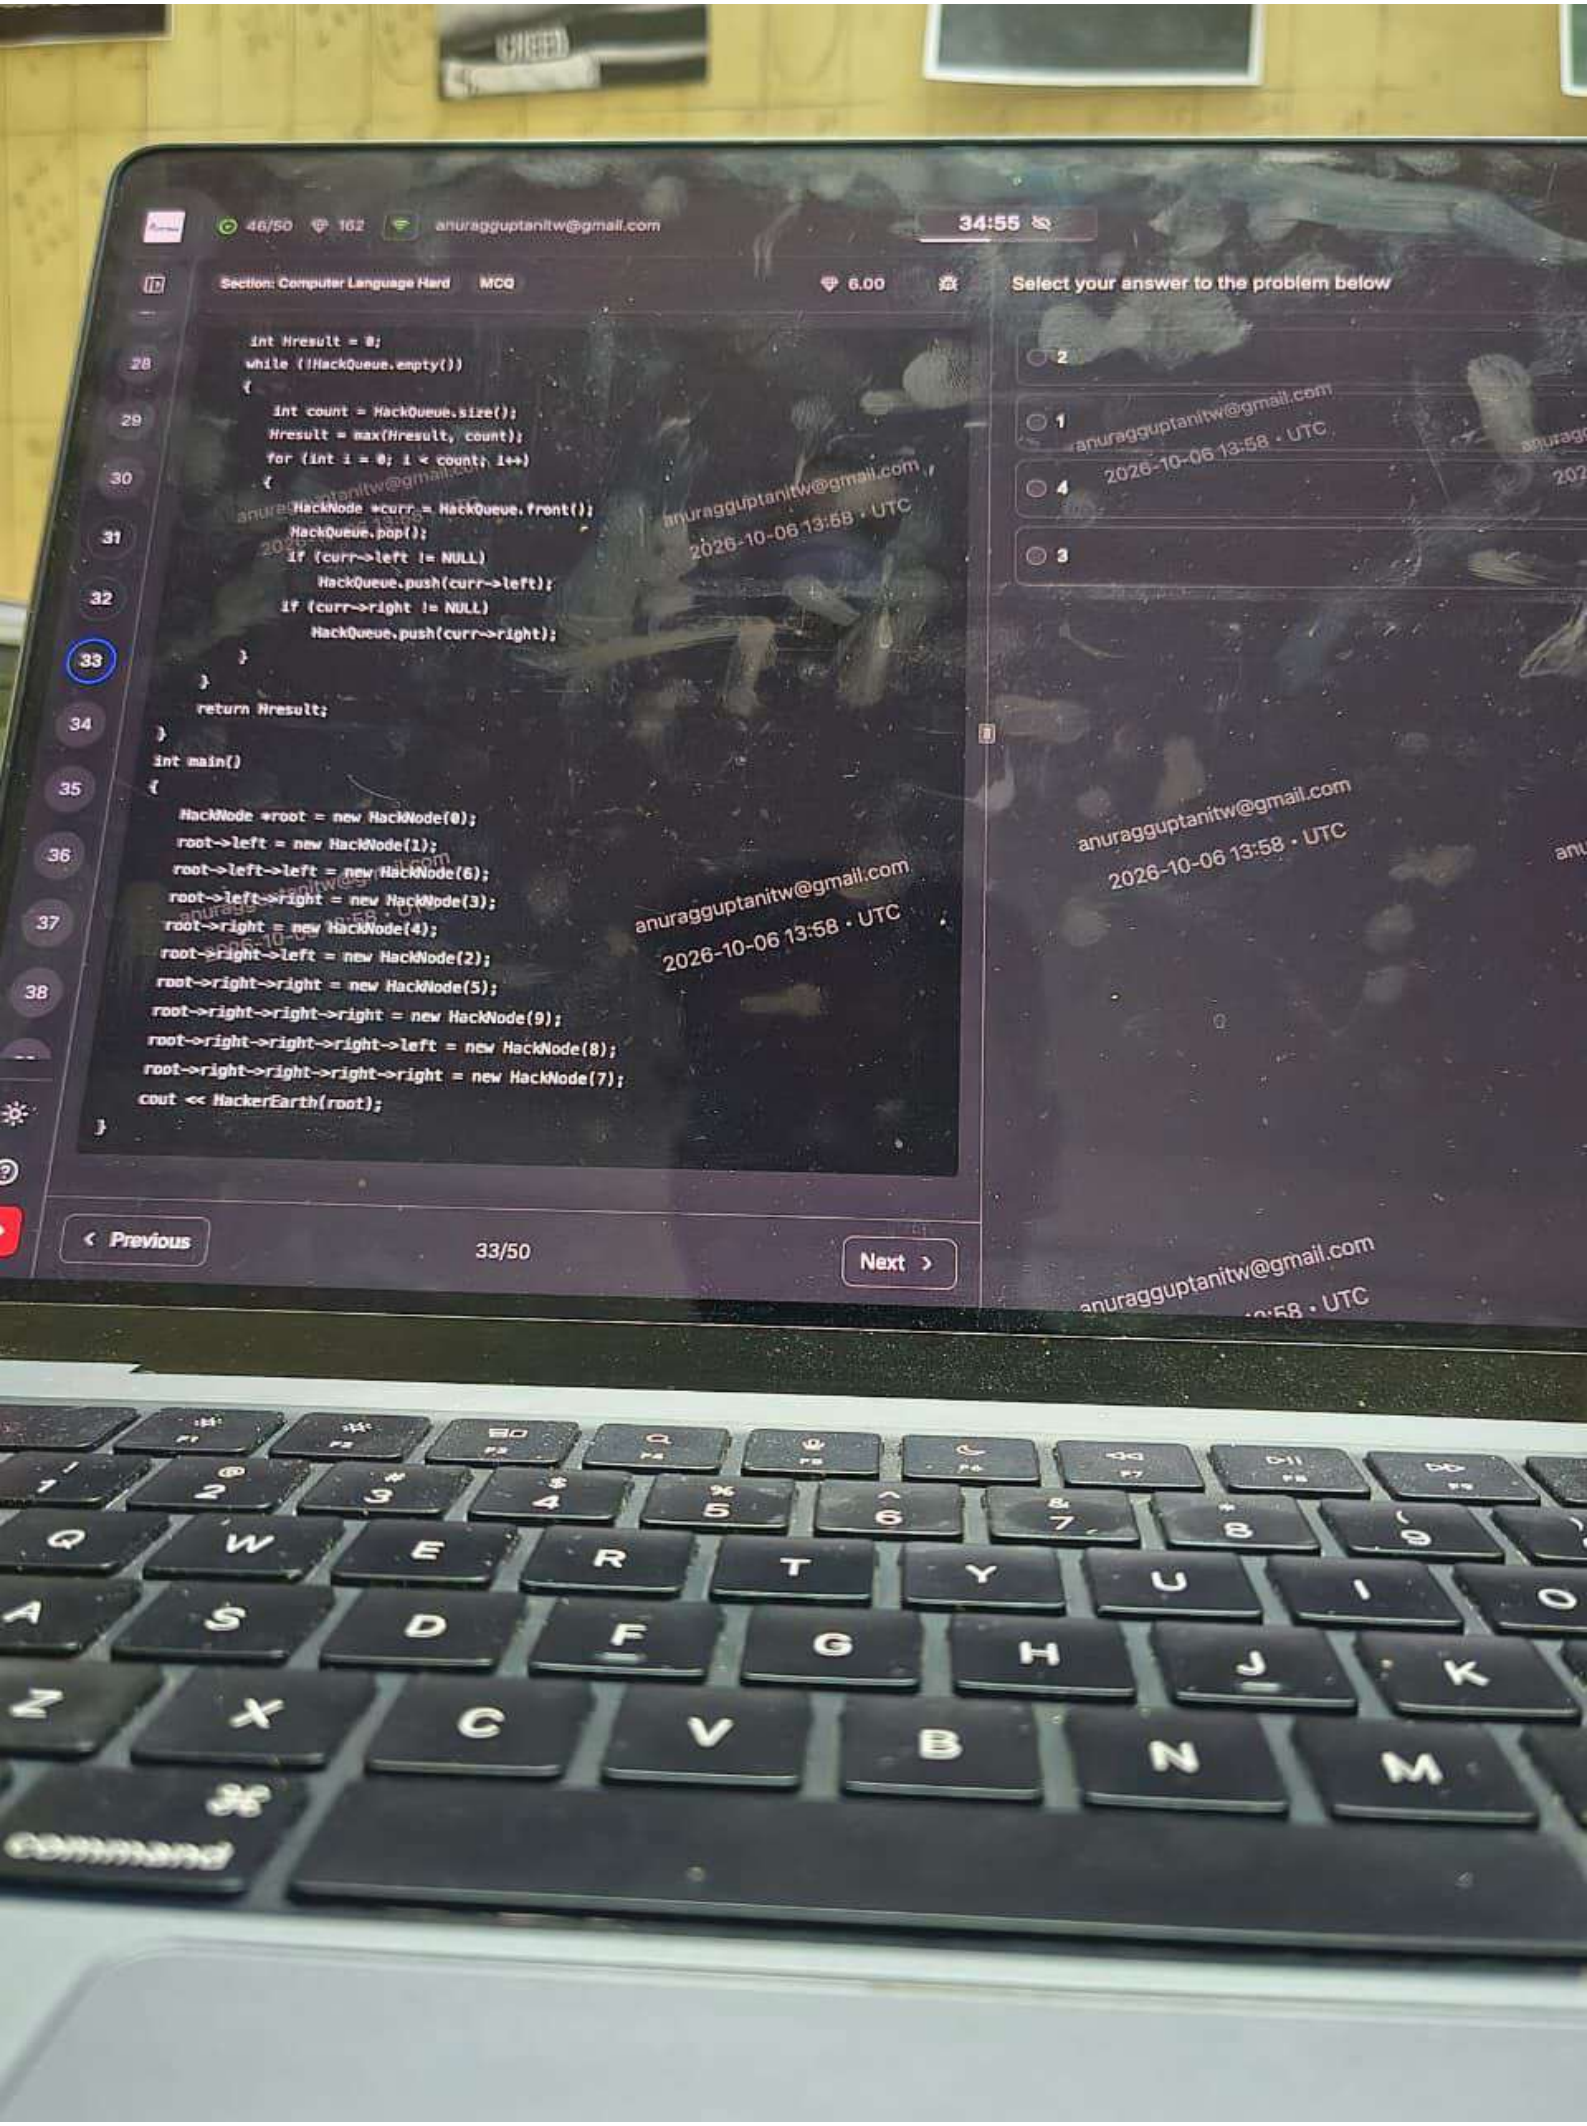
command

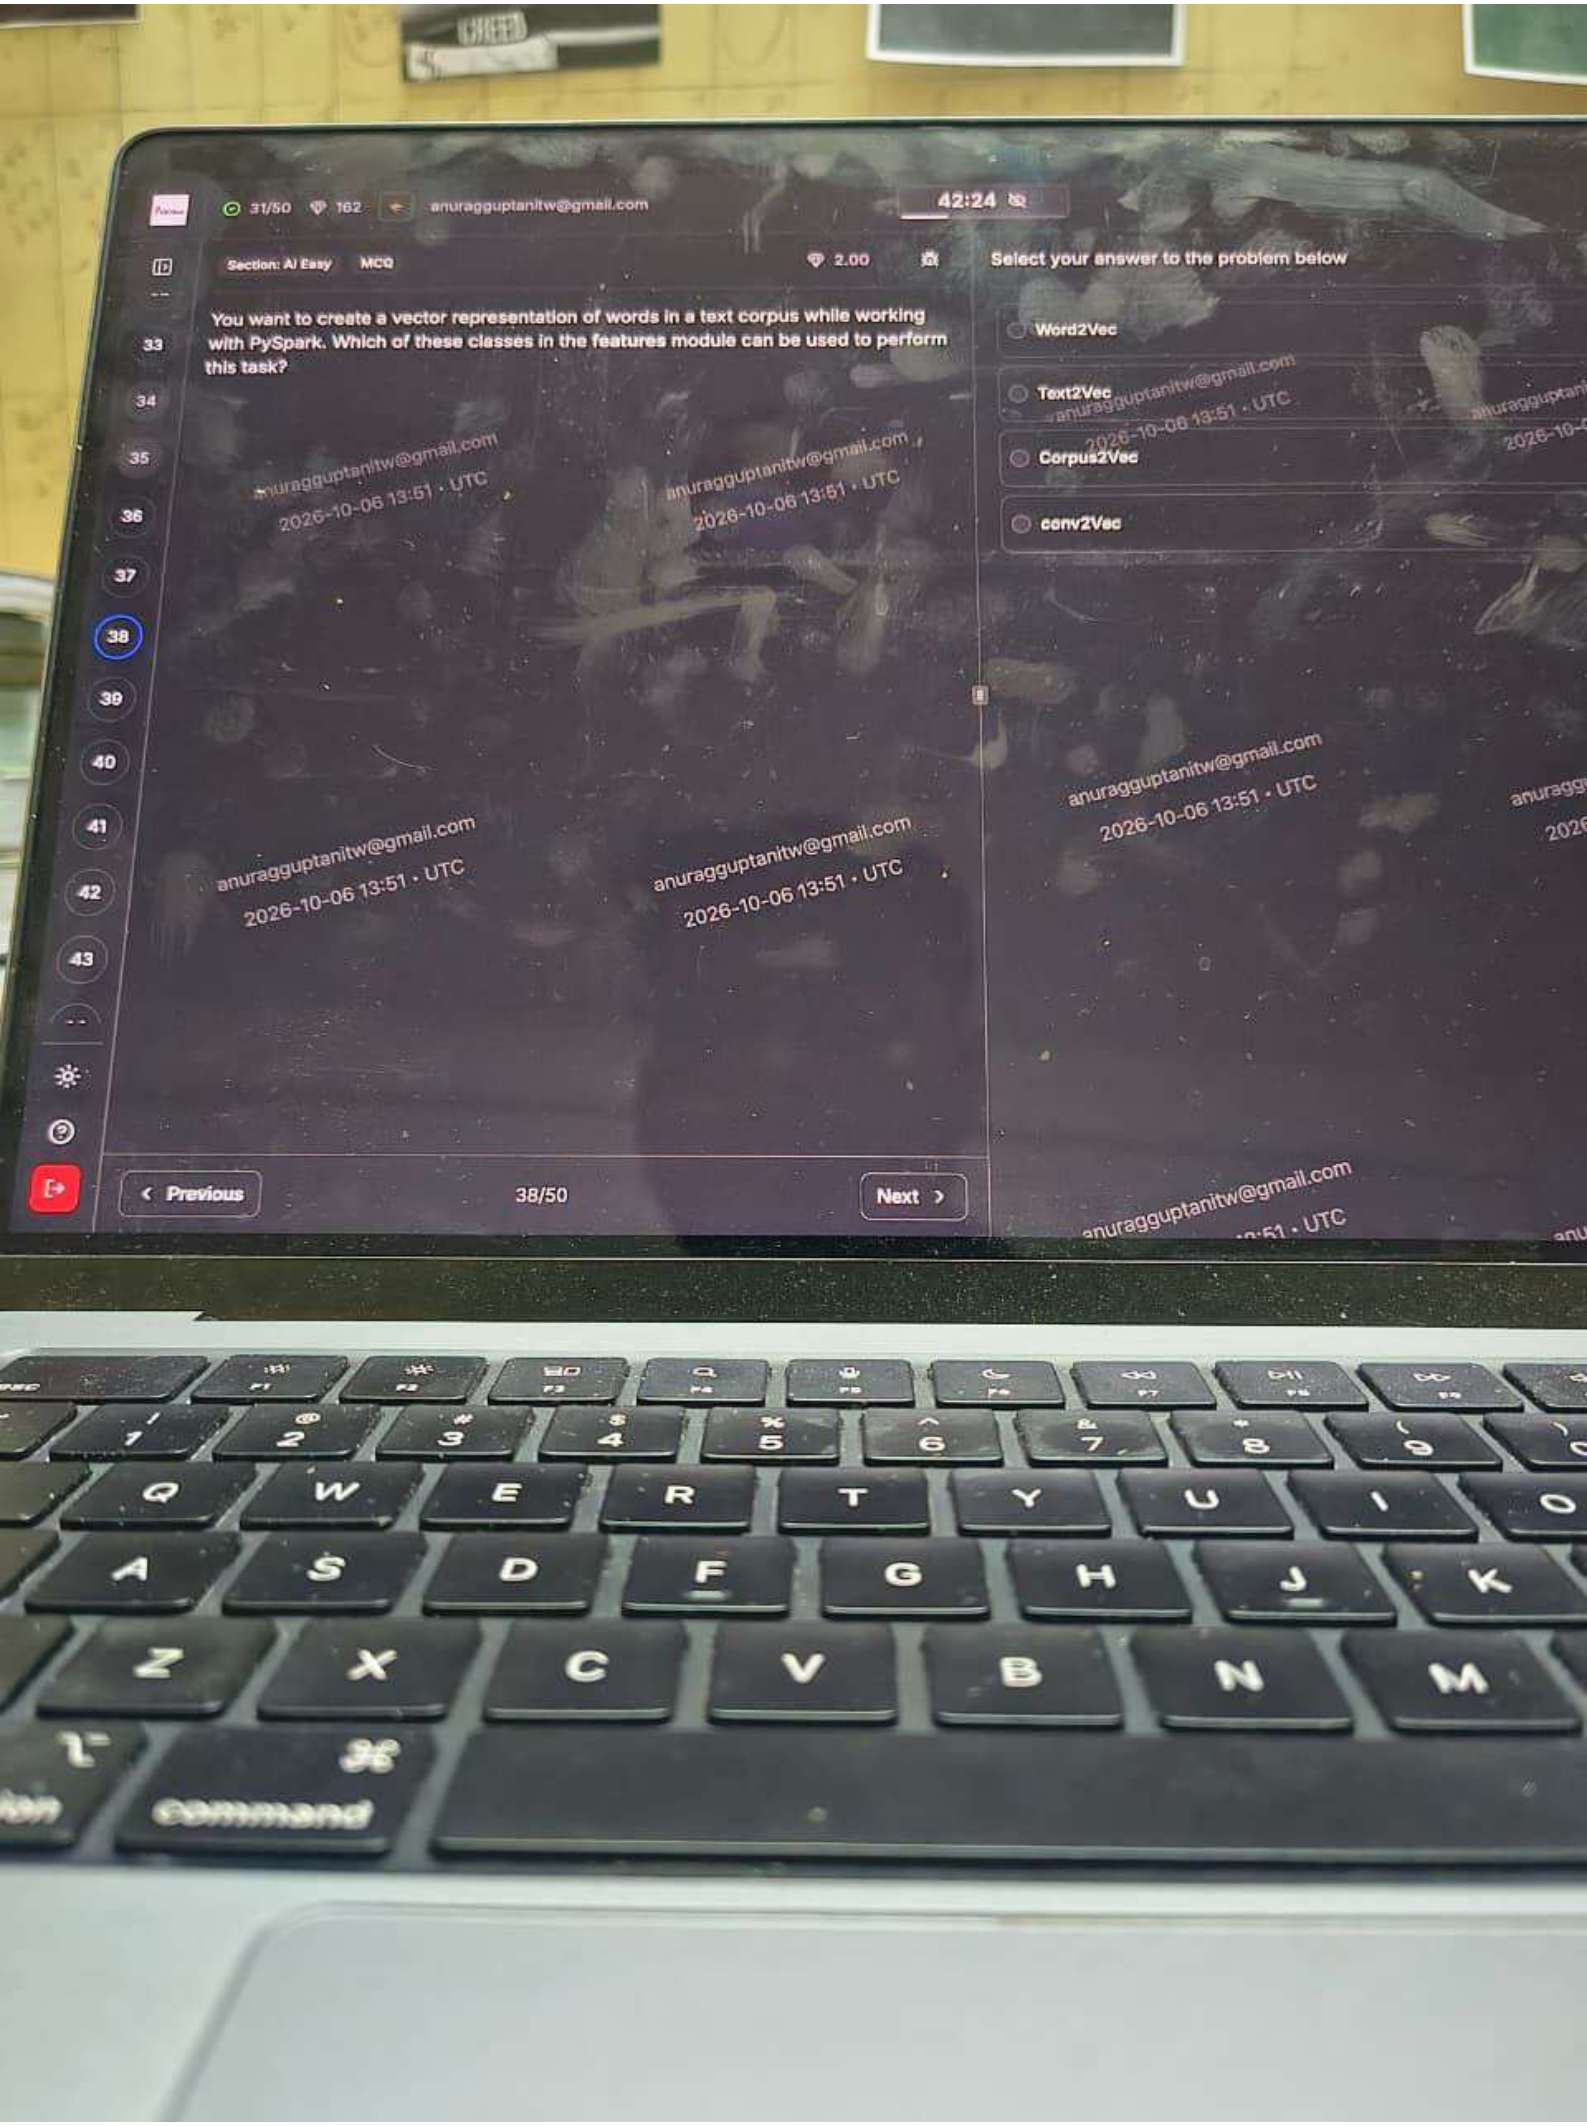

15/50
162
anuragguptanitw@gmail.com
Show Timer
Section: OOPS Medium
MCQ
4.00
Select your answer to the problem below
else:
return object.__getattribute__(self,attr)
X=GetAttribute()
print(X.attr1)
print(X.attr2)
print(X.attr3)
Options
1.
1
2
get:attr3
2.
get:attr1
get:attr2
get:attr3
3.
1
2
3
4.
get:attr1
1
get:attr2
2
get:attr3
3
1
2
3
4
anuragguptanitw@gmail.com
2026-10-06 13:40 · UTC
Previous
19/50
Next

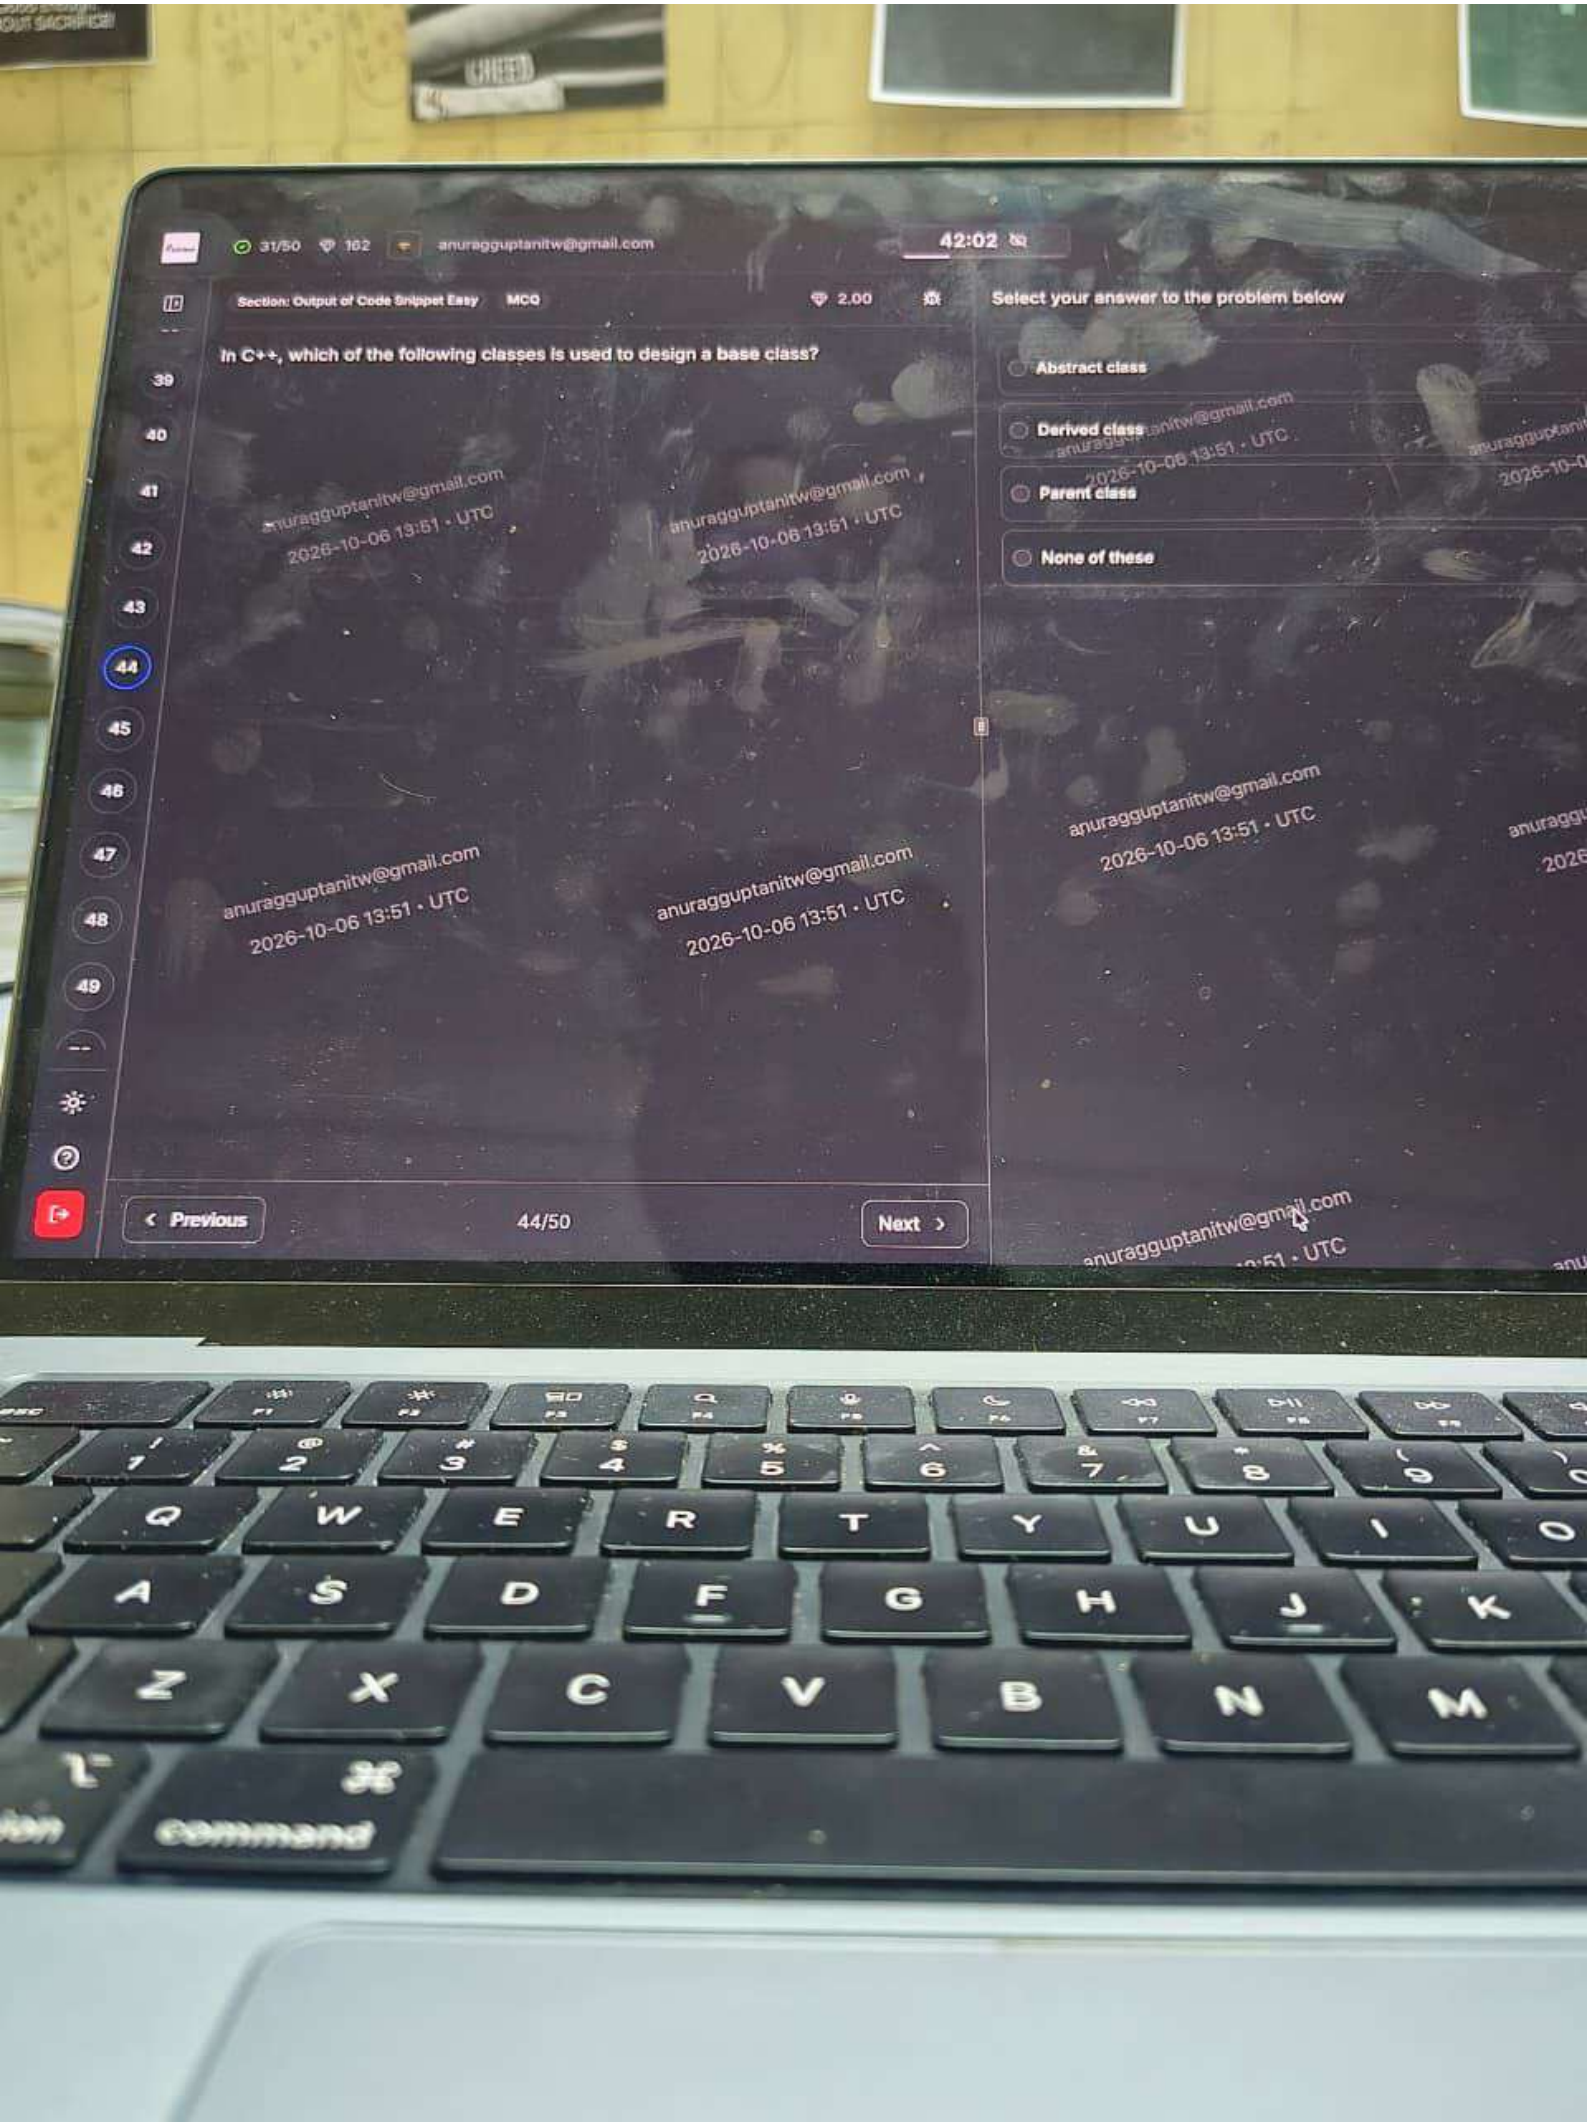

15/50
162
anuragguptanitw@gmail.com
Show Timer
Section: Calculus
MCQ
4.00
Select your answer to the problem below
Anita was trying to solve a problem in Bayesian inference. What is the main advantage of Bayesian inference over frequentist inference?
21
22
23
24
25
26
27
It provides exact probabilities for hypotheses.
It does not require any assumptions about the data distribution.
It is computationally simpler and faster.
It can incorporate prior information and update beliefs based on new data.
anuragguptanitw@gmail.com
2026-10-06 13:41 • UTC
Previous
26/50
Next

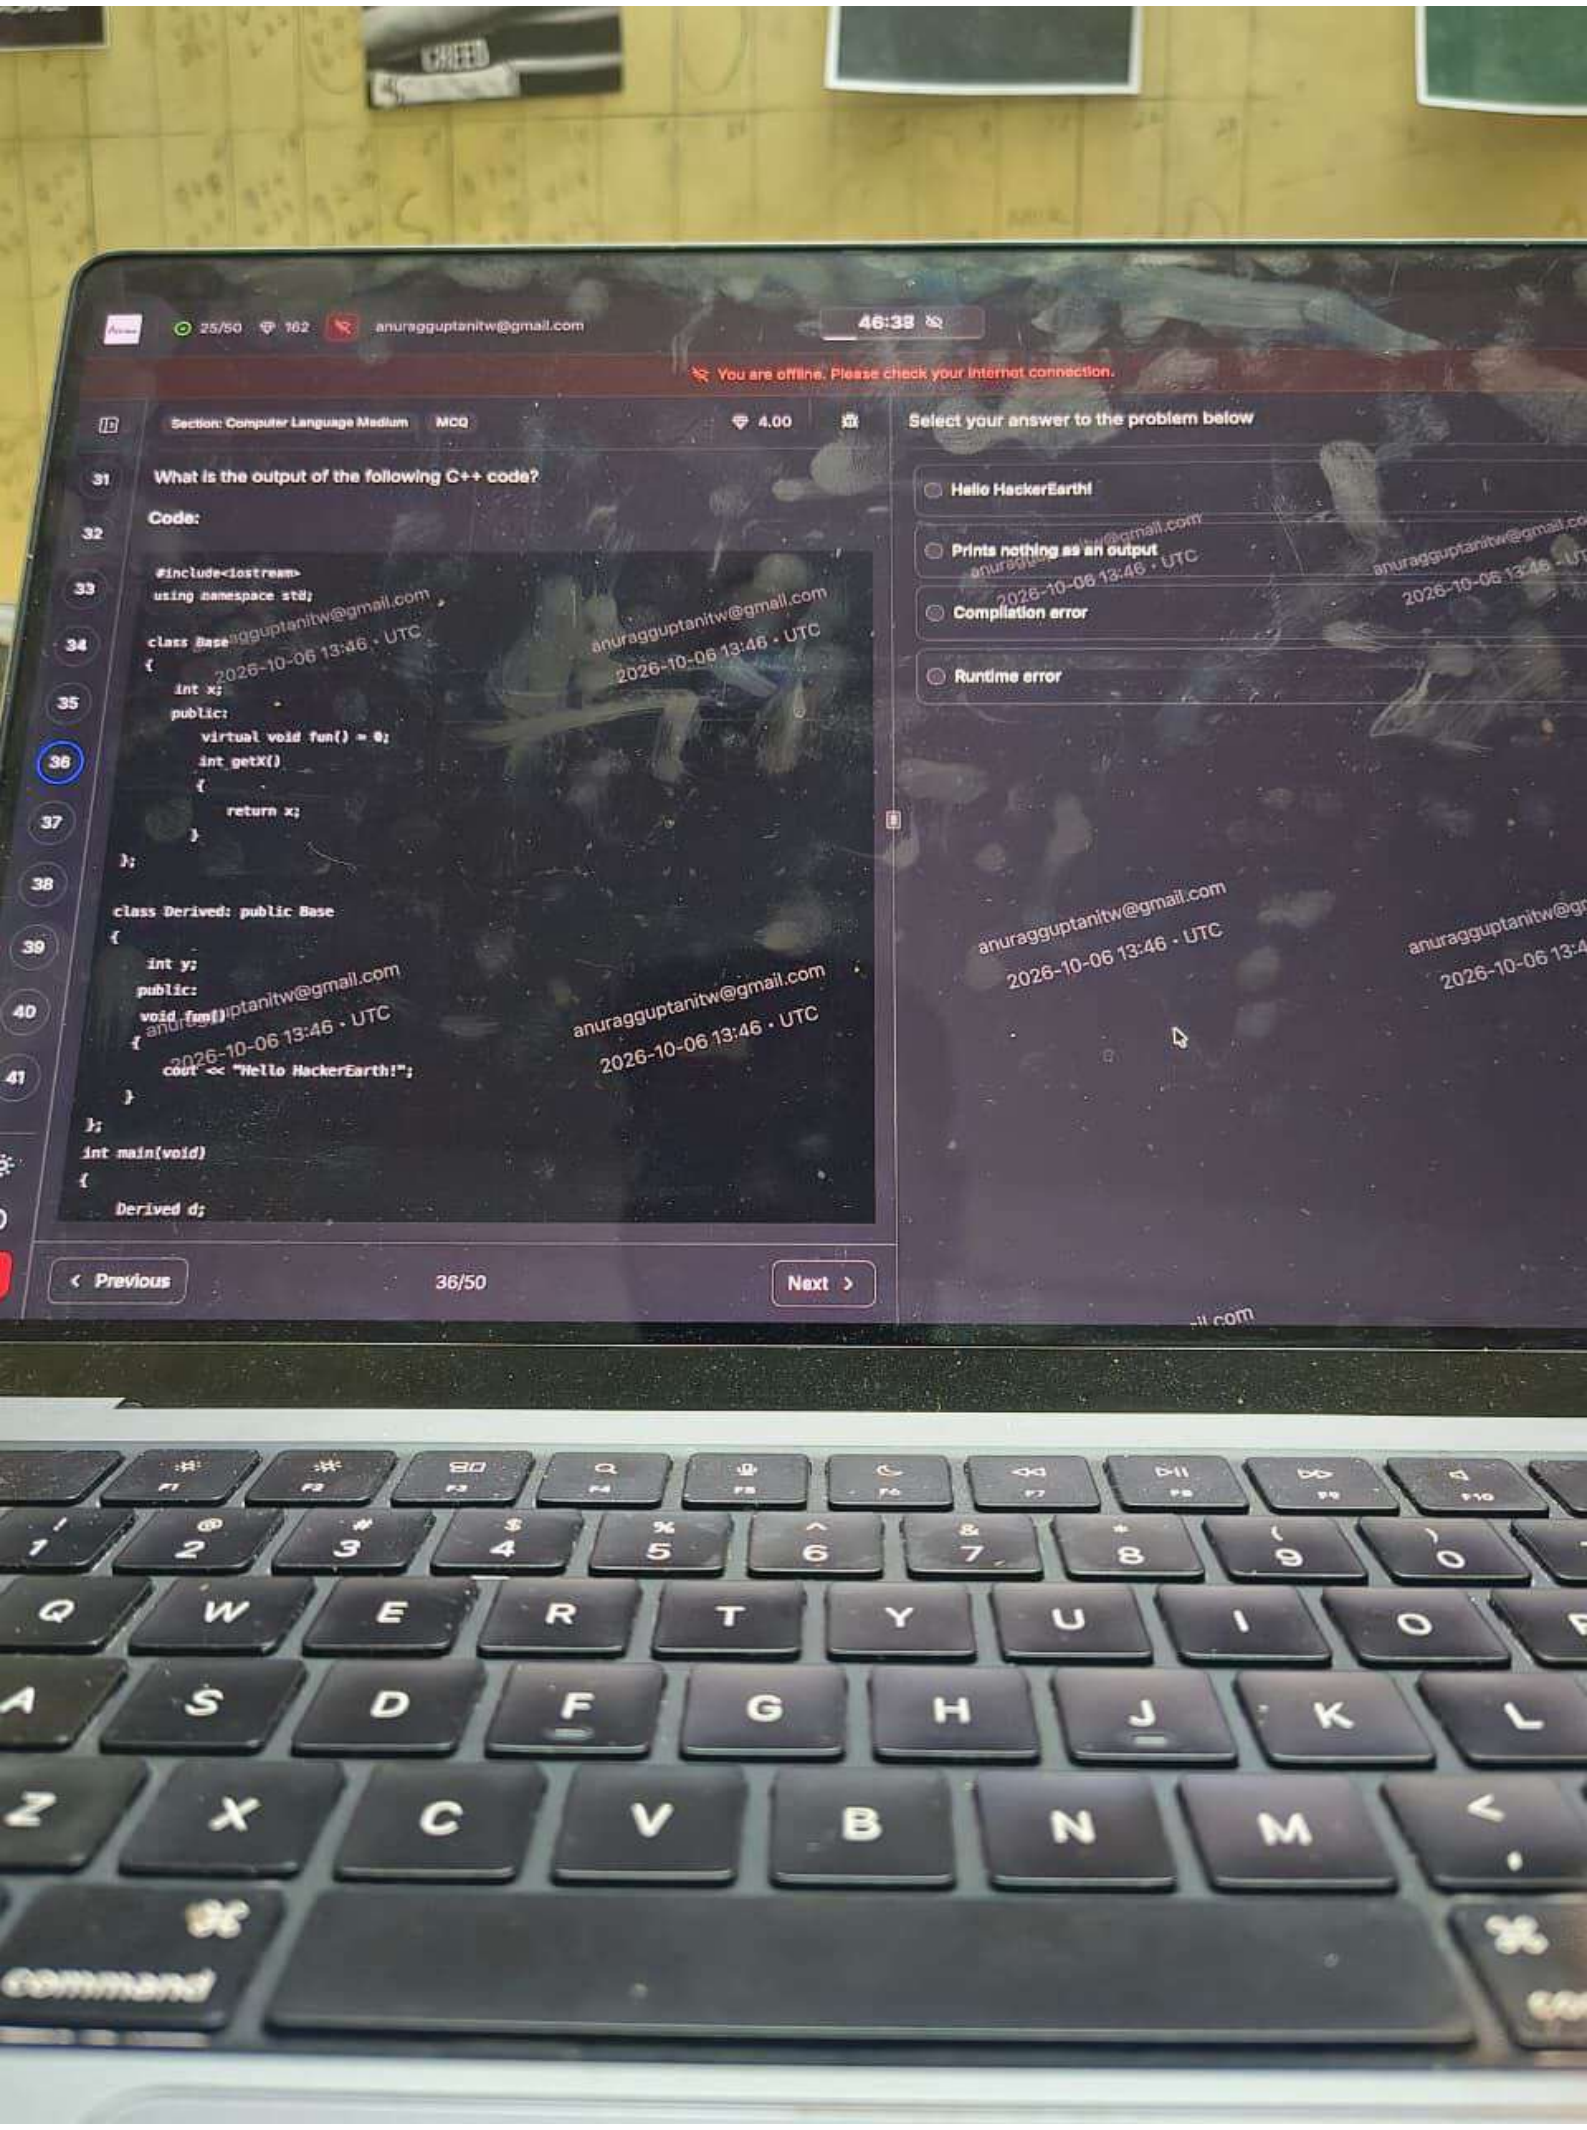

0/50
162
anuragguptanitw@gmail.com
58:59
Section: Networking Hard
MCQ
6.00
Select your answer to the problem below
In networking, which of the following statements are valid regarding a remote frame that is available in an automotive ECU with the CAN protocol:
1. A recessive RTR bit in the arbitration field can be set for a remote frame.
2. No data must be specified in a remote frame.
1
2
Both of these
None of these
anuragguptanitw@gmail.com
2026-10-06 13:34 • UTC
Previous
2/50
Next


25/50
162
anuragguptanitw@gmail.com
46:47
Section: Computer Language Medium
MCQ
4.00
Select your answer to the problem below
John is working with Page Class on an ASP.NET Web application. He has created a class "Mypage" that inherits from the Page class, then which of the following statements are correct?
Options:
1. The InitializeCulture() method can be overridden.
2. The CreateChildControls() method can be overridden.
3. When he will create a Page_Load event handler, then Onload will be implicitly called in this method.
1 and 3
1 and 2
2 and 3
1, 2 and 3
anuragguptanitw@gmail.com
2026-10-06 13:46 · UTC
Previous
35/50
Next


46/50
102
anuragguptanitw@gmail.com
34:55
Section: Computer Language Hard
MCQ
6.00
Select your answer to the problem below
int Hresult = 0;
while (!HackQueue.empty())
{
int count = HackQueue.size();
Hresult = max(Hresult, count);
for (int i = 0; i < count; i++)
{
HackNode *curr = HackQueue.front();
HackQueue.pop();
if (curr->left != NULL)
HackQueue.push(curr->left);
if (curr->right != NULL)
HackQueue.push(curr->right);
}
}
return Hresult;
}
int main()
{
HackNode *root = new HackNode(0);
root->left = new HackNode(1);
root->left->left = new HackNode(6);
root->left->right = new HackNode(3);
root->right = new HackNode(4);
root->right->left = new HackNode(2);
root->right->right = new HackNode(5);
root->right->right->right = new HackNode(9);
root->right->right->right->left = new HackNode(8);
root->right->right->right->right = new HackNode(7);
cout << HackerEarth(root);
}
2
1
4
3
anuragguptanitw@gmail.com
2026-10-06 13:58 · UTC
Previous
33/50
Next


31/50
162
anuragguptanitw@gmail.com
42:24
Section: AI Easy
MCQ
2.00
Select your answer to the problem below
You want to create a vector representation of words in a text corpus while working with PySpark. Which of these classes in the features module can be used to perform this task?
Word2Vec
Text2Vec
Corpus2Vec
conv2Vec
33
34
35
36
37
38
39
40
41
42
43
anuragguptanitw@gmail.com
2026-10-06 13:51 · UTC
Previous
38/50
Next


31/50
162
anuragguptanitw@gmail.com
42:02
Section: Output of Code Snippet Easy
MCQ
2.00
In C++, which of the following classes is used to design a base class?
Select your answer to the problem below
Abstract class
Derived class
Parent class
None of these
anuragguptanitw@gmail.com
2026-10-06 13:51 • UTC
39
40
41
42
43
44
45
46
47
48
49
Previous
44/50
Next
command


25/50
162
anuragguptanitw@gmail.com
46:38
You are offline. Please check your internet connection.
Section: Computer Language Medium
MCQ
4.00
Select your answer to the problem below
What is the output of the following C++ code?
Code:
#include<iostream>
using namespace std;
class Base
{
int x;
public:
virtual void fun() = 0;
int getX()
{
return x;
}
};
class Derived: public Base
{
int y;
public:
void fun()
{
cout << "Hello HackerEarth!";
}
};
int main(void)
{
Derived d;
Hello HackerEarth!
Prints nothing as an output
Compilation error
Runtime error
anuragguptanitw@gmail.com
2026-10-06 13:46 • UTC
Previous
36/50
Next

41/50 162 anuragguptanitw@gmail.com 38:26

Section: Output of Code Snippet Medium MCQ 4.00

Select your answer to the problem below

What is the output of the following Python code:

Code

```
with open('example.txt', 'w') as f:
    f.write('HackerEarth\n')

with open('example.txt', 'w') as f:
    f.write('Hacker_Earth\n')

with open('example.txt', 'a') as f:
    f.write('Programming\n')

with open('example.txt') as rt:
    d = rt.read()
    print(d)
```

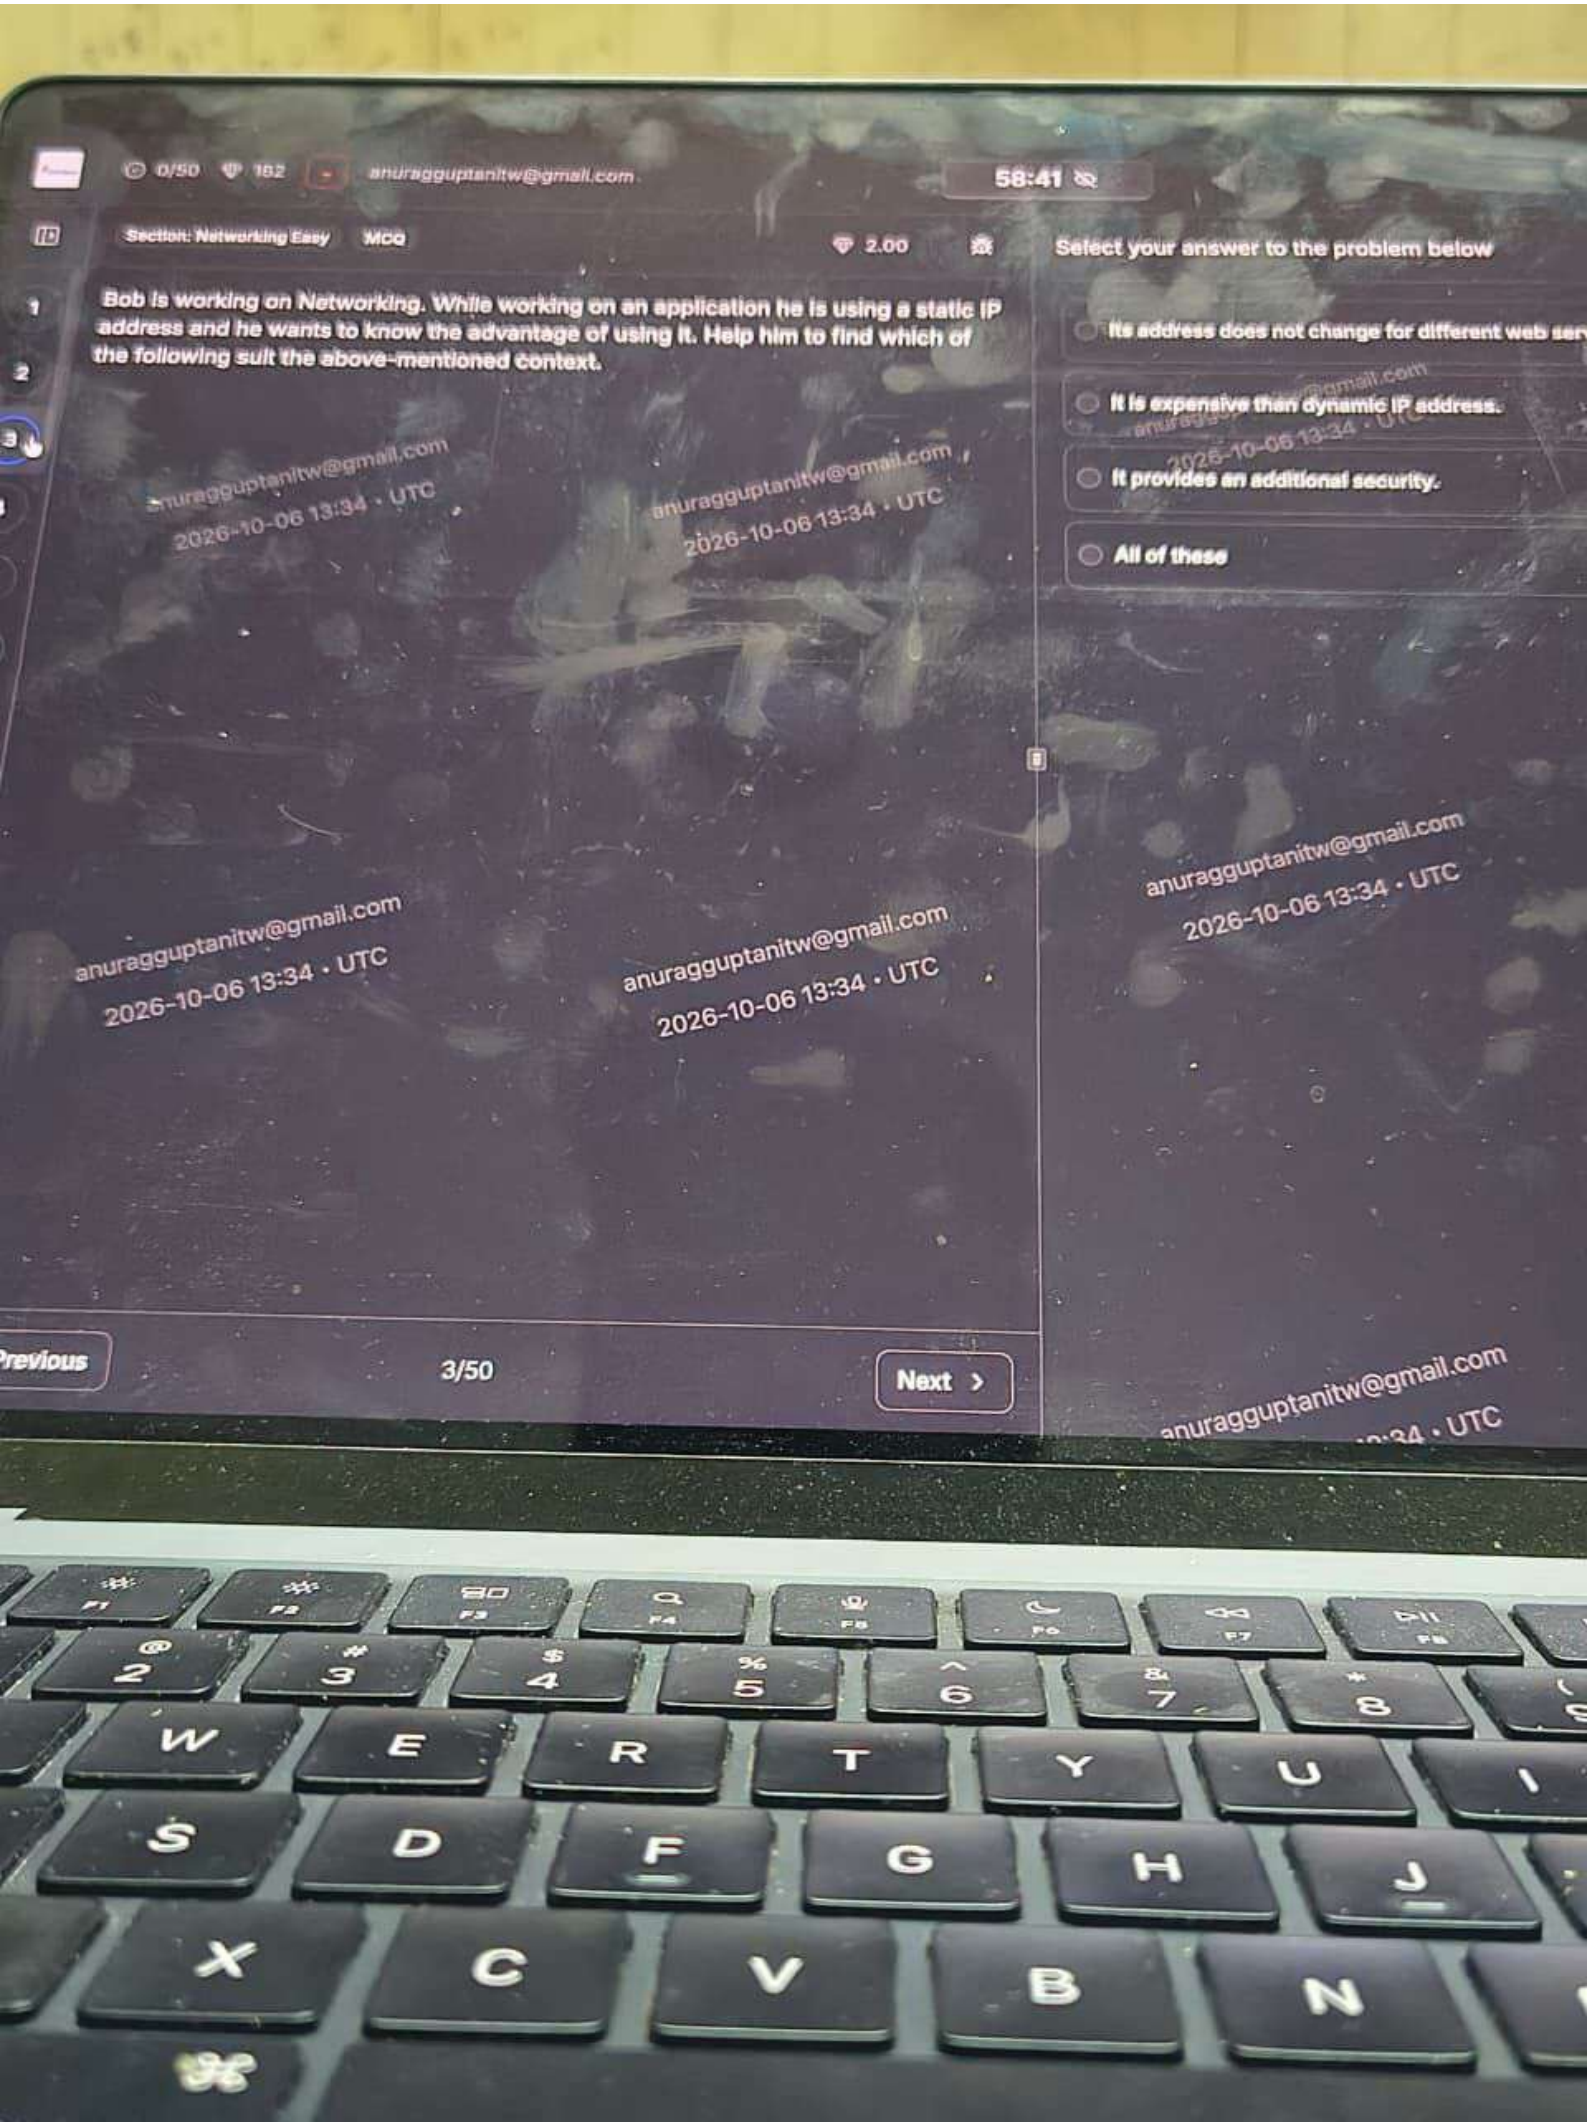
Output

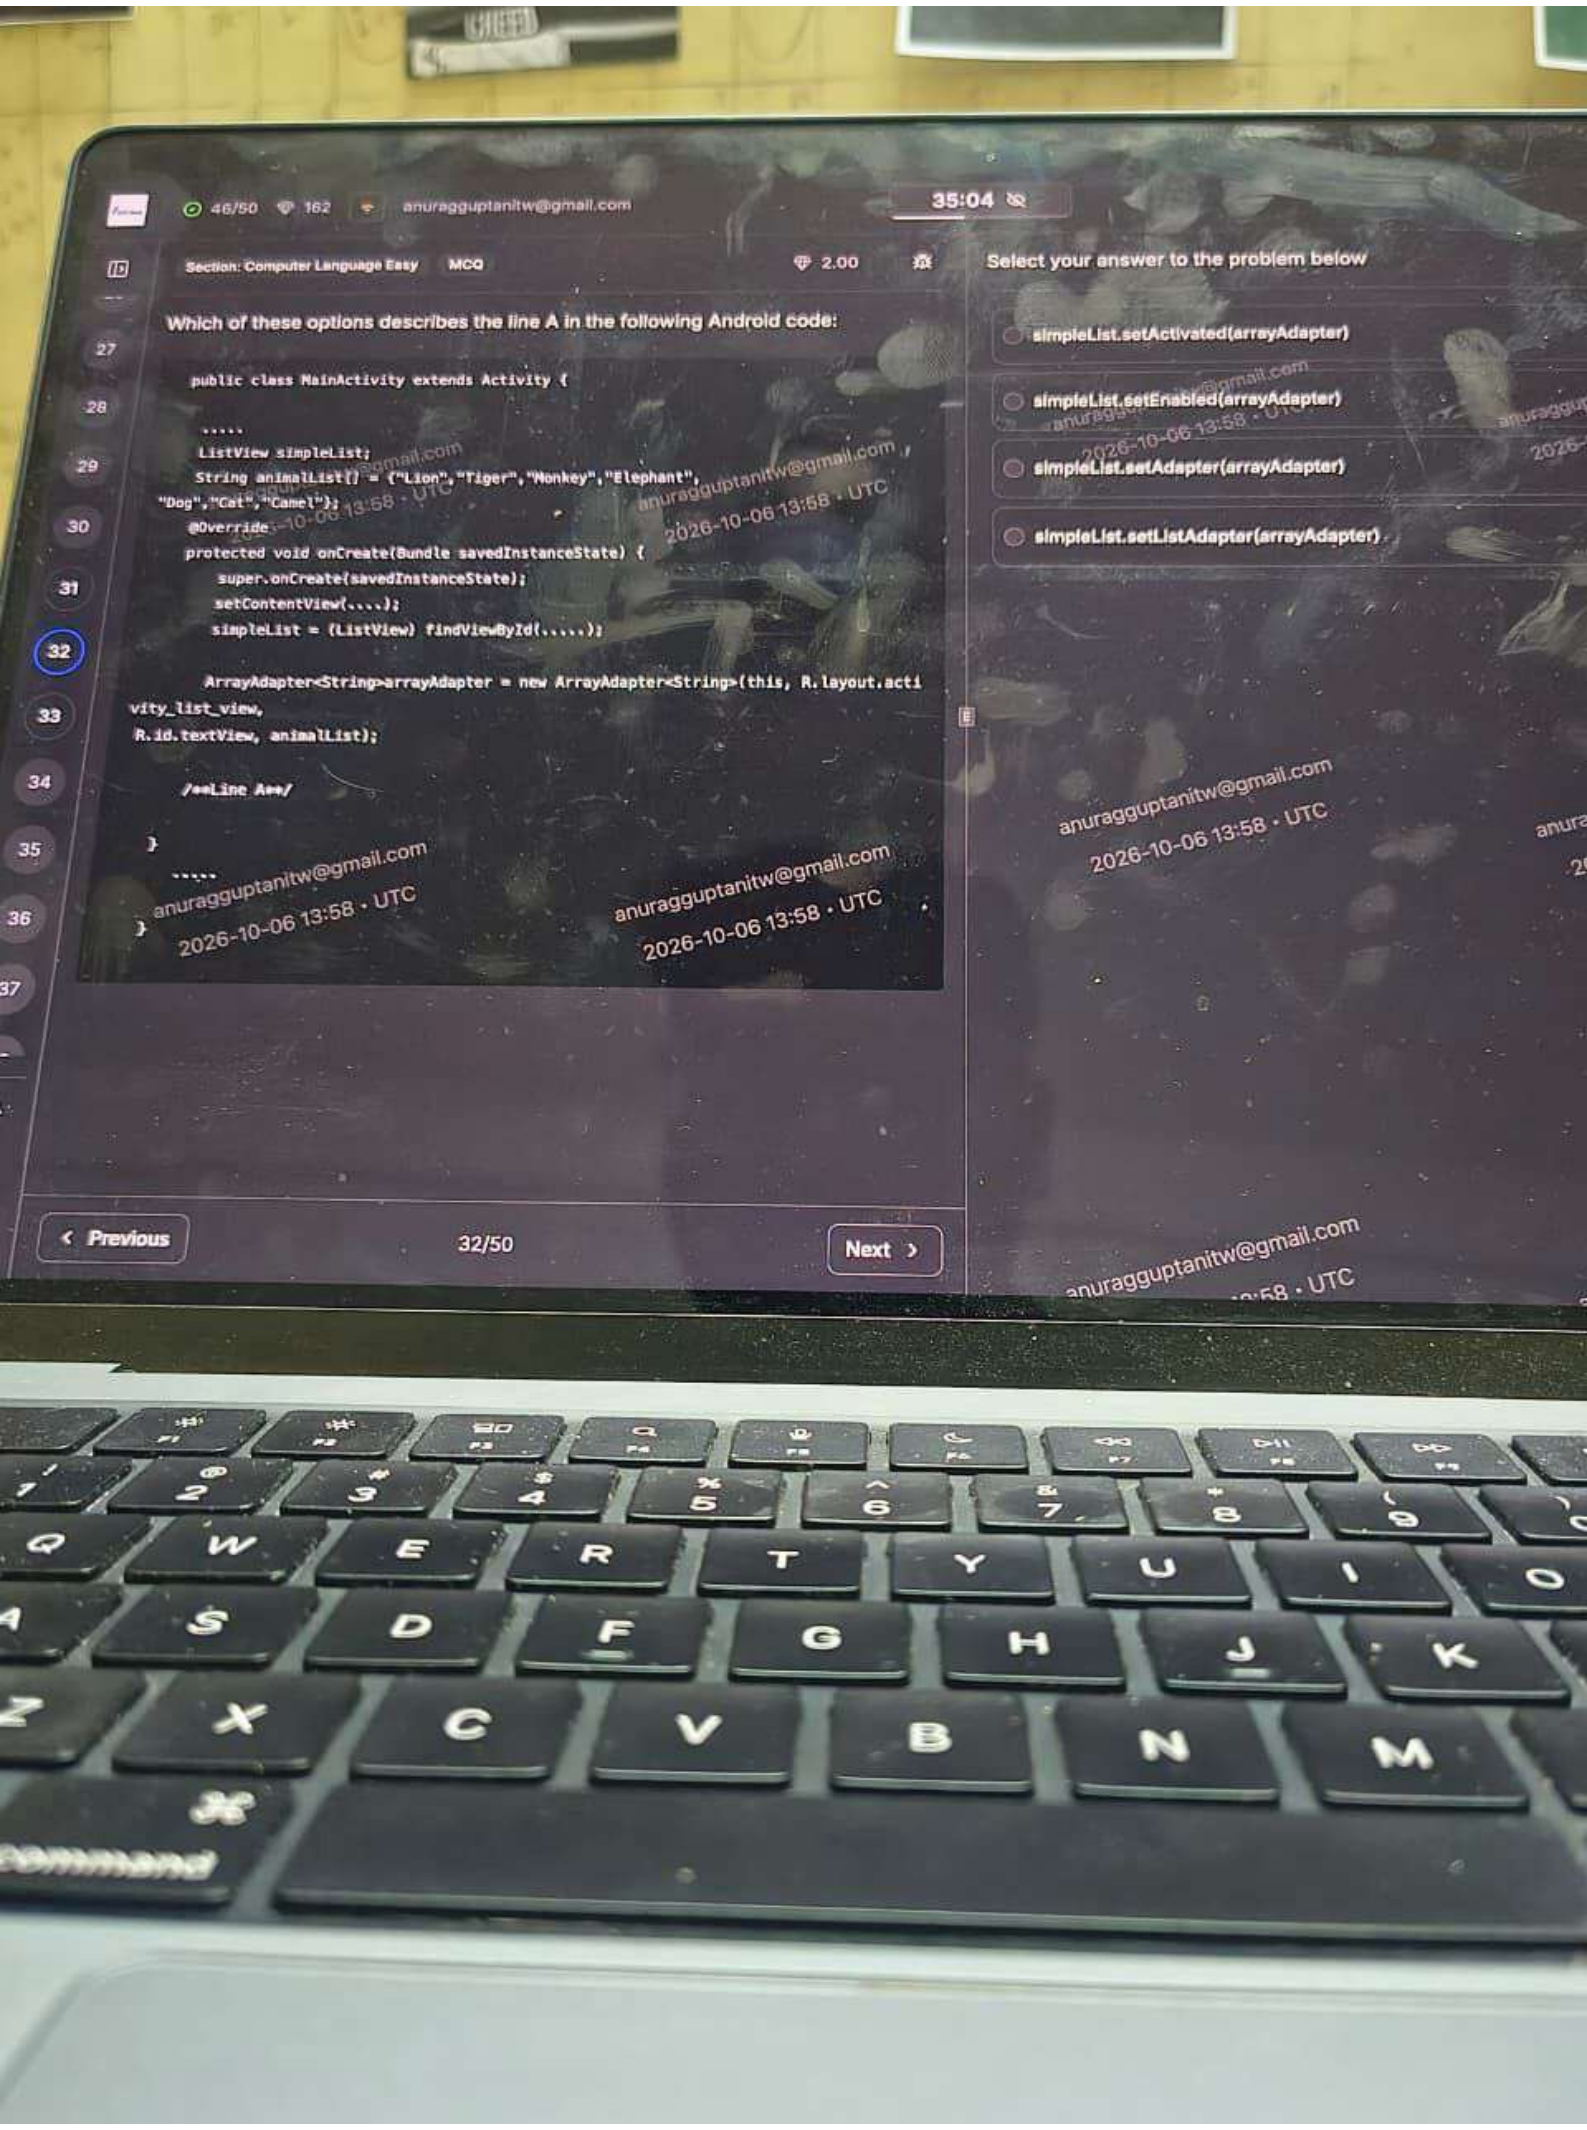
1. HackerEarth
   Hacker_Earth
   Programming
2. HackerEarth
   Programming
3. Programming
4. Hacker Earth

1
2
3
4

Previous 49/50 Next

anuragguptanitw@gmail.com
2026-10-06 13:54 · UTC


0/50
182
anuragguptanitw@gmail.com
58:41
Section: Networking Easy
MCQ
2.00
Select your answer to the problem below
Bob is working on Networking. While working on an application he is using a static IP address and he wants to know the advantage of using it. Help him to find which of the following suit the above-mentioned context.
Its address does not change for different web ser
It is expensive than dynamic IP address.
It provides an additional security.
All of these
anuragguptanitw@gmail.com
2026-10-06 13:34 • UTC
Previous
3/50
Next


46/50
162
anuragguptanitw@gmail.com
35:04
Section: Computer Language Easy
MCQ
2.00
Select your answer to the problem below
Which of these options describes the line A in the following Android code:
public class MainActivity extends Activity {
.....
ListView simpleList;
String animalList[] = {"Lion","Tiger","Monkey","Elephant",
"Dog","Cat","Camel"};
@Override
protected void onCreate(Bundle savedInstanceState) {
super.onCreate(savedInstanceState);
setContentView(....);
simpleList = (ListView) findViewById(.....);
ArrayAdapter<String>arrayAdapter = new ArrayAdapter<String>(this, R.layout.acti
vity_list_view,
R.id.textView, animalList);
/**Line A**/
}
.....
}
simpleList.setActivated(arrayAdapter)
simpleList.setEnabled(arrayAdapter)
simpleList.setAdapter(arrayAdapter)
simpleList.setListAdapter(arrayAdapter)
anuragguptanitw@gmail.com
2026-10-06 13:58 · UTC
Previous
32/50
Next