

PRACTICAL



<https://bit.ly/polinsar-8-slides>

Prepared by DLR HR's Pol InSAR Team


German Aerospace Center (DLR), Microwaves & Radar Institute (HR), Pol InSAR Research Group

Email : islam.mansour@dlr.de, kostas.papathanassiou@dlr.de , matteo.pardini@dlr.de , November 04, 2024

Access ESA MAAP

Open ESA MAAP Portal:

<https://che.ade.esa-maap.org/>

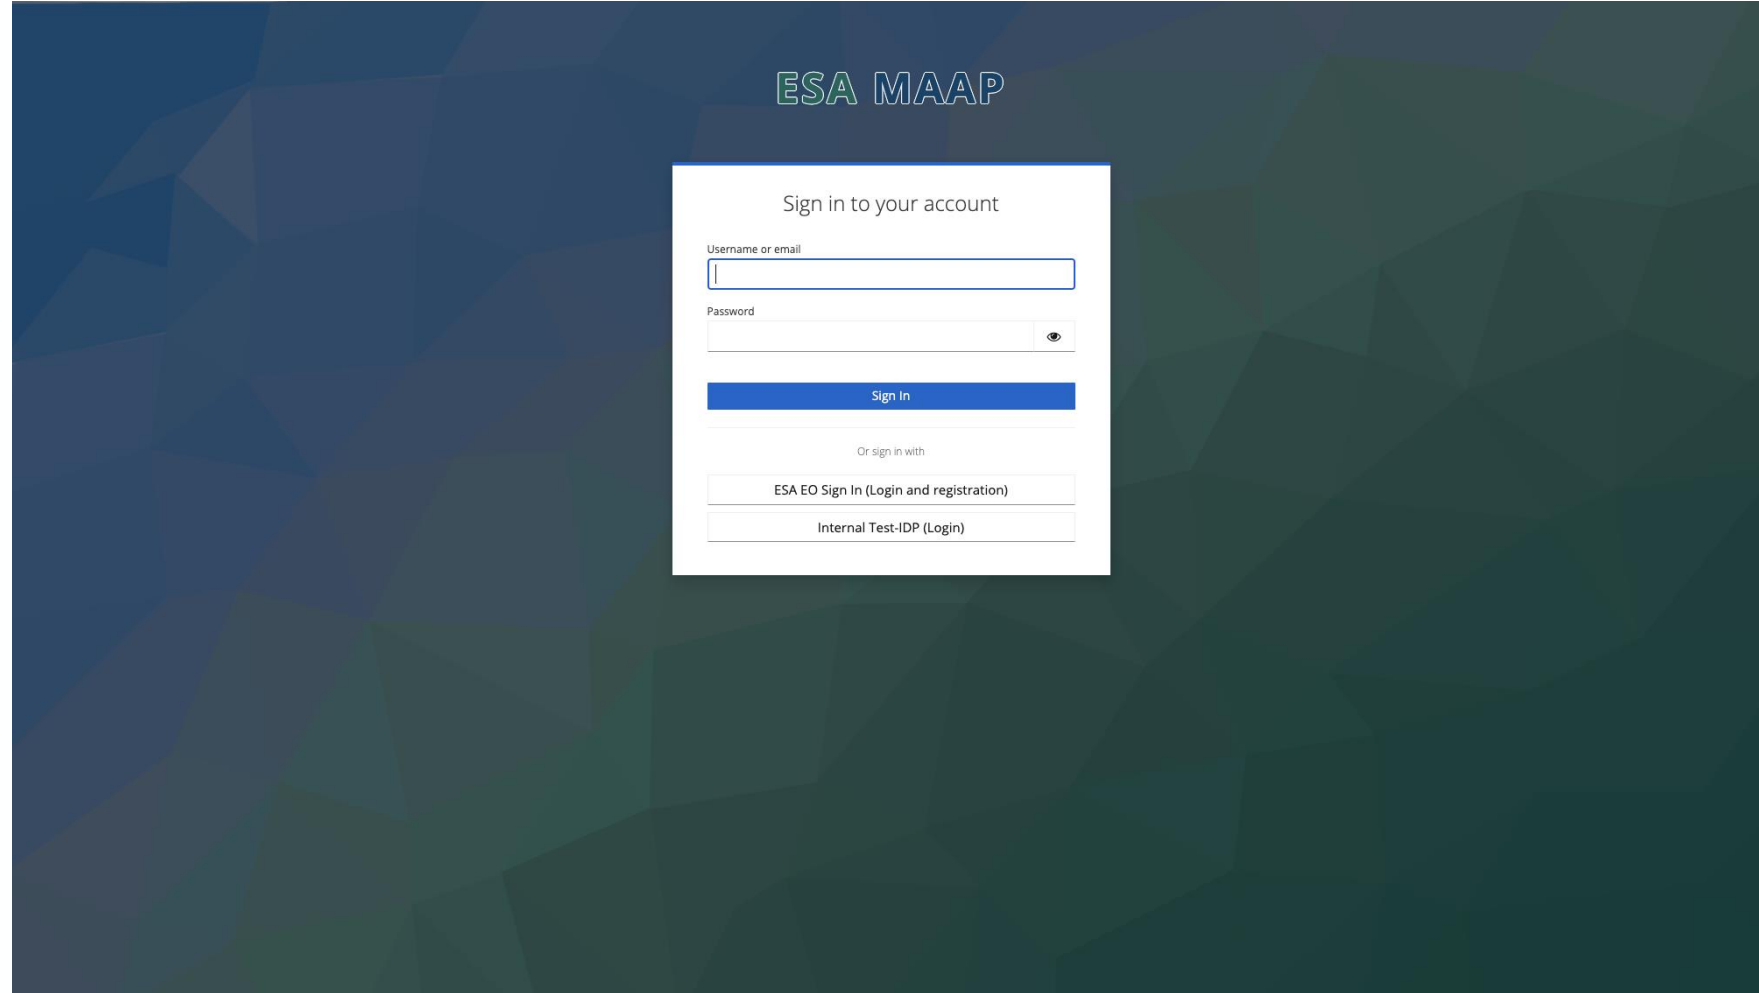


The screenshot shows the ESA MAAP login interface. At the top, the text "ESA MAAP" is displayed in a green, stylized font. Below this, a white login box is centered on a dark blue background with a geometric pattern. The box contains the heading "Sign in to your account". There are two input fields: "Username or email" and "Password". The "Password" field has a toggle icon (an eye) to its right. Below the input fields is a blue "Sign In" button. Underneath the button, the text "Or sign in with" is displayed. Below this text are two buttons: "ESA EO Sign In (Login and registration)" and "Internal Test-IDP (Login)".

Access ESA MAAP

Account username and password:

Shared via email

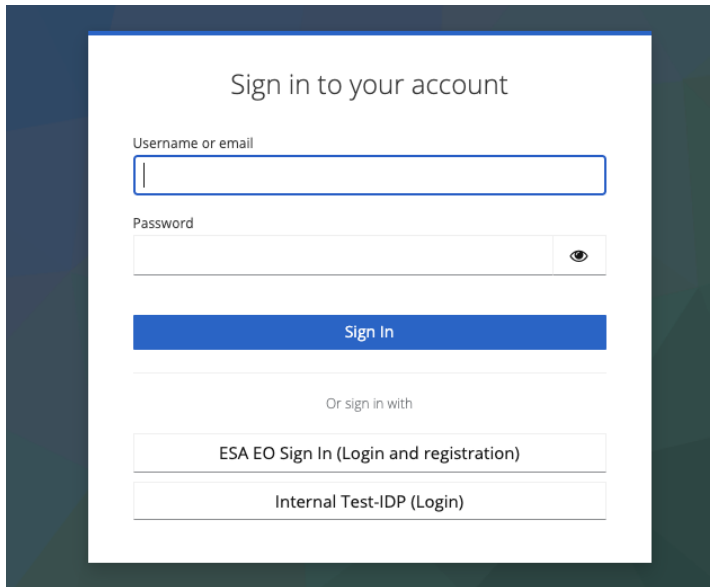

Sign in to your account

Username or email


Password

Sign In

Or sign in with

ESA EO Sign In (Login and registration)

Internal Test-IDP (Login)

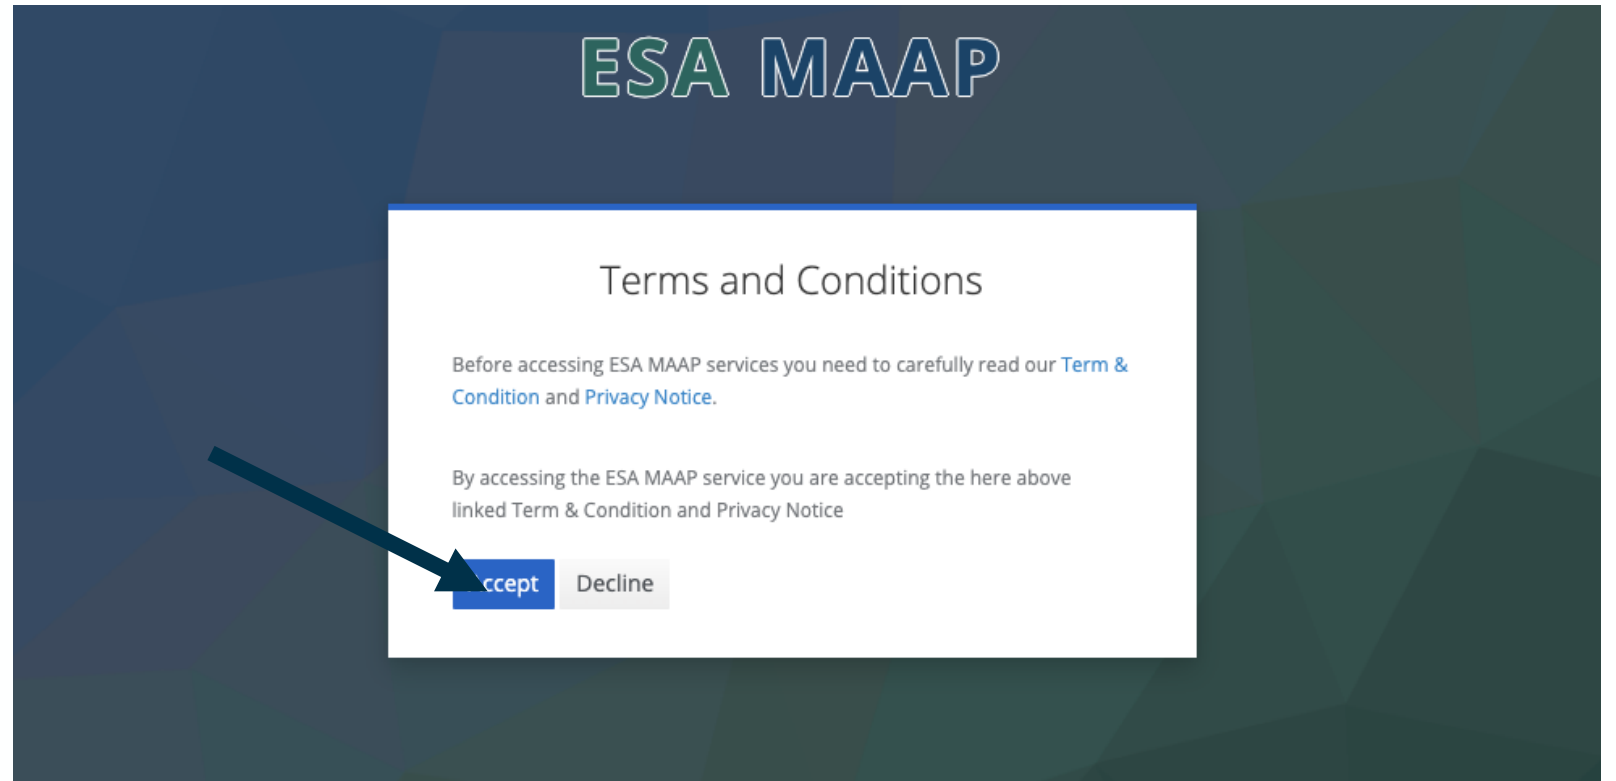

ESA MAAP

Terms and Conditions

Before accessing ESA MAAP services you need to carefully read our [Term & Condition](#) and [Privacy Notice](#).

By accessing the ESA MAAP service you are accepting the here above linked Term & Condition and Privacy Notice

Accept Decline

Workspaces (1)

RECENT WORKSPACES

 maap-polinsar-starter

Create Workspace

Editor Selector

Use a Default Editor

The editor defined as a query parameter, at the repository level or at the Custom Resource level will be used.

[How to specify and use a custom editor](#)

Choose an Editor

Use an Editor Definition

Import from Git

Git repo URL *

Enter HTTPS or SSH URL

Create & Open

Import from a Git repository to create your first workspace.

Select a Sample

Select a sample to create your first workspace.

Filter by

☐ Temporary Storage Off ?



Empty Workspace
Start an empty remote



Jupyter MAAP Python 3.9
Jupyter lab IDE containing the BTK



MAAP PolInSAR Jupyter LAB
IDE



VSCode BTK MAAP Python
3.9




VSCode MAAP Python 3.10.13
Python 3.10.13 sample MAAP using



VSCode Pangeo Python
Python sample PANGEO

Jupyter Notebook Environment

JupyterLab Interface:

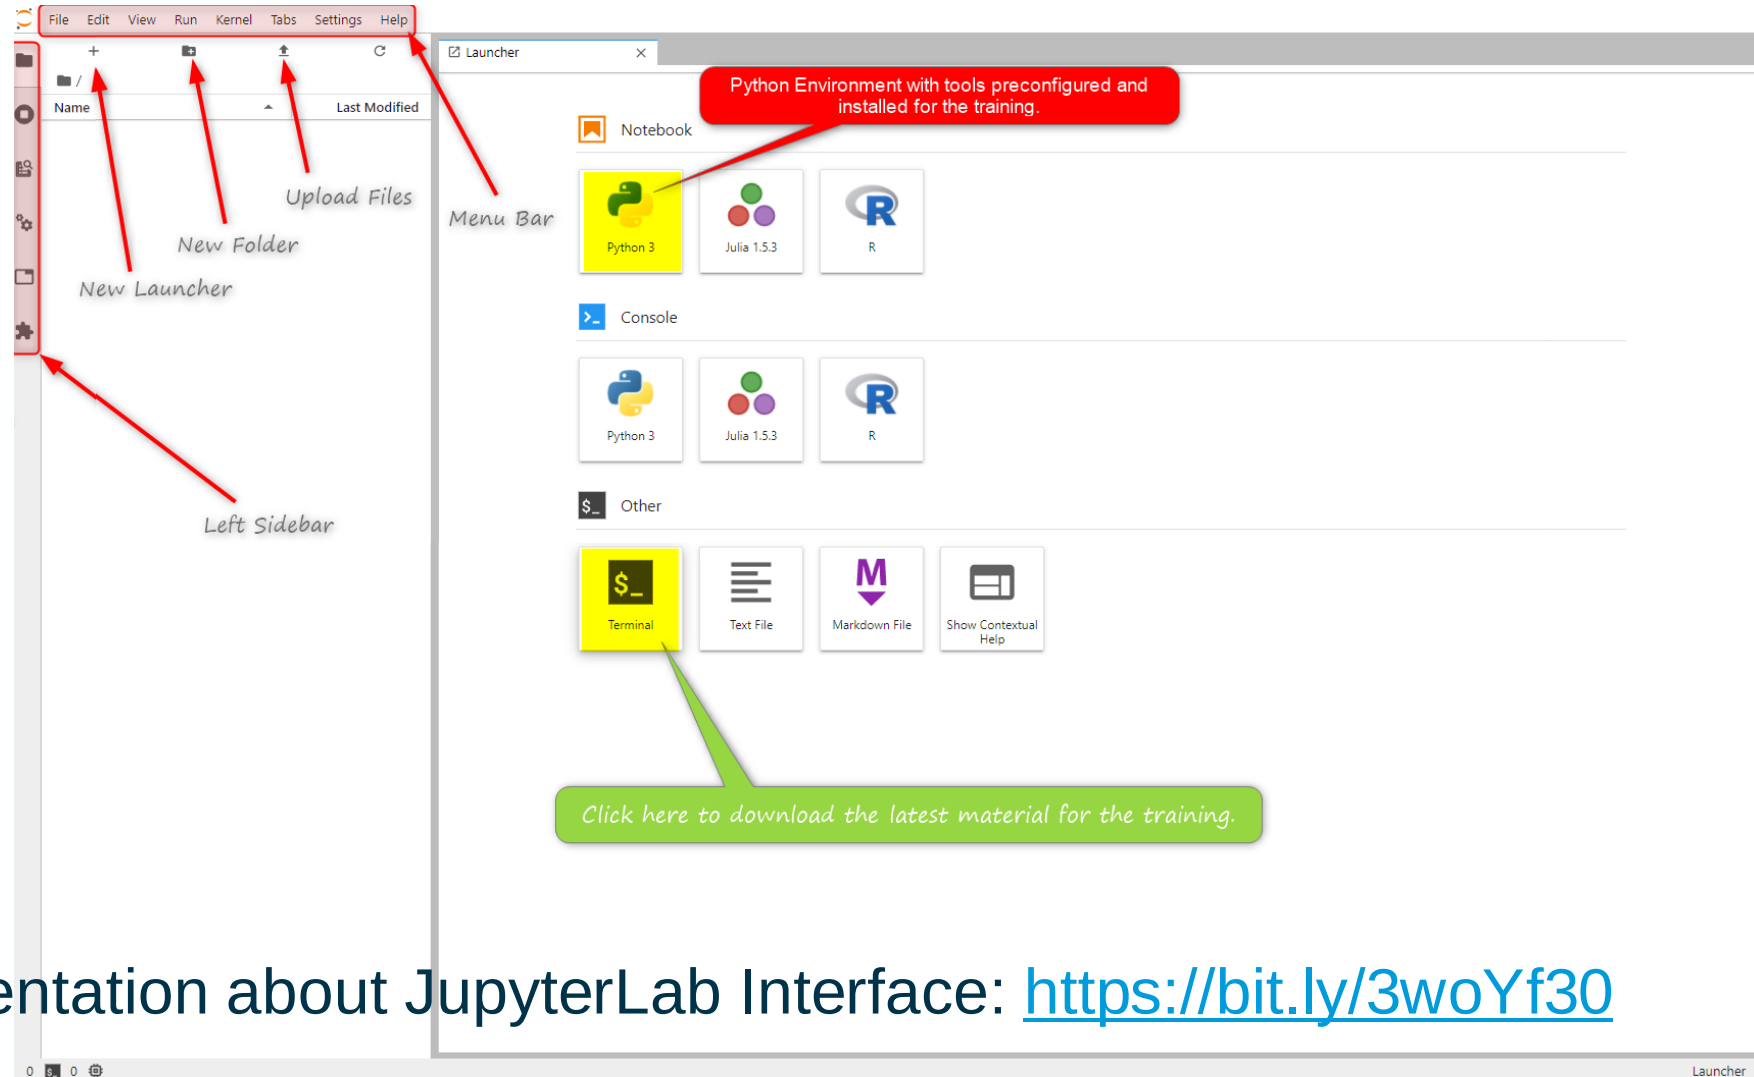

For the documentation about JupyterLab Interface: <https://bit.ly/3woYf30>

... using the Jupyterlab:



<https://bit.ly/polinsar-jupyterlab>

Contact:

Islam.Mansour@dlr.de

... ESA MAAP Portal:



<https://che.ade.esa-maap.org/>

... This Slides:



<https://bit.ly/polinsar-8-slides>

Thank you!