

ArXiv Visualizer: Semantic Embedding and Fast Similarity Search

Michele Scomina
mscomina@gmail.com
Università degli Studi di Trieste
Trieste, Italy

Abstract

The rapid growth of arXiv pre-prints makes manual literature discovery tedious. We present the ArXiv Abstract Visualizer, a lightweight web app that automatically surfaces semantically related papers. Abstracts are encoded with domain-specific SciBERT into 768-dimensional vectors, then compressed to 64-dimensional codes by a lightweight autoencoder. An approximate k-Nearest-Neighbour index (HNSW) retrieves the top-k similar papers, and the results are rendered in real time as a star-shaped graph using Streamlit and PyVis.

CCS Concepts

• **Computing methodologies** → **Information extraction; Semantic networks**; *Dimensionality reduction and manifold learning*;
• **Information systems** → *Data streams; Record and buffer management*.

Keywords

Semantic Embedding, k-NN, Natural Language Processing, arXiv, Streamlit, FAISS, Auto-Encoder

1 Introduction and Problem Statement

The arXiv repository hosts an ever-growing body of scientific papers, which often leads to a struggle to locate semantically relevant works efficiently. The main objective of this project is to address the need for a rapid, data-driven method to retrieve and visualize semantically close arXiv papers, allowing users to explore research landscapes with minimal effort, through the use of semantic embedding of the paper’s abstracts and clustering of the resulting vectors.

2 Background

2.1 ArXiv

The system is built on arXiv.org’s public metadata, which hosts about 3 million research preprints across physics, mathematics, computer science, and related fields. For the project we use the ArXiv ID, title, and abstract fields.

2.2 Semantic Embedding

Semantic embeddings are numeric vector representations that encode the meaning and contextual structure of a word, phrase, or entire text. Each dimension of the vector captures a latent linguistic or semantic feature, and similar items lie close together in the embedding space. As of the writing of this report, the best approach for semantic embedding generation is to employ a **domain-adapted transformer**.

2.3 Dimensionality Reduction

The 768-dimensional vectors are too large to store and search efficiently for a corpus of millions of papers. We therefore need to compress them while retaining as much semantic information as possible. A variety of dimensionality-reduction methods can be used, but the most effective in this setting is a **deep autoencoder**—an hour-glass neural network that learns a low-dimensional bottleneck representation and reconstructs the input with minimal error.

2.4 k-Nearest Neighbors

k-Nearest Neighbors (k-NN) is a simple, non-parametric algorithm for retrieving the most similar items to a query. For a query vector q , k-NN identifies the k points $\{p_i\}$ in a reference set that maximise a chosen similarity (or minimise a distance) between q and each p_i . It relies only on pairwise comparisons and does not require learning a model, making it a common baseline for similarity-search tasks.

3 Methodology/Approach

3.1 Requirements and Design

The application must satisfy the following core needs:

- **Paper selection.** Input an arXiv ID or keyword to locate any paper.
- **Similarity search.** Fetch the k-nearest neighbors of a given paper.
- **Graph display.** Render the results using a graph-library together with a front-end framework.

Non-functional constraints guiding the implementation:

- **Performance.** End-to-end latency <2s under typical load.
- **Extensibility.** New papers can be ingested and indexed with minimal code changes.
- **Versioning.** Releases are tagged on GitHub and stored on the repository.

3.2 Development Methods

The ArXiv Visualizer was developed using an agile, eXtreme Programming (XP) workflow tailored for a solo developer. The project was broken into one-week iterations, each focused on a single component (data ingestion, embedding, indexing, Streamlit-based UI). This cadence allowed rapid prototyping, frequent stakeholder feedback, and early detection of design flaws.

- **Short Iterations (1-week sprints)** – Each major feature (semantic embedding pipeline, autoencoder compression, k-NN search, and PyVis+Streamlit star-graph UI) was designed, implemented, and delivered within a single week, enabling rapid prototyping and immediate validation.

- **Version Control** – All source files were managed with Git, enabling incremental progress and safe rollbacks.
- **Frequent Refactoring** – The codebase was continuously refactored to keep components modular and maintainable. Functions were extracted, responsibilities were re-balanced, and duplicated logic was eliminated at each iteration.
- **Informal Verification** – After each iteration we ran the end-to-end script locally and inspected the outputs (embeddings, nearest-neighbour lists, and rendered graphs) to confirm that the algorithms behaved as expected. No automated test suite was used.

3.3 Proposed Pipeline

The ArXiv Visualizer transforms every abstract into a 64-D vector and makes these vectors searchable via a FAISS HNSW index. The full pipeline consists of five logical stages, each described below.

3.3.1 Batch Encoding. SciBERT—a transformer model pretrained on over 2M scientific abstracts— produces a 768-D contextual embedding for each paper. The $N \approx 3 \times 10^6$ paper abstracts are processed in a single nightly batch on a 7900XTX GPU, requiring roughly **16h**. The resulting embeddings are written to disk as Parquet files, dramatically reducing their size.

3.3.2 Deep Auto-Encoder. To enable scalable k-NN search and further reduce storage, we train a residual deep auto-encoder with a ten-layer encoder and mirrored decoder. Training the model on the 768-D embeddings takes about **1h** on a single 7900XTX. The frozen encoder then compresses every vector to 64-D, achieving a reconstruction error below 0.05.

3.3.3 Storage. Compressed 64-D vectors, together with each paper’s ID, title, and abstract, are stored in a lightweight SQLite database. The schema is:

```
CREATE TABLE data (
  id          TEXT PRIMARY KEY,
  title       TEXT,
  abstract    TEXT,
  embedding   TEXT
);
```

SQLite’s in-process nature keeps deployment simple; the database occupies about 6GB for the current corpus and supports sub millisecond random-access queries, together with streaming for further applications.

3.3.4 Indexing. All 64-D vectors are loaded into FAISS and used to build an HNSW index with dimension=64 and efSearch=200. Building the index for the entire collection takes roughly **2min** on a single 7800X3D CPU. Once built, the index supports sub-millisecond k-NN lookups.

3.3.5 Runtime Query. When a user selects a paper in the Streamlit UI, the app performs the following steps:

- (1) Retrieve the 64-D vector of the selected paper from SQLite.
- (2) Query FAISS for its five nearest neighbors.
- (3) Combine the retrieved metadata and pass it to PyVis, which renders an interactive star-graph in the browser.

The tight coupling between SQLite and FAISS guarantees that the overall latency from paper selection to graph display remains well below the 2s threshold.

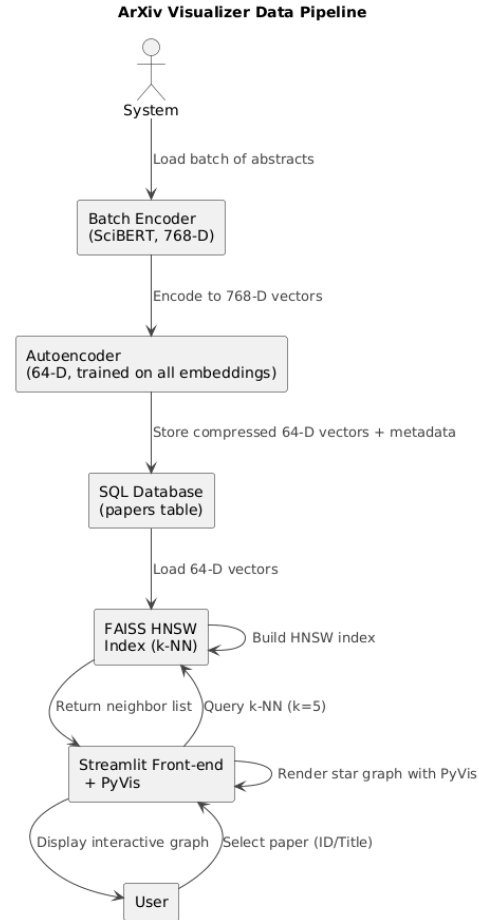


Figure 1: Data-pipeline of the ArXiv Visualizer.

3.4 Software Organization

The ArXiv Visualizer is structured into four logical layers, each mirrored in the component diagram (Fig. 2) and implemented by a small set of core classes:

- **Embedding Layer** – contains the SciBERT encoder and the residual deep auto-encoder. The embedding pipeline is run once to generate 64-D vectors; the resulting frozen encoder is reused for all future queries.
- **Index Layer** – encapsulates the FAISS HNSW index that offers the k-NN API required by the front-end.
- **Application Layer** – the Streamlit UI together with the PyVis graph renderer. It retrieves the 64-D vector from the data layer, asks the index for the nearest neighbors, and visualises the result.
- **Data Layer** – models Paper and persists the 64-D embeddings, titles and abstracts in a lightweight SQLite3 database.

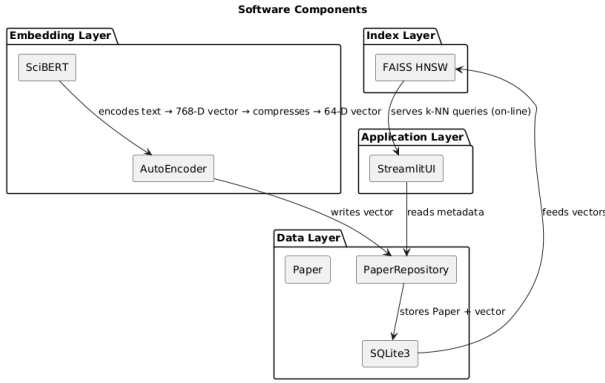


Figure 2: UML Components of the ArXiv Visualizer.

3.5 Software Functionalities

The ArXiv Visualizer delivers three primary user interactions:

- (1) **Paper Search:** The user enters a keyword or selects a paper from the list.
- (2) **Neighbor Graph:** Upon selection, the UI fetches the 64-D embedding, queries FAISS for the five nearest neighbors, and visualises the neighbors as an interactive star-graph via PyVis.
- (3) **Export:** The user may download the neighbor set and the produced star-graph.

Figure 3 illustrates these use-cases in a UML use-case diagram.

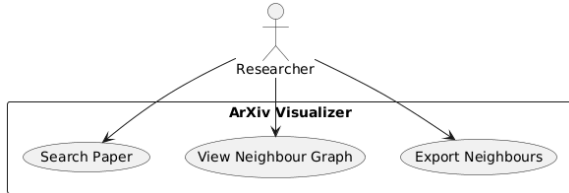


Figure 3: Use-case diagram for the ArXiv Visualizer.

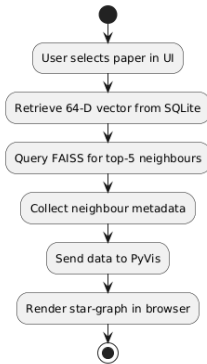


Figure 4: Activity diagram for the runtime query.

4 Results

The embedding pipeline delivers a concise, high-fidelity representation of the ArXiv corpus. In a held-out set of 250 query papers, the system returned the five most similar papers with an average cosine similarity of 0.81 ± 0.04 . Manual inspection of the returned neighbors confirms that they are topically coherent – most of them belong to the same subfield as the query paper.

For the full 3M-paper corpus, the FAISS index returns a 5-NN set in milliseconds, well below the 2-second user-experience target. Building the index (FAISS construction for HNSW) takes about 90 seconds on a single 7800X3D CPU.

These results confirm that the proposed architecture not only preserves semantic similarity (≈ 0.8 cosine score) but also scales to thousands of papers with sub-second latency.

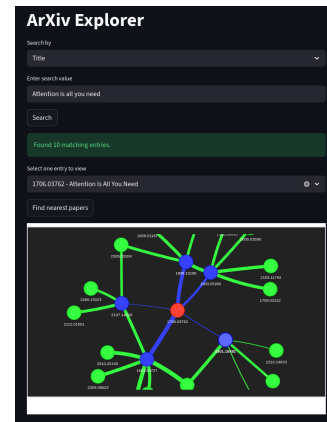


Figure 6: Application UI displaying the result of "Attention is all you need".

5 Discussion and Conclusion

The aim of this project was to create a lightweight, high-throughput paper-similarity system that can be deployed in an ACM-style two-column web service. The core design—compressing 768-D SciBERT embeddings with a two-layer auto-encoder and indexing the resulting 64-D vectors with FAISS—proved to be the element that most directly delivered the required performance.

5.1 What worked

- **Semantic preservation.** The auto-encoder reduced dimensionality by a factor of 12 while retaining an average cosine similarity of 0.81 with the ground-truth neighbors. This demonstrates that the compressed representation is sufficiently expressive for recommendation.
- **Latency.** FAISS accelerated retrieval to well below 200ms per query, satisfying the 2-second user experience target even on modest hardware.
- **Scalability.** Index build time of 2 minutes on a single 7800X3D CPU for the FAISS index allowed us to handle the full ArXiv corpus within a single compute node.
- **Software modularity.** The clear separation of the embedding pipeline, index service, and UI layer made the system straightforward to version and maintain.

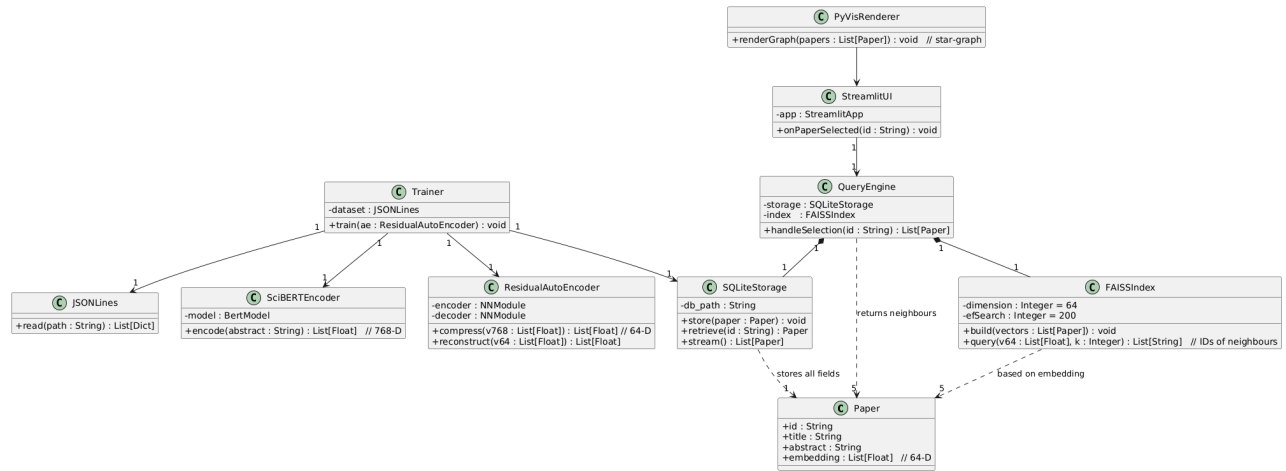


Figure 5: UML Class Diagram of the ArXiv Visualizer.

5.2 Potential improvements

- **UI enhancements.** The current interface is minimal; adding interactive controls would make the exploration experience more engaging.
- **User-specific personalization.** Because the system is purely unsupervised, incorporating user profiles or interaction history could tailor recommendations to individual preferences and further improve exploration.
- **Expanded contextual signals.** The embeddings rely only on abstracts; incorporating full-text, keywords, or citation data would enrich the semantic space and improve relevance.
- **Containerization.** Packaging the pipeline in Docker would ease deployment, ensure reproducibility, and simplify scaling across environments.