Blockchain 101 An introduction to blockchain technology

☑ Hash functions

- Proof of work
- Merkle Tree
- Blockchain
- Miners
- Key issues

One-way Hash Functions

Input	Hash
sanya	834ac48d8e6d1d7f0b8d21a5b3e81446f5a4caa63765cc23836f61844b67fb83
SANYA	4247bff9d41c0f2da68ef43c5624531da9ca5bc31b39760a67e32265082e1ba8
Sanya	513a15ed036e62c14b41b2608a5bb18aa7af2a3502c90b892f9dddabaf136bc2

Input	Hash
PDF	b48928ef0131d6fb61b5cee25163ae104a25f0edbd4230f2e7b3daa4a9b057d3
W =	043a718774c572bd8a25adbeb1bfcd5c0256ae11cecf9f9c3f925d0e52beaf89

✓ Hash functions

- Proof of work
- Merkle Tree
- Blockchain
- Miners
- Key issues

- Hash functions take an electronic record (such as a PDF file, a video, an email etc.) and produce a fixed-length output e.g. 64 characters.
- If the information is changed in any way even a comma is changed in a 3000 page document a different output value is produced.
- There's no way to calculate the original record from the hash.

- Hash functions
- ✓ Proof of work
- Merkle Tree
- Blockchain
- Miners
- Key issues

- 1. Sender^Receiver^Date^Nonce
- 2. Hash begins with 4 zeros


input	d@blockchain.org.in^info@primechain.in^10092016^1	
hash	288721860bec3a490811981c831702d4f41e54c3f8c183c5650ac73ff231659c	
input	d@blockchain.org.in^info@primechain.in^10092016^2	
hash	241e2b81192c0aa918c14f2896522428ccb77e937cade900d8f052ec3966c9cf	

... increase nonce till


input	d@blockchain.org.in^info@primechain.in^10092016^66504
hash	<u>0000</u> 6bcc72f130eedbe9830c47e8d9f500d1e232540b03e095950aa798e2b97d

Computing hash is not trivial, verification is.

- Hash functions
- Proof of work
- ✓ Merkle Tree
- Blockchain
- Miners
- Key issues

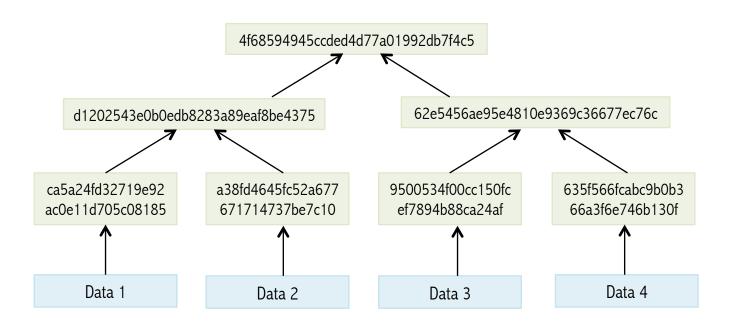

- Hash functions
- Proof of work
- Merkle Tree
- **☑** Blockchain
- Miners
- Key issues

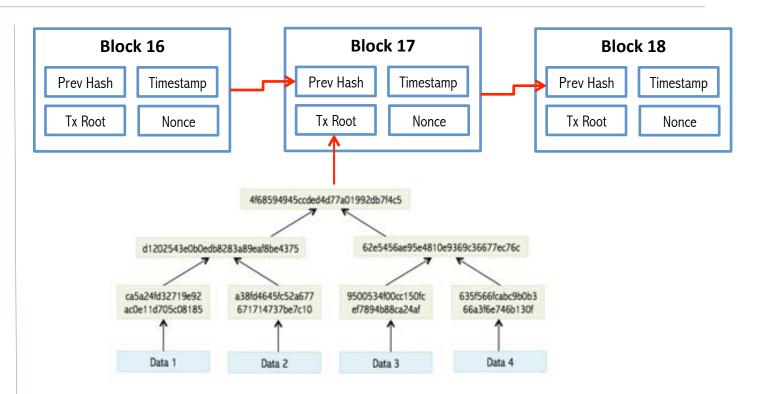

- 1. Ordered and time-stamped record.
- 2. Prevents double-spending.
- 3. Prevents modification of previous records.

- Hash functions
- Proof of work
- Merkle Tree
- Blockchain
- ✓ Miners
- Key issues

- While a gold miner digs into the earth to discover gold, a bitcoin miner uses computational power to calculate hashes.
- To add an entire block to the block chain, a Bitcoin miner must successfully hash a block header to a value below the target threshold.
- Miners spend on computational power and electricity and are compensated by way of a reward for each block they mine and transaction fees.
- Miners usually operate as part of a large pool instead of as individuals.

- Hash functions
- Proof of work
- Merkle Tree
- Blockchain
- ✓ Miners
- Key issues



- Hash functions
- Proof of work
- Merkle Tree
- Blockchain
- ✓ Miners
- Key issues



- Hash functions
- Proof of work
- Merkle Tree
- Blockchain
- ✓ Miners
- Key issues



- Hash functions
- Proof of work
- Merkle Tree
- Blockchain
- Miners
- ✓ Key issues

- ☐ Bitcoin platform vs. the bitcoin cryptocurrency
- ☐ The Blockchain vs. private blockchains
- ☐ Permissioned blockchains

Stuff that only blockchains CAN do	Stuff that blockchains CAN do better	Stuff that blockchains CANNOT do
Crypto-currencies	Data auth & verificationSecurities settlement	High speed trading

Primechain Technologies

Building blockchains for a better world

Primechain Technologies Pvt. Ltd. 410, Supreme Headquarters, Mumbai-Bangalore Highway, Near Audi Showroom, Baner, Pune - 411045 (INDIA)

Phone: (91) 020-66243952 Email: info@primechain.in