DP600

QUESTION 11

You have a Fabric warehouse that contains a table named Staging.Sales. Staging.Sales contains the following columns.

Name	Data type	Nullable
ProductID	Integer	No
ProductName	Varchar(30)	No
SalesDate	Datetime2(6)	No
WholesalePrice	Decimal(18,2)	Yes
Amount	Decimal(18,2)	Yes

You need to write a T-SQL query that will return data for the year 2023 that displays ProductID and ProductName and has a summarized Amount that is higher than 10,000.

Which query should you use?

A.
```
SELECT ProductID, ProductName, SUM(Amount) AS TotalAmount
FROM Staging.Sales
WHERE DATEPART(YEAR,SaleDate) = '2023'
GROUP BY ProductID, ProductName
HAVING SUM(Amount) > 10000
```

B.
```
SELECT ProductID, ProductName, SUM(Amount) AS TotalAmount
FROM Staging.Sales
GROUP BY ProductID, ProductName
HAVING DATEPART(YEAR,SaleDate) = '2023' AND SUM(Amount) > 10000
```

C.
```
SELECT ProductID, ProductName, SUM(Amount) AS TotalAmount
FROM Staging.Sales
WHERE DATEPART(YEAR,SaleDate) = '2023' AND SUM(Amount) > 10000
```

D.
```
SELECT ProductID, ProductName, SUM(Amount) AS TotalAmount
FROM Staging.Sales
WHERE DATEPART(YEAR,SaleDate) = '2023'
GROUP BY ProductID, ProductName
HAVING TotalAmount > 10000
```

ANSWER: A

QUESTION 12

You have a data warehouse that contains a table named Stage.Customers. Stage.Customers contains all the customer record updates from a customer relationship management (CRM) system. There can be multiple updates per customer.

You need to write a T-SQL query that will return the customer ID, name. postal code, and the last updated time of the most recent row for each customer ID.

How should you complete the code? To answer, select the appropriate options in the answer area.

```
WITH CUSTOMERBASE AS (
     SELECT [CustomerID]
     ,[CustomerName]
     ,[PostalCode]
     ,[LastUpdated]
     ,x = [ LAST_Value() / NTILE() / ROW_NUMBER() ] OVER (PARTITION BY CustomerID
          ORDER BY LastUpdated DESC)
     FROM [LakehousePOC].[dbo].[CustomerChanges]
          )
          SELECT CustomerID, CustomerName, PostalCode, LastUpdated
          FROM CUSTOMERBASE
          [ Having Max(LastUpdated) = 1 / WHERE LastUpdated = Max(LastUpdated) / WHERE X = 1 ]
```

ANSWER: C, C

QUESTION 13

You have a Fabric tenant.
You plan to create a Fabric notebook that will use Spark DataFrames to generate Microsoft Power BI visuals.
You run the following code.

```
from powerbiclient import QuickVisualize, get_dataset_config, Report

PBI_visualize = QuickVisualize(get_dataset_config(df))
PBI_visualize
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
The code embeds an existing Power BI report.	○	○
The code creates a Power BI report.	○	○
The code displays a summary of the DateFrame.	○	○

ANSWER: N, Y, N
QuickVisualize crea una visualizzazione veloce, non incorpora (embed) un report già esistente e genera automaticamente un report Power BI temporaneo a partire dal DataFrame. Non mostra una semplice sintesi (tipo describe), ma crea visualizzazioni interattive.

QUESTION 14

You have a Fabric tenant that contains a warehouse. You use a dataflow to load a new dataset from OneLake to the warehouse. You need to add a PowerQuery step to identify the maximum values for the numeric columns. Which function should you include in the step?

A. Table.MaxN
B. Table.Max
C. Table.Range
D. Table.Profile

ANSWER: D

Table.Profile restituisce statistiche per ogni colonna (incluso max, min, media, ecc.)

QUESTION 15

You have a Fabric tenant that contains a machine learning model registered in a Fabric workspace. You need to use the model to generate predictions by using the PREDICT function in a Fabric notebook. Which two languages can you use to perform model scoring? Each correct answer presents a complete solution.

A. T-SQL
B. DAX
C. Spark SQL
D. PySpark

ANSWER: A, C

QUESTION 16

You are analyzing the data in a Fabric notebook. You have a Spark DataFrame assigned to a variable named df. You need to use the Chart view in the notebook to explore the data manually. Which function should you run to make the data available in the Chart view?

A. displayHTML
B. show
C. write
D. display

ANSWER: D

*In un notebook Fabric/Spark, la funzione **display(df)** abilita la **Chart view**, permettendo esplorazione interattiva (grafici, aggregazioni, ecc.), show() → stampa tabella testuale (no Chart view), write() → salva dati, displayHTML() → per contenuti HTML, non DataFrame*

QUESTION 17

You have a Fabric tenant that contains a Microsoft Power BI report named Report1. Report1 includes a Python visual. Data displayed by the visual is grouped automatically and duplicate rows are NOT displayed. You need all rows to appear in the visual. What should you do?

A. Reference the columns in the Python code by index.
B. Modify the Sort Column By property for all columns.
C. Add a unique field to each row.
D. Modify the Summarize By property for all columns.

ANSWER: C

QUESTION 18

You have a Fabric tenant that contains a semantic model. The model contains data about retail stores. You need to write a DAX query that will be executed by using the XMLA endpoint. The query must return a table of stores that have opened since December 1, 2023.

How should you complete the DAX expression? To answer, drag the appropriate values to the correct targets. Each value may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

Values

- DEFINE
- EVALUATE
- FILTER
- SUMMARIZE
- TABLE


Answer Area

```
[ ]
VAR_SalesSince =
     DATE (2023, 12, 01)
[ ]
FILTER(
    [ ] (Store, Store[Name], Store[OpenDate]),
  Store[OpenDate] >= _SalesSince
)
```

ANSWER: DEFINE, EVALUATE, SUMMARIZE

QUESTION 19

You have a Fabric workspace named Workspace1 that contains a dataflow named Dataflow1. Dataflow1 has a query that returns 2,000 rows. You view the query in Power Query as shown in the following exhibit. What can you identify about the *pickupLongitude* column?

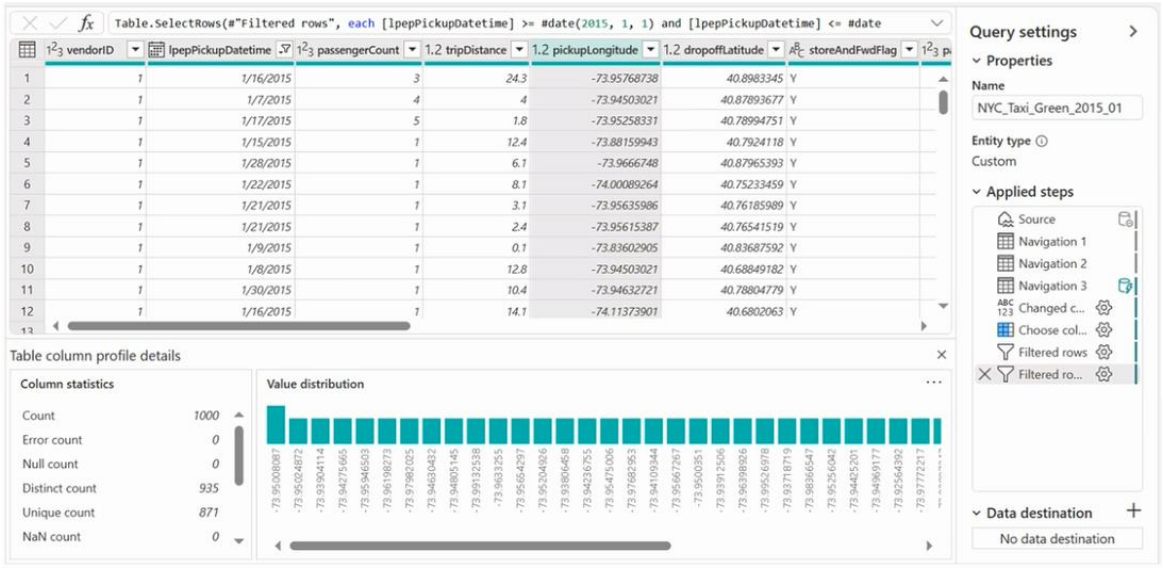

A. The column has duplicate values.
B. All the table rows are profiled.
C. The column has missing values.
D. There are 935 values that occur only once.

ANSWER:A

QUESTION 20

You have a Fabric tenant named Tenant1 that contains a workspace named WS1. WS1 uses a capacity named C1 and contains a dataset named DS1. You need to ensure read-write access to DS1 is available by using XMLA endpoint. What should be modified first?

A. the DS1 settings
B. the WS1 settings
C. the C1 settings
D. the Tenant1 settings

ANSWER: C

L'accesso read-write via XMLA endpoint dipende prima dalla capacity (C1). Devi impostare l'XMLA endpoint su Read Write a livello di capacity. Dataset / Workspace / Tenant → non servono se la capacity non è configurata

QUESTION 21

You have a Fabric tenant that contains a workspace named Workspace1. Workspace1 is assigned to a Fabric capacity. You need to recommend a solution to provide users with the ability to create and publish custom Direct Lake semantic models by using external tools. The solution must follow the principle of least privilege. Which three actions in the Fabric Admin portal should you include in the recommendation? Each correct answer presents part of the solution. NOTE: Each correct answer is worth one point.

A. From the Tenant settings, set Allow XMLA Endpoints and Analyze in Excel with on-premises datasets to Enabled.
B. From the Tenant settings, set Allow Azure Active Directory guest users to access Microsoft Fabric to Enabled.
C. From the Tenant settings, select Users can edit data model in the Power BI service.
D. From the Capacity settings, set XMLA Endpoint to Read Write.
E. From the Tenant settings, set Users can create Fabric items to Enabled.
F. From the Tenant settings, enable Publish to Web.

ANSWER: A, D, E

A. Abilita XMLA endpoints → necessario per usare strumenti esterni, D. XMLA Endpoint su Read Write nella capacity → fondamentale per creare/modificare modelli, E. Permette agli utenti di creare item Fabric → minimo necessario per pubblicare modelli. Perché NON gli altri: B → guest users, non richiesto, C → editing nel servizio, non necessario per external tools, F → Publish to web, non rilevante (e rischioso)

QUESTION 22

You are creating a semantic model in Microsoft Power BI Desktop. You plan to make bulk changes to the model by using the Tabular Model Definition Language (TMDL) extension for Microsoft Visual Studio Code. You need to save the semantic model to a file. Which file format should you use?

A. PBIP
B. PBIX
C. PBIT
D. PBIDS

ANSWER: A


Il formato PBIP (Power BI Project) salva il modello in file testuali (TMDL) modificabili con Visual Studio Code, è l'unico formato compatibile con editing avanzato e versioning (Git). Gli altri: PBIX → file binario (non adatto a TMDL), PBIT → template, PBIDS → file di connessione dati

QUESTION 23

You have a Fabric tenant that contains a warehouse named Warehouse1. Warehouse1 contains three schemas named schemaA, schemaB, and schemaC.

You need to ensure that a user named User1 can truncate tables in schemaA only. How should you complete the T-SQL statement? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.

Answer Area



ANSWER: ALTER, SCHEMA

QUESTION 24

You plan to deploy Microsoft Power BI items by using Fabric deployment pipelines. You have a deployment pipeline that contains three stages named Development, Test, and Production. A workspace is assigned to each stage. You need to provide Power BI developers with access to the pipeline. The solution must meet the following requirements:

- Ensure that the developers can deploy items to the workspaces for Development and Test.
- Prevent the developers from deploying items to the workspace for Production.
- Follow the principle of least privilege.

Which three levels of access should you assign to the developers? Each correct answer presents part of the solution. NOTE: Each correct answer is worth one point.

A. Build permission to the production semantic models
B. Admin access to the deployment pipeline
C. Viewer access to the Development and Test workspaces
D. Viewer access to the Production workspace
E. Contributor access to the Development and Test workspaces
F. Contributor access to the Production workspace

ANSWER: D, E, B

QUESTION 25

You have a Fabric workspace that contains a DirectQuery semantic model. The model queries a data source that has 500 million rows. You have a Microsoft Power Bi report named Report1 that uses the model. Report1 contains visuals on multiple pages. You need to reduce the query execution time for the visuals on all the pages. What are two features that you can use? Each correct answer presents a complete solution, NOTE: Each correct answer is worth one point.

A. user-defined aggregations

B. automatic aggregation

C. query caching

D. OneLake integration

ANSWER: A, B

User-defined aggregations → permettono di creare tabelle aggregate per evitare scan su 500M righe → enorme miglioramento performance, Automatic aggregation → Power BI crea automaticamente aggregazioni in cache → accelera le query senza intervento manuale mentre Query caching → aiuta, ma non è una soluzione completa per tutte le query e tutti gli scenari, OneLake integration → non influenza direttamente le performance DirectQuery.

QUESTION 26

You have a Fabric tenant that contains 30 CSV files in OneLake. The files are updated daily. You create a Microsoft Power BI semantic model named Model1 that uses the CSV files as a data source. You configure incremental refresh for Model1 and publish the model to a Premium capacity in the Fabric tenant. When you initiate a refresh of Model1, the refresh fails after running out of resources. What is a possible cause of the failure?

A. Query folding is occurring.
B. Only refresh complete days is selected.
C. XMLA Endpoint is set to Read Only.
D. Query folding is NOT occurring.
E. The delta type of the column used to partition the data has changed.

ANSWER: D

QUESTION 27

You have a Fabric tenant that uses a Microsoft Power BI Premium capacity. You need to enable scale-out for a semantic model. What should you do first?

A. At the semantic model level, set Large dataset storage format to Off.
B. At the tenant level, set Create and use Metrics to Enabled.
C. At the semantic model level, set Large dataset storage format to On.
D. At the tenant level, set Data Activator to Enabled.

ANSWER: C

Lo scale-out (read replicas) richiede che il modello sia configurato come large dataset, abilitando Large dataset storage format = On, rendi possibile lo scale-out. A → contrario (disabilita), B / D → non hanno relazione con scale-out

QUESTION 28

You have a Fabric tenant that contains a warehouse. The warehouse uses row-level security (RLS). You create a Direct Lake semantic model that uses the Delta tables and RLS of the warehouse. When users interact with a report built from the model, which mode will be used by the DAX queries?

A. DirectQuery
B. Dual
C. Direct Lake
D. Import

ANSWER: A

Quando usi Direct Lake con RLS ereditata dal warehouse, il motore non può usare Direct Lake puro. Per applicare la sicurezza, passa automaticamente a DirectQuery

QUESTION 29

You have a Fabric tenant that contains a complex semantic model. The model is based on a star schema and contains many tables, including a fact table named Sales. You need to create a diagram of the model. The diagram must contain only the Sales table and related tables. What should you use from Microsoft Power BI Desktop?

A. data categories
B. Data view
C. Model view
D. DAX query view

ANSWER: C

QUESTION 30

You have a Fabric tenant that contains a semantic model. The model uses Direct Lake mode. You suspect that some DAX queries load unnecessary columns into memory. You need to identify the frequently used columns that are loaded into memory. What are two ways to achieve the goal? Each correct answer presents a complete solution. NOTE: Each correct answer is worth one point.


A. Use the Analyze in Excel feature.
B. Use the Vertipaq Analyzer tool.
C. Query the $System.DISCOVER_STORAGE_TABLE_COLUMN_SEGMENTS dynamic management view (DMV).
D. Query the DISCOVER_MEMORYGRANT dynamic management view (DMV).

ANSWER: B, C

Vertipaq Analyzer → analizza l'uso delle colonne in memoria e identifica quelle più pesanti/usate, DMV $System.DISCOVER_STORAGE_TABLE_COLUMN_SEGMENTS → mostra quali colonne sono caricate in memoria e con che frequenza

QUESTION 31

You have the source data model shown in the following exhibit.

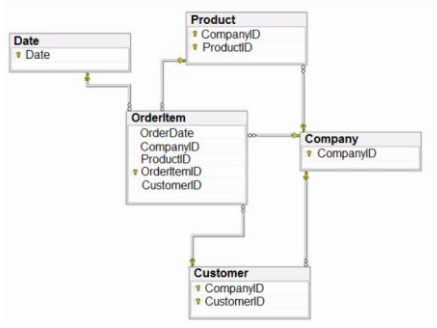

The primary keys of the tables are indicated by a key symbol beside the columns involved in each key. You need to create a dimensional data model that will enable the analysis of order items by date, product, and customer.
What should you include in the solution? To answer, select the appropriate options in the answer area.

Answer Area

The relationship between OrderItem and Product must be based on:
- The ProductID column
- Both the CompanyID and the ProductID columns
- A new key that combines the CompanyID and ProductID columns

The Company entity must be:
- Omitted
- Denormalized into the Product entity only
- Denormalized into the Customer and Product entities

ANSWER: B, C

QUESTION 32

You have a Fabric tenant that contains a semantic model named Model1. Model1 uses Import mode. Model1 contains a table named Orders. Orders has 100 million rows and the following fields.

Name	Data type	Description
OrderID	Integer	Column imported from the source
OrderDateTime	Date/Time	Column imported from the source
Quantity	Integer	Column imported from the source
Price	Decimal	Column imported from the source
TotalSalesAmount	Decimal	Calculated column that multiplies Quantity and Price
TotalQuantity	Integer	Measure

You need to reduce the memory used by Model1 and the time it takes to refresh the model. Which two actions should you perform? Each correct answer presents part of the solution. NOTE: Each correct answer is worth one point.

A. Split OrderDateTime into separate date and time columns.
B. Replace TotalQuantity with a calculated column.
C. Convert Quantity into the Text data type.
D. Replace TotalSalesAmount with a measure.

ANSWER: A, D

QUESTION 33

You have a Fabric tenant that contains a semantic model. You need to prevent report creators from populating visuals by using implicit measures. What are two tools that you can use to achieve the goal? Each correct answer presents a complete solution. NOTE: Each correct answer is worth one point.

A. Microsoft Power BI Desktop
B. Tabular Editor
C. Microsoft SQL Server Management Studio (SSMS)
D. DAX Studio

ANSWER: A, B