
QUESTION 34

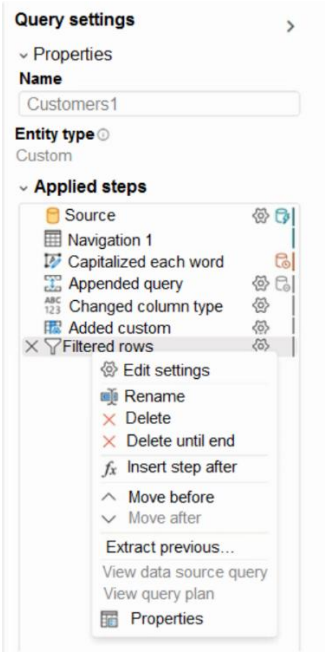

You have a Fabric tenant that contains two lakehouses. You are building a dataflow that will combine data from the lakehouses. The applied steps from one of the queries in the dataflow is shown in the following exhibit.

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

Answer Area

[Answer choice] of the transformation steps in the query will fold.

- All
- None
- Some

The Added custom step will be performed in **[answer choice]**.

- each lakehouse's query engine
- the Microsoft Power Query engine
- the source lakehouse query engine

ANSWER: C, B

QUESTION 35

You have a Fabric tenant that contains a lakehouse named Lakehouse1. Lakehouse1 contains a table named Table1. You are creating a new data pipeline. You plan to copy external data to Table1. The schema of the external data changes regularly. You need the copy operation to meet the following requirements:

- Replace Table1 with the schema of the external data.
- Replace all the data in Table1 with the rows in the external data.

You add a Copy data activity to the pipeline. What should you do for the Copy data activity?

A. From the Source tab, add additional columns.
B. From the Destination tab, set Table action to Overwrite.
C. From the Settings tab, select Enable staging.
D. From the Source tab, select Enable partition discovery.
E. From the Source tab, select Recursively.

ANSWER: B

Sostituire lo schema → quindi la tabella deve essere ricreata/aggiornata, sostituire completamente i dati → non appendere, ma rimpiazzare. L'opzione Overwrite: cancella i dati esistenti, ricrea la tabella in base allo schema della sorgente

QUESTION 36

You have a Fabric tenant that contains a lakehouse. You plan to query sales data files by using the SQL endpoint. The files will be in an Amazon Simple Storage Service (Amazon S3) storage bucket. You need to recommend which file format to use and where to create a shortcut. Which two actions should you include in the recommendation? Each correct answer presents part of the solution. NOTE: Each correct answer is worth one point.

A. Create a shortcut in the Files section.
B. Use the Parquet format
C. Use the CSV format.
D. Create a shortcut in the Tables section.
E. Use the delta format.

ANSWER: A, B

Parquet → è un formato supportato per query via SQL endpoint (mentre CSV è limitato e Delta richiede struttura specifica). I dati da Amazon S3 non sono tabelle gestite → quindi il shortcut va in Files, non in Tables

QUESTION 37

You have a Fabric tenant that contains a lakehouse named Lakehouse1. Lakehouse1 contains a subfolder named Subfolder1 that contains CSV files. You need to convert the CSV files into the delta format that has V-Order optimization enabled. What should you do from Lakehouse explorer?

A. Use the Load to Tables feature.
B. Create a new shortcut in the Files section.
C. Create a new shortcut in the Tables section.
D. Use the Optimize feature.

ANSWER: A

QUESTION 38

You have a Fabric tenant that contains a lakehouse named Lakehouse1. Lakehouse1 contains an unpartitioned table named Table1. You plan to copy data to Table1 and partition the table based on a date column in the source data. You create a Copy activity to copy the data to Table1. You need to specify the partition column in the Destination settings of the Copy activity. What should you do first?

A. From the Destination tab, set Mode to Append.
B. From the Destination tab, select the partition column.
C. From the Source tab, select Enable partition discovery.
D. From the Destination tabs, set Mode to Overwrite.

ANSWER: A

Per poter specificare una colonna di partizione, la Copy activity richiede che la tabella venga popolata incrementalmente → quindi il Mode deve essere Append. In modalità Overwrite: il partizionamento non è configurabile nello stesso modo e si riscrive tutto senza usare la logica di partizione per insert. Perché le altre sono sbagliate: B → è il passo che vuoi fare, ma non è il primo requisito, C → riguarda la sorgente (file), non la destinazione Lakehouse, D (Overwrite) → incompatibile con partizionamento via Copy activity

QUESTION 40

You have source data in a folder on a local computer. You need to create a solution that will use Fabric to populate a data store. The solution must meet the following requirements:

- Support the use of dataflows to load and append data to the data store.
- Ensure that Delta tables are V-Order optimized and compacted automatically.

Which type of data store should you use?

A. a lakehouse
B. an Azure SQL database
C. a warehouse
D. a KQL database

ANSWER: A

Dataflows supportati → i lakehouse funzionano nativamente con dataflows per append, Delta format + V-Order + auto-compaction → caratteristiche native dei lakehouse Fabric. Perché le altre no: B (Azure SQL) → non supporta Delta/V-Order, C (warehouse) → usa Delta ma non espone V-Order/auto-compaction nello stesso modo per dataflows, D (KQL) → per analytics su log/stream, non per questo scenario

QUESTION 41

You have a Fabric tenant that contains a lakehouse.
You are using a Fabric notebook to save a large DataFrame by using the following code.
df.write.partitionBy("year", "month", "day").mode("overwrite").parquet("Files/SalesOrder")
For each of the following statements, select Yes if the statement is true. Otherwise, select No.

Answer Area


Statements	Yes	No
The results will form a hierarchy of folders for each partition key.	○	○
The resulting file partitions can be read in parallel across multiple nodes.	○	○
The resulting file partitions will use file compression.	○	○

ANSWER: Y, Y, Y

partitionBy("year","month","day") → crea cartelle tipo: /year=2024/month=06/day=18/, Parquet è un formato columnar distribuito → supporta parallel read, Parquet usa compressione automatica (snappy di default)

QUESTION 42

You have a Fabric workspace named Workspace1 that contains a data flow named Dataflow1 contains a query that returns the data shown in the following exhibit. You need to transform the data columns into attribute-value pairs, where columns become rows. You select the VendorID column. Which transformation should you select from the context menu of the VendorID column?

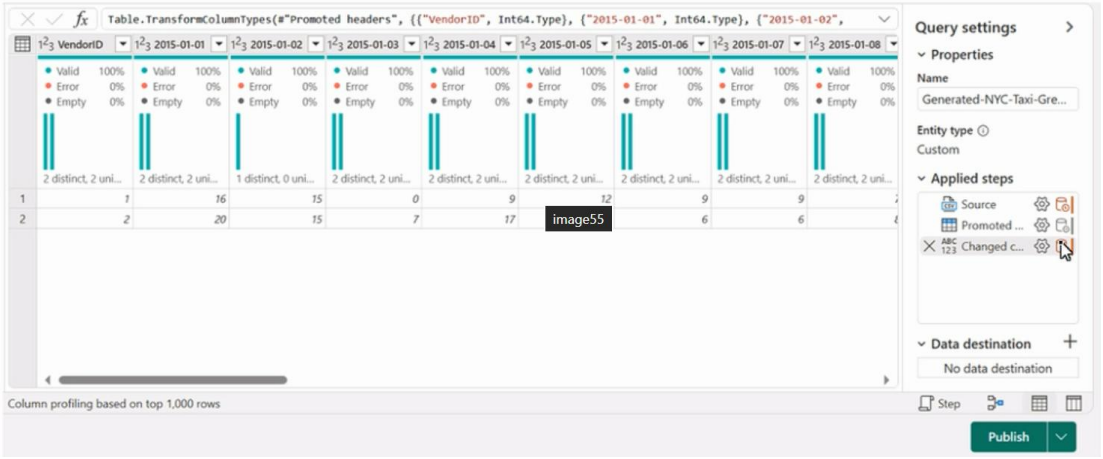

A. Group by
B. Unpivot columns
C. Unpivot other columns
D. Split column
E. Remove other columns

ANSWER: C

QUESTION 43

You have a Fabric tenant that contains a data pipeline. You need to ensure that the pipeline runs every four hours on Mondays and Fridays. To what should you set Repeat for the schedule?

A. Daily
B. By the minute
C. Weekly
D. Hourly

ANSWER: C

QUESTION 44

You have a Fabric tenant that contains a warehouse. Several times a day, the performance of all warehouse queries degrades. You suspect that Fabric is throttling the compute used by the warehouse. What should you use to identify whether throttling is occurring?

A. the Capacity settings
B. the Monitoring hub
C. dynamic management views (DMVs)
D. the Microsoft Fabric Capacity Metrics app

ANSWER: D

Il Capacity Metrics app è lo strumento specifico per: monitorare utilizzo della capacità e identificare throttling (CPU, memory, query delays): mostra chiaramente quando le risorse sono saturate e quindi limitate (throttled). Perché le altre no: A (Capacity settings) → solo configurazione, non analisi, B (Monitoring hub) → monitora attività, non throttling della capacity, C (DMVs) → utili per query interne, ma non per vedere throttling a livello capacity

QUESTION 45

You have a Fabric workspace that uses the default Spark starter pool and runtime version 1.2.
You plan to read a CSV file named Sales_raw.csv in a lakehouse, select columns, and save the data as a Delta table to the managed area of the lakehouse. Sales_raw.csv contains 12 columns.
You have the following code.

```
from pyspark.sql.functions import year

(spark
 .red
 .format("csv")
 .option("heade", 'true')
 .load("Files/sales_raw.csv")
 .select('SalesOrderNumber', 'OrderDate', 'CustomerName',
'UnitPrice')
 .withColumn("Year", year("OrderDate"))
 .write
 .partitionBy('Year')
 .saveAsTable("sales")
)
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
The Spark engine will read only the 'SalesOrderNumber', 'OrderDate', 'CustomerName', 'UnitPrice' columns from Sales_raw.csv.	○	○
Removing the partition will reduce the execution time of the query.	○	○
Adding `inferSchema= 'true'` to the options will increase the execution time of the query.	○	○

ANSWER: N, Y, Y

Con i file CSV, Spark non fa column pruning a livello di lettura: legge tutto il file e poi applica .select(...). Il partitionBy("Year") aggiunge overhead (scrittura cartelle + shuffle), se non serve per query future → rallenta, inferSchema=true forza Spark a scansionare i dati per dedurre i tipi ⇒ aumenta il tempo di esecuzione

QUESTION 46


You have a Fabric tenant that contains a warehouse. A user discovers that a report that usually takes two minutes to render has been running for 45 minutes and has still not rendered. You need to identify what is preventing the report query from completing. Which dynamic management view (DMV) should you use?

A. sys.dm_exec_requests
B. sys.dm_exec_sessions
C. sys.dm_exec_connections
D. sys.dm_pdw_exec_requests

ANSWER: A

QUESTION 47

You are creating a data flow in Fabric to ingest data from an Azure SQL database by using a T-SQL statement. You need to ensure that any foldable Power Query transformation steps are processed by the Microsoft SQL Server engine.
How should you complete the code? Each value may be used once, more than once, or not at all.

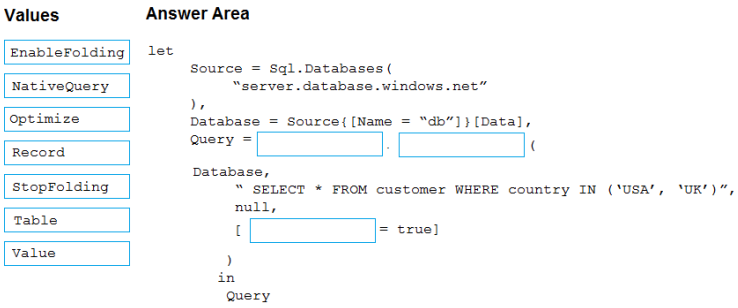

ANSWER: Value, NativeQuery, EnableFolding


Value.NativeQuery → permette di eseguire una query T-SQL mantenendo il query folding, EnableFolding = true → forza Power Query a continuare il folding sugli step successivi. Questo garantisce che:le trasformazioni foldable vengano eseguite nel motore SQL Server, non in Power Query

QUESTION 48

You have a Fabric tenant that contains a lakehouse named Lakehouse1. Readings from 100 IoT devices are appended to a Delta table in Lakehouse1. Each set of readings is approximately 25 KB. Approximately 10 GB of data is received daily. All the table and SparkSession settings are set to the default.

You discover that queries are slow to execute. In addition, the lakehouse storage contains data and log files that are no longer used. You need to remove the files that are no longer used and combine small files into larger files with a target size of 1 GB per file.

What should you do? Each action may be used once, more than once, or not at all. NOTE: Each correct selection is worth one point.

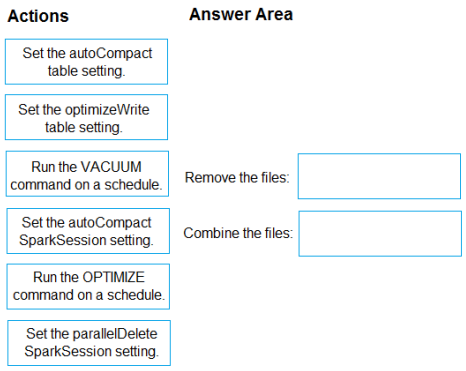

ANSWER: VACUUM, OPTIMIZE

QUESTION 49

You need to create a data loading pattern for a Type 1 slowly changing dimension (SCD). Which two actions should you include in the process? Each correct answer presents part of the solution. NOTE: Each correct answer is worth one point.


A. Update rows when the non-key attributes have changed.
B. Insert new rows when the natural key exists in the dimension table, and the non-key attribute values have changed.
C. Update the effective end date of rows when the non-key attribute values have changed.
D. Insert new records when the natural key is a new value in the table.

ANSWER: A, D

QUESTION 50

You have a Fabric workspace named Workspace1 and an Azure Data Lake Storage Gen2 account named storage1. Workspace1 contains a lakehouse named Lakehouse1. You need to create a shortcut to storage1 in Lakehouse1.

Which connection and endpoint should you specify? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.



ANSWER: A, B

abfss → è il protocollo corretto per connettersi a Azure Data Lake Storage Gen2 (secure + ottimizzato per Spark/Fabric), dfs endpoint → è l'endpoint usato per Data Lake (filesystem), necessario per accesso ai file e shortcut

QUESTION 51

You are analyzing customer purchases in a Fabric notebook by using PySpark. You have the following DataFrames:

- transactions: Contains five columns named transaction_id, customer_id, product_id, amount, and date and has 10 million rows, with each row representing a transaction.
- customers: Contains customer details in 1,000 rows and three columns named customer_id, name, and country.

You need to join the DataFrames on the customer_id column. The solution must minimize data shuffling. You write the following code:

from pyspark.sql

import functions as Fresults =

Which code should you run to populate the results DataFrame?

A. transactions.join(F.broadcast(customers), transactions.customer_id == customers.customer_id)
B. transactions.join(customers, transactions.customer_id == customers.customer_id).distinct()
C. transactions.join(customers, transactions.customer_id == customers.customer_id)
D. transactions.crossJoin(customers).where(transactions.customer_id == customers.customer_id)


ANSWER: A

Perché customers è molto piccolo (1.000 righe) e transactions è molto grande (10 milioni). Con broadcast(customers): Spark replica il DataFrame piccolo su tutti i nodi, evita shuffle della tabella grande e minimizza il data shuffling. Invece B (.distinct()) → aggiunge overhead inutile, C (join normale) → causa shuffle su entrambe le tabelle, D (crossJoin) → estremamente inefficiente

QUESTION 52

You have a Microsoft Power BI report and a semantic model that uses Direct Lake mode.

From Power BI Desktop, you open Performance analyzer as shown in the following exhibit.

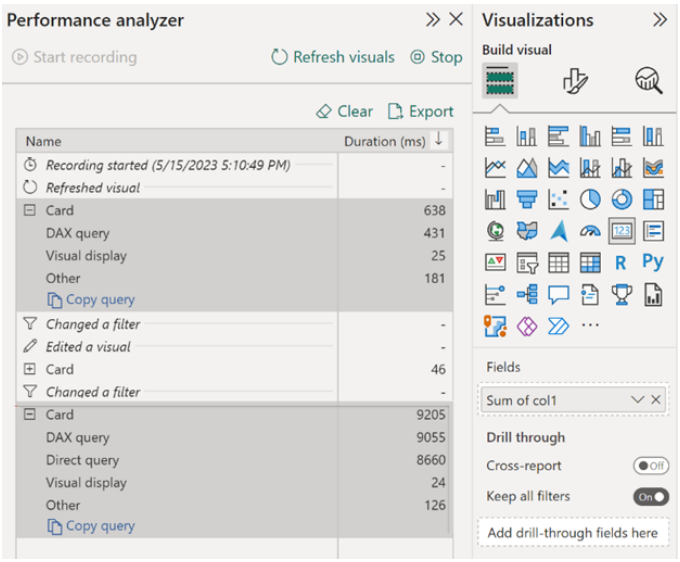

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic. NOTE: Each correct selection is worth one point.

Answer Area

The Direct Lake fallback behavior is set to
- Automatic
- DirectLakeOnly
- DirectQueryOnly

The query for the table visual is executed by using
- the composite model
- Direct Lake
- Direct Query

ANSWER: A, C

QUESTION 53

Name	Data type
pickupDateTime	Timestamp
passengerCount	Integer
fareAmount	Double
paymentType	String
tipAmount	Double

You have a Fabric tenant that contains a lakehouse named Lakehouse1. Lakehouse1 contains a table named Nyctaxi_raw. Nyctaxi_row contains the following table.

You create a Fabric notebook and attach it to Lakehouse1. You need to use PySpark code to transform the data. The solution must meet the following requirements:

- Add a column named pickupDate that will contain only the date portion of pickupDateTime.
- Filter the DataFrame to include only rows where fareAmount is a positive number that is less than 100.

Answer Area

```
df = spark.read.format("delta").load("Tables/nyctaxi_raw")
df2= [ ] ("pickupDate", df['tpepPickupDateTime'])
```
- df.columns
- df.select
- df.withColumn
- df.withColumnsRenamed

```
[ ] \
```
- .alias('date')
- .cast('date')
- .cast('pickupDate')
- .getfield('date')

```
[ ]
```
- .filter("fareAmount > 0 AND farAmount < 100")
- .filter(col("fareAmount").contains("1..100"))
- .when(df.fareAmount > 0 AND fareAmount < 100)
- .where(df.fareAmount.isin([1,100]))

How should you complete the code? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.

ANSWER: C, B, A

withColumn → serve per creare una nuova colonna, cast('date') → estrae solo la parte data da un timestamp, filter(...) → applica correttamente la condizione richiesta, mentre select → non aggiunge colonna, seleziona, alias → solo rinomina, non cambia tipo,when → inutilmente complesso, isin → condizione sbagliata

QUESTION 54 – 55 – 56 – 106 -113

You have a Fabric tenant that contains a new semantic model in OneLake. You use a Fabric notebook to read the data into a Spark DataFrame. You need to evaluate the data to calculate the min, max, mean, and standard deviation values for all the string and numeric columns.

Solution: You use the following PySpark expression: df.explain(). Does this meet the goal?

A. Yes
B. No

Solution: You use the following PySpark expression: df.show(). Does this meet the goal?

A. Yes
B. No

Solution: You use the following PySpark expression: df.summary(). Does this meet the goal?

A. Yes
B. No

Solution: You use the following PySpark expression: df.explain().show()Does this meet the goal?

A. Yes
B. No

Solution: You use the following PySpark expression: df.describe().show()Does this meet the goal?

A. Yes
B. No

ANSWER: B, B, A, B, B

summary() calcola min, max, mean, stddev, count, etc. sia per colonne numeriche che stringhe, anche describe() dà lo stesso risultato ma per le stringhe fa solo max e min. df.show() serve per visualizzare i dati contenuti in un DataFrame, df.explain() serve per mostrare il piano di esecuzione (execution plan) che Spark utilizzerà per eseguire le operazioni sul DataFrame. df.explain().show() è sbagliato perché df.explain() non restituisce un DataFrame, restituisce None e stampa direttamente il piano, quindi: df.explain().show() genera errore, perché stai chiamando .show() su None

QUESTION 57 – 58 – 59 - 105

You have a Fabric tenant that contains a lakehouse named Lakehouse1. Lakehouse1 contains a Delta table named Customer. When you query Customer, you discover that the query is slow to execute. You suspect that maintenance was NOT performed on the table. You need to identify whether maintenance tasks were performed on Customer.

Solution: You run the following Spark SQL statement: DESCRIBE HISTORY customer -Does this meet the goal?

A. Yes
B. No

Solution: You run the following Spark SQL statement: REFRESH TABLE customer -Does this meet the goal?

A. Yes
B. No

Solution: You run the following Spark SQL statement: EXPLAIN TABLE customer -Does this meet the goal?

A. Yes
B. No

Solution: You run the following Spark SQL statement: DESCRIBE DETAIL customer -Does this meet the goal?

A. Yes
B. No

ANSWER: A, B, B, B

DESCRIBE HISTORY mostra la cronologia delle operazioni sulla tabella Delta, specialmente per questo caso il tipo di operazione (OPTIMIZE, VACUUM, WRITE, ecc.). EXPLAIN TABLE mostra il piano di esecuzione della query sulla tabella, cioè come il motore (Spark/Fabric) leggerà i dati, serve per capire perché una query è lenta e come viene eseguita internamente, ma non dà informazioni sullo storico di manutenzione della tabella. DESCRIBE DETAIL restituisce metadati dettagliati della tabella Delta.

QUESTION 68


You need to configure OneLake security for users shown in the following table.

Name	Required access
User1	Read all the Spark data.
User2	Read all the SQL endpoint data.

The solution must follow the principle of least privilege.

Which permission should you assign to each user? To answer, select the appropriate options in the answer area.

Answer Area



ANSWER: B, C

ReadData permission on SQL endpoint to access data without SQL policy. ReadAll permission on the lakehouse to access all data using Apache Spark.

QUESTION 69

You have an Azure Repos repository named Repo1 and a Fabric-enabled Microsoft Power BI Premium capacity. The capacity contains two workspaces named Workspace1 and Workspace2. Git integration is enabled at the workspace level. You plan to use Microsoft Power BI Desktop and Workspace1 to make version-controlled changes to a semantic model stored in Repo1. The changes will be built and deployed to Workspace2 by using Azure Pipelines. You need to ensure that report and semantic model definitions are saved as individual text files in a folder hierarchy. The solution must minimize development and maintenance effort. In which file format should you save the changes?

A. PBIP
B. PBIDS
C. PBIT
D. PBIX

ANSWER: A


QUESTION 70

You are implementing a medallion architecture in a single Fabric workspace. You have a lakehouse that contains the Bronze and Silver layers and a warehouse that contains the Gold layer. You create the items required to populate the layers as shown in the following table.

Layer	Data integration tool
Bronze	Pipelines with Copy activities
Silver	Dataflows
Gold	Stored procedures

You need to ensure that the layers are populated daily in sequential order such that Silver is populated only after Bronze is complete, and Gold is populated only after Silver is complete. The solution must minimize development effort and complexity.

What should you use to execute each set of items? To answer, drag the appropriate options to the correct items. Each option may be used once, more than once, or not at all.

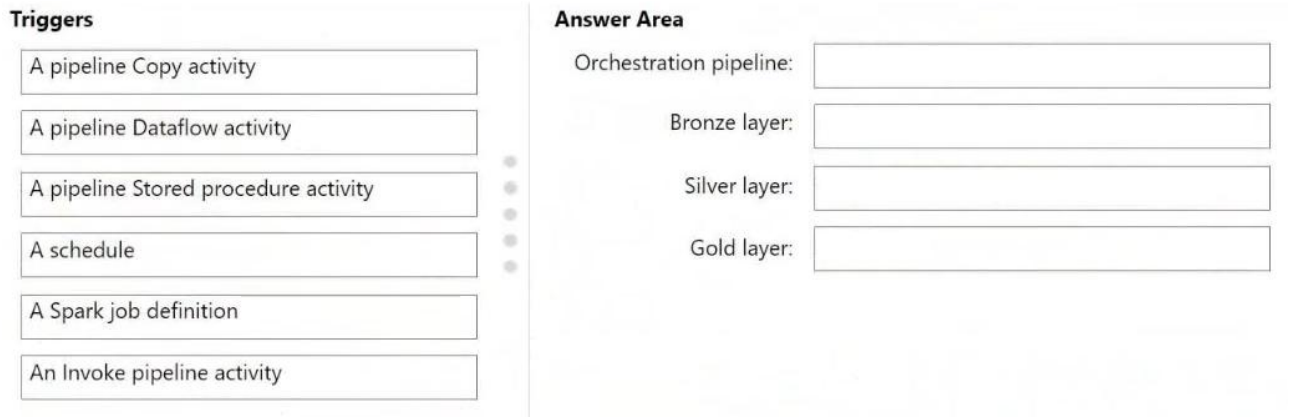


ANSWER: SCHEDULE, COPY, DATAFLOW

QUESTION 71

You are building a solution by using a Fabric notebook. You have a Spark DataFrame assigned to a variable named df. The DataFrame returns four columns. You need to change the data type of a string column named Age to integer. The solution must return a DataFrame that includes all the columns.

How should you complete the code? To answer, drag the appropriate values to the correct targets. Each value may be used once, more than once, or not at all.

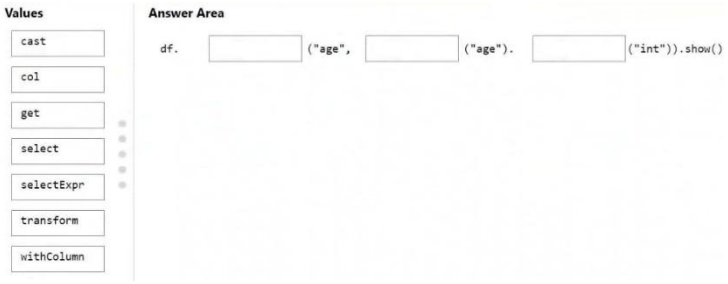


ANSWER: WITHCOLUMN, COL, CAST

QUESTION 72

You have an Azure Data Lake Storage Gen2 account named storage1 that contains a Parquet file named sales.parquet. You have a Fabric tenant that contains a workspace named Workspace1.

Using a notebook in Workspace1, you need to load the content of the file to the default lakehouse. The solution must ensure that the content will display automatically as a table named Sales in Lakehouse explorer. How should you complete the code? To answer, select the appropriate options in the answer area.

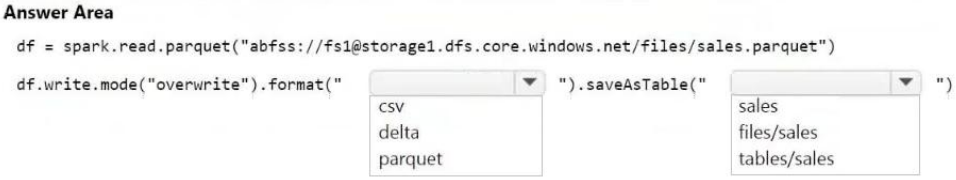

ANSWER: B, A

QUESTION 73

You have a Fabric workspace named Workspace1 that contains a lakehouse named Lakehouse1. In Workspace1, you create a data pipeline named Pipeline1. You have CSV files stored in an Azure Storage account. You need to add an activity to Pipeline1 that will copy data from the CSV files to Lakehouse1. The activity must support Power Query M formula language expressions. Which type of activity should you add?

A. Dataflow
B. Notebook
C. Script
D. Copy data


ANSWER: A

QUESTION 74

You have a Fabric tenant that contains lakehouse named Lakehouse1. Lakehouse1 contains a Delta table with eight columns. You receive new data that contains the same eight columns and two additional columns. You create a Spark DataFrame and assign the DataFrame to a variable named df. The DataFrame contains the new data. You need to add the new data to the Delta table to meet the following requirements:

- Keep all the existing rows.
- Ensure that all the new data is added to the table.

How should you complete the code?

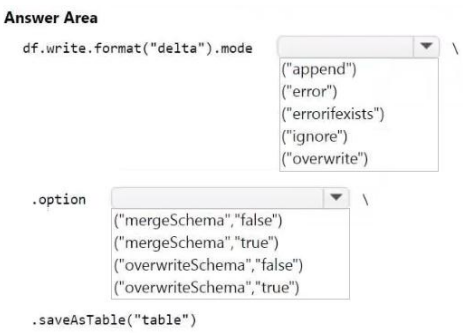

ANSWER: A, B

QUESTION 75


Name	Data type	Nullable
OrderID	Integer	No
CustomerID	Integer	No
ProductID	Integer	No
Quantity	Integer	Yes
Weight	Decimal(18, 3)	Yes
ListPrice	Decimal(18, 2)	No
SalePrice	Decimal(18, 2)	Yes

You have a Fabric warehouse that contains a table named Sales.Orders. Sales.Orders contains the following columns.

You need to write a T-SQL query that will return the following columns.

Name	Description
OrderID	Returns the OrderID value
CustomerID	Returns the CustomerID value
ProductID	Returns the ProductID value
ChargedQuantity	Returns the Weight value if present, otherwise returns the Quantity value if present, otherwise returns a value of 1
OrderPrice	Returns the lowest value from ListPrice and SalePrice Ignores NULL values in SalePrice

How should you complete the code?

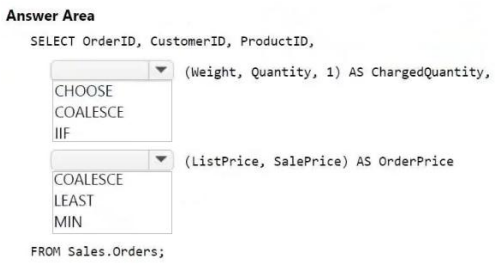

ANSWER: COALESCE, LEAST

QUESTION 76

You have a Fabric tenant that contains a lakehouse. You plan to use a visual query to merge two tables. You need to ensure that the query returns all the rows in both tables. Which type of join should you use?

A. inner
B. full outer
C. left outer
D. right anti
E. right outer
F. left anti

ANSWER: B

QUESTION 77

You have a Fabric tenant that contains a lakehouse named Lakehouse1. Lakehouse1 contains a Delta table that has one million Parquet files. You need to remove files that were NOT referenced by the table during the past 30 days. The solution must ensure that the transaction log remains consistent, and the ACID properties of the table are maintained. What should you do?

A. From OneLake file explorer, delete the files.
B. Run the OPTIMIZE command and specify the Z-order parameter.
C. Run the OPTIMIZE command and specify the V-order parameter.
D. Run the VACUUM command.

ANSWER: D

QUESTION 78

You are implementing two dimension tables named Customers and Products in a Fabric warehouse. You need to use slowly changing dimension (SCD) to manage the versioning of data. The solution must meet the requirements shown in the following table.

Table	Change action
Customers	Create a new version of the row.
Products	Overwrite the existing value in the latest row.

Which type of SCD should you use for each table? To answer, drag the appropriate SCD types to the correct tables. Each SCD type may be used once, more than once, or not at all.



ANSWER: C, B

QUESTION 79

You have a Fabric workspace named Workspace1 and an Azure SQL database. You plan to create a dataflow that will read data from the database, and then transform the data by performing an inner join. You need to ignore spaces in the values when performing the inner join. The solution must minimize development effort. What should you do?

A. Append the queries by using fuzzy matching.
B. Merge the queries by using fuzzy matching.
C. Append the queries by using a lookup table.
D. Merge the queries by using a lookup table.

ANSWER: B

QUESTION 80

You have a Fabric tenant that contains a warehouse named Warehouse1. Warehouse1 contains two schemas name schema1 and schema2 and a table named schema1.city. You need to make a copy of schema1.city in schema2. The solution must minimize the copying of data. Which T-SQL statement should you run? Suggested

A. INSERT INTO schema2.city SELECT * FROM schema1.city;
B. SELECT * INTO schema2.city FROM schema1.city;
C. CREATE TABLE schema2.city AS CLONE OF schema1.city;
D. CREATE TABLE schema2.city AS SELECT * FROM schema1.city;


ANSWER: C

QUESTION 82

You have a Fabric tenant that contains a workspace named Workspace1. Workspace1 contains a lakehouse named Lakehouse1 and a warehouse named Warehouse1.

You need to create a new table in Warehouse1 named POSCustomers by querying the customer table in Lakehouse1.

How should you complete the T-SQL statement?

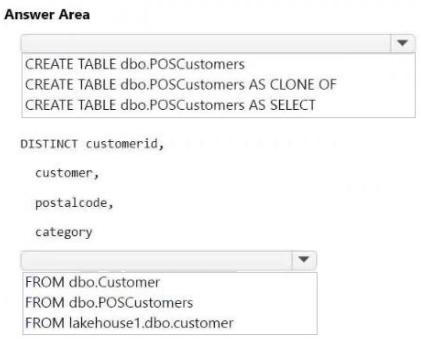

ANSWER: C, C

QUESTION 83

You have a Fabric tenant. You are creating an Azure Data Factory pipeline. You have a stored procedure that returns the number of active customers and their average sales for the current month. You need to add an activity that will execute the stored procedure in a warehouse. The returned values must be available to the downstream activities of the pipeline. Which type of activity should you add?

A. Switch
B. Copy data
C. Append variable
D. Lookup

ANSWER: D

La Lookup activity è progettata specificamente per questo scenario: restituisce il risultato dell'esecuzione di una query o di una stored procedure e l'output può essere utilizzato nelle attività successive della pipeline. Switch: controllo del flusso (logica di branching), nessun recupero dati. Copy data: sposta dati, ma non espone output scalari per la logica della pipeline. Append variable: si usa dopo aver già ottenuto i dati, non per eseguire stored procedure

QUESTION 84

You have a Fabric tenant that contains two workspaces named Workspace1 and Workspace2. Workspace1 contains a lakehouse named Lakehouse1. Workspace2 contains a lakehouse named Lakehouse2. Lakehouse1 contains a table named dbo.Sales. Lakehouse2 contains a table named dbo.Customers. You need to ensure that you can write queries that reference both dbo.Sales and dbo.Customers in the same SQL query without making additional copies of the tables. What should you use?

A. a shortcut
B. a dataflow
C. a view
D. a managed table

ANSWER: A

QUESTION 85

You have a Fabric tenant that contains a warehouse. You are designing a star schema model that will contain a customer dimension. The customer dimension table will be a Type 2 slowly changing dimension (SCD). You need to recommend which columns to add to the table. The columns must NOT already exist in the source. Which three types of columns should you recommend?

A. a foreign key
B. a natural key
C. an effective end date and time
D. a surrogate key
E. an effective start date and time

ANSWER: C, E, D

*La **surrogate key (D)** è l'unico modo per avere **più righe per lo stesso cliente senza conflitti**.*

QUESTION 86

You have a Fabric tenant. You plan to create a data pipeline named Pipeline1. Pipeline1 will include two activities that will execute in sequence. You need to ensure that a failure of the first activity will NOT block the second activity. Which conditional path should you configure between the first activity and the second activity?

A. Upon Failure
B. Upon Completion
C. Upon Skip

ANSWER: B

*È corretta **B (Upon Completion)** perché permette alla seconda activity di partire sempre indipendentemente dal risultato della prima, mentre **A (Upon Failure)** esegue la seconda solo se la prima fallisce e **C (Upon Skip)** la esegue solo se la prima viene saltata, quindi entrambe non soddisfano il requisito di esecuzione in tutti i casi.*

QUESTION 87

You have a Microsoft Power BI semantic model. You need to identify any surrogate key columns in the model that have the Summarize By property set to a value other than to None. The solution must minimize effort. What should you use?


A. DAX Formatter in DAX Studio
B. Model explorer in Microsoft Power BI Desktop
C. Model view in Microsoft Power BI Desktop
D. Best Practice Analyzer in Tabular Editor

ANSWER: D

QUESTION 88

You have a Fabric tenant that contains a Microsoft Power BI report named Report1. Report1 is slow to render. You suspect that an inefficient DAX query is being executed. You need to identify the slowest DAX query, and then review how long the query spends in the formula engine as compared to the storage engine.

Which five actions should you perform in sequence?

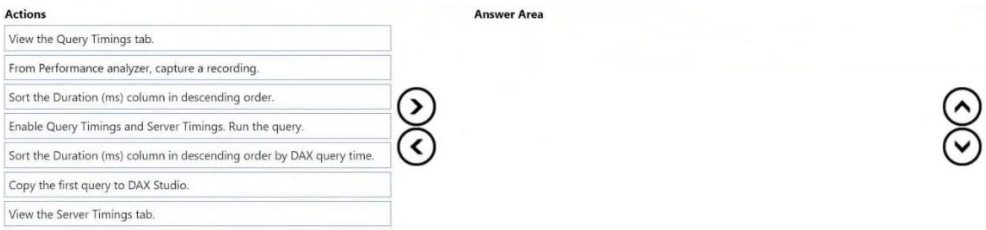

ANSWER: 2, 5, 6, 4, 7

QUESTION 89

You have a Fabric tenant that contains a semantic model. The model contains 15 tables. You need to programmatically change each column that ends in the word Key to meet the following requirements:

- Hide the column.
- Set Nullable to False
- Set Summarize By to None.
- Set Available in MDX to False.
- Mark the column as a key column.

What should you use?


A. Microsoft Power BI Desktop
B. ALM Toolkit
C. Tabular Editor
D. DAX Studio

ANSWER: C

QUESTION 90

You have a Microsoft Power BI semantic model. You plan to implement calculation groups. You need to create a calculation item that will change the context from the selected date to month-to-date (MTD).

How should you complete the DAX expression?



ANSWER: A, B

QUESTION 91

You have a Microsoft Power BI report named Report1 that uses a Fabric semantic model. Users discover that Report1 renders slowly. You open Performance analyzer and identify that a visual named Orders By Date is the slowest to render. The duration breakdown for Orders By Date is shown in the following table. What will provide the greatest reduction in the rendering duration of Report1?

A. Enable automatic page refresh.
B. Optimize the DAX query of Orders By Date by using DAX Studio.
C. Change the visual type of Orders By Date.
D. Reduce the number of visuals in Report1.

Name	Duration (ms)
DAX query	27
Visual display	39
Other	1047

ANSWER: D

*l tempo maggiore (1047 ms) è nella categoria **Other**, che dipende da elementi come il numero totale di visual nella pagina, quindi ridurli è l'unico intervento che ha l'impatto più grande sulle performance complessive.*

QUESTION 92

You have a custom Direct Lake semantic model named Model1 that has one billion rows of data. You use Tabular Editor to connect to Model1 by using the XMLA endpoint. You need to ensure that when users interact with reports based on Model1, their queries always use Direct Lake mode. What should you do?

A. From Model, configure the Default Mode option.
B. From Partitions, configure the Mode option.
C. From Model, configure the Storage Location option.
D. From Model, configure the Direct Lake Behavior option.

ANSWER: D


*Per forzare che le query usino **sempre Direct Lake**, devi impostare il comportamento a livello di modello → l'opzione **Direct Lake Behavior** controlla se il modello può fare fallback (es. a DirectQuery) oppure no.*

QUESTION 93

You create a semantic model by using Microsoft Power BI Desktop. The model contains one security role named SalesRegionManager and the following tables:

- Sales
- SalesRegion
- SalesAddress

You need to modify the model to ensure that users assigned the SalesRegionManager role cannot see a column named Address in SalesAddress. Which three actions should you perform in sequence?

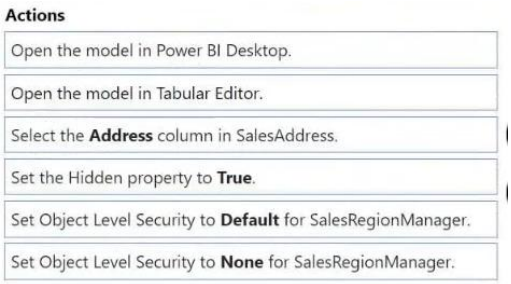

ANSWER: 2, 3, 6

QUESTION 94

You have a Microsoft Power BI semantic model that contains measures. The measures use multiple CALCULATE functions and a FILTER function. You are evaluating the performance of the measures. In which use case will replacing the FILTER function with the KEEPFILTERS function reduce execution time?

A. when the FILTER function uses a nested calculate function
B. when the FILTER function references a measure
C. when the FILTER function references columns from multiple tables
D. when the FILTER function references a column from a single table that uses Import mode

ANSWER: D

KEEPFILTERS è più efficiente quando filtri su una singola colonna, dato che evita l'iterazione riga per riga tipica di FILTER e sfrutta direttamente il contesto di filtro, migliorando le prestazioni soprattutto in Import mode.

QUESTION 95

You have a semantic model named Model1. Model1 contains five tables that all use Import mode. Model1 contains a dynamic row-level security (RLS) role named HR. The HR role filters employee data so that HR managers only see the data of the department to which they are assigned. You publish Model1 to a Fabric tenant and configure RLS role membership. You share the model and related reports to users. An HR manager reports that the data they see in a report is incomplete. What should you do to validate the data seen by the HR Manager?

A. Select Test as role to view the data as the HR role.
B. Filter the data in the report to match the intended logic of the filter for the HR department.
C. Select Test as role to view the report as the HR manager.
D. Ask the HR manager to open the report in Microsoft Power BI Desktop.

ANSWER: C