



The answer key is wrong. **Nobody checked.**

Cekgu reviews a quiz before learners sit it.

● Two models, key withheld

● Every reading receipted

● Refuses on disagreement

TEAM M1KU

@AlaskanTuna

Gateway · Queue ·
API

@kymil4

Frontend · Deploy

@chaosiris

Testing · Deck

@c3638

Docs · Submission


ALIGNED WITH
UN GLOBAL GOAL 4



cekgu-op7lf5dspq-as.a.run.app

github.com/MUBA-M1KU/Cekgu

Submitted on Devfolio · Independent models sit each
question blind, before the learner does.

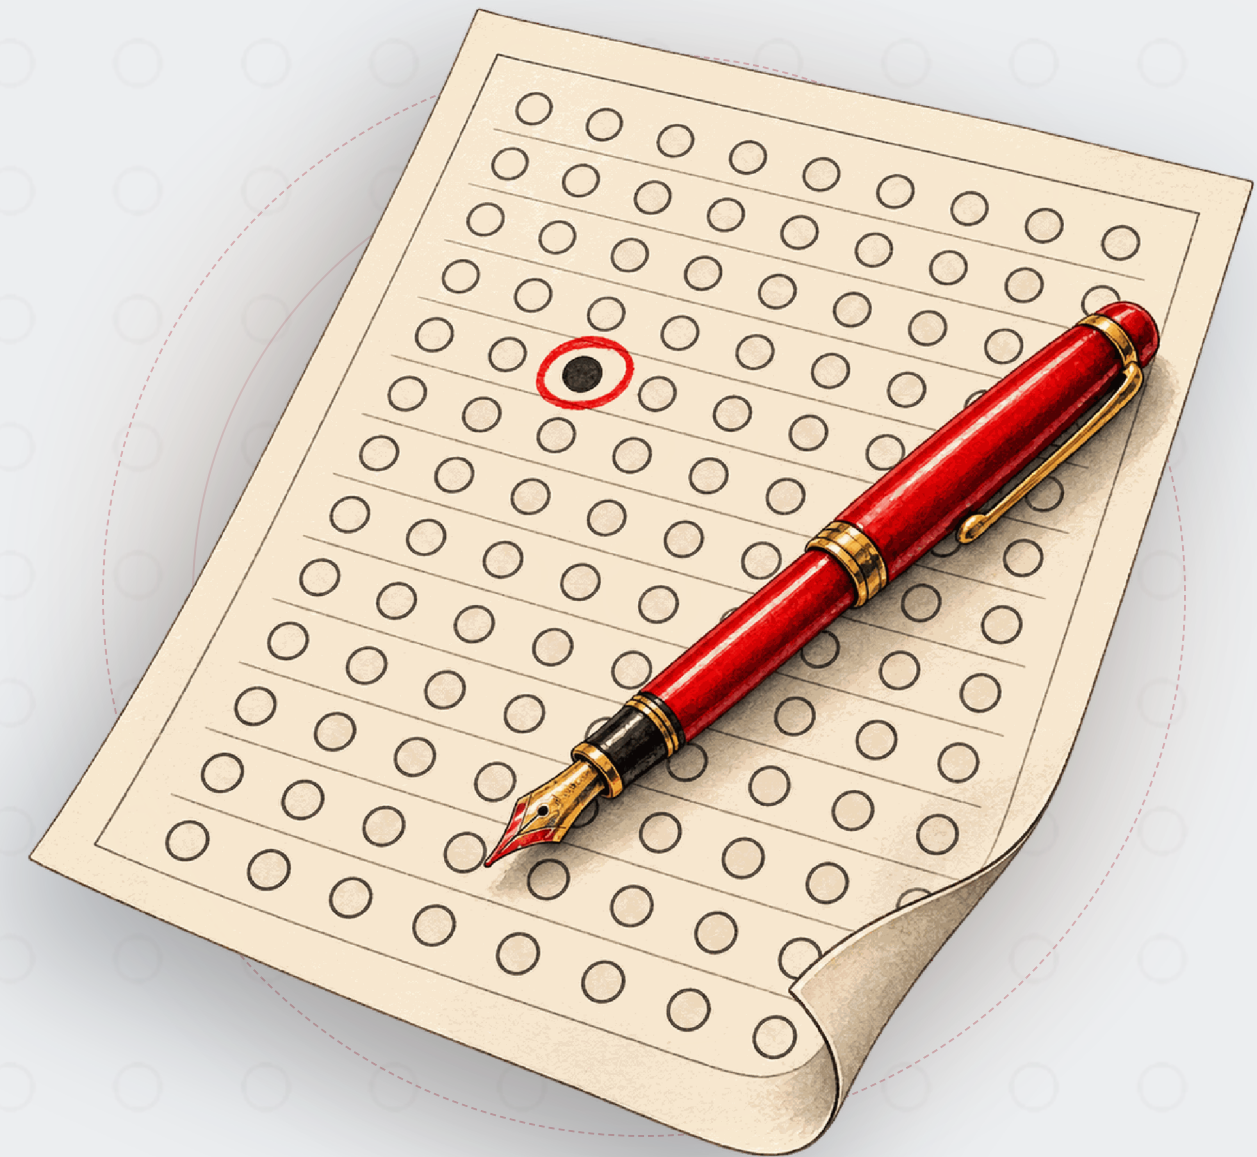

1. PROBLEM STATEMENT

A quiz goes out with the wrong answer marked. **Every student loses that mark.**

Teachers set multiple-choice quizzes with an answer key. When the key is wrong, nobody finds out until the marks are in. Cekgu checks the key first.

HOW A WRONG KEY GETS CAUGHT TODAY

The teacher re-reads it	Anchored to the key she already believes.
A colleague re-solves it	An expert's hour, every single time.
She asks a chatbot	One opinion, and no proof it did not just agree with her.

ONE FROM OUR SAMPLE QUIZ

Which data structure removes elements in first in, first out order?

SUPPLIED KEY CORRECT ANSWER

A • Stack

B • Queue

Possible Key Error

Universities already vet exam papers by committee because this is real. **Cekgu is the check that runs before the committee, on every quiz, in minutes.**

UITM FINAL-EXAMINATION GUIDANCE

1. PROBLEM STATEMENT · THE USER

Meet Cikgu Farah. The tutor who gets the complaints.

She sets multiple-choice quizzes for her students. When an answer key is wrong, the students complain to her, and she has to sort it out.

F

Cikgu Farah, 34

INDEPENDENT TUTOR · INTRODUCTORY COMPUTER SCIENCE · SHAH ALAM

PUBLISHES

Twelve items, several times a month.

ACCOUNTABLE FOR

Every item a learner challenges.

WANTS

A second pair of eyes. Not an AI author.

DEVICE

Laptop to write. Phone to check.

“Which three questions should I look at again, and why?”

- IN →

She types each question into the **New Check** form: the question, its two to six options, and a tick on the one she marks correct. **No file to upload.**

One item at a time · validated before any model runs · paste and CSV import after submission
- 

Her record exists in under a second. She closes the laptop. It keeps checking.

Every item verdicted within five minutes, nineteen times in twenty
- OUT →

Every item with a verdict, the risky ones first. Two readings each, with a request id. Her decision beside the verdict, never over it.

~~She re-reads all twelve herself.~~
→ **She reads the three that came back different.**

~~A colleague re-solves the paper.~~
→ **Two models re-solve it without the key, with receipts.**

~~She hears about a wrong key after the marks.~~
→ **She hears before the quiz goes out.**

2. PROJECT OBJECTIVE

Spend human attention **where it matters.**

Cekgu uses two separate AI models on GonkaRouter to audit every answer, so the educator only reads the ones that came back flagged instead of all of them.

TWO MODELS RE-SOLVE EVERY ITEM, KEY WITHHELD **12**

- 1 What is the time complexity of reading the element at a known ind...
- 2 Which transport protocol retransmits lost segments so that data a...
- 3 Which data structure removes elements in first in, first out orde...
- 4 In big-O notation, what does O(n) say about an algorithm?
- 5 Mutual exclusion, hold and wait, and no preemption are three of t...
- 6 Which layer of the TCP/IP model does HTTP belong to?
- 7 What does a primary key guarantee about a relational table?
- 8 What does a compiler do with a source program?
- 9 What is the main job of the Domain Name System?
- 10 Why does a processor have a cache?
- 11 How many bytes are there in one kilobyte?
- 12 What does creating a branch in Git let a developer do?

SORTED
→

ONLY THESE NEED A HUMAN **3**

- 3 Which data structure removes elements in firs...

Possible Key Error
- 9 What is the main job of the Domain Name Syste...

Possible Key Error
- 11 How many bytes are there in one kilobyte?

Possible Ambiguity

9 items

Clear

3. OVERALL CONCEPT

Two GonkaRouter models answer each question without seeing the key. **A fixed rule compares them.**

Neither model is shown the teacher’s answer or the other model’s. The rule checks whether the two agree first, and only then whether they agree with the key.

THE ITEM AS SUBMITTED

Which data structure removes elements in first in, first out order?

Your key is withheld.

TWO GONKAROUTER MODELS, KEY WITHHELD

MiniMax-M2.7

Queue

=

Kimi-K2.6

Queue

≠

THE SUPPLIED KEY

Stack

CHECKED IN THIS ORDER

- 1

Unverified

fewer than two verified readings
- 2

Split Opinion

the two answers differ
- 3

Possible Ambiguity

both list more than one option
- 4

Clear

the shared answer is the key
- 5

Possible Key Error

the shared answer is not the key

3. OVERALL CONCEPT · THE MOMENT

Nobody told them the key. Both chose Queue.

Question 3 of the public sample record, exactly as it came back.

Which data structure removes elements in first in, first out order?

SUPPLIED KEY

- A
- B
- C
- D

Stack

MiniMaxAI/MiniMax-M2.7

- A
- B
- C
- D

Queue

RECEIPT

Verified

moonshotai/Kimi-K2.6

- A
- B
- C
- D

Queue

RECEIPT

Verified

Possible Key Error

Both readers chose Queue. The supplied key is Stack.

The supplied key says Stack.

Cekgu asks a human to look. It changes nothing.

RULE FIRED

Two verified readings agree on a non-key option.

3. OVERALL CONCEPT · THE PROOF

Every reading carries **a request id.**

Each reading is tied to a GonkaRouter receipt anyone can fetch. A reading without one never enters a verdict.

PUBLIC SAMPLE RECORD · QUESTION 9

SERVED MODEL

MiniMaxAI/MiniMax-M2.7

REQUEST ID

req-1788427238422211326-414866

RECEIPT

Verified

SERVED MODEL

moonshotai/Kimi-K2.6

REQUEST ID

req-1788427238422211356-414867

RECEIPT

Verified

ASK THE GATEWAY YOURSELF

`api.gonkarouter.io/v1/receipts/
req-1788427238422211326-414866`

No key, no login. Anyone in this room can open it now.


Both ids are on the public sample record. Neither reading counts without one.

```
"model": "MiniMaxAI/MiniMax-M2.7",
"outcome": "success",
"status_code": 200,
"duration_ms": 30867,
"created_at": "2026-09-03T09:21:09Z",
"x_devshard_id": "70340"
```

4. TECHNOLOGY AND TRACK

One process. One gateway. Two models.

One Bun process, one gateway, four calls in flight, and a rule you can read off the screen.

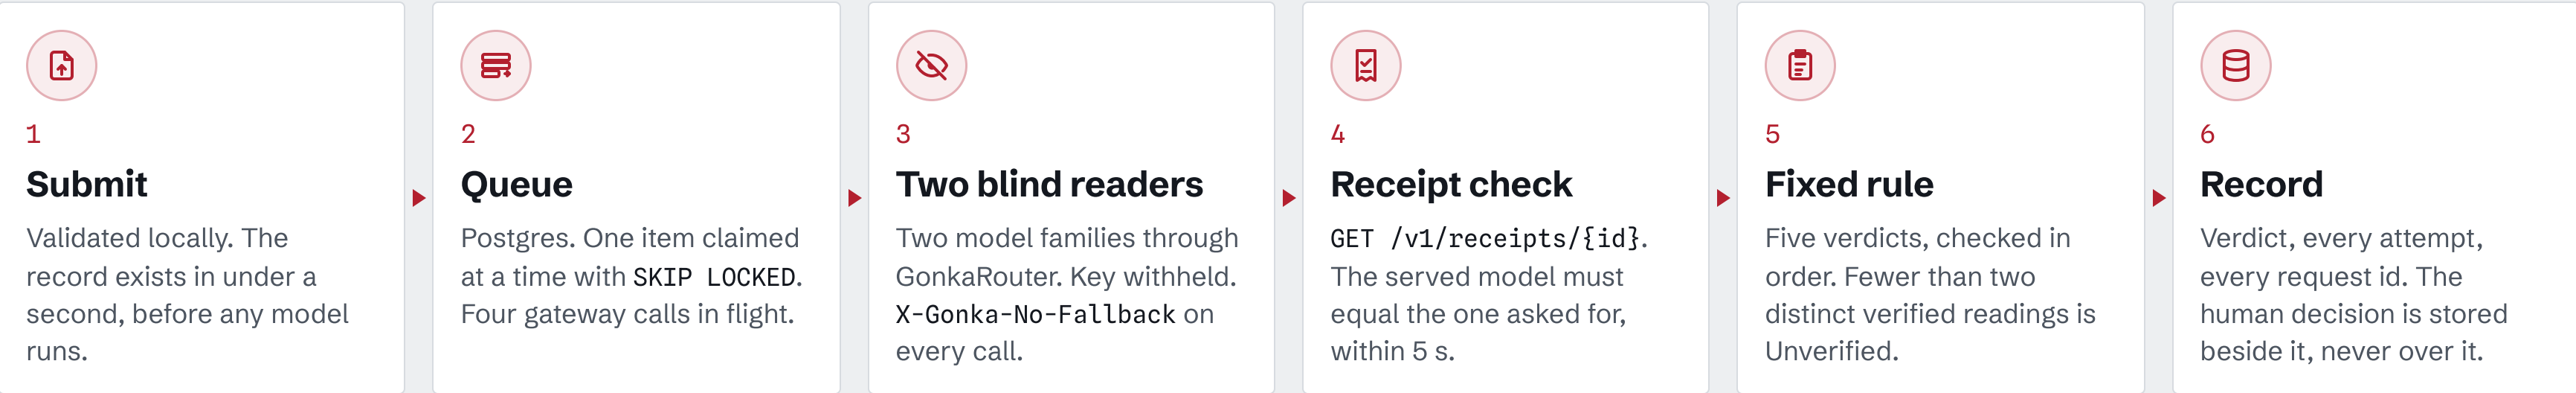

STACK	
Browser	React 19, Vite
Server	Bun, Hono, worker in the same process
Data	Postgres on Neon, Drizzle
Host	Cloud Run

WHEN THE GATEWAY IS SLOW	
Hedge at 45 s	a duplicate call to the same model, first answer wins
Cutoff at 90 s	the call is aborted and recorded with no request id
3 attempts per family	then the item is Unverified, never guessed

ASSERTED EVERY RUN

only-gonkarouter.test.ts

No other AI provider exists anywhere in the code. A judge can grep for it.

5. MOTIVATION AND CHALLENGES

Two independent models on every item. Built to wait for both.

Two models on GonkaRouter give every verdict redundancy and a check against a single model’s hallucination. A second reading takes time, so the queue does the waiting and the educator does not.

So Cekgu queues the work, retries, and fails closed.

12 of 12

items, two verified readings each

PUBLIC SAMPLE RECORD

5 abstained as Unverified. 1 came back Clear.

SECONDS TO A COMPLETED CALL • 3 SEP BENCHMARK



30-ITEM EVALUATION SET • RUN TWICE THROUGH THE DEPLOYED QUEUE



6. BUSINESS MODEL

We charge for questions checked. **Not tokens.**

Priced by questions checked, so the educator never sees a model bill.

FREE 20 questions checked per month RM0	CEKGU PLUS 300 questions checked per month RM29 / month	CEKGU STUDIO 1500 questions checked per month RM79 / month
---	---	--

The educator never sees a model bill. **Pilot pricing, and no buyer has paid yet.**

AFTER SUBMISSION, IN THE ORDER THE SCOPE LADDER PLACES THEM

NEXT
Get papers in faster
Paste and CSV import. Bahasa Malaysia product copy.

THEN
Keep the record useful
Trash restore, duplication, export, email when a record is ready.

LATER
Charge for it
Billing on the three tiers. Library search and filters.

Guest is a shared demo workspace, expiring in 24 hours.

Check the exam before the exam checks us.

LIVE DEMO `cekgu-op7lf5dspq-as.a.run.app`

REPOSITORY `github.com/MUBA-M1KU/Cekgu`


DEVFOLIO `muba-hackathon.devfolio.co`

Twelve items. Two blind readers
each. Three sent back to a human.



ALIGNED WITH
UN GLOBAL GOAL 4

Team M1KU · @chaosiris · @AlaskanTuna · @kymil4 · @c3638
MUBA Blockchain Hackathon 2026 · GonkaRouter track
Submitted on Devfolio

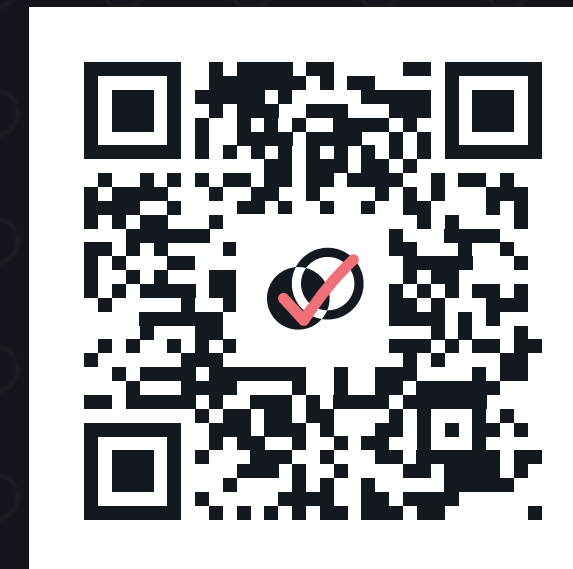

Scan to open the public sample record