



The answer key is wrong. Nobody checked.

Cekgu reviews a quiz before learners sit it.

- Two models, read blind
- Every reading receipted
- Refuses on disagreement

TEAM M1KU

@AlaskanTuna Gateway · Queue · API	@kymil4 Frontend · Deploy	@chaosiris Testing · Deck	@c3638 Docs · Submission
---------------------------------------	------------------------------	------------------------------	-----------------------------



PROBLEM STATEMENT

One wrong key. Every learner pays.

Three ways a published item is already wrong.

- **A wrong key.** The marked answer is not the right one.
- **Two defensible answers.** Both are arguable; only one scores.
- **A missing word.** The stem no longer asks what it meant to.

The paper was vetted. **The defect survived.**

Which data structure removes elements in first in, first out order?

SUPPLIED KEY

A

Stack

B

Queue

C

Binary search tree

D

Hash table

Published. Nobody re-solved it.



VETTED

PROJECT OBJECTIVE

Spend human attention where it matters.

CEKGU RE-SOLVES EVERY ITEM, BLIND

12

1 What is the time complexity of reading the element at a known ind...

2 Which transport protocol retransmits lost segments so that data a...

3 Which data structure removes elements in first in, first out orde...

4 In big-O notation, what does O(n) say about an algorithm?

5 Mutual exclusion, hold and wait, and no preemption are three of t...

6 Which layer of the TCP/IP model does HTTP belong to?

7 What does a primary key guarantee about a relational table?

8 What does a compiler do with a source program?

9 What is the main job of the Domain Name System?

10 Why does a processor have a cache?

11 How many bytes are there in one kilobyte?

12 What does creating a branch in Git let a developer do?

SORTED

→

ONLY THESE NEED A HUMAN

3

3 Which data structure removes elements in firs...

Possible Key Error

9 What is the main job of the Domain Name Syste...

Possible Key Error

11 How many bytes are there in one kilobyte?

Possible Ambiguity

9 items

Clear

PUBLIC SAMPLE RECORD • 12 ITEMS

OVERALL CONCEPT

Two readers, blind. Then a fixed rule.

THE ITEM AS SUBMITTED

Which data structure removes elements in first in, first out order?

Your key is withheld.

TWO MODEL FAMILIES, ANSWERING BLIND

MiniMax-M2.7

Queue

=

Kimi-K2.6

Queue

→

THE SUPPLIED KEY

Stack

CHECKED IN THIS ORDER

- 1 Unverified
fewer than two verified readings
- 2 Split Opinion
the two answers differ
- 3 Possible Ambiguity
both list more than one option
- 4 Clear
the shared answer is the key
- 5 Possible Key Error
the shared answer is not the key

Nobody told them the key. Both chose Queue.

Which data structure removes elements in first in, first out order?

SUPPLIED KEY

- A
- B
- C
- D

Stack

MiniMaxAI/MiniMax-M2.7

- A
- B
- C
- D

Queue

RECEIPT

Verified

moonshotai/Kimi-K2.6

- A
- B
- C
- D

Queue

RECEIPT

Verified

●○ Possible Key Error

Both readers chose Queue. The supplied key is Stack.

The supplied key says Stack.

Cekgu asks a human to look. It changes nothing.

RULE FIRED

Two verified readings agree on a non-key option.

OVERALL CONCEPT · THE PROOF

Every reading carries a request id.

PUBLIC SAMPLE RECORD · QUESTION 9

SERVED MODEL

MiniMaxAI/MiniMax-M2.7

REQUEST ID

req-1788427238422211326-414866

RECEIPT

Verified

SERVED MODEL

moonshotai/Kimi-K2.6

REQUEST ID

req-1788427238422211356-414867

RECEIPT

Verified

ASK THE GATEWAY YOURSELF


`api.gonkarouter.io/v1/receipts/
req-1788427238422211326-414866`

No key, no login. Anyone in this room can open it now.

Both ids are on the public sample record. Neither reading counts without one.

```
"model": "MiniMaxAI/MiniMax-M2.7",  
"outcome": "success",  
"status_code": 200,  
"duration_ms": 30867,  
"created_at": "2026-09-03T09:21:09Z",  
"x_devshard_id": "70340"
```

One process. One gateway. Two models.

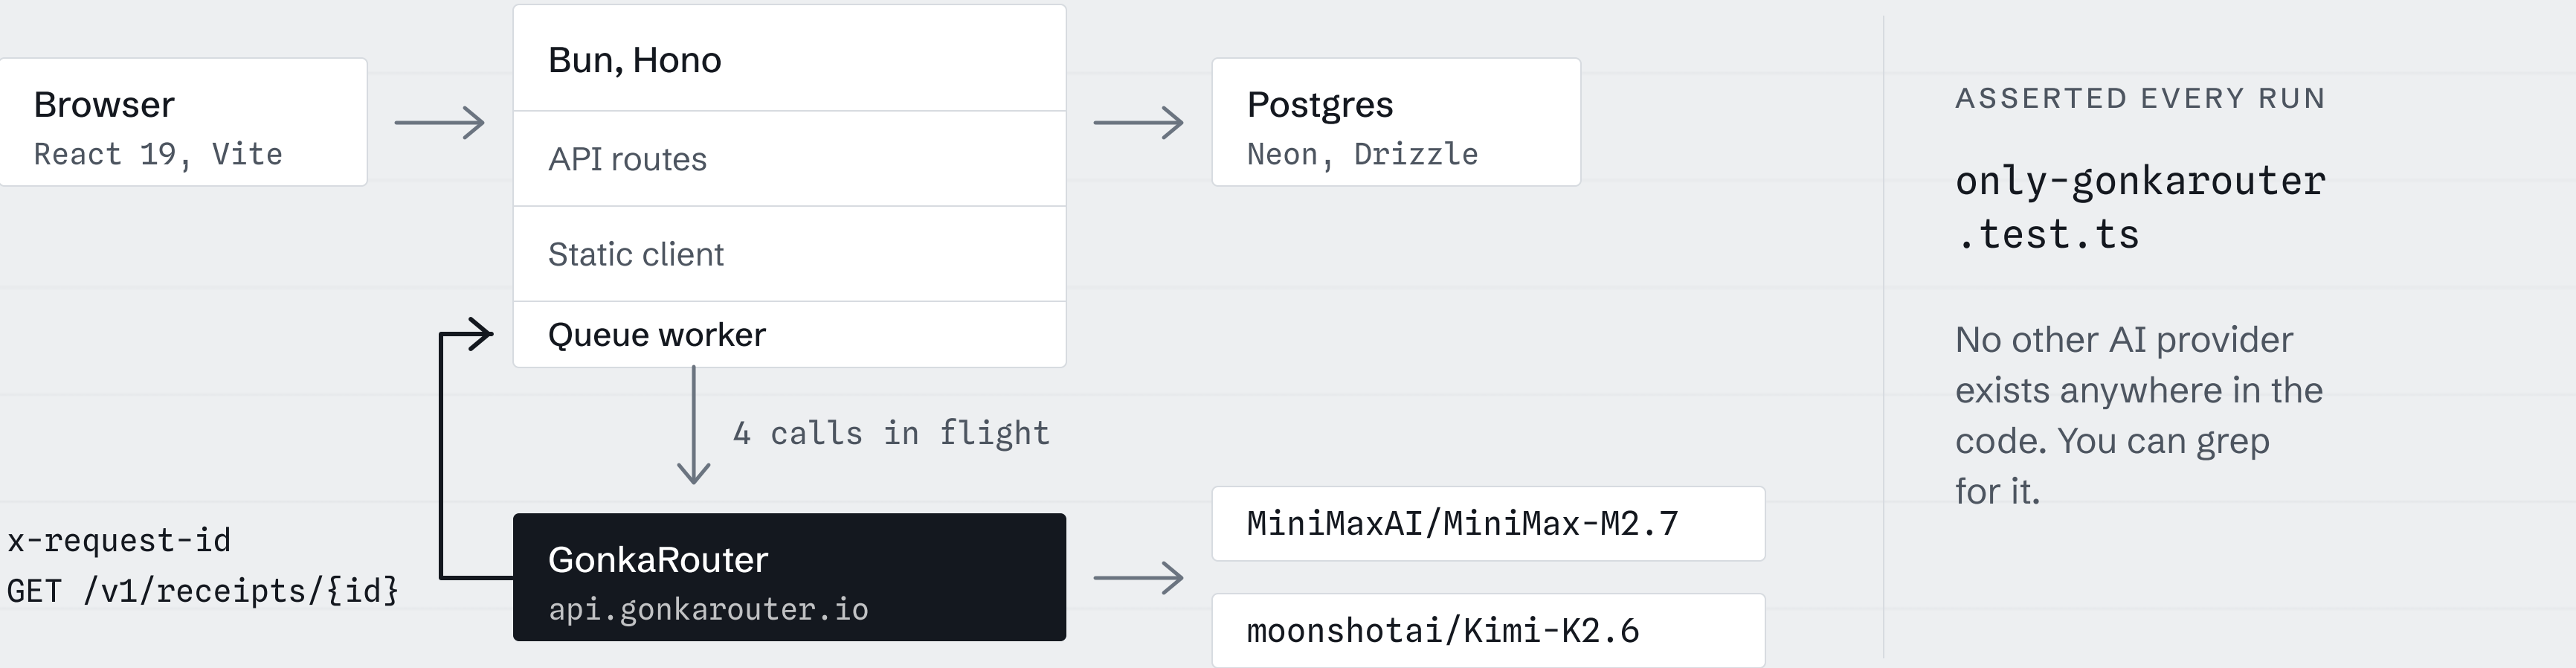

- ✓ All inference on GonkaRouter
- ✓ Two models, distinct receipts
- ✓ A request id per step
- ✓ The rule printed on screen

MOTIVATION AND CHALLENGES

No item had two readings in 30 seconds.


So Cekgu queues the work, retries, and fails closed.

12 of 12


items, two verified readings each

PUBLIC SAMPLE RECORD

SECONDS TO A COMPLETED CALL · 3 SEP BENCHMARK

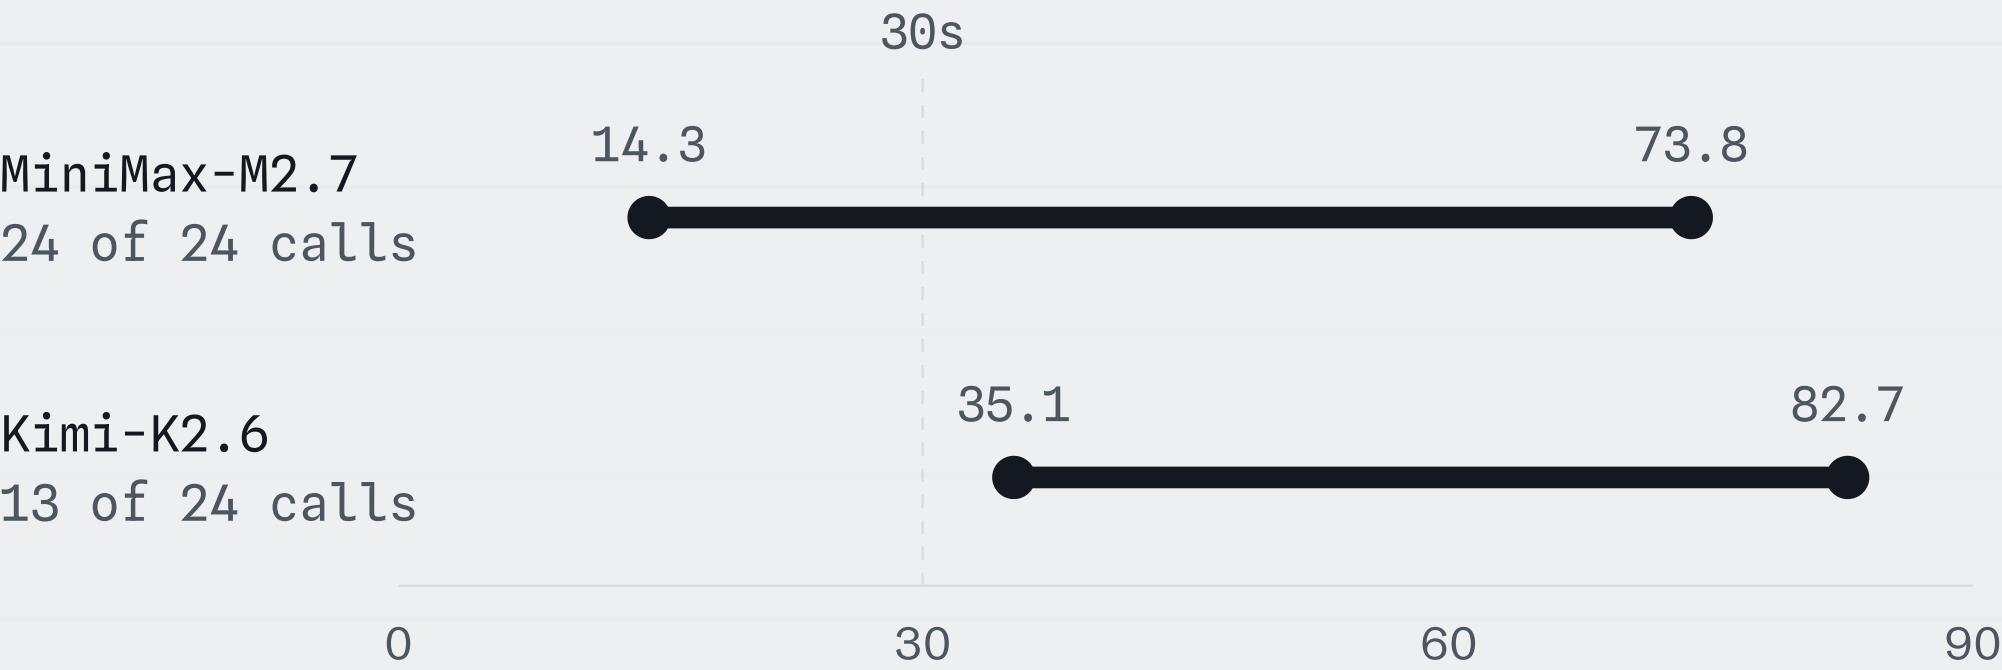

30-ITEM EVALUATION SET · RUN TWICE THROUGH THE DEPLOYED QUEUE

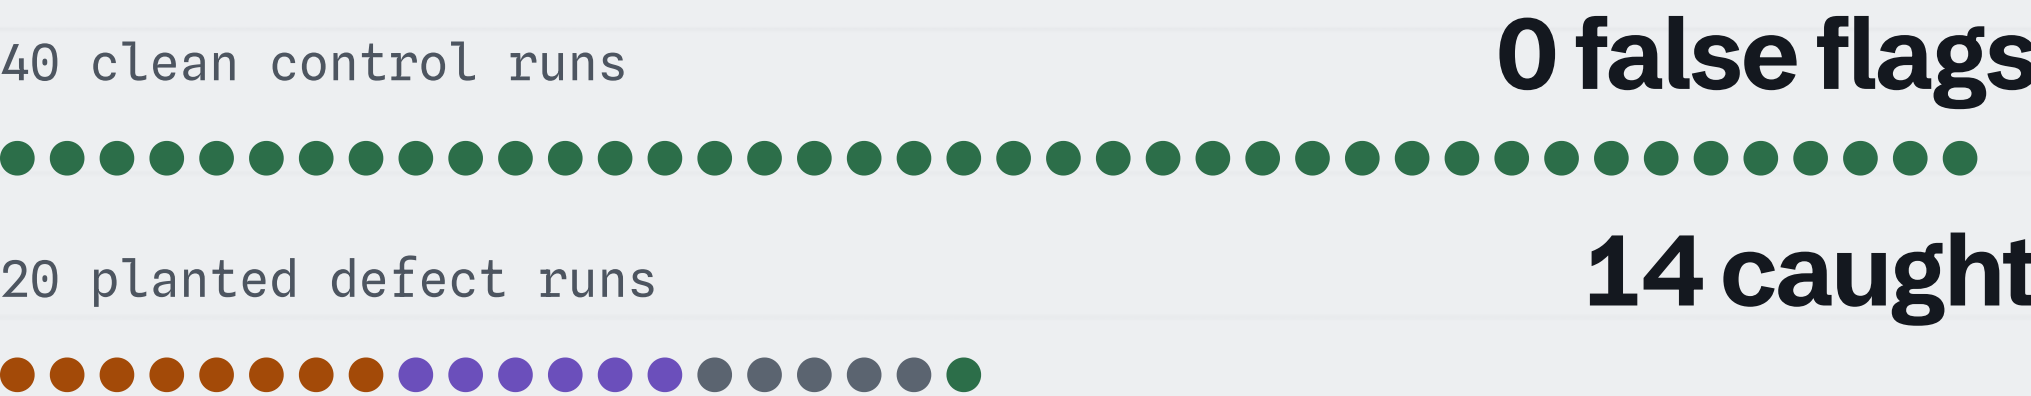

5 abstained as Unverified. 1 came back Clear.

BUSINESS MODEL

We charge for questions checked. Not tokens.

FREE

20

questions checked per month

RM0

CEKGU PLUS

300

questions checked per month

RM29 / month

CEKGU STUDIO

1500

questions checked per month

RM79 / month


The educator never sees a model bill. **Pilot pricing, and no buyer has paid yet.**

Check the exam before the exam checks us.

LIVE DEMO `cekgu-op7lf5dspq-as.a.run.app`
REPOSITORY `github.com/MUBA-M1KU/Cekgu`
DEVFOLIO `muba-hackathon.devfolio.co`

Twelve items. Two blind readers
each. Three sent back to a human.

@chaosiris · @AlaskanTuna · @kymil4 · @c3638

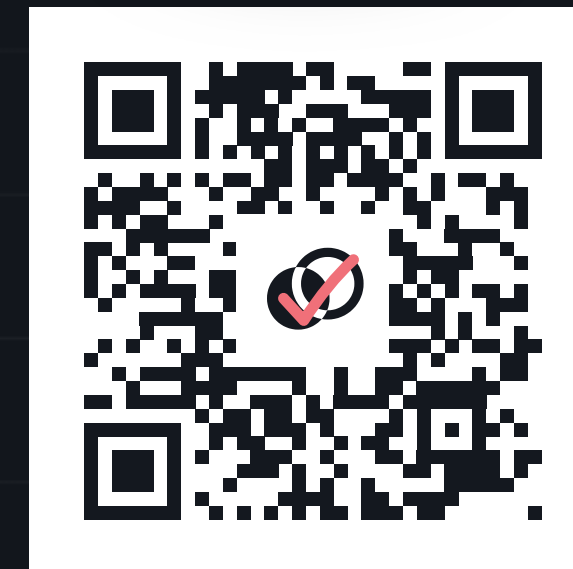

Scan to open the public sample record