



The answer key is wrong. **Nobody checked.**

Cekgu reviews a quiz for teachers and tutors, before students lose marks to a mistake in the answer key.

• Two models, neither sees the answer key

• Every answer has a receipt

• Stops and asks when they disagree

TEAM M1KU

@AlaskanTuna

Gateway · Queue ·
API

@kymil4


Frontend · Deploy

@chaosiris

Testing · Deck

@c3638

Docs · Submission

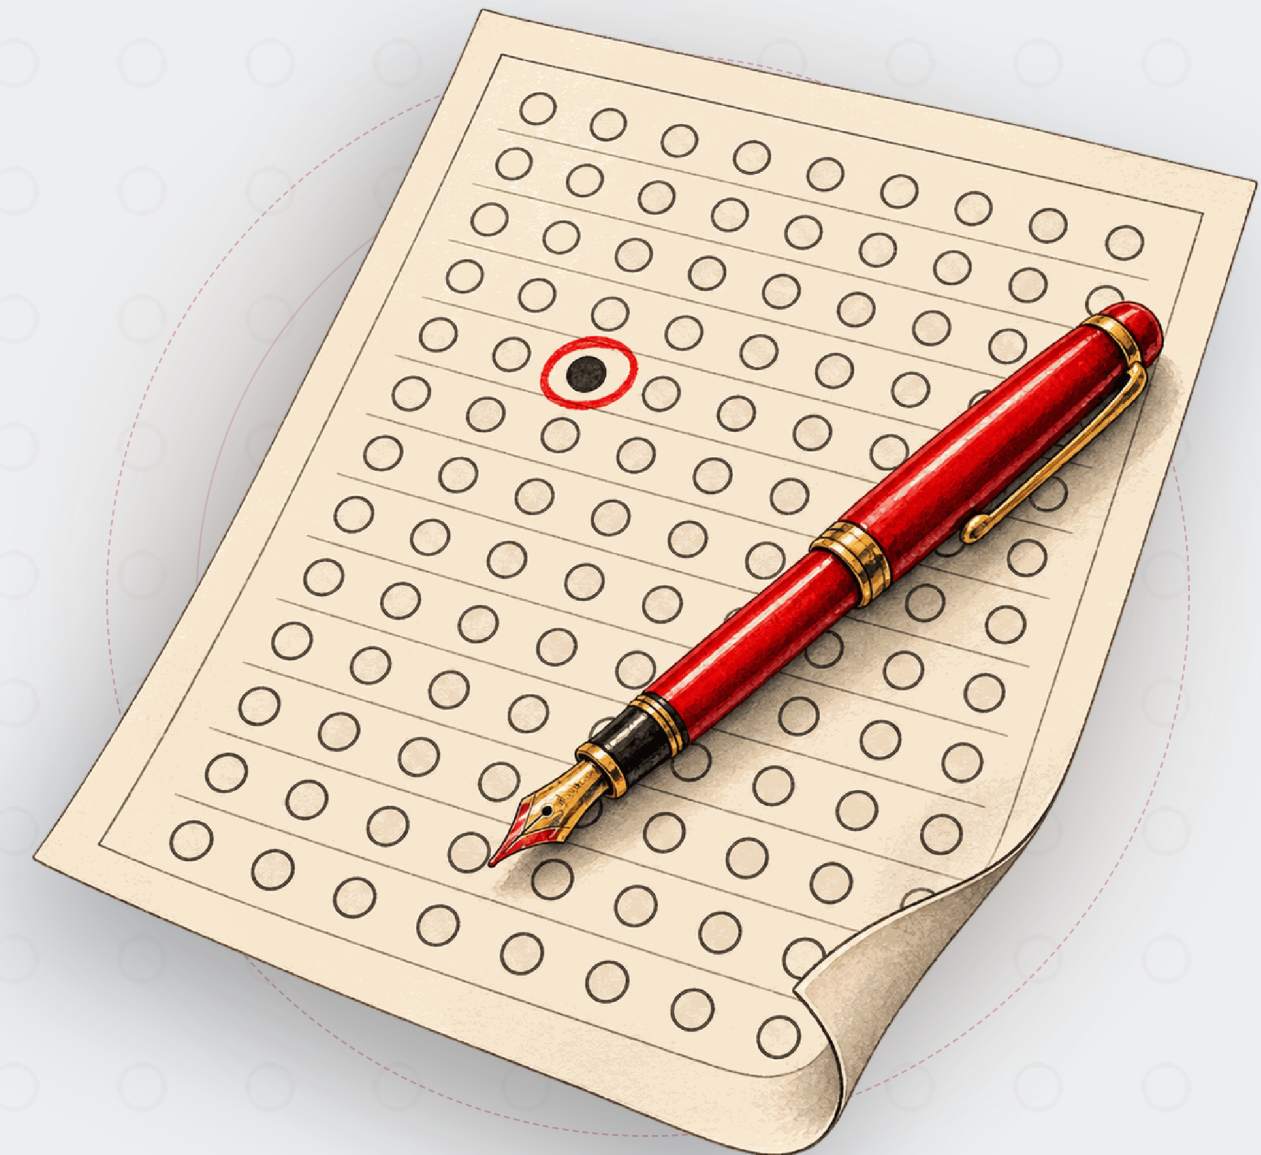

cekgu-op7lf5dspq-as.a.run.app

github.com/MUBA-M1KU/Cekgu

Submitted on Devfolio · Two separate models
answer every question without the answer key,
before any student sees it.

ALIGNED WITH
UN GLOBAL GOALS 4 AND 16



1. PROBLEM STATEMENT

A quiz goes out with the wrong answer marked. **Every student loses that mark.**

Teachers set multiple-choice quizzes with an answer key. When it is wrong, nobody finds out until the marks are in. Cekgu checks it first.

HOW A WRONG ANSWER KEY GETS CAUGHT TODAY

The teacher re-reads it	She already believes her answer key, so she reads straight past the mistake.
A colleague re-solves it	That costs a colleague an hour, every time.
She asks a chatbot	One answer, and no way to tell whether it just agreed with her.

ONE FROM OUR SAMPLE QUIZ

Which data structure removes elements in first in, first out order?

ANSWER KEY CORRECT ANSWER
A • Stack B • Queue

Possible Key Error

Universities already put exam papers through a vetting committee, because this happens. **Cekgu runs that check on every quiz, in minutes, before the committee does.**

UITM FINAL-EXAMINATION GUIDANCE

1. PROBLEM STATEMENT • THE USER

Meet Cikgu Farah. A private computer science tutor in Bukit Jalil.

She sets twelve-question quizzes several times a month. When her answer key is wrong, her students lose marks.

F

Cikgu Farah, 34

PRIVATE TUTOR • COMPUTER SCIENCE • BUKIT JALIL

PUBLISHES

Twelve questions, several times a month.

ACCOUNTABLE FOR

Every question a student disputes.

WANTS

A second pair of eyes, not something that writes the quiz for her.

DEVICE

Writes on a laptop, checks on her phone.

“Which three questions should I look at again, and why?”

~~She re-reads all twelve herself.~~
→ She reads the three that came back different.

~~A colleague re-solves the paper.~~
→ Two models answer it without the answer key, and each answer comes with a receipt.

~~She hears about a wrong answer key after the marks.~~
→ She hears before the quiz goes out.

IN → She types each question in, one at a time: the question, the answer options, and which one she thinks is right. **That is all. Nothing to upload.**

Cekgu checks she has not missed an option or an answer before it does anything else. Pasting in a whole paper comes later.

 **The moment she hits submit, the record is saved.** She can shut the laptop and come back to it.
Results take a few minutes. In our tests, nineteen of twenty questions were done inside five.

OUT → **Every question with its result, the worrying ones at the top.** For each one, what Kimi said, what MiniMax said, and a receipt for both. She decides what to change; Cekgu does not edit her quiz.

2. PROJECT OBJECTIVE

She reads three questions **instead of twelve.**

Cekgu uses two separate AI models on GonkaRouter to audit every answer, so the educator only reads the ones that came back flagged instead of all of them.

ALL 12 QUESTIONS, NO ANSWER KEY **12**

- 1 What is the time complexity of reading the element at a known ind...
- 2 Which transport protocol retransmits lost segments so that data a...
- 3 Which data structure removes elements in first in, first out orde...
- 4 In big-O notation, what does O(n) say about an algorithm?
- 5 Mutual exclusion, hold and wait, and no preemption are three of t...
- 6 Which layer of the TCP/IP model does HTTP belong to?
- 7 What does a primary key guarantee about a relational table?
- 8 What does a compiler do with a source program?
- 9 What is the main job of the Domain Name System?
- 10 Why does a processor have a cache?
- 11 How many bytes are there in one kilobyte?
- 12 What does creating a branch in Git let a developer do?

SORTED
→

FLAGGED FOR HER TO READ **3**

- 3 Which data structure removes elements in firs...
Possible Key Error
- 9 What is the main job of the Domain Name Syste...
Possible Key Error
- 11 How many bytes are there in one kilobyte?
Possible Ambiguity

9 questions Clear

3. OVERALL CONCEPT

Two GonkaRouter models answer without seeing the answer key. **A fixed rule compares them.**

Neither model is shown the teacher’s answer or the other model’s. The rule checks whether the two agree first, and only then whether they agree with the answer key.

THE QUESTION AS SHE TYPED IT

Which data structure removes elements in first in, first out order?

The answer key is withheld.

BOTH MODELS, NO ANSWER KEY

MiniMax-M2.7

Queue

=

Kimi-K2.6

Queue

≠

ANSWER KEY

Stack

CHECKED IN THIS ORDER

- 1

Unverified

fewer than two verified answers
- 2

Split Opinion

the two answers differ
- 3

Possible Ambiguity

both list more than one option
- 4

Clear

both answers match the answer key
- 5

Possible Key Error

both answers match, and the answer key is different

3. OVERALL CONCEPT · THE MOMENT

Nobody told them the answer key. Both chose Queue.

Question 3 of the public sample record, unedited.

Which data structure removes elements in first in, first out order?

SUPPLIED KEY

☒ A ☐ B ☐ C ☐ D
Stack

MiniMaxAI/MiniMax-M2.7

☐ A ☒ B ☐ C ☐ D
Queue

RECEIPT Verified

moonshotai/Kimi-K2.6

☐ A ☒ B ☐ C ☐ D
Queue

RECEIPT Verified

●○ Possible Key Error

Both models chose Queue. The answer key says Stack.

The answer key says Stack.

Cekgu flags it for a person to check.
It does not touch her answer key.

WHY

Both verified answers agree, and neither matches the answer key.

3. OVERALL CONCEPT · THE PROOF

Every answer comes with a **GonkaRouter request ID**.

Each answer has a GonkaRouter receipt anyone can open. An answer without a receipt is not counted.

PUBLIC SAMPLE RECORD · QUESTION 9

SERVED MODEL

MiniMaxAI/MiniMax-M2.7

REQUEST ID

req-1788427238422211326-414866

RECEIPT

Verified

SERVED MODEL

moonshotai/Kimi-K2.6

REQUEST ID

req-1788427238422211356-414867

RECEIPT

Verified

OPEN IT YOURSELF

`api.gonkarouter.io/v1/receipts/
req-1788427238422211326-414866`


No API key or login needed. Anyone in this room can open it now.
Both IDs are on the public sample record.

```
"model": "MiniMaxAI/MiniMax-M2.7",  
"outcome": "success",  
"status_code": 200,  
"duration_ms": 30867,  
"created_at": "2026-09-03T09:21:09Z",  
"x_devshard_id": "70340"
```

4. TECHNOLOGY AND TRACK

One server, one gateway, **two models.**

One Bun process, one gateway, four calls in flight, and a rule you can read off the screen.

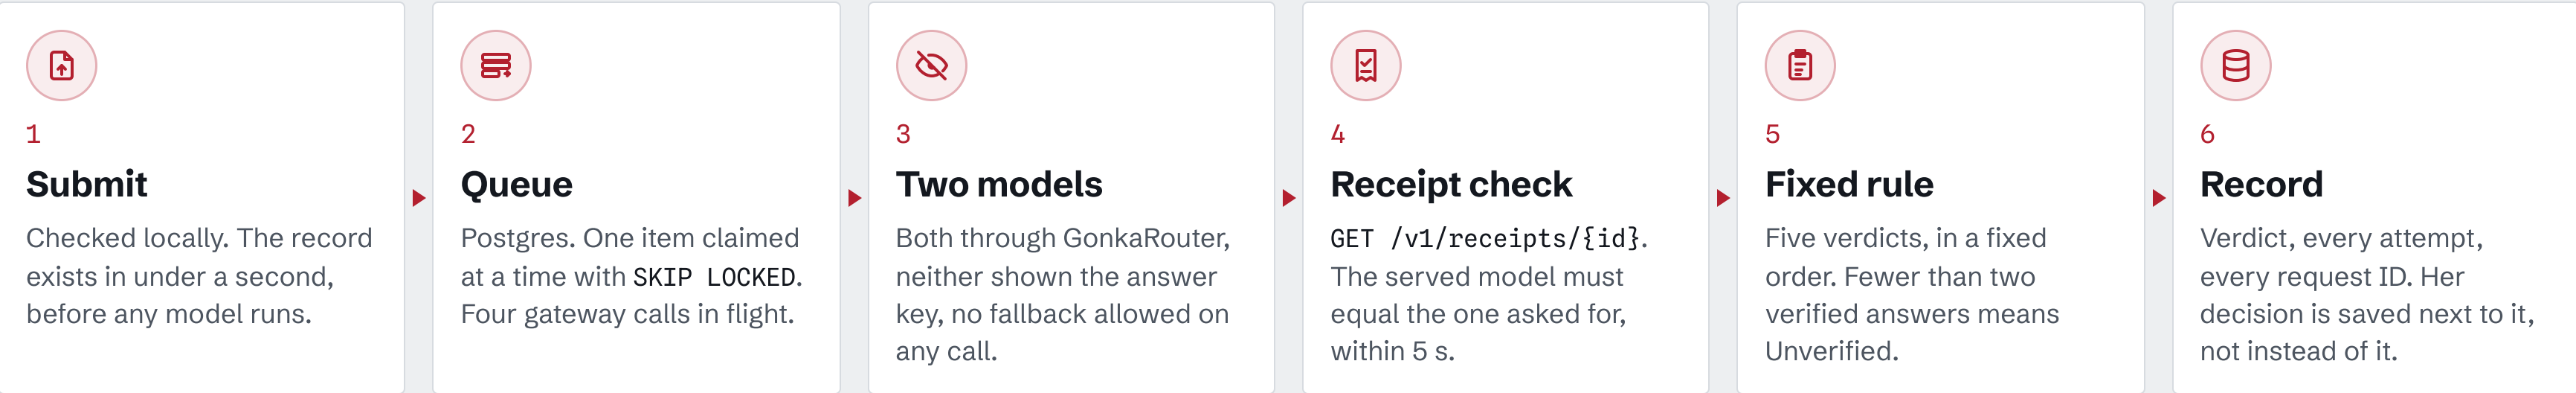

STACK

Browser

React 19

Vite

Server

Bun

Hono

Data

PostgreSQL

Neon

Drizzle

Host

Cloud Run

WHEN THE GATEWAY IS SLOW

Hedge at 45 s

a duplicate call to the same model, first answer wins

Cutoff at 90 s

the call is aborted and recorded with no request ID

3 attempts per family

then the question is marked Unverified

CHECKED ON EVERY TEST RUN

only-gonkarouter.test.ts

No other AI provider exists anywhere in the code. A judge can grep for it.

5. MOTIVATION AND CHALLENGES

Two separate models on every question, **and we wait for both.**

With two models on GonkaRouter, no verdict rests on one model’s mistake. A second answer takes time, so the queue does the waiting and the teacher does not.

So Cekgu queues the work, retries, and marks the question Unverified rather than guessing.

12 of 12

questions, two
verified answers each

PUBLIC SAMPLE RECORD

5 came back Unverified. 1 came back Clear.

SECONDS TO A COMPLETED CALL • 3 SEP BENCHMARK



30-ITEM EVALUATION SET • RUN TWICE THROUGH THE DEPLOYED QUEUE

40 clean control runs

0 false flags



20 planted defect runs

14 caught



6. BUSINESS MODEL

We charge per question checked, **not per token.**

Priced by questions checked, so the educator never sees a model bill.

FREE 20 questions checked per month RM0	CEKGU PLUS 300 questions checked per month RM29 / month	CEKGU STUDIO 1500 questions checked per month RM79 / month
---	---	--

Pilot pricing. No buyer has paid yet.

WHAT WE BUILD NEXT, IN ORDER

NEXT

Get papers in faster

Paste and CSV import. Bahasa Malaysia product copy.

THEN

Keep the record useful

Trash restore, duplication, export, email when a record is ready.

LATER

Charge for it

Billing on the three tiers. Library search and filters.

Guest is a shared demo workspace, expiring in 24 hours.

Check the paper before the students sit it.

LIVE DEMO `cekgu-op7lf5dspq-as.a.run.app`

REPOSITORY `github.com/MUBA-M1KU/Cekgu`


DEVFOLIO `muba-hackathon.devfolio.co`

Twelve questions, two models on each,
three flagged for a person to read.



ALIGNED WITH
UN GLOBAL GOALS 4 AND 16

Team M1KU · @chaosiris · @AlaskanTuna · @kymil4 · @c3638
MUBA Blockchain Hackathon 2026 · GonkaRouter track
Submitted on Devfolio

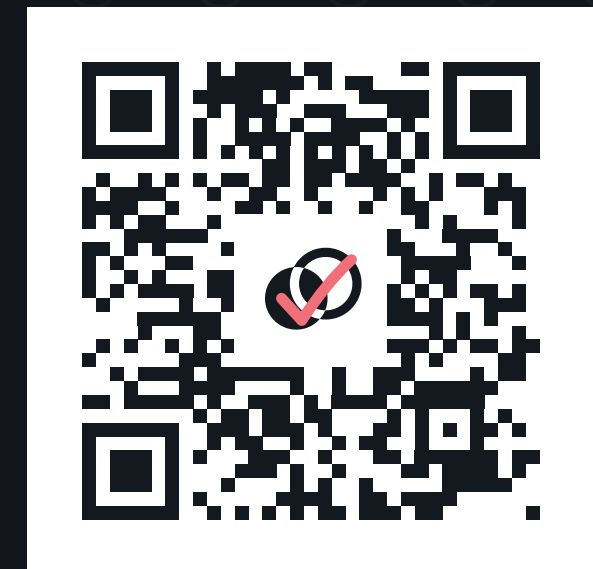

Scan to open the public sample record