

MUBA BLOCKCHAIN HACKATHON 2026 · GONKAROUTER TRACK

The answer key is wrong. Nobody checked.

Cekgu reviews a quiz before learners sit it.

TEAM M1KU



PROBLEM STATEMENT

One wrong key, every learner pays.

A wrong key. Two defensible answers. A missing word.

The paper was vetted. The defect survived.

Which data structure removes elements in first in, first out order?

SUPPLIED KEY

- A

Stack
- B

Queue
- C

Binary search tree
- D

Hash table

Published. Nobody re-solved it.

VETTED



PROJECT OBJECTIVE

Spend human attention where it matters.

EVERY ITEM, READ AGAIN 12



THREE ITEMS, IN ORDER 3

●○ Possible Key Error

●○ Possible Key Error

ⓘ ⓘ Possible Ambiguity

9 items

● Clear

The public sample record, 12 items

Two readers, blind, then a fixed rule.

Which data structure removes elements in first in, first out order?

Key Withheld

TWO MODEL FAMILIES, ANSWERING BLIND

MiniMax-M2.7Queue

=

Kimi-K2.6Queue

≠

THE SUPPLIED KEYStack

CHECKED IN THIS ORDER

- 1 Unverified

fewer than two verified readings
- 2 Split Opinion

the two answers differ
- 3 Possible Ambiguity

both list more than one option
- 4 Clear

the shared answer is the key

5 Possible Key Error

the shared answer is not the key

Which data structure removes elements in first in, first out order?

SUPPLIED KEY

A

Stack

B

C

D

MiniMaxAI/MiniMax-M2.7

A

B

Queue

C

D

Receipt Verified

moonshotai/Kimi-K2.6

A

B

Queue

C

D

Receipt Verified

●○

 Possible Key Error

Both readers chose Queue. The supplied key is Stack.

Nobody told them the key.

Both chose Queue. The supplied key says Stack.

Cekgu asks a human to look. It changes nothing.

Every reading carries a request id.

Copy one into the receipt URL. The gateway names the model.

PUBLIC SAMPLE RECORD, QUESTION 9

SERVED MODEL

MiniMaxAI/MiniMax-M2.7

REQUEST ID

req-1788427238422211326-414866

Verified

SERVED MODEL

moonshotai/Kimi-K2.6

REQUEST ID

req-1788427238422211356-414867

Verified


api.gonkarouter.io/v1/receipts/req-1788427238422211326-414866

●○ Possible Key Error

Both ids are on the public sample record. Neither reading counts without one.

One process. One gateway. Two models.

No other AI provider exists anywhere in the code.

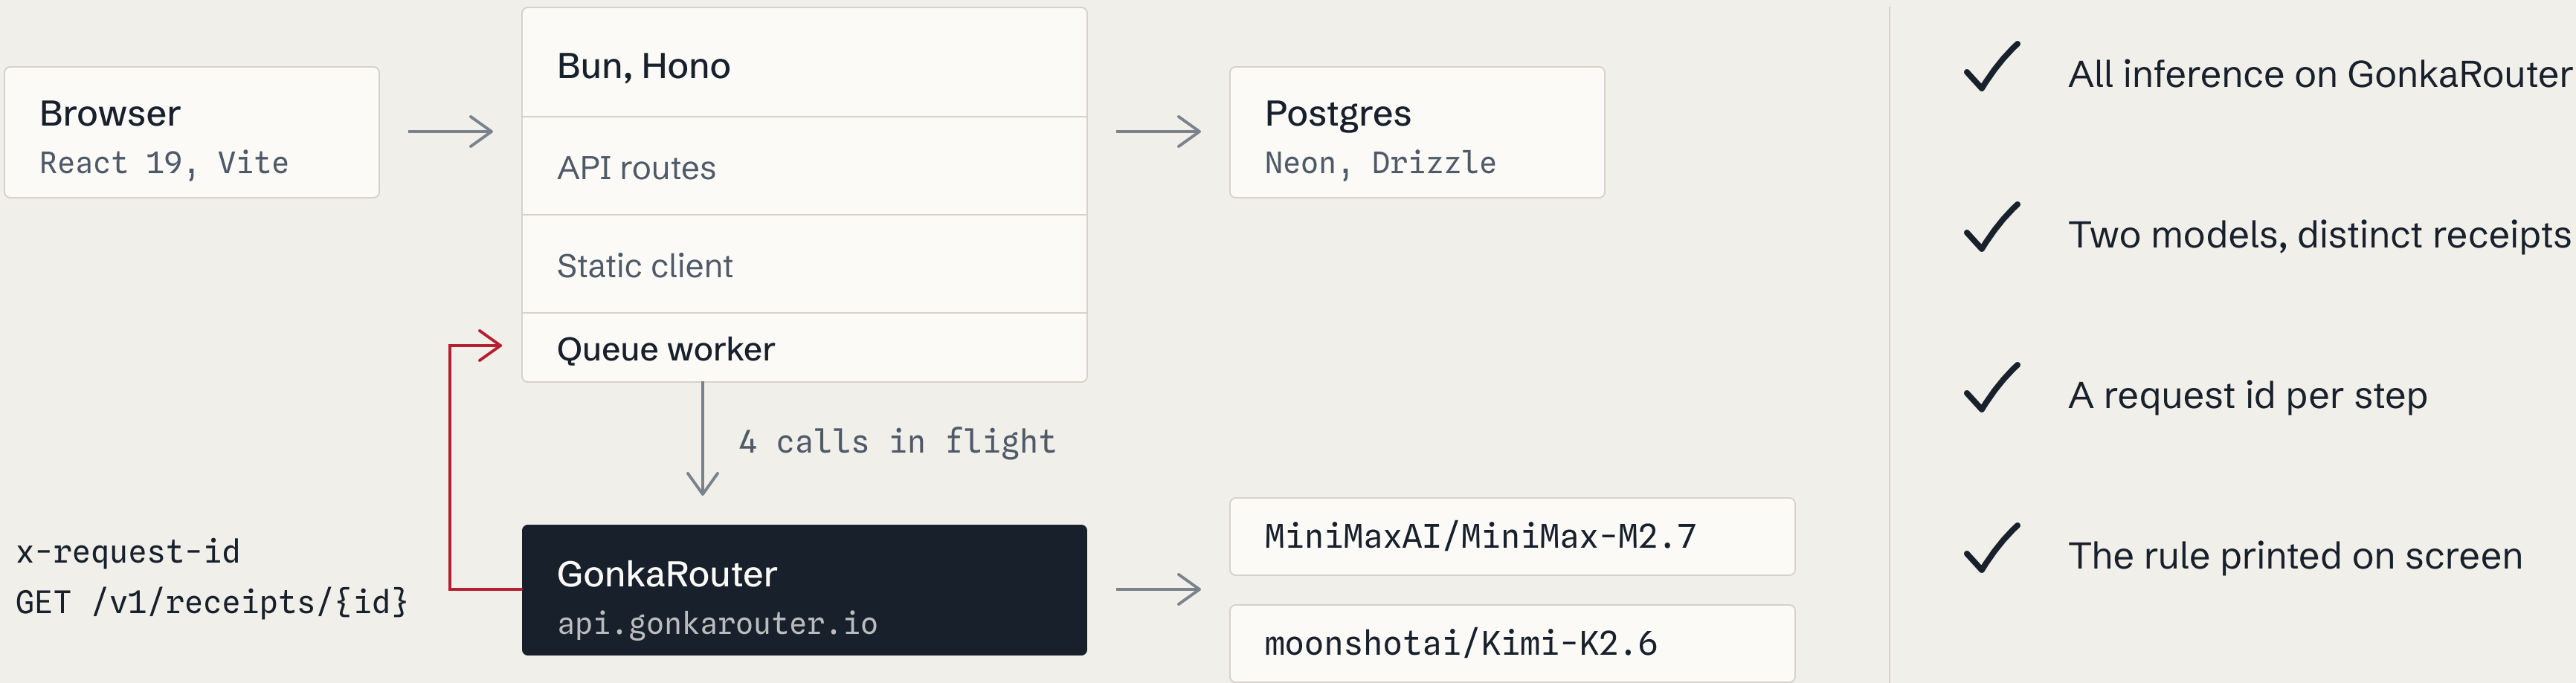


MOTIVATION AND CHALLENGES

No item had two readings in 30 seconds.

So Cekgu queues the work, retries, and fails closed.

On the sample record: 12 of 12 items, two verified readings.

SECONDS TO A COMPLETED CALL, 3 SEP BENCHMARK

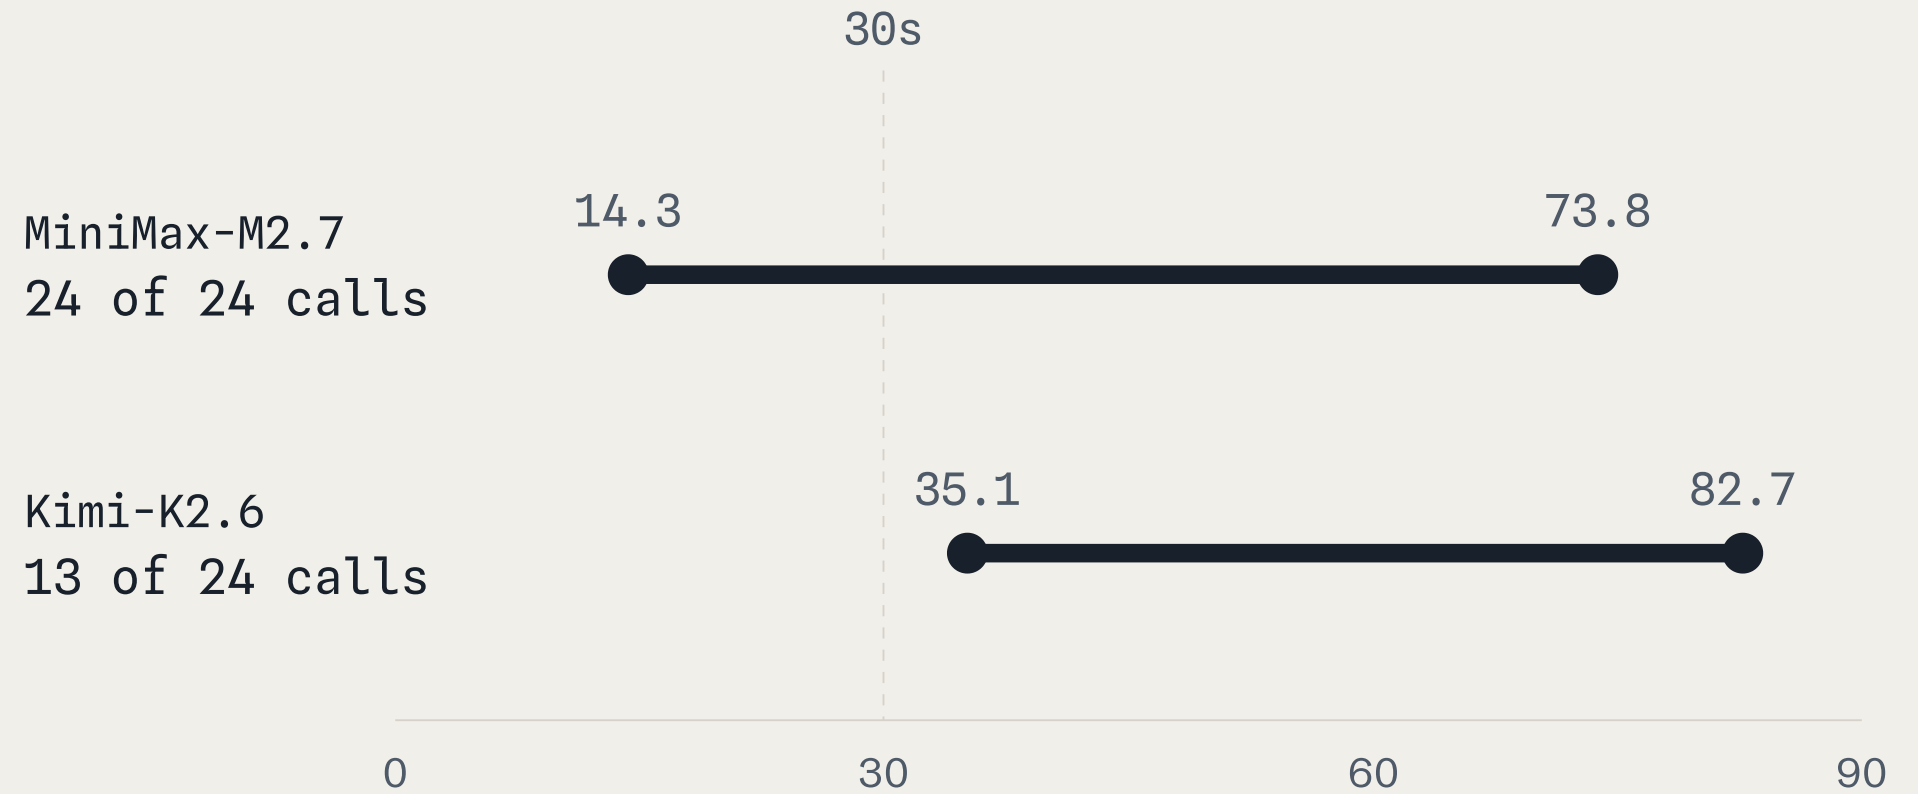

30-ITEM EVALUATION SET, RUN TWICE THROUGH THE DEPLOYED QUEUE



QUESTIONS CHECKED PER MONTH



Guest is a shared demo workspace, expiring in 24 hours.

BUSINESS MODEL

We charge for questions checked.

Not tokens. The educator never sees a model bill.

Pilot pricing. No buyer has paid yet.

Check the exam before the exam checks us.

LIVE DEMO	<code>cekgu-op7lf5dspq-as.a.run.app</code>
REPOSITORY	<code>github.com/MUBA-M1KU/Cekgu</code>
DEVFOLIO	<code>muba-hackathon.devfolio.co</code>

