



The answer key is wrong. **Nobody checked.**

A second opinion on every
question, before the marks are in.

- Two models, neither sees the answer key
- Every answer has a receipt
- Stops and asks when the two disagree

TEAM M1KU

@AlaskanTuna
Gateway · Queue ·
API

@kymil4
Frontend · Deploy

@chaosiris
Testing · Deck

@c3638
Docs · Submission

ALIGNED WITH UN GLOBAL
GOALS 4 AND 16



cekgu-op7lf5dspq-as.a.run.app
github.com/MUBA-M1KU/Cekgu
Submitted on Devfolio



1. PROBLEM STATEMENT

The committee reads the paper. **Nobody re-solves it.**

When the answer key is wrong, every student loses that mark.

ONE QUESTION FROM OUR PUBLIC SAMPLE

Which data structure removes elements in first in, first out order?

ANSWER KEY

A • Stack

CORRECT ANSWER

B • Queue

Possible Key Error

Universities already vet exam papers by committee. SOURCE: UITM PROCEDURE PK009
Cekgu re-solves every question, in minutes, before a student does.

2. PROJECT OBJECTIVE

She reads three questions **instead of twelve.**

Two models read every question. She opens only the flagged ones.

ALL 12 QUESTIONS, NO ANSWER KEY

12

1 What is the time complexity of reading the element at a known ind...

2 Which transport protocol retransmits lost segments so that data a...

3 Which data structure removes elements in first in, first out orde...

4 In big-O notation, what does O(n) say about an algorithm?

5 Mutual exclusion, hold and wait, and no preemption are three of t...

6 Which layer of the TCP/IP model does HTTP belong to?

7 What does a primary key guarantee about a relational table?

8 What does a compiler do with a source program?

9 What is the main job of the Domain Name System?

10 Why does a processor have a cache?

11 How many bytes are there in one kilobyte?

12 What does creating a branch in Git let a developer do?

FLAGGED FOR HER TO READ

3

3 Which data structure removes elements in firs...

Possible Key Error

9 What is the main job of the Domain Name Syste...

Possible Key Error

11 How many bytes are there in one kilobyte?

Possible Ambiguity

9 questions

Clear

PUBLIC SAMPLE RECORD • 12 QUESTIONS

SORTED

→

3. OVERALL CONCEPT

Two models, no answer key, one fixed rule.

Compared to each other first. Only then to the answer key.

THE QUESTION AS SHE TYPED IT

TWO MODEL FAMILIES, NO ANSWER KEY

CHECKED IN THIS ORDER

Which data structure removes elements in first in, first out order?

The answer key is withheld.

Reader A

Queue

=

Reader B

Queue

≠

ANSWER KEY

Stack

- 1

Unverified

fewer than two verified answers
- 2

Split Opinion

the two answers differ
- 3

Possible Ambiguity

both answers list more than one option
- 4

Clear

both answers match the answer key
- 5

Possible Key Error

both answers agree, and neither matches the answer key

3. OVERALL CONCEPT · THE PROOF

Every answer comes with a **GonkaRouter** request ID.

The gateway keeps the record, not us. No receipt, no reading.

PUBLIC SAMPLE RECORD · QUESTION 9 · READ 3 SEP

SERVED MODEL

MiniMaxAI/MiniMax-M2.7

REQUEST ID

req-1788427238422211326-414866

RECEIPT

Verified

```
"model": "MiniMaxAI/MiniMax-M2.7",  
"outcome": "success",  
"status_code": 200,  
"duration_ms": 30867,  
"created_at": "2026-09-03T09:21:09Z",  
"x_devshard_id": "70340"
```

OPEN IT YOURSELF

api.gonkarouter.io/v1/receipts/req-1788427238422211326-414866


No API key and no login. Anyone in this room can open it now.

Every question gets two of these, from two different model families.

4. TECHNOLOGY STACK AND TRACK CHOSEN

One server, one gateway, **two model families.**

Every model call leaves from one file. It only reaches GonkaRouter.

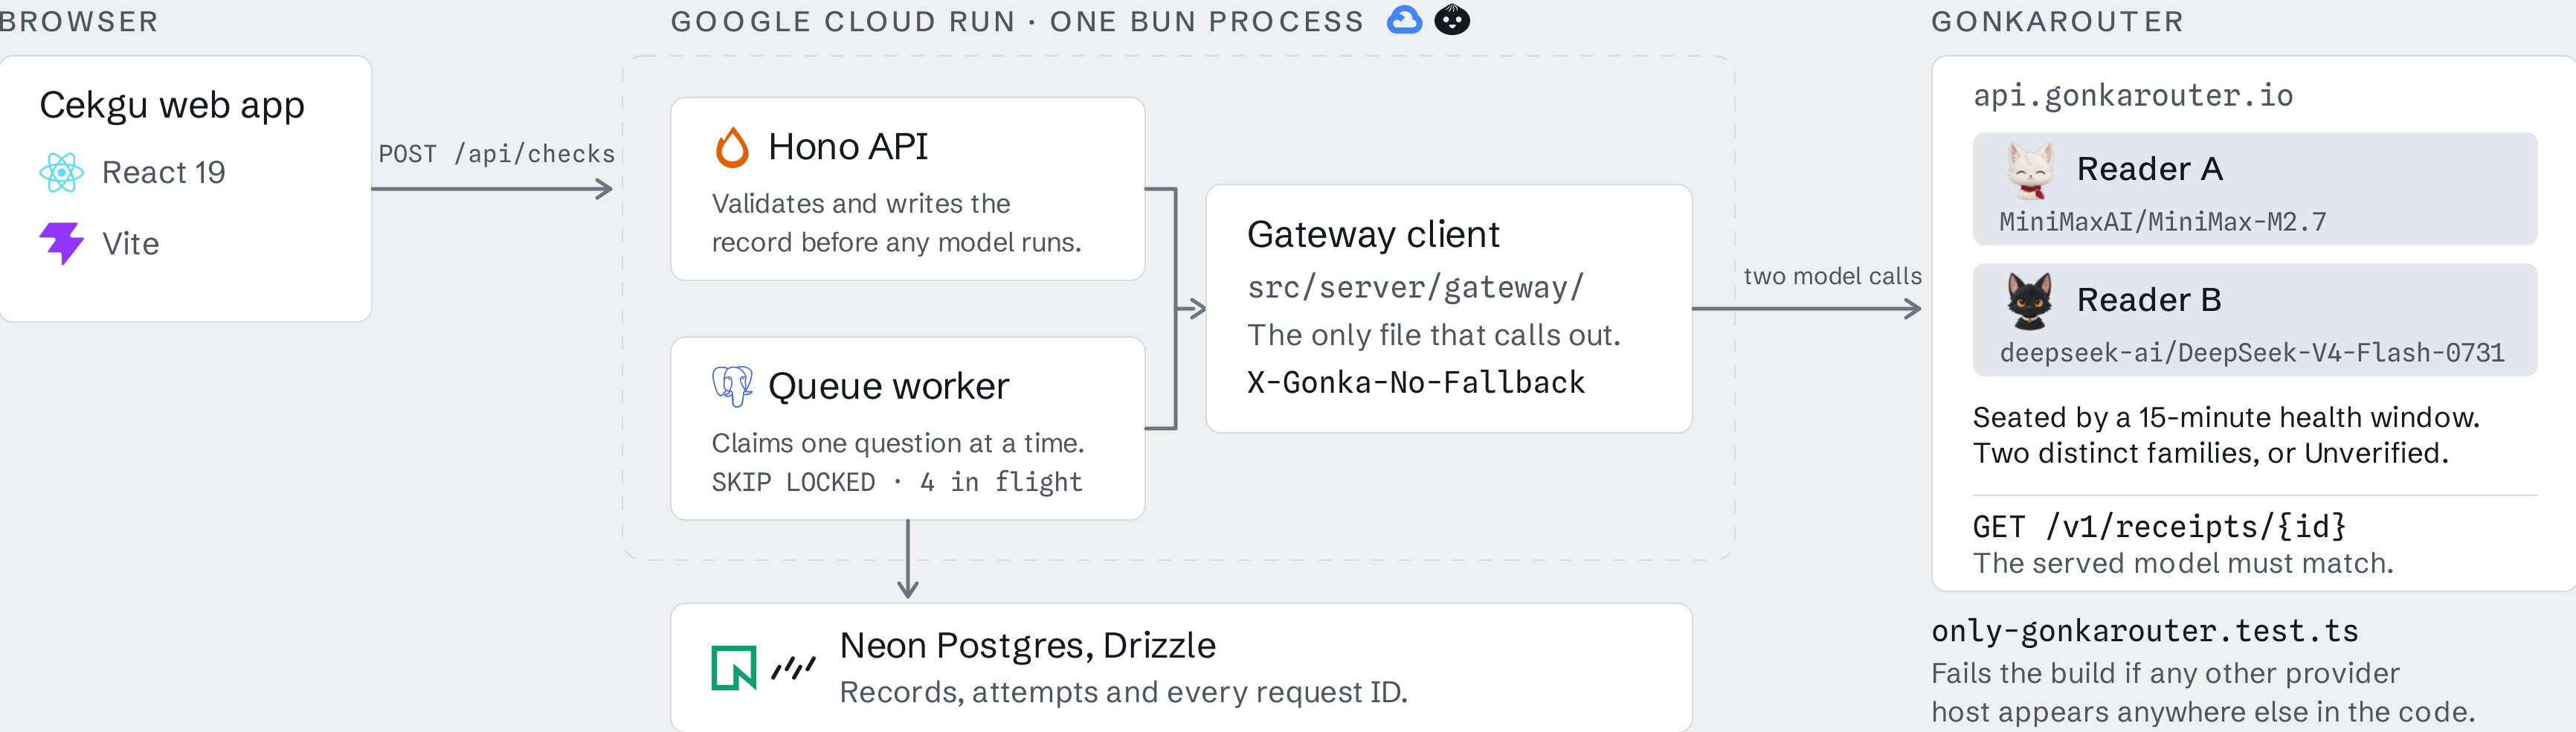

- ✓ All AI calls via GonkaRouter
- ✓ Two families, distinct receipts
- ✓ A request ID per step
- ✓ The rule printed on screen

5. MOTIVATION AND CHALLENGES

We measured first. Then a model went dark.

The benchmark killed our first design. Then a model family vanished.


5 SEPTEMBER, THE NIGHT BEFORE

One of our reader families went offline.
The queue seated the other two.

1 line

changed in production. The queue and the rule did not.
`src/server/gateway/models.ts`

SECONDS TO A COMPLETED CALL • 3 SEP BENCHMARK

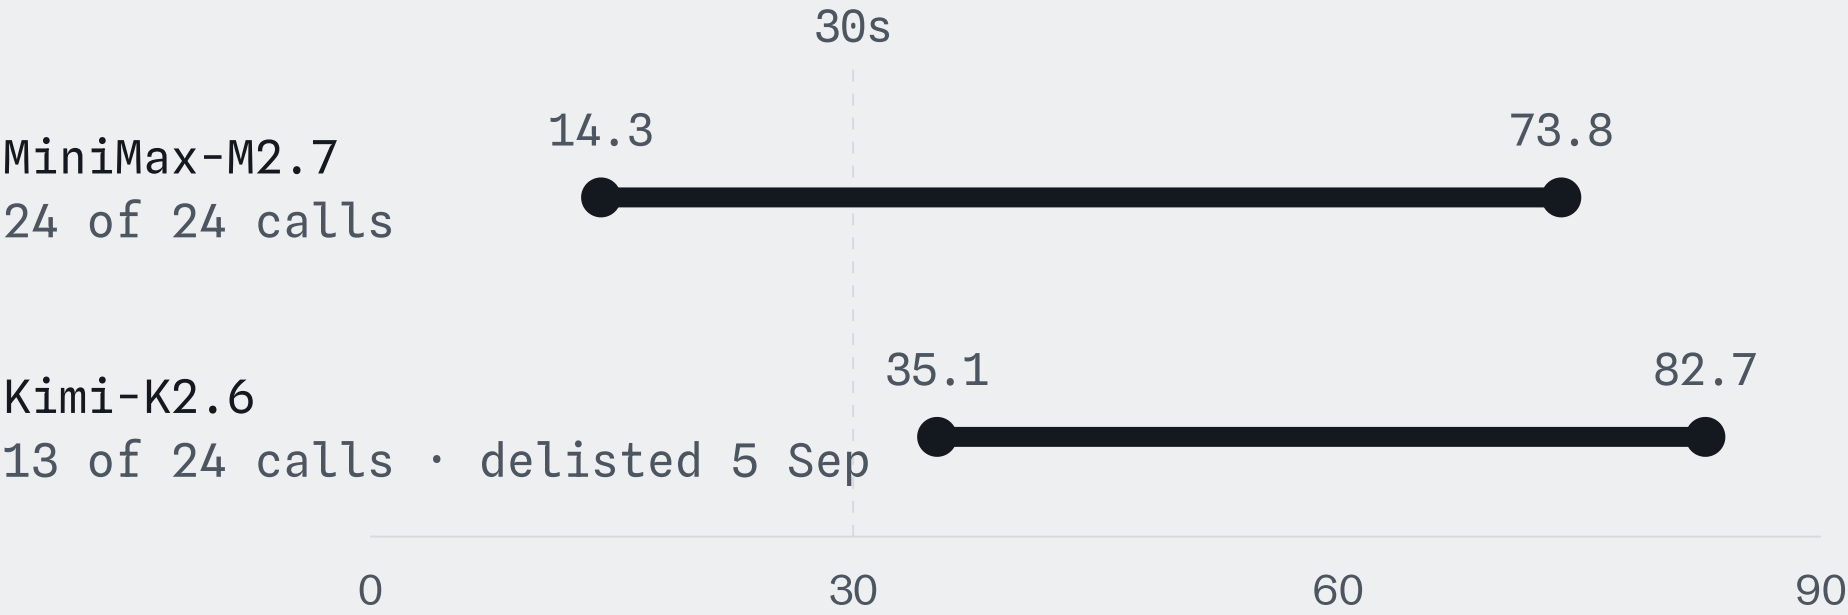

30-QUESTION EVALUATION SET • RUN TWICE THROUGH THE DEPLOYED QUEUE



Of the 20 planted defects, 5 came back Unverified and 1 came back Clear.

6. COMMERCIALISATION AND BUSINESS MODEL

We charge per question checked, **not per token.**

Priced by questions checked, so the educator never sees a model bill.

FREE

20

questions checked per month

RM0

CEKGU PLUS

300

questions checked per month

RM29 / month

CEKGU STUDIO

1500

questions checked per month

RM79 / month

Pilot pricing; no buyer has paid yet.

The first buyer is an independent tutor,
not a university procurement office.

Guest is a shared demo workspace, expiring in 24 hours.

Check the paper before the students sit it.

LIVE DEMO `cekgu-op7lf5dspq-as.a.run.app`

REPOSITORY `github.com/MUBA-M1KU/Cekgu`


DEVFOLIO `muba-hackathon.devfolio.co`

Twelve questions, two models on each,
three flagged for a person to read.



ALIGNED WITH UN GLOBAL
GOALS 4 AND 16

Team M1KU · @chaosiris · @AlaskanTuna · @kymil4 · @c3638
MUBA Blockchain Hackathon 2026 · GonkaRouter Track
Submitted on Devfolio

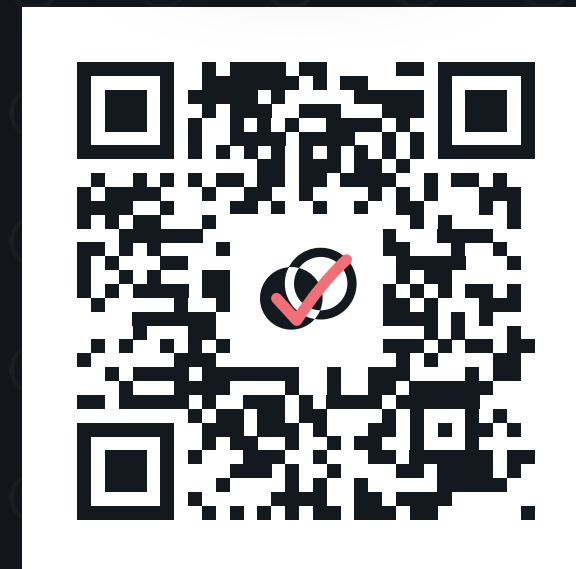

Scan to open the public sample record