

NSS-guided local quality branch | project draft

Statistics branch + deep-feature branch; current MSCN-like implementation, without GGD fitting

(a) From pixels to 196 local statistical descriptors

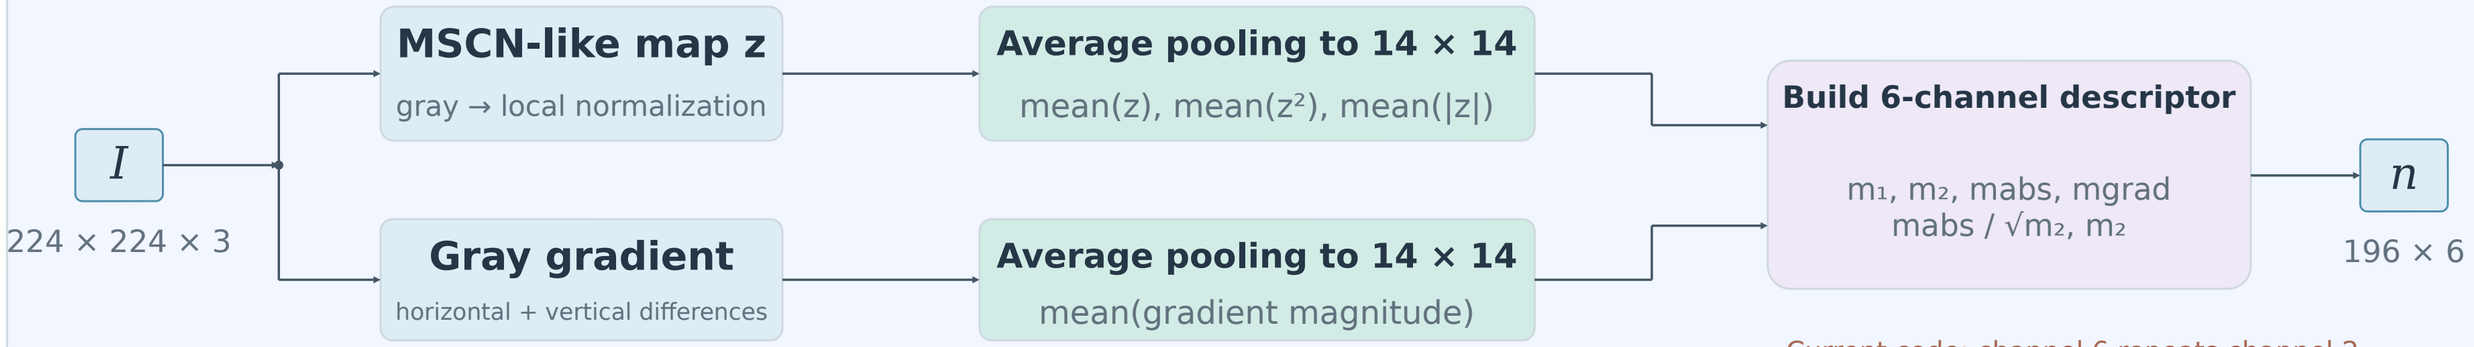

(b) Use statistics to enhance and weight local features

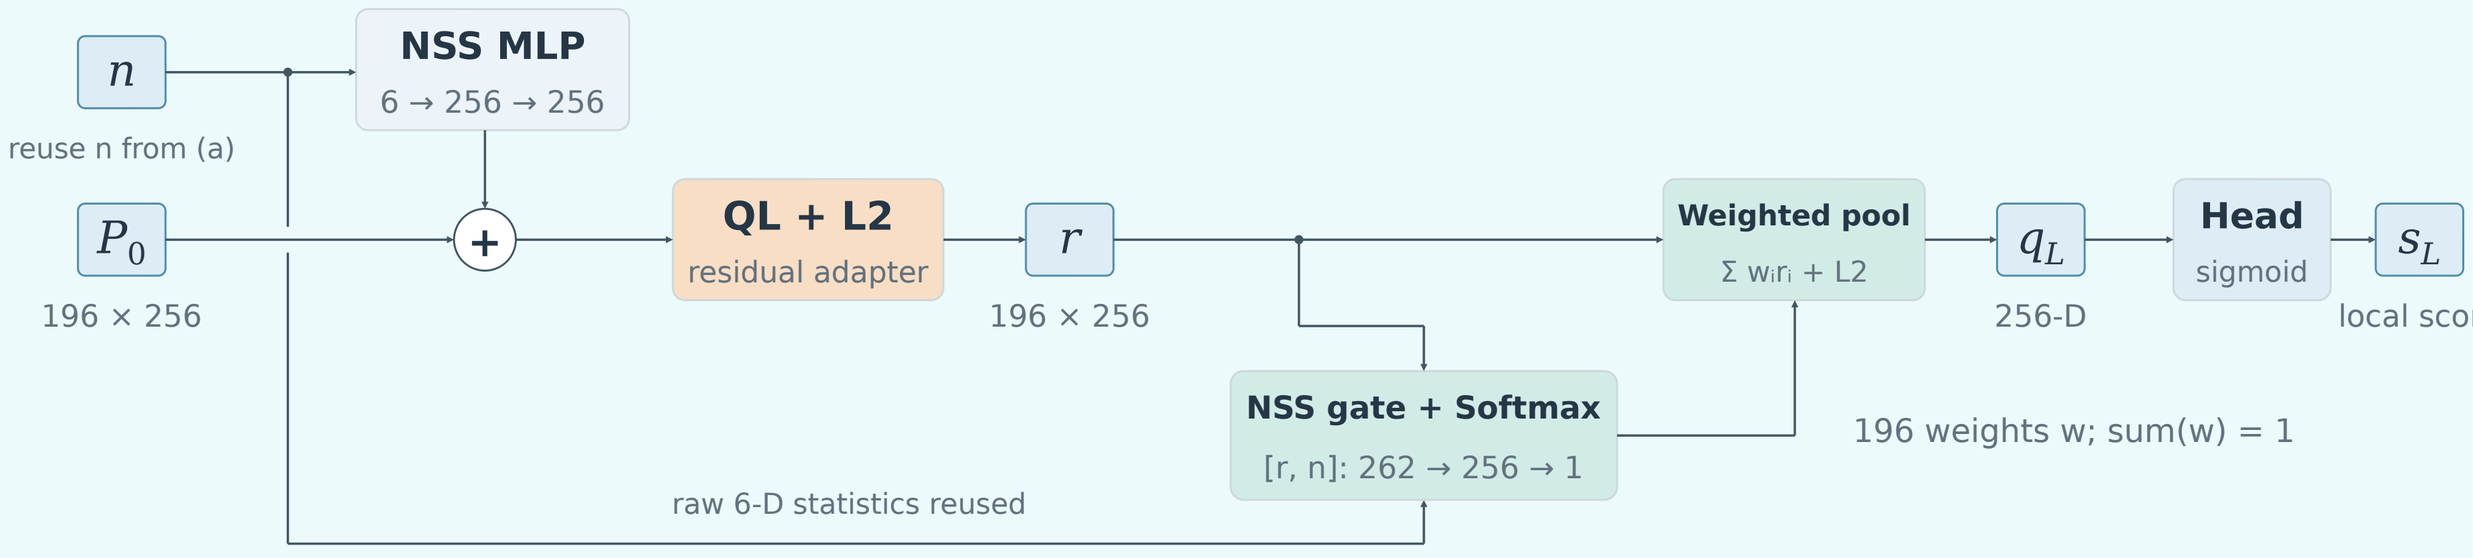

Pooling weights act on FEATURES r before the score head. They do not multiply the final local score.

Layout inspired by Fig. 2 of Xia et al., TMM 2025; computations follow our code. Small ε terms omitted. sL later joins the global quality score.