
SRM · SimSiam Relation Module

Projected feature inputs from DAC · predictors are reused by modality

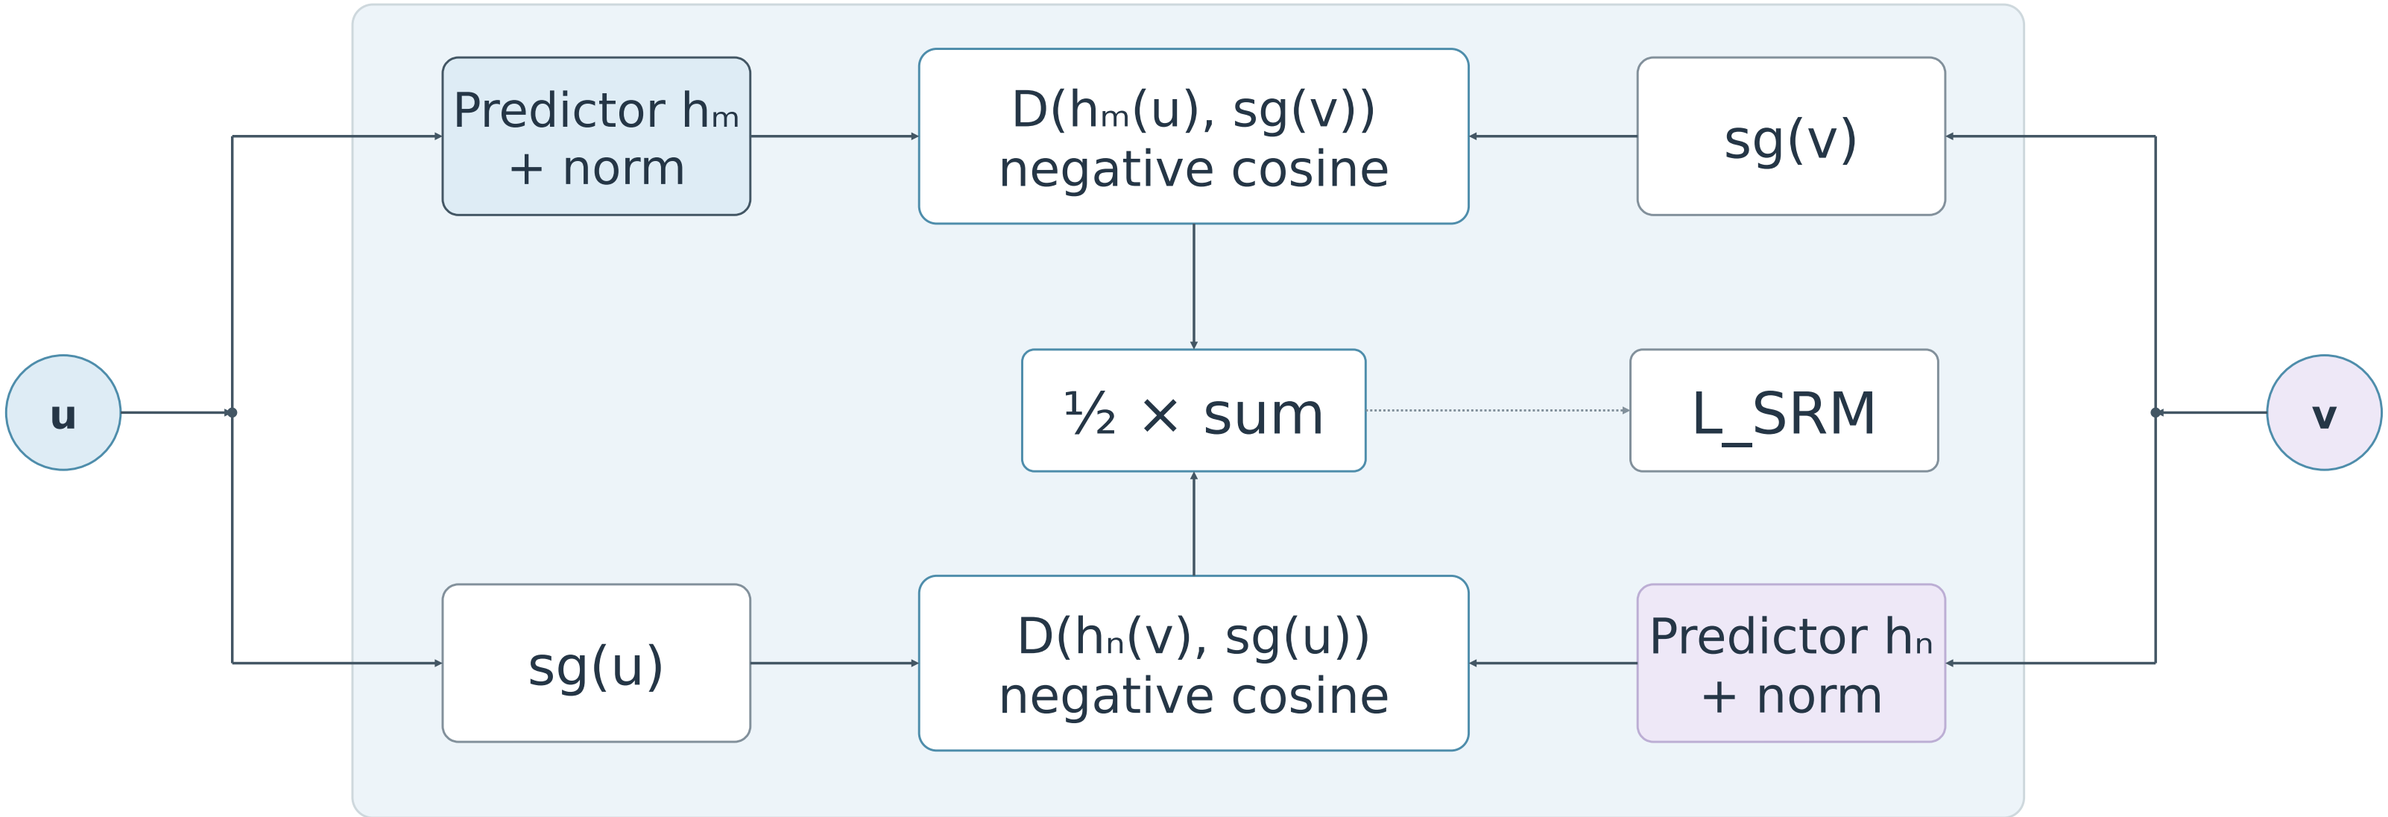

Four primary relations · two shared modality-specific predictor parameter sets

SRM 1 · I–I	SRM 2 · I–Prompt	SRM 3 · I–Answer	SRM 4 · Prompt–Answer
Inputs: v_1 , v_2	Inputs: a^c , tP	Inputs: a^c , tA	Inputs: tP , tA
Predictors: h_I / h_I	Predictors: h_I / h_T	Predictors: h_I / h_T	Predictors: h_T / h_T

PI/PT remain inside DAC and transfer downstream; h_I/h_T are pretraining-only predictors (256 → 128 → 256).