

# Assignment 3

Mats Slik & Dennis Haandrikman

23-05-2022

## Assignment 1: assess model validity

You have to compare the data from the experiment with the simulation data, to assess the model validity. The best way to do this is plotting the model results and the experimental results in one graph. The model results have one value per time unit, the experimental results have multiple values per time unit. Either plot all data points of the experimental data using a scatterplot or calculate the median results for each time unit and plot a line of these median points. You can do this for instance with the function `aggregate`.

### Does this need to be removed?

```
medians <- aggregate(data[,c("MPL_conc", "mRNA", "Free_receptor")], list(datadose, datatime), median, na.rm=T)
names(medians)[1:2] <- c("dose", "time")
head(medians)
# A tibble: 6 x 5
#   dose time MPL_conc mRNA
#   <dbl> <dbl> <dbl> <dbl>
1 0.0    0 3.7900 292.95
2 0.1    6 11.180 1.7025
3 0.3    6 31.295 1.7295
4 0.1   10 12.335 1.7515
5 0.3   10 36.960 1.4140
6 0.1   13 11.945 1.7045
```

The results of the entire experiment can be found in `MPL.csv`, the results of the model is to be calculated with the model you programmed in the previous assignment. Make sure you calculate the right dosis concentration parameter (D) for the model corresponding with the dosis 0.1 and 0.3.

An example of an mRNA plot with the model (black line), the experiment (datapoints) and the median of the experimental data (red line) you find below (this is just an example, parameter values might be different!)

```
# read the data file (if the wrapper doesn't work: put this as file: "./Data/MPL.csv")
data <- read.csv(file = data_file, na.strings = "NA",)
# Extract the median for the low dose
median_MPL_01 <- median(data$MPL_conc[data$dose==0.1], na.rm=T)
median_MPL_01
```

```
## [1] 14.59
```

```
# Extract the median for the high dose
median_MPL_03 <- median(data$MPL_conc[data$dose==0.3], na.rm=T)
median_MPL_03
```

```
## [1] 39.925
```

```
# Generate the medians for the MPL concentration, mRNA & Free receptor
medians <- aggregate(data[,c("MPL_conc", "mRNA", "Free_receptor")], list(data$dose, data$time), median, na.rm=T)
names(medians)[1:2] <- c("dose", "time")
head(medians)
```

```
##    dose time MPL_conc    mRNA Free_receptor
## 1  0.0   0     0.000 3.7900         292.95
## 2  0.1   6    11.180 1.7025         124.70
## 3  0.3   6    31.295 1.7295          97.90
## 4  0.1  10    12.335 1.7515         157.80
## 5  0.3  10    36.960 1.4140          69.55
## 6  0.1  13    11.945 1.7045         152.50
```

```
# Subset the datasets so the low/high dose are seperated
```

```
data_low_dose <- subset(data, dose != 0.3)
```

```
data_high_dose <- subset(data, dose != 0.1)
```

```
median_low_dose <- subset(medians, dose != 0.3)
```

```
median_high_dose <- subset(medians, dose != 0.1)
```

```
head(median_low_dose)
```

```
##    dose time MPL_conc    mRNA Free_receptor
## 1  0.0   0     0.000 3.7900         292.95
## 2  0.1   6    11.180 1.7025         124.70
## 4  0.1  10    12.335 1.7515         157.80
## 6  0.1  13    11.945 1.7045         152.50
## 8  0.1  18    29.270 2.6270          97.55
## 10 0.1  24    13.080 1.2055          74.25
```

```
head(median_high_dose)
```

```
##    dose time MPL_conc    mRNA Free_receptor
## 1  0.0   0     0.000 3.7900         292.95
## 3  0.3   6    31.295 1.7295          97.90
## 5  0.3  10    36.960 1.4140          69.55
## 7  0.3  13    31.970 1.6905          34.30
## 9  0.3  18    46.300 1.5380          26.25
## 11 0.3  24    51.975 0.9330          31.85
```

## Questions:

[1] Why is it best practice to plot the median for the experimental data? Explain in your report

The reason why it's best to plot with the median is that it gives a representation of the central value.

```
# Set the parameters, state and times for the low dose ode model
```

```
D <- (median_MPL_01 * 1000)/374.471
```

```
parameters <- c(Ks_rm = 2.90, ic50_rm = 26.2, Kon = 0.00329, Kt = 0.63, Kre = 0.57, Rf = 0.49, Kd_R = 0)
```

```
state <- c(Rmo = 4.74, Ro = 267, DR = 0, DRN = 0)
```

```
times <- seq(0, 168, by = 1)
```

```
# Define the model function for the ode model
```

```
Grd_model <- function(t, y, parms){
```

```
  with(as.list(c(parms, y)),{
```

```
    Rmo.delta <- Ks_rm * (1-(DRN / (ic50_rm + DRN)))- Kd_Rm * Rmo
```

```
    R.delta <- Ks_r * Rmo + Rf * Kre * DRN - Kon * D * Ro - Kd_R * Ro
```

```
    DR.delta <- Kon * D * Ro - Kt * DR
```

```


DRN.delta <- Kt * DR - Kre * DRN

  return(list(c(Rmo.delta, R.delta, DR.delta, DRN.delta)))
})

# Run the ode model and save the output to the out variable
out <- ode(times = times, y = state, parms = parameters, func = Grd_model, method = "euler")

# Plot the graph for mRNA with the model data
plot(as.data.frame(out)$Rmo, type = "l", xlab = "Time in Hours", ylab = "Rmo concentration", ylim = c(
# Plot the median of the experimental data-set as a line and the full experimental data-set as points
lines(mRNA~time, data = median_low_dose, col = "red")
points(mRNA~time, data = data_low_dose)


```

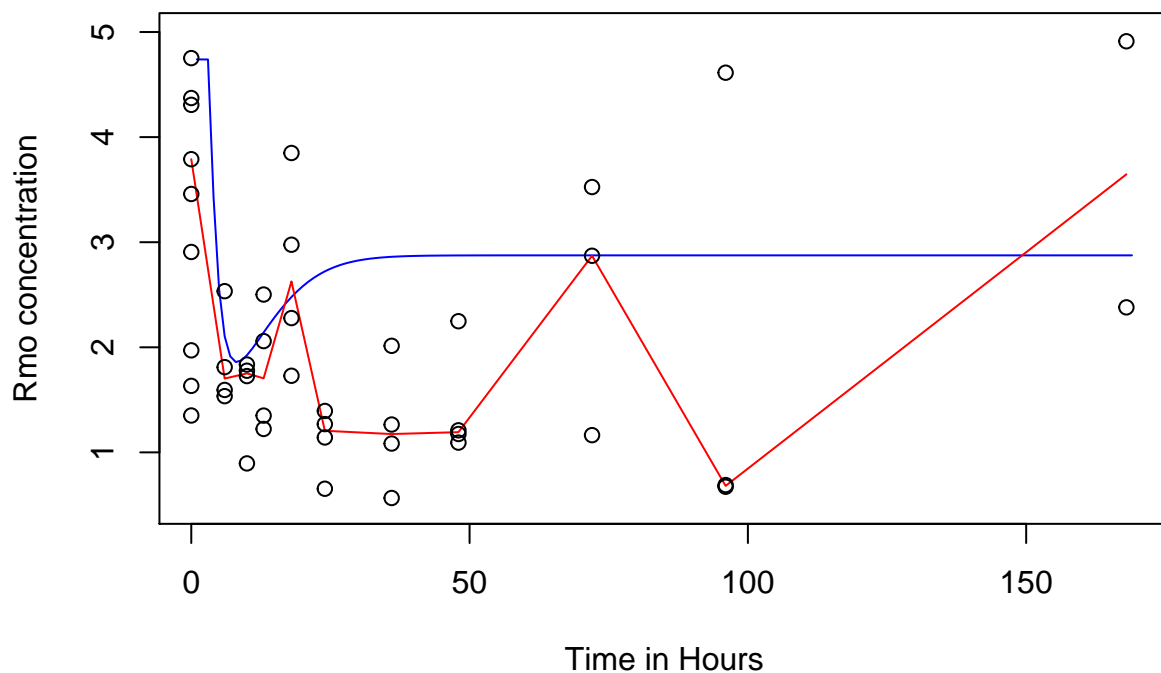


```

# Plot the graph for free receptor with the model data
plot(as.data.frame(out)$Ro, type = "l", xlab = "Time in Hours", ylab = "Ro concentration", col = "blue")
# Plot the median of the experimental data-set as a line and the full experimental data-set as points
lines(Free_receptor~time, data = median_low_dose, col = "red")
points(Free_receptor~time, data = data_low_dose)


```

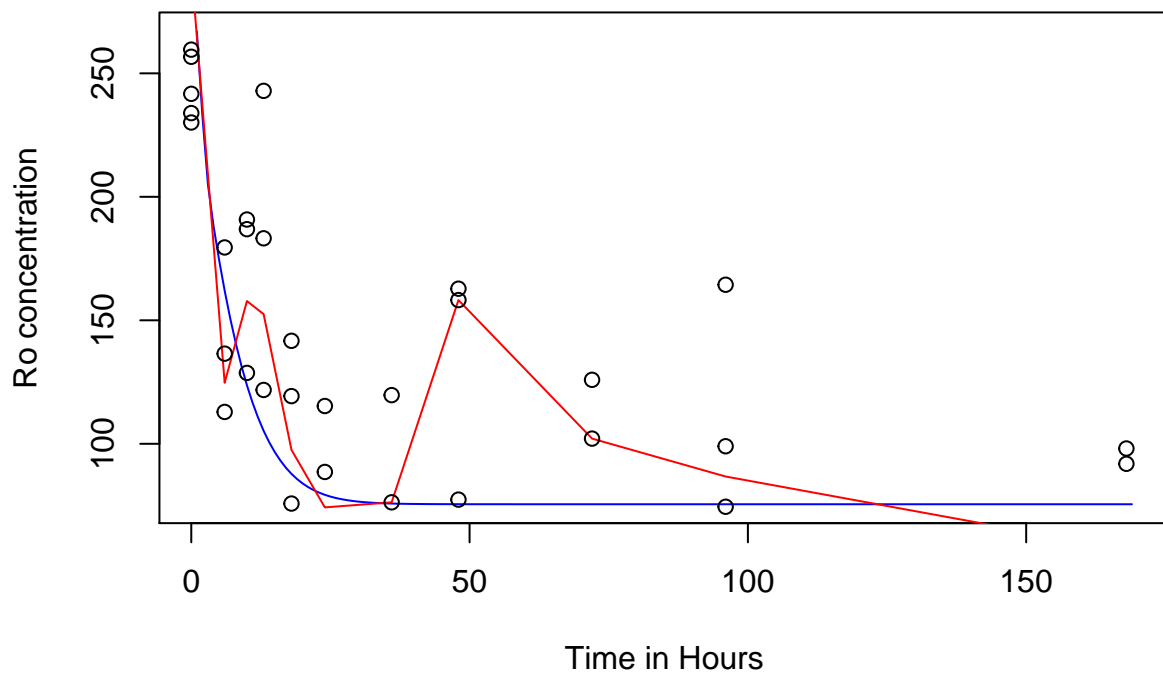

```
# Plot the graph for MPL_complex with the model data
plot(as.data.frame(out)$DR, type = "l", xlab = "Time in Hours", ylab = "DR concentration", col = "blue")
# Plot the median of the experimental data-set as a line and the full experimental data-set as points
lines(MPL_conc~time, data = median_low_dose, col = "red")
points(MPL_conc~time, data = data_low_dose)
```

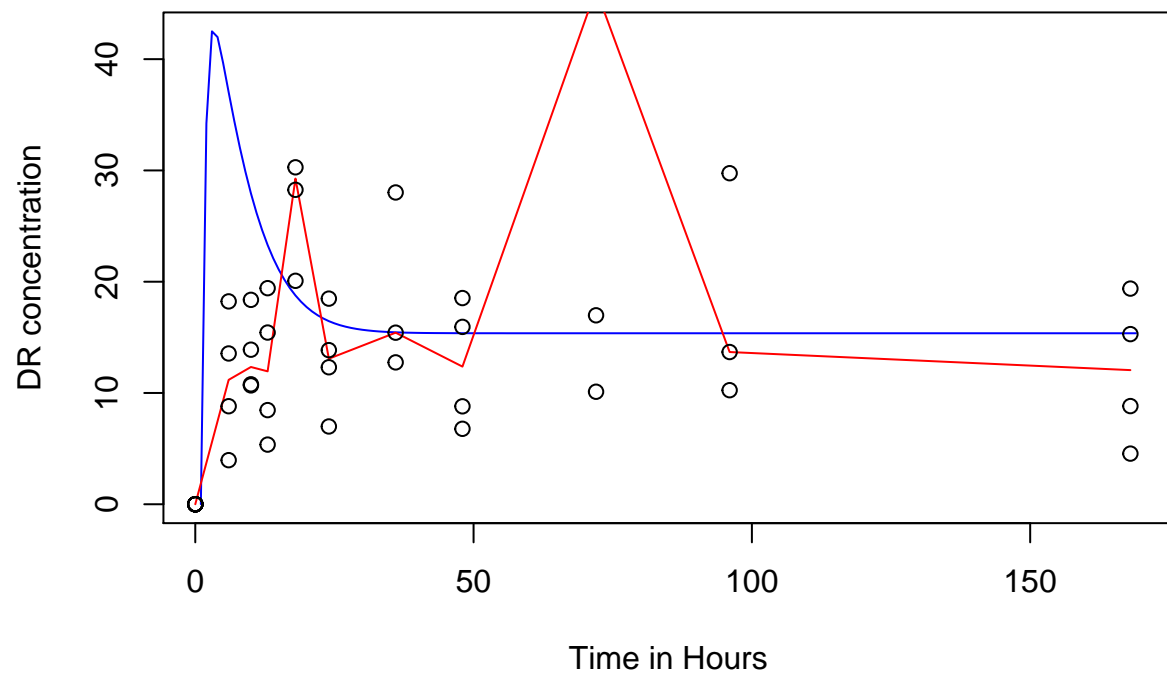


```
# Plot the graph for MPL_complex in nucleus with the model data
plot(as.data.frame(out)$DRN, type = "l", xlab = "Time in Hours", ylab = "DRN concentration", col = "blue")
```

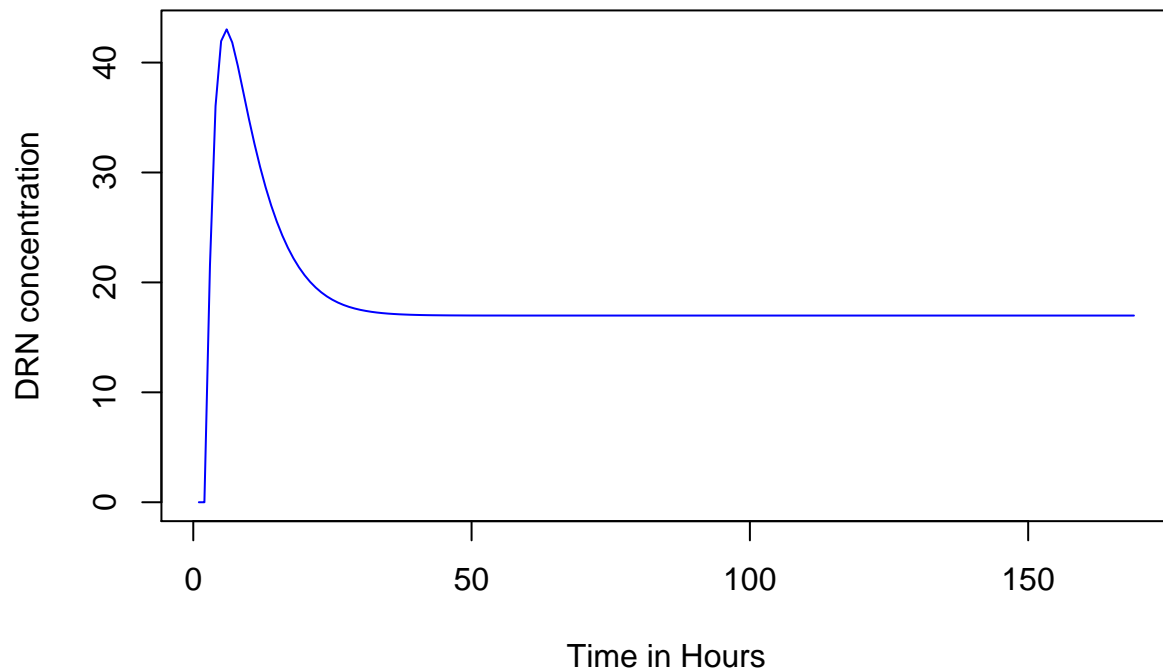


```
# Set the parameters for the high-dose ode model
D <- (median_MPL_03 * 1000)/374.471
parameters <- c(Ks_rm = 2.90, ic50_rm = 26.2, Kon = 0.00329, Kt = 0.63, Kre = 0.57, Rf = 0.49, Kd_R = 0.0001)

# Run the ode model and save the output to the out variable
out <- ode(times = times, y = state, parms = parameters, func = Grd_model, method = "euler")

# Plot the graph for mRNA with the model data
plot(as.data.frame(out)$Rmo, type = "l", xlab = "Time in Hours", ylab = "Rmo concentration", ylim = c(0, 40))
# Plot the median of the experimental data-set as a line and the full experimental data-set as points
lines(mRNA~time, data = median_high_dose, col = "red")
points(mRNA~time, data = data_high_dose)
```

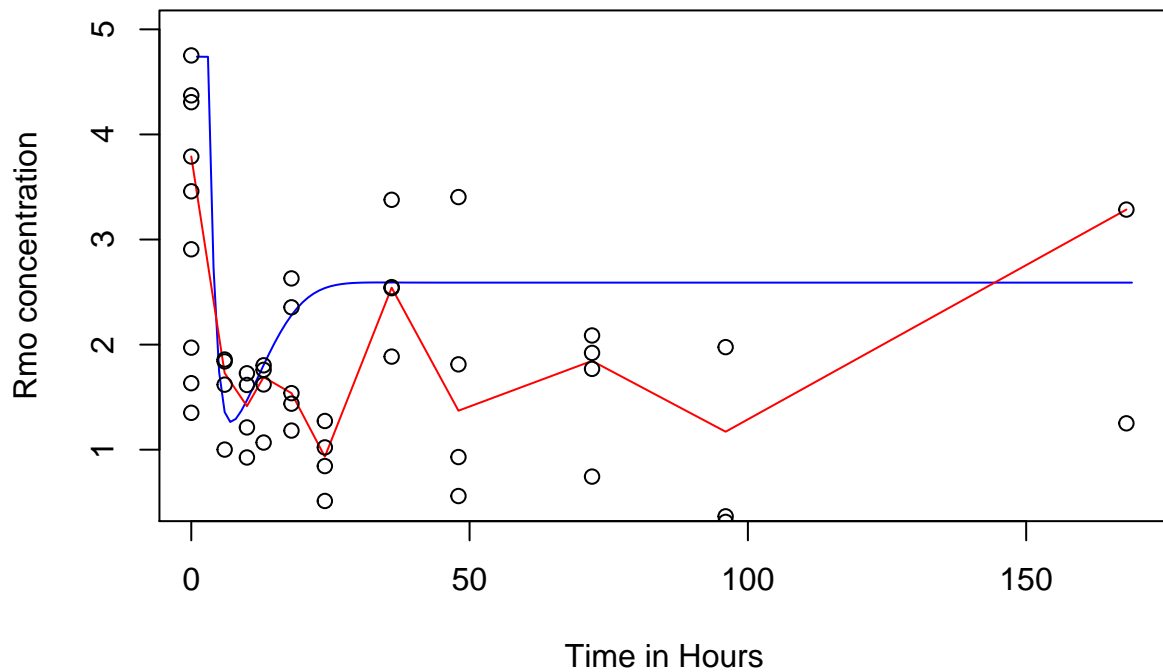

```
# Plot the graph for free receptor with the model data
plot(as.data.frame(out)$Ro, type = "l", xlab = "Time in Hours", ylab = "Ro concentration", col = "blue")
# Plot the median of the experimental data-set as a line and the full experimental data-set as points
lines(Free_receptor~time, data = median_high_dose, col = "red")
points(Free_receptor~time, data = data_high_dose)
```

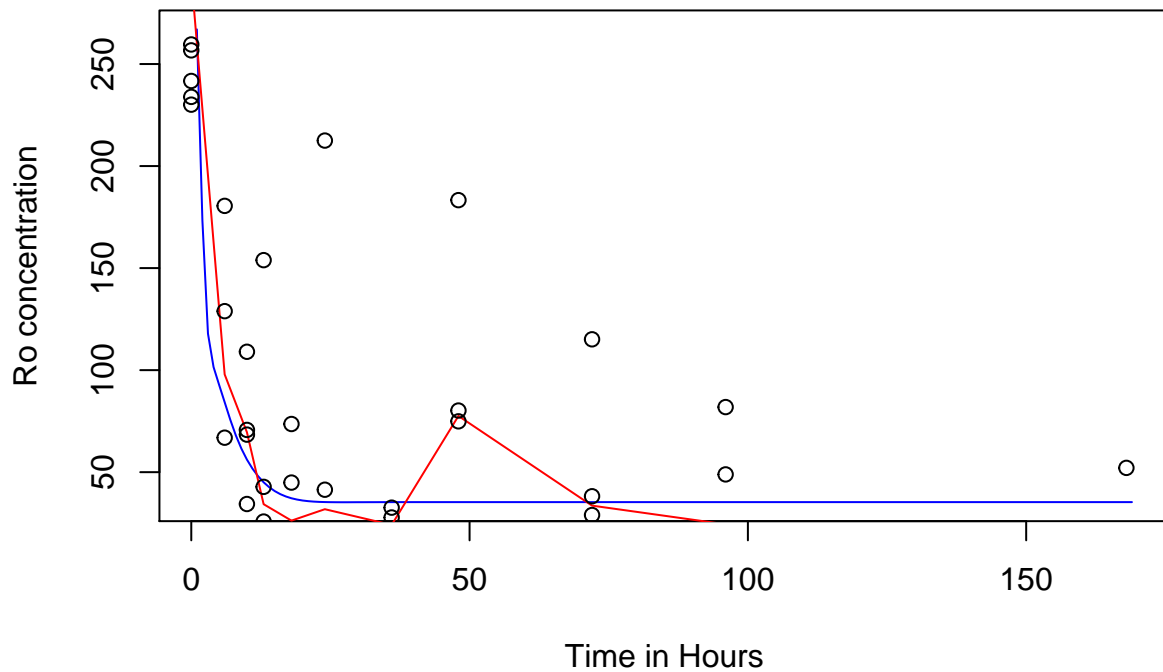

```
# Plot the graph for MPL_complex with the model data
```


```
plot(as.data.frame(out)$DR, type = "l", xlab = "Time in Hours", ylab = "DR concentration", col = "blue")
```

```
# Plot the median of the experimental data-set as a line and the full experimental data-set as points
```


```
lines(MPL_conc~time, data = median_high_dose, col = "red")
```

```
points(MPL_conc~time, data = data_high_dose)
```



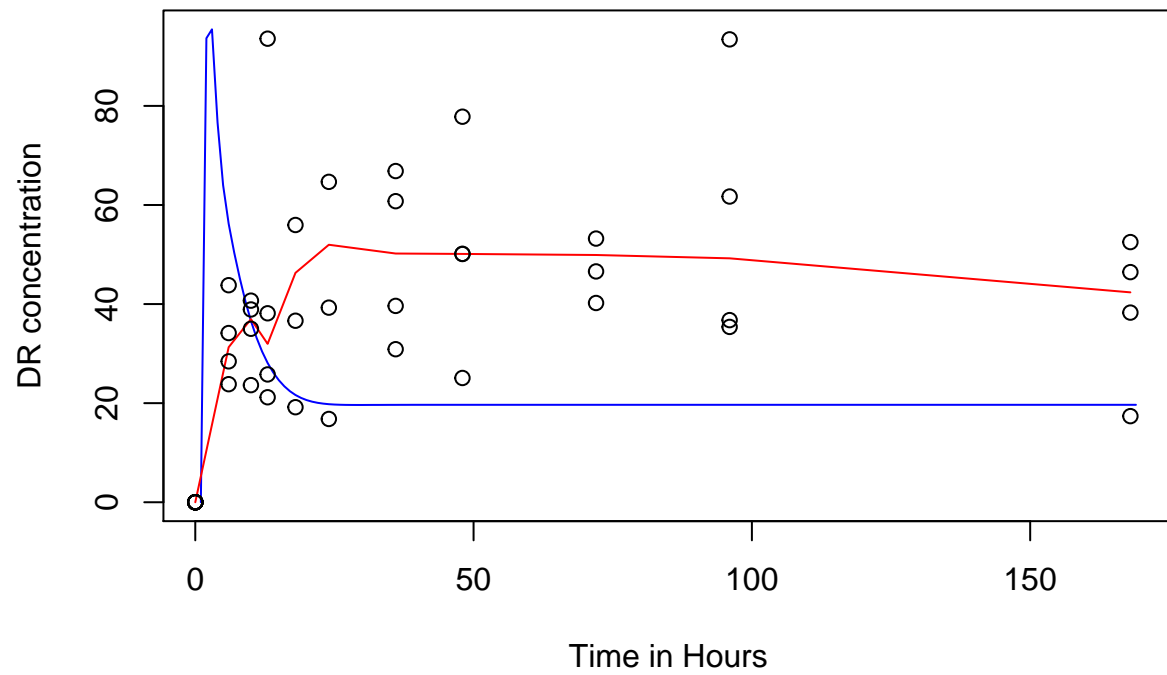

```
# Plot the graph for MPL_complex in nucleus with the model data
plot(as.data.frame(out)$DRN, type = "l", xlab = "Time in Hours", ylab = "DRN concentration", col = "blue")
```

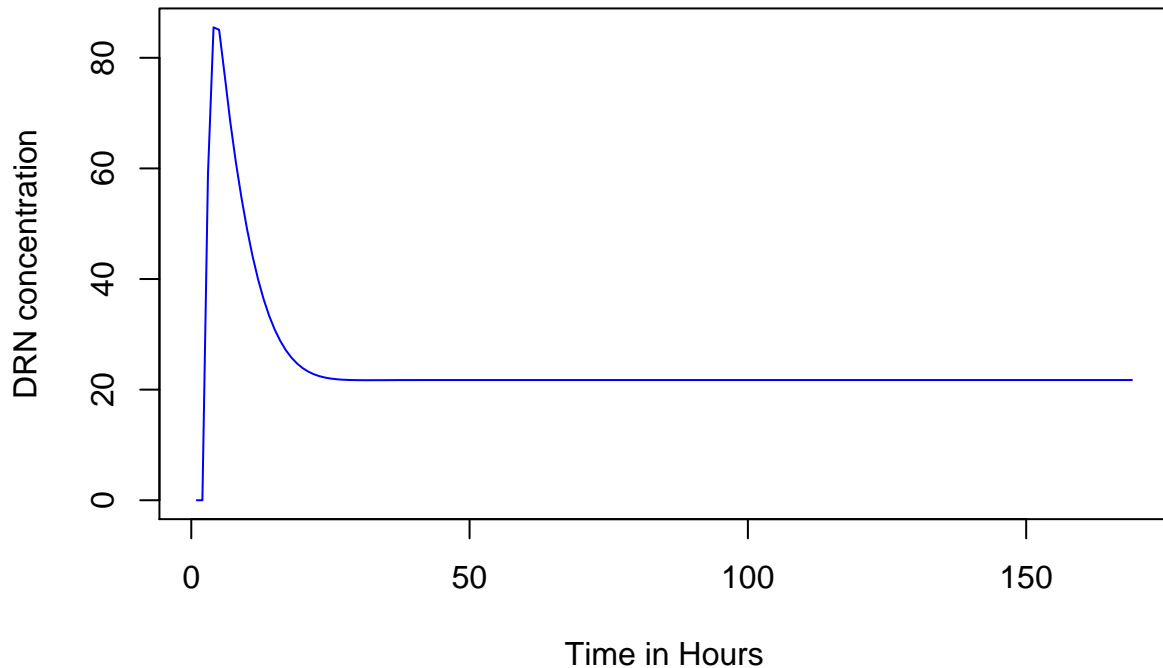

[2] How do the results of the simulations depend on the dose and concentration of the drug? Compare the model variables mRNA, R with the experimental data by running the simulations adjusting dosis D and plot these to find the answer.

With both doses, we can see that the mRNA concentration follows the same trend as the model, it decreases and then increases again. However, it's notable that with at both dose levels the mRNA doesn't stabilise like the model, and it performs a yoyo-effect before the mRNA stabilises in an upwards climb.

[3] Are the results of the model in line with experimental data? If not, what could be the reason? Think of at least one explanation. Try to test it with simulations (you will get bonus points for that, your explanation does not need to be correct, but should be logical).

Depending on what data is compared, it seems that both low and high dose don't properly follow the model to a point. The low dose data seemingly deviating more than the high-dose data. That is quite possible due to a significant amount more factors playing into the regulation of the receptors, mRNA & complexes. This is also possible due to the cells not being able to perfectly achieve a balance as the model, causing the rollercoaster effect of ups and downs.

## Assignment 2: simulate scenario's

You are going to check what happens if you change the model and model parameters and compare the results to the basic scenario (from week 2). Unless stated otherwise, in the simulations for the solutions to this part, the values of different parameters and initial conditions should be as in the table in the assignments document. Value of  $kd\_Rm$  should be 0.612, value of  $ks\_r$ =3.22, value of  $D=20*1000/374.471$ .

## Questions:

[1] What would be the time course concentration of the activated drug-receptor complex if there was no auto-regulation of glucocorticoid receptor, i.e. if there was not effect of drug on the synthesis of the receptor mRNA? What formula needs to be changed? Adjust the model, run the simulation and plot the results to find out.


```
# Set the parameters, state and times for the ode-model
D <- (20 * 1000)/374.471
parameters <- c(Ks_rm = 2.90, ic50_rm = 26.2, Kon = 0.00329, Kt = 0.63, Kre = 0.57, Rf = 0.49, Kd_R = 0)
state <- c(Rmo = 4.74, Ro = 267, DR = 0, DRN = 0)
times <- seq(0, 168, by = 1)

# Define the model function for the ode model
Grd_model <- function(t, y, parms){
  with(as.list(c(parms, y)),{
    Rmo.delta <- Ks_rm * (1-(DRN / (ic50_rm + DRN)))- Kd_Rm * Rmo
    R.delta <- Ks_r * Rmo + Rf * Kre * DRN - Kon * D * Ro - Kd_R * Ro
    DR.delta <- Kon * D * Ro - Kt * DR
    DRN.delta <- Kt * DR - Kre * DRN

    return(list(c(Rmo.delta, R.delta, DR.delta, DRN.delta)))
  })
}

# Run the ode model and save the output to the out variable
out <- ode(times = times, y = state, parms = parameters, func = Grd_model, method = "euler")

# plot the graph with the results from the model
plot(out)
```

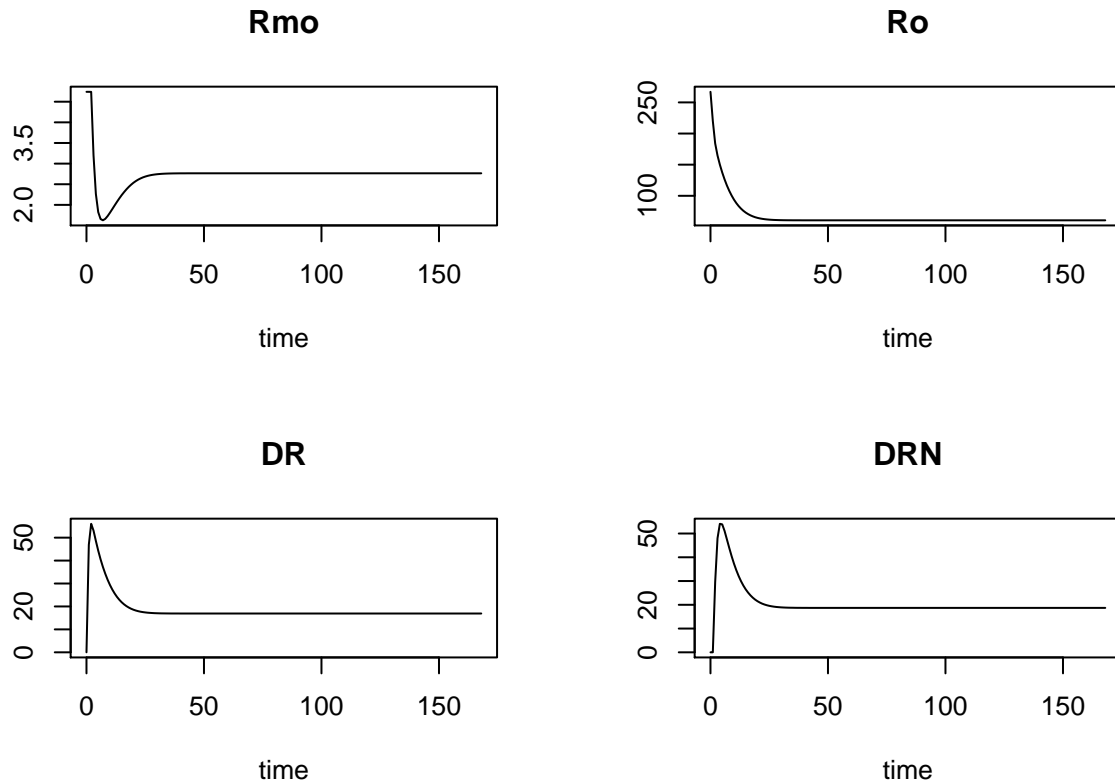

[2] What is the time course of receptor and mRNA concentrations when the drug treatment is stopped? So After the steady state is reached (at time  $t_{\text{steady}}$ ),  $D$  should be set to zero and the simulation should continue from time  $t_{\text{steady}}$  till the new steady state is reached ( $t_{\text{steady\_second}}$ ). Run the simulations and plot the results from  $t = 0$  till  $t_{\text{steady\_second}}$ .

```
# parameters
D <- (20 * 1000)/374.471
parameters <- c(Ks_rm = 2.90, ic50_rm = 26.2, Kon = 0.00329, Kt = 0.63, Kre = 0.57, Rf = 0.49, Kd_R = 0)
state <- c(Rmo = 4.74, Ro = 267, DR = 0, DRN = 0, D = D)
times <- seq(0, 200, by = 1)

nummer1 <- 0

# Define the model function for the ode model
Grd_model <- function(t, y, parms){
  with(as.list(c(parms, y)),{
    Rmo.delta <- Ks_rm * (1-(DRN / (ic50_rm + DRN)))- Kd_Rm * Rmo
    R.delta <- Ks_r * Rmo + Rf * Kre * DRN - Kon * D * Ro - Kd_R * Ro
    DR.delta <- Kon * D * Ro - Kt * DR
    DRN.delta <- Kt * DR - Kre * DRN
    D.delta <- 0

    nummer1 <- R.delta

    return(list(c(Rmo.delta, R.delta, DR.delta, DRN.delta, D.delta)))
  })
}
```

```

}


event_1 <- function(t, y, parms){
  y["D"] <- 0
  return(y)
}

# steady state point change D to 0 when Ro hits 60.6490...
root <- function(t, y, parms) nummer1

# Run the ode model and save the output to the out variable
out <- ode(times = times, y = state, parms = parameters, func = Grd_model, rootfun = root,
           events = list(func = event_1, root = TRUE))

# plot the graph with the data from the ode model
plot(out)

```

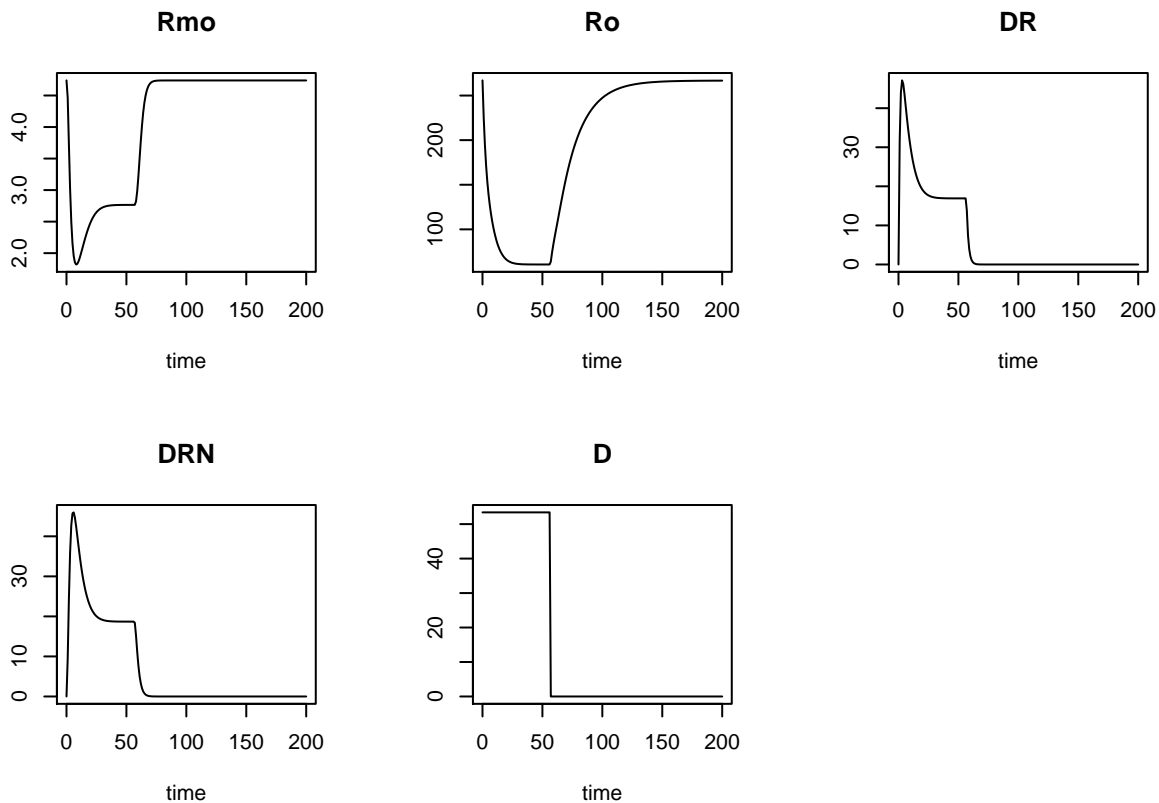

[3] Different corticosteroids show different association rates from receptors ( $k_{on}$ ) and different dissociation rates (in this model reflected by  $k_{re}$ ). Assuming the same concentrations of the drug, what is the effect of different values of  $k_{on}$  and  $k_{re}$  (consider 2 and 5 times increase and decrease of both parameters separately) on the receptor and mRNA dynamics? Adjust  $k_{on}$  and  $k_{re}$  as below and plot the results of the simulation for each change. Note: Simulations should be run for 4 new values of  $k_{on}$ :  $0.00329/5$ ,  $0.00329/2$ ,  $0.00329 \cdot 2$  and  $0.00329 \cdot 5$ . The results should be compared to the basic scenario when  $k_{on}=0.00329$ . Separately, simulations should be run for 4 new values of  $k_{re}$ :  $0.57/5$ ,  $0.57/2$ ,  $0.57 \cdot 2$  and  $0.57 \cdot 5$ . The results should be compared to the basic scenario when  $k_{re}=0.57$ .

```

# Set the parameters, state and times for the ode model
D <- (20 * 1000)/374.471
parameters <- c(Ks_rm = 2.90, ic50_rm = 26.2, Kon = 0.00329, Kt = 0.63, Kre = 0.57, Rf = 0.49, Kd_R = 0)
state <- c(Rmo = 4.74, Ro = 267, DR = 0, DRN = 0)
times <- seq(0, 48, by = 1)

# Define the function for the ode model
Grd_model <- function(t, y, parms){
  with(as.list(c(parms, y)),{
    Rmo.delta <- Ks_rm * (1-(DRN / (ic50_rm + DRN)))- Kd_Rm * Rmo
    R.delta <- Ks_r * Rmo + Rf * Kre * DRN - Kon * D * Ro - Kd_R * Ro
    DR.delta <- Kon * D * Ro - Kt * DR
    DRN.delta <- Kt * DR - Kre * DRN

    return(list(c(Rmo.delta, R.delta, DR.delta, DRN.delta)))
  })
}

# Standard Kon
out <- ode(times = times, y = state, parms = parameters, func = Grd_model, method = "euler")

# Setting kon to 0.0329/5
parameters["Kon"] <- 0.00329/5
out2 <- ode(times = times, y = state, parms = parameters, func = Grd_model, method = "euler")


# setting Kon to 0.0329/2
parameters["Kon"] <- 0.00329/2
out3 <- ode(times = times, y = state, parms = parameters, func = Grd_model, method = "euler")

# setting Kon to 0.0329*2
parameters["Kon"] <- 0.00329*2
out4 <- ode(times = times, y = state, parms = parameters, func = Grd_model, method = "euler")

# setting Kon to 0.0329*5
parameters["Kon"] <- 0.00329*5
out5 <- ode(times = times, y = state, parms = parameters, func = Grd_model, method = "euler")

# Plotting everything Kon related
plot(out, out2, out3, out4, out5)
legend("topright", lty = 1:5, col = 1:5, cex = 0.7, legend = c("standard", "/5", "/2", "*2", "*5"), tit

```

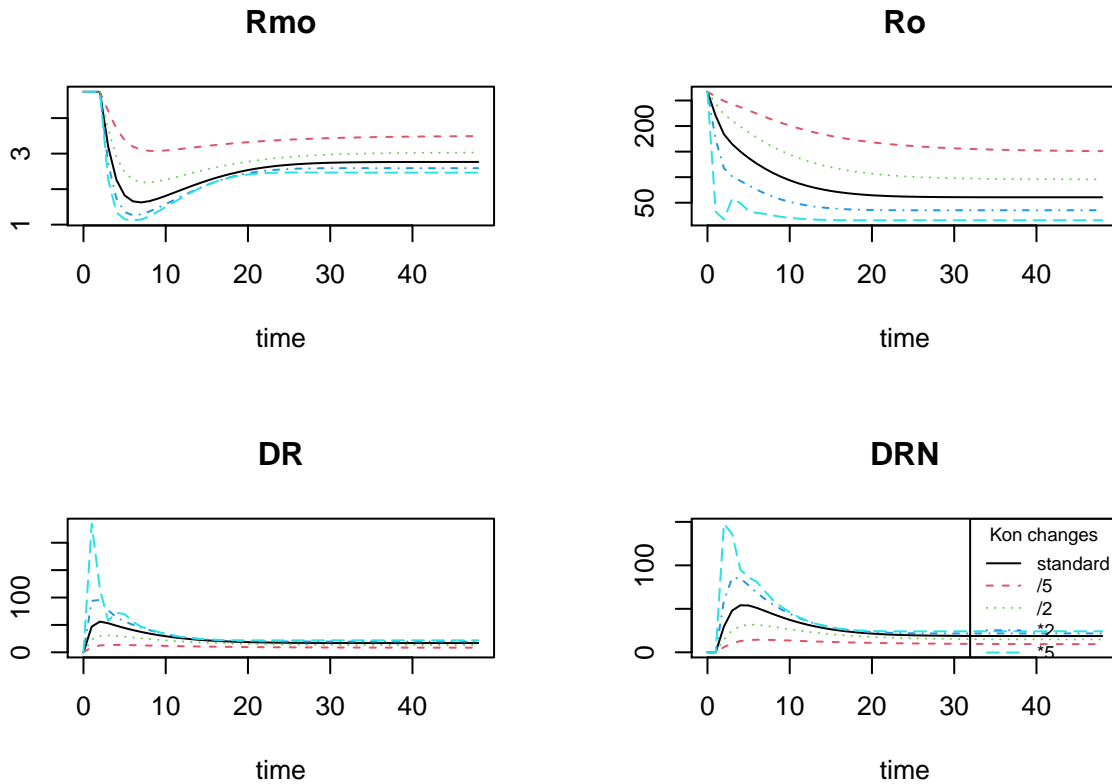

```
# Resetting Kon to default value and running standard kre
parameters["Kon"] <- 0.00329
out <- ode(times = times, y = state, parms = parameters, func = Grd_model, method = "euler")





# setting kre to 0.57/5
parameters["Kre"] <- 0.57/5
out2 <- ode(times = times, y = state, parms = parameters, func = Grd_model, method = "euler")

# setting kre to 0.57/2
parameters["Kre"] <- 0.57/2
out3 <- ode(times = times, y = state, parms = parameters, func = Grd_model, method = "euler")

# setting kre to 0.57*2
parameters["Kre"] <- 0.57*2
out4 <- ode(times = times, y = state, parms = parameters, func = Grd_model, method = "euler")


# setting kre to 0.57*5
parameters["Kre"] <- 0.57*5
out5 <- ode(times = times, y = state, parms = parameters, func = Grd_model, method = "euler")

# Plotting everything Kre related
plot(out, out2, out3, out4)
legend("topright", lty = 1:4, col = 1:4, cex = 0.6, legend = c("standard", "/5", "/2", "*2"), title = "Kre")
```

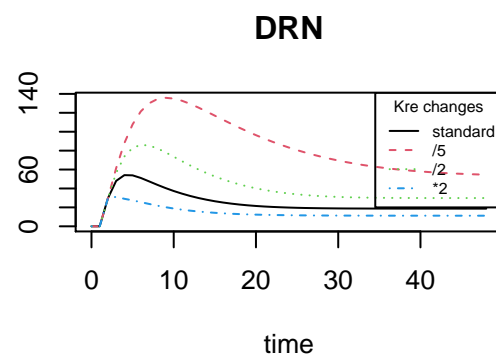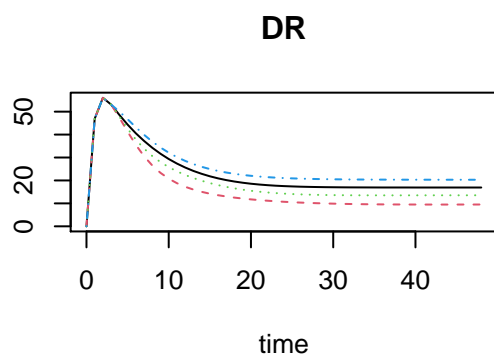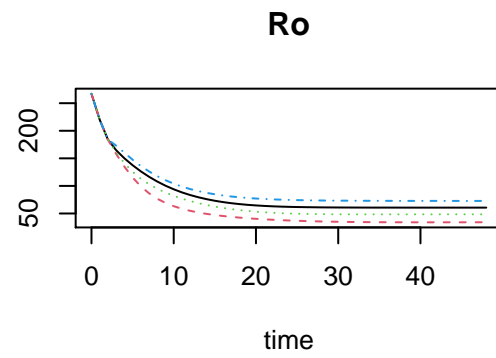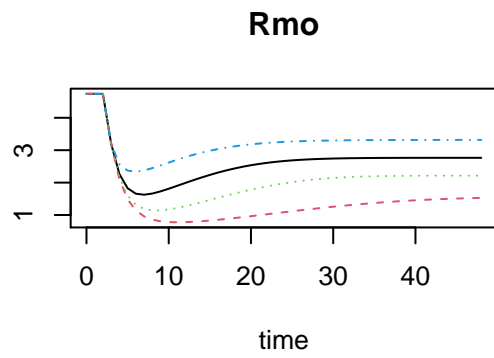

```
# plotted this scenario separtately due to the value difference, it would ruin the plots
plot(out5)
legend("topright", legend = "*5", cex = 0.7, title = "Kre changes")
```



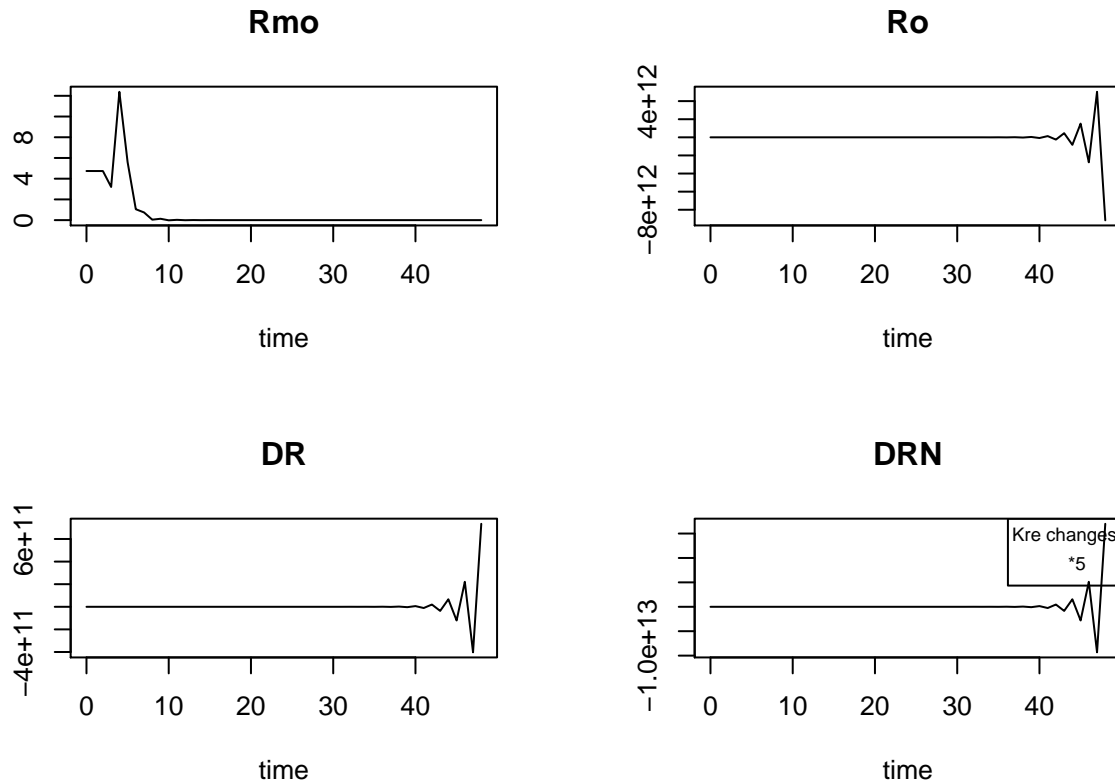

If the legend isn't showing properly in the PDF: First group of graphs are for  $K_{on}$  changes: The white line is for the standard  $K_{on}$  value. The red dotted line is for 5 times lower  $K_{on}$  value. The green dotted line is for 2 times lower  $K_{on}$  value. The blue dotted line is for 2 times higher  $K_{on}$  value. The cyan dotted line is for 5 times higher  $K_{on}$  value.

Second & third group of graphs are for  $K_{re}$  changes. The white line in the first graph with multiple lines is for standard  $K_{re}$  value. The red dotted line is for 5 times lower  $K_{re}$  value. The green dotted line is for 2 times lower  $K_{re}$  value. The blue dotted line is for 2 times higher  $K_{re}$  value. The solo plotted white line is for 5 times higher  $K_{re}$  value.

[4] What would happen if the synthesis of the receptor was completely blocked? Which parameter needs to be put to zero? Adjust the parameter, run the simulations and plot the results.

$K_{s\_rm}$  needs to be set to zero, as this is the constant for mRNA synthesis.

```
D <- (20 * 1000)/374.471
parameters <- c(Ks_rm = 2.90, ic50_rm = 26.2, Kon = 0.00329, Kt = 0.63, Kre = 0.57, Rf = 0.49, Kd_R = 0)
state <- c(Rmo = 4.74, Ro = 267, DR = 0, DRN = 0)
times <- seq(0, 168, by = 1)

Grd_model <- function(t, y, parms){
  with(as.list(c(parms, y)),{
    Rmo.delta <- Ks_rm * (1-(DRN / (ic50_rm + DRN))) - Kd_Rm * Rmo
    R.delta <- Ks_r * Rmo + Rf * Kre * DRN - Kon * D * Ro - Kd_R * Ro
    DR.delta <- Kon * D * Ro - Kt * DR
    DRN.delta <- Kt * DR - Kre * DRN

    return(list(c(Rmo.delta, R.delta, DR.delta, DRN.delta)))
  })
}
```

```


    })
  }

  # standard plot
  out <- ode(times = times, y = state, parms = parameters, func = Grd_model, method = "euler")

  # setting mRNA synthesis to 0 (ks_Rm)
  parameters["Ks_rm"] <- 0
  out2 <- ode(times = times, y = state, parms = parameters, func = Grd_model, method = "euler")

  plot(out, out2)
  legend("topright", lty = 1:2, col = 1:2, cex = 0.8, legend = c("standard", "no synthesis"), title = "mRNA")

```

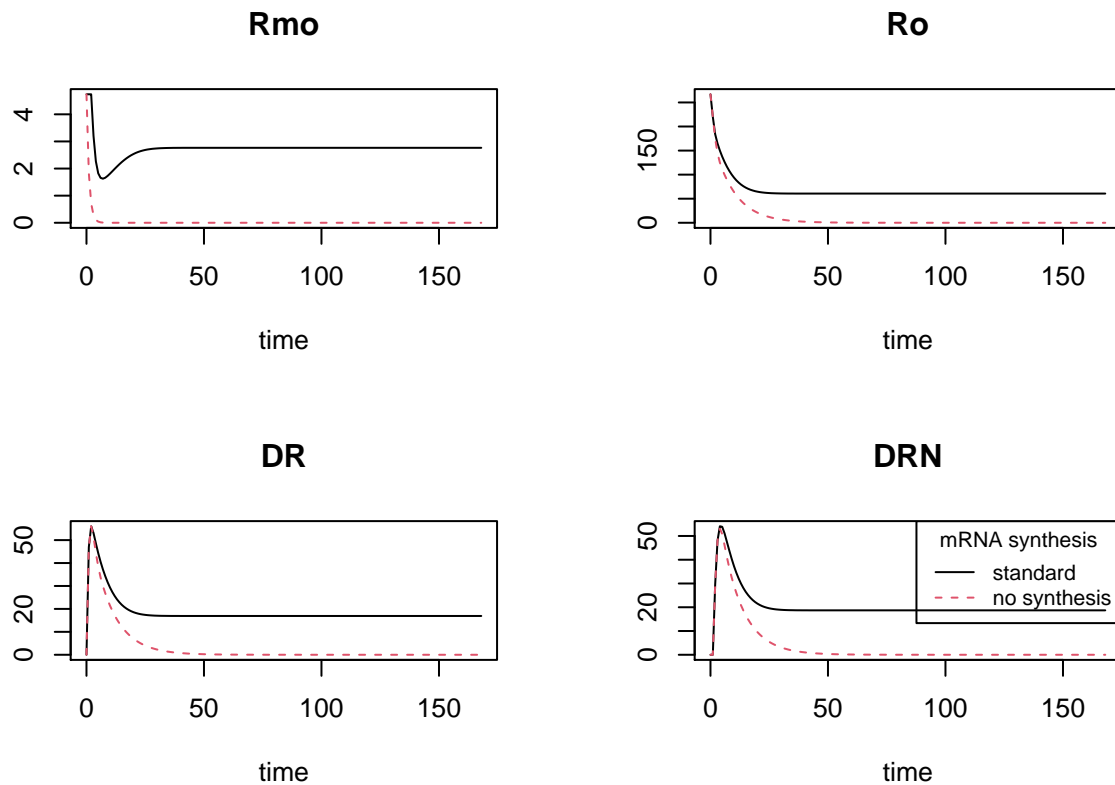

If the legend in the PDF isn't showing properly: The white line is for the standard mRNA synthesis. The red dotted line is for no mRNA synthesis.

[5] What is the dynamic of the system when the baseline rate of production of mRNA of the receptor is increased or decreased 2 or 5 fold (recalculate the rate of mRNA degradation so that the steady-state assumption at baseline (without the drug) is still valid, i.e. mRNA levels are constant when there is not drug)? Mind you:  $ks\_Rm$  values should be changed, but we know that if without the drug the system is at steady-state then  $kd\_Rm = ks\_Rm/Rm0$ . Therefore if we change  $ks\_Rm$  we need to change  $kd\_Rm$  as well. Also after we recalculate the value of  $kd\_Rm$  for the baseline conditions, the simulations should be run with drug present. Simulations should be run for 4 different scenarios:  $ks\_Rm = 2.9/5$  and  $kd\_Rm=2.9/5/4.74$   $ks\_Rm = 2.9/2$  and  $kd\_Rm=2.9/2/4.74$   $ks\_Rm = 2.9/2$  and  $kd\_Rm=2.9/2/4.74$   $ks\_Rm = 2.9/5$  and  $kd\_Rm=2.9/5/4.74$

```

# Set the parameters, state and times for the ode model
D <- (20 * 1000)/374.471
parameters <- c(Ks_rm = 2.90, ic50_rm = 26.2, Kon = 0.00329, Kt = 0.63, Kre = 0.57, Rf = 0.49, Kd_R = 0)
state <- c(Rmo = 4.74, Ro = 267, DR = 0, DRN = 0)
times <- seq(0, 48, by = 1)

# Define the function for the ode model.
Grd_model <- function(t, y, parms){
  with(as.list(c(parms, y)),{
    Rmo.delta <- Ks_rm * (1-(DRN / (ic50_rm + DRN)))- Kd_Rm * Rmo
    R.delta <- Ks_r * Rmo + Rf * Kre * DRN - Kon * D * Ro - Kd_R * Ro
    DR.delta <- Kon * D * Ro - Kt * DR
    DRN.delta <- Kt * DR - Kre * DRN

    return(list(c(Rmo.delta, R.delta, DR.delta, DRN.delta)))
  })
}

# standard scenario
out <- ode(times = times, y = state, parms = parameters, func = Grd_model, method = "euler")

# rate of production divided by 5
parameters["Ks_rm"] <- 2.9/5
parameters["Kd_Rm"] <- parameters["Ks_rm"]/4.74
out2 <- ode(times = times, y = state, parms = parameters, func = Grd_model, method = "euler")





# rate of production divided by 2
parameters["Ks_rm"] <- 2.9/2
parameters["Kd_Rm"] <- parameters["Ks_rm"]/4.74
out3 <- ode(times = times, y = state, parms = parameters, func = Grd_model, method = "euler")

# rate of production multiplied by 2
parameters["Ks_rm"] <- 2.9*2
parameters["Kd_Rm"] <- parameters["Ks_rm"]/4.74
out4 <- ode(times = times, y = state, parms = parameters, func = Grd_model, method = "euler")


# rate of production multiplied by 5
parameters["Ks_rm"] <- 2.9*5
parameters["Kd_Rm"] <- parameters["Ks_rm"]/4.74
out5 <- ode(times = times, y = state, parms = parameters, func = Grd_model, method = "euler")

plot(out, out2, out3, out4)
legend("topright", lty = 1:4, col = 1:4, cex = 0.6, legend = c("Standard", "/5", "/2", "*2"), title = "r")

```

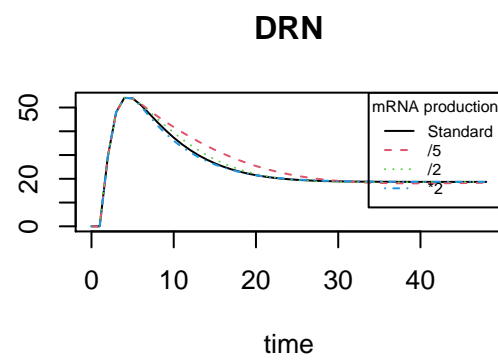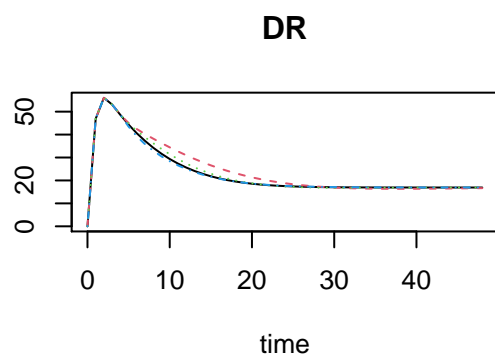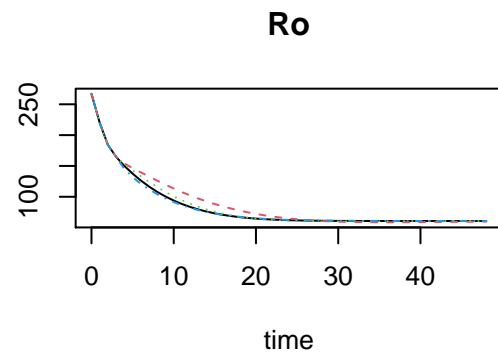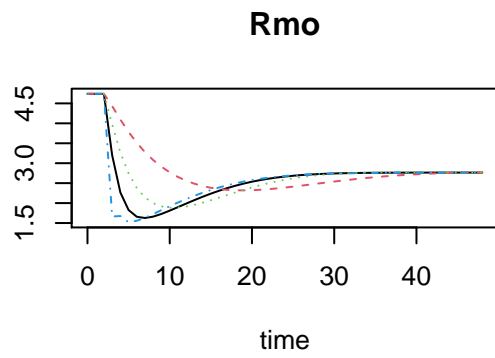

```
# plotted this scenario sepertately due to the value difference, it would ruin the plots
plot(out5)
legend("topright", legend = "*5", cex = 0.6, title = "mRNA production")
```

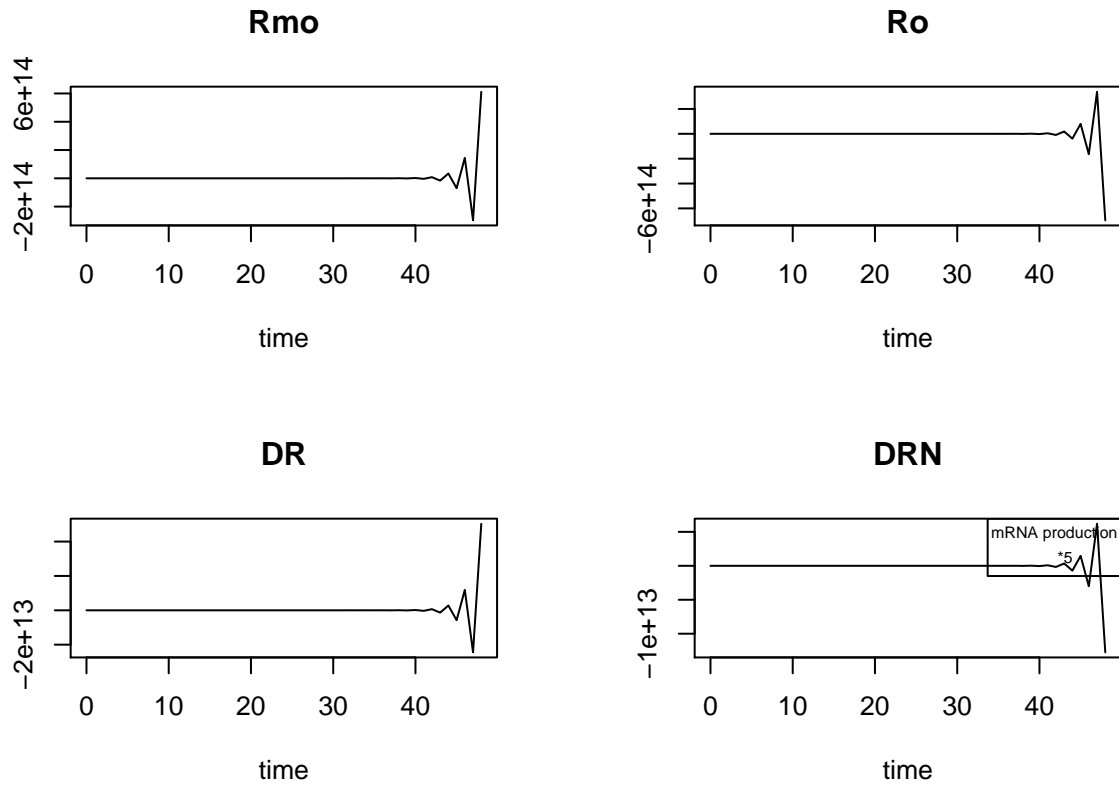

If the legend isn't showing properly in the PDF: The white line in the first graph with multiple lines is for standard mRNA production. The red dotted line is for 5 times less mRNA production. The green dotted line is for 2 times less mRNA production. The blue dotted line is for 2 times more mRNA production. The single plotted white line is for 5 times more mRNA production.