

Introduction into machine learning and analyzes of Breast Cancer Proteomes

true

September 15th, 2022

Contents

Dataset	1
About Dataset	1
Exploratory Data Analysis	2
Data observation	9
Data cleaning and altering	9

Dataset

About Dataset

information about the data set and the three give files :

Context: This data set contains published iTRAQ proteome profiling of 77 breast cancer samples generated by the Clinical Proteomic Tumor Analysis Consortium (NCI/NIH). It contains expression values for ~12.000 proteins for each sample, with missing values present when a given protein could not be quantified in a given sample.

Content:

- **File:** 77cancerproteomesCPTACitraq.csv
 - **RefSeqaccessionnumber:** RefSeq protein ID (each protein has a unique ID in a RefSeq database)
 - **gene__symbol:** a symbol unique to each gene (every protein is encoded by some gene)
 - **gene__name:** a full name of that gene
 - **Remaining columns:** log2 iTRAQ ratios for each sample (protein expression data, most important), three last columns are from healthy individuals
- **File:** clinicalatabreast_cancer.csv
 - **First column** “Complete TCGA ID” is used to match the sample IDs in the main cancer proteomes file (see example script).
 - **All other columns** have self-explanatory names, contain data about the cancer classification of a given sample using different methods. ‘PAM50 mRNA’ classification is being used in the example script.

- **File:** PAM50_proteins.csv
 - **Contains** the list of genes and proteins used by the PAM50 classification system. The column RefSeqProteinID contains the protein IDs that can be matched with the IDs in the main protein expression data set.

Past Research: Original research paper: https://www.researchgate.net/publication/303509927_Proteogenomics_connects_somatic_mutations_to_signaling_in_breast_cancer

Summary: the data were used to assess how the mutations in the DNA are affecting the protein expression landscape in breast cancer. Genes in our DNA are first transcribed into RNA molecules which then are translated into proteins. Changing the information content of DNA has impact on the behavior of the proteome, which is the main functional unit of cells, taking care of cell division, DNA repair, enzymatic reactions and signaling etc. They performed K-means clustering on the protein data to divide the breast cancer patients into sub-types, each having unique protein expression signature. They found that the best clustering was achieved using 3 clusters (original PAM50 gene set yields four different subtypes using RNA data). my question is: are there different ways to categorize subtypes of breast cancer other than the PAM50 method, and define them as benign or malignant?

Exploratory Data Analysis

loading of the dataframes and showing the successful loading and its dimensions. note only the first 5 columns of “77_cancer_proteomes_CPTAC_itraq.csv” are shown since after column 4 they are the same type.

```
proteomes_data <- read.csv(file = "Data//77_cancer_proteomes_CPTAC_itraq.csv")

clinical_data <- read.csv(file = "Data/clinical_data_breast_cancer.csv")
pam50_protein_data <- read.csv(file = "Data/PAM50_proteins.csv")

# showing succeseful loading of data

# only showing first 5 columns of proteomes
pander(head(proteomes_data[1:5], n = 5))
```

Table 1: Table continues below

RefSeq_accession_number	gene_symbol	gene_name	AO.A12D.01TCGA
NP_958782	PLEC	plectin isoform 1	1.096
NP_958785	NA	plectin isoform 1g	1.111
NP_958786	PLEC	plectin isoform 1a	1.111
NP_000436	NA	plectin isoform 1c	1.108
NP_958781	NA	plectin isoform 1e	1.115

C8.A131.01TCGA
2.61
2.65
2.65
2.646
2.646

```
pander(head(clinical_data, n=5))
```

Table 3: Table continues below

Complete.TCGA.ID	Gender	Age.at.Initial.Pathologic.Diagnosis	ER.Status
TCGA-A2-A0T2	FEMALE	66	Negative
TCGA-A2-A0CM	FEMALE	40	Negative
TCGA-BH-A18V	FEMALE	48	Negative
TCGA-BH-A18Q	FEMALE	56	Negative
TCGA-BH-A0E0	FEMALE	38	Negative

Table 4: Table continues below

PR.Status	HER2.Final.Status	Tumor	Tumor..T1.Coded	Node	Node.Coded
Negative	Negative	T3	T_Other	N3	Positive
Negative	Negative	T2	T_Other	N0	Negative
Negative	Negative	T2	T_Other	N1	Positive
Negative	Negative	T2	T_Other	N1	Positive
Negative	Negative	T3	T_Other	N3	Positive

Table 5: Table continues below

Metastasis	Metastasis.Coded	AJCC.Stage	Converted.Stage
M1	Positive	Stage IV	No_Conversion
M0	Negative	Stage IIA	Stage IIA
M0	Negative	Stage IIB	No_Conversion
M0	Negative	Stage IIB	No_Conversion
M0	Negative	Stage IIIC	No_Conversion

Table 6: Table continues below

Survival.Data.Form	Vital.Status	Days.to.Date.of.Last.Contact
followup	DECEASED	240
followup	DECEASED	754
enrollment	DECEASED	1555
enrollment	DECEASED	1692
followup	LIVING	133

Table 7: Table continues below

Days.to.date.of.Death	OS.event	OS.Time	PAM50.mRNA
240	1	240	Basal-like
754	1	754	Basal-like
1555	1	1555	Basal-like
1692	1	1692	Basal-like
NA	0	133	Basal-like

Table 8: Table continues below

SigClust.Unsupervised.mRNA	SigClust.Intrinsic.mRNA	miRNA.Clusters
0	-13	3
-12	-13	4
-12	-13	5
-12	-13	5
0	-13	5

Table 9: Table continues below

methylation.Clusters	RPPA.Clusters	CN.Clusters
5	Basal	3
4	Basal	4
5	Basal	1
5	Basal	1
5	Basal	1

Table 10: Table continues below

Integrated.Clusters..with.PAM50.	Integrated.Clusters..no.exp.
2	2
2	1
2	2
2	2
2	2

Integrated.Clusters..unsup.exp.
2
1
2
2
2

```
pander(head(pam50_protein_data, n=5))
```

GeneSymbol	RefSeqProteinID	Species	Gene.Name
MIA	NP_006524	Homo sapiens	melanoma inhibitory activity
FGFR4	NP_002002	Homo sapiens	fibroblast growth factor receptor 4
FGFR4	NP_998812	Homo sapiens	fibroblast growth factor receptor 4
FGFR4	NP_075252	Homo sapiens	fibroblast growth factor receptor 4
GPR160	NP_055188	Homo sapiens	G protein-coupled receptor 160

```
# showing the structure/dimensions of dataframe
cat("77_cancer_proteomes_CPTAC_itraq [ number of rows:", nrow(proteomes_data), "number of columns:", ncol(proteomes_data))
```

```
## 77_cancer_proteomes_CPTAC_itraq [ number of rows: 12553 number of columns: 86
```

```
cat("clinical_data [ number of rows:", nrow(clinical_data), "number of columns:", ncol(clinical_data), "\n")
```

```
## clinical_data [ number of rows: 105 number of columns: 30
```

```
cat("pam50_protein_data [ number of rows:", nrow(pam50_protein_data), "number of columns:", ncol(pam50_p
```

```
## pam50_protein_data [ number of rows: 100 number of columns: 4
```

Checking if the Proteomes data has been correctly read.

```
str(proteomes_data)
```

```
## 'data.frame': 12553 obs. of 86 variables:
## $ RefSeq_accession_number: chr "NP_958782" "NP_958785" "NP_958786" "NP_000436" ...
## $ gene_symbol : chr "PLEC" NA "PLEC" NA ...
## $ gene_name : chr "plectin isoform 1" "plectin isoform 1g" "plectin isoform 1a" "plec
## $ A0.A12D.01TCGA : num 1.1 1.11 1.11 1.11 1.12 ...
## $ C8.A131.01TCGA : num 2.61 2.65 2.65 2.65 2.65 ...
## $ A0.A12B.01TCGA : num -0.66 -0.649 -0.654 -0.632 -0.64 ...
## $ BH.A18Q.02TCGA : num 0.195 0.215 0.215 0.205 0.215 ...
## $ C8.A130.02TCGA : num -0.494 -0.504 -0.501 -0.51 -0.504 ...
## $ C8.A138.03TCGA : num 2.77 2.78 2.78 2.8 2.79 ...
## $ E2.A154.03TCGA : num 0.863 0.87 0.87 0.866 0.87 ...
## $ C8.A12L.04TCGA : num 1.41 1.41 1.41 1.41 1.41 ...
## $ A2.A0EX.04TCGA : num 1.19 1.19 1.19 1.19 1.2 ...
## $ A0.A12D.05TCGA : num 1.1 1.1 1.1 1.1 1.09 ...
## $ AN.A04A.05TCGA : num 0.385 0.371 0.371 0.378 0.375 ...
## $ BH.A0AV.05TCGA : num 0.351 0.367 0.367 0.361 0.371 ...
## $ C8.A12T.06TCGA : num -0.205 -0.162 -0.167 -0.184 -0.167 ...
## $ A8.A06Z.07TCGA : num -0.496 -0.499 -0.496 -0.492 -0.488 ...
## $ A2.A0CM.07TCGA : num 0.683 0.694 0.698 0.687 0.687 ...
## $ BH.A18U.08TCGA : num -0.265 -0.252 -0.252 -0.252 -0.252 ...
## $ A2.A0EQ.08TCGA : num -0.913 -0.928 -0.928 -0.932 -0.928 ...
## $ AR.A0U4.09TCGA : num -0.0332 -0.0302 -0.0272 -0.0302 -0.0302 ...
## $ A0.A0J9.10TCGA : num 0.02 0.012 0.012 0.0039 0.012 ...
## $ AR.A1AP.11TCGA : num 0.461 0.461 0.461 0.461 0.461 ...
## $ AN.A0FK.11TCGA : num 0.974 0.977 0.977 0.97 0.985 ...
## $ A0.A0J6.11TCGA : num 0.831 0.857 0.857 0.837 0.865 ...
## $ A7.A13F.12TCGA : num 1.28 1.28 1.28 1.28 1.28 ...
## $ BH.A0E1.12TCGA : num 0.762 0.762 0.766 0.758 0.766 ...
## $ A7.A0CE.13TCGA : num -1.12 -1.12 -1.12 -1.13 -1.13 ...
## $ A2.A0YC.13TCGA : num 0.819 0.815 0.815 0.799 0.819 ...
## $ A0.A0JC.14TCGA : num -0.307 -0.307 -0.307 -0.307 -0.301 ...
## $ A8.A08Z.14TCGA : num 0.569 0.569 0.569 0.569 0.569 ...
## $ AR.A0TX.14TCGA : num -0.583 -0.573 -0.567 -0.583 -0.573 ...
## $ A8.A076.15TCGA : num 1.87 1.87 1.87 1.86 1.87 ...
## $ A0.A126.15TCGA : num 0.196 0.196 0.196 0.219 0.2 ...
## $ BH.A0C1.16TCGA : num -0.518 -0.51 -0.507 -0.518 -0.513 ...
## $ A2.A0EY.16TCGA : num 1.17 1.18 1.18 1.17 1.18 ...
## $ AR.A1AW.17TCGA : num 0.578 0.582 0.578 0.59 0.586 ...
```

```

## $ AR.A1AV.17TCGA : num -0.76 -0.76 -0.749 -0.736 -0.749 ...
## $ C8.A135.17TCGA : num 1.12 1.14 1.14 1.14 1.12 ...
## $ A2.A0EV.18TCGA : num 0.453 0.473 0.473 0.459 0.473 ...
## $ AN.AOAM.18TCGA : num 1.5 1.51 1.5 1.5 1.5 ...
## $ D8.A142.18TCGA : num 0.539 0.542 0.542 0.535 0.542 ...
## $ AN.AOFL.19TCGA : num 2.46 2.48 2.48 2.46 2.48 ...
## $ BH.AODG.19TCGA : num -0.206 -0.206 -0.206 -0.215 -0.206 ...
## $ AR.AOTV.20TCGA : num -1.51 -1.53 -1.53 -1.53 -1.51 ...
## $ C8.A12Z.20TCGA : num -0.787 -0.756 -0.756 -0.775 -0.772 ...
## $ A0.AOJJ.20TCGA : num 0.757 0.781 0.774 0.764 0.771 ...
## $ A0.AOJE.21TCGA : num 0.56 0.563 0.56 0.542 0.56 ...
## $ AN.AOAJ.21TCGA : num -0.428 -0.406 -0.406 -0.406 -0.406 ...
## $ A7.AOCJ.22TCGA : num -1.001 -1.005 -1.005 -0.998 -1.001 ...
## $ A0.A12F.22TCGA : num -1.95 -1.95 -1.96 -1.95 -1.96 ...
## $ A8.A079.23TCGA : num 1.05 1.05 1.05 1.06 1.05 ...
## $ A2.AOT3.24TCGA : num 0.584 0.581 0.581 0.587 0.587 ...
## $ A2.AOYD.24TCGA : num 0.0638 0.0933 0.0845 0.0667 0.0845 ...
## $ AR.AOTR.25TCGA : num -1.1 -1.11 -1.11 -1.1 -1.11 ...
## $ A0.A030.25TCGA : num 1.05 1.06 1.06 1.06 1.06 ...
## $ A0.A12E.26TCGA : num 0.265 0.276 0.276 0.278 0.278 ...
## $ A8.A06N.26TCGA : num 0.239 0.25 0.244 0.25 0.25 ...
## $ A2.AOYG.27TCGA : num -0.0782 -0.0681 -0.0714 -0.0579 -0.0647 ...
## $ BH.A18N.27TCGA : num 1.1 1.1 1.1 1.09 1.11 ...
## $ AN.AOAL.28TCGA : num 0.324 0.327 0.327 0.33 0.327 ...
## $ A2.AOT6.29TCGA : num 0.794 0.818 0.815 0.801 0.818 ...
## $ E2.A158.29TCGA : num -1.09 -1.1 -1.1 -1.1 -1.1 ...
## $ E2.A15A.29TCGA : num 2.18 2.18 2.18 2.18 2.18 ...
## $ A0.AOJM.30TCGA : num 1.4 1.41 1.41 1.41 1.41 ...
## $ C8.A12V.30TCGA : num 0.674 0.689 0.689 0.678 0.689 ...
## $ A2.AOD2.31TCGA : num 0.1075 0.1042 0.1075 0.0975 0.1042 ...
## $ C8.A12U.31TCGA : num -0.482 -0.478 -0.482 -0.471 -0.482 ...
## $ AR.A1AS.31TCGA : num 1.22 1.22 1.22 1.2 1.22 ...
## $ A8.A09G.32TCGA : num -1.52 -1.51 -1.51 -1.52 -1.51 ...
## $ C8.A131.32TCGA : num 2.71 2.73 2.74 2.73 2.75 ...
## $ C8.A134.32TCGA : num 0.14 0.126 0.133 0.112 0.126 ...
## $ A2.AOYF.33TCGA : num 0.311 0.296 0.296 0.296 0.296 ...
## $ BH.AODD.33TCGA : num -0.692 -0.659 -0.664 -0.657 -0.662 ...
## $ BH.AOE9.33TCGA : num 1.47 1.48 1.47 1.46 1.47 ...
## $ AR.AOTT.34TCGA : num -0.511 -0.526 -0.526 -0.533 -0.53 ...
## $ A0.A12B.34TCGA : num -0.964 -0.938 -0.944 -0.935 -0.935 ...
## $ A2.AOSW.35TCGA : num -0.488 -0.488 -0.488 -0.488 -0.504 ...
## $ A0.AOJL.35TCGA : num -0.107 -0.107 -0.107 -0.107 -0.107 ...
## $ BH.AOBV.35TCGA : num -0.0658 -0.0559 -0.0658 -0.0559 -0.0625 ...
## $ A2.AOYM.36TCGA : num 0.656 0.658 0.656 0.656 0.651 ...
## $ BH.AOC7.36TCGA : num -0.552 -0.548 -0.552 -0.552 -0.557 ...
## $ A2.AOSX.36TCGA : num -0.399 -0.393 -0.393 -0.393 -0.396 ...
## $ X263d3f.I.CPTAC : num 0.599 0.607 0.604 0.604 0.604 ...
## $ blcdb9.I.CPTAC : num -0.191 -0.184 -0.186 -0.186 -0.167 ...
## $ c4155b.C.CPTAC : num 0.567 0.579 0.577 0.577 0.577 ...

```

Nothing strange about the Proteomes dat everything seems to be read correct.

Checking if the clinical data has been correctly read.

```
str(clinical_data)
```

```
## 'data.frame': 105 obs. of 30 variables:
## $ Complete.TCGA.ID : chr "TCGA-A2-AOT2" "TCGA-A2-AOCM" "TCGA-BH-A18V" "TCGA-BH-A18V" ...
## $ Gender : chr "FEMALE" "FEMALE" "FEMALE" "FEMALE" ...
## $ Age.at.Initial.Pathologic.Diagnosis: int 66 40 48 56 38 57 74 60 61 67 ...
## $ ER.Status : chr "Negative" "Negative" "Negative" "Negative" ...
## $ PR.Status : chr "Negative" "Negative" "Negative" "Negative" ...
## $ HER2.Final.Status : chr "Negative" "Negative" "Negative" "Negative" ...
## $ Tumor : chr "T3" "T2" "T2" "T2" ...
## $ Tumor..T1.Coded : chr "T_Other" "T_Other" "T_Other" "T_Other" ...
## $ Node : chr "N3" "N0" "N1" "N1" ...
## $ Node.Coded : chr "Positive" "Negative" "Positive" "Positive" ...
## $ Metastasis : chr "M1" "M0" "M0" "M0" ...
## $ Metastasis.Coded : chr "Positive" "Negative" "Negative" "Negative" ...
## $ AJCC.Stage : chr "Stage IV" "Stage IIA" "Stage IIB" "Stage IIB" ...
## $ Converted.Stage : chr "No_Conversion" "Stage IIA" "No_Conversion" "No_Conversion" ...
## $ Survival.Data.Form : chr "followup" "followup" "enrollment" "enrollment" ...
## $ Vital.Status : chr "DECEASED" "DECEASED" "DECEASED" "DECEASED" ...
## $ Days.to.Date.of.Last.Contact : int 240 754 1555 1692 133 309 425 643 775 964 ...
## $ Days.to.date.of.Death : int 240 754 1555 1692 NA NA NA NA NA NA ...
## $ OS.event : int 1 1 1 1 0 0 0 0 0 0 ...
## $ OS.Time : int 240 754 1555 1692 133 309 425 643 775 964 ...
## $ PAM50.mRNA : chr "Basal-like" "Basal-like" "Basal-like" "Basal-like" ...
## $ SigClust.Unsupervised.mRNA : int 0 -12 -12 -12 0 0 0 -12 -12 -12 ...
## $ SigClust.Intrinsic.mRNA : int -13 -13 -13 -13 -13 -13 -13 -13 -13 -13 ...
## $ miRNA.Clusters : int 3 4 5 5 5 5 3 5 2 5 ...
## $ methylation.Clusters : int 5 4 5 5 5 5 5 5 5 5 ...
## $ RPPA.Clusters : chr "Basal" "Basal" "Basal" "Basal" ...
## $ CN.Clusters : int 3 4 1 1 1 1 1 1 1 3 ...
## $ Integrated.Clusters..with.PAM50. : int 2 2 2 2 2 2 2 2 2 2 ...
## $ Integrated.Clusters..no.exp. : int 2 1 2 2 2 2 2 2 2 2 ...
## $ Integrated.Clusters..unsup.exp. : int 2 1 2 2 2 2 2 2 2 2 ...
```

Nothing strange about the clinical data everything seems to be read correct.

Checking if the pam50 protein data has been correctly read.

```
str(pam50_protein_data)
```

```
## 'data.frame': 100 obs. of 4 variables:
## $ GeneSymbol : chr "MIA" "FGFR4" "FGFR4" "FGFR4" ...
## $ RefSeqProteinID: chr "NP_006524" "NP_002002" "NP_998812" "NP_075252" ...
## $ Species : chr "Homo sapiens" "Homo sapiens" "Homo sapiens" "Homo sapiens" ...
## $ Gene.Name : chr "melanoma inhibitory activity" "fibroblast growth factor receptor 4" "fibroblast growth factor receptor 4" ...
```

Nothing strange about the pam50 protein data everything seems to be read correct.

codebook

loading of the created codebooks for the three dataframes. showing also its contents and successful loading

```
cancer_proteomes_CPTAC_codebook <- read.csv2("Data/77_cancer_proteomes_CPTAC_codebook.txt")
clinical_data_codebook <- read.csv2("Data/clinical_data_breast_cancer_codebook.txt")
PAM50_protein_codebook <- read.csv2("Data/PAM50_protein_codebook.txt", sep = ";")
```

```
pander(cancer_proteomes_CPTAC_codebook)
```

Column	Description	data.type	unit
RefSeq_accession_number	RefSeq protein ID	string	NA
gene_symbol	Gene abbreviation code	string	NA
gene_name	Name of the gene	string	NA
Remaining columns	log2 iTRAQ ratios	float	NA

```
pander(clinical_data_codebook)
```

Table 14: Table continues below

Column	Description
Complete_TCGA_ID	TCGA ID
Gender	Gender
Age_at_Initial_Pathologic_Diagnosis	Age at Initial Pathologic Diagnosis
ER Status	Estrogen receptor Status
PR Status	Progesterone receptor Status
HER2 Final Status	Human Epidermal growth factor Receptor 2
Tumor	Tumor
Tumor-T1 Coded	Tumor-T1 Coded
Node	Node
Node-Coded	Node-Coded
Metastasis	Metastasis
Metastasis-Coded	Metastasis-Coded
AJCC Stage	American Joint Committee on Cancer Stage
Converted Stage	Converted Stage
Survival Data Form	Survival Data Form
Vital Status	Vital Status
Days to Date of Last Contact	Days to Date of Last Contact
Days to date of Death	Days to date of Death
OS event	OS event 0= NO, 1= YES
OS Time	OS Time
PAM50 mRNA	PAM50 mRNA
SigClust Unsupervised mRNA	SigClust Unsupervised mRNA
SigClust Intrinsic mRNA	SigClust Intrinsic mRNA
miRNA Clusters	miRNA Clusters
methylation Clusters	methylation Clusters
RPPA Clusters	RPPA Clusters
CN Clusters	CN Clusters
Integrated Clusters (with PAM50)	Integrated Clusters (with PAM50)
Integrated Clusters (no exp)	Integrated Clusters (no exp)
Integrated Clusters (unsup exp)	Integrated Clusters (unsup exp)

type	data.type	unit
name	chr	NA
name	chr	NA
Descriptive	chr	NA
Descriptive	chr	NA
Descriptive	chr	NA
Descriptive	chr	NA
Descriptive	chr	NA
Descriptive	chr	NA
Descriptive	chr	NA
Descriptive	chr	NA
Descriptive	chr	NA
Descriptive	chr	NA
Descriptive	chr	NA
Descriptive	chr	NA
Descriptive	chr	NA
Descriptive	chr	NA
Time	int	Days
Time	int	Days
Descriptive	int	NA
Time	int	Hours
Descriptive	chr	NA
Count	int	NA
Count	int	NA
Count	int	NA
Count	int	NA
Descriptive	chr	NA
Count	int	NA
count	int	NA
count	int	NA
count	int	NA

```
pander(PAM50_protein_codebook)
```

Column	Description	type	unit
GeneSymbol	Gene abbreviation	chr	NA
RefSeqProteinID	Unique reference identifier	chr	NA
Species	Species	chr	latin name
Gene.Name	Name of the gene	chr	NA

Data observation

there are 12553 rows in the data, these are proteins identifiable with a RefSeq ID number and have 86 columns of which the last 83 are samples (with named with their identifiers and the last three from healthy individuals). to further use the data i shall reshape it to make the rows samples and each column a protein

Data cleaning and altering

altering sample names

the alteration of sample names to correspond to the clinical data names is needed for further comparison and analyses. this is done by changing the column names to that of the same format of the clinical data. this is done with some regex magic

```
# storing a list of the column names
column_names <- names(proteomes_data)

# function
change_sample_name <- function(x){
  #search for TCGA name, if found split and make new name
  if(grepl("TCGA",x) == TRUE){
    temp_list <- as.list(strsplit(x, '[_|-|.\\.'])[[1]])
    x <- str_c(c('TCGA',temp_list[[1]],temp_list[[2]]),collapse = '-')
  }
  return (x)
}

# changing of the colnames
colnames(proteomes_data) <- lapply(column_names, change_sample_name)
cat("Old name:",column_names[[4]],",New name:",names(proteomes_data)[[4]])
```

```
## Old name: A0.A12D.01TCGA ,New name: TCGA-A0-A12D
```

this output show to conversion has been successful

numerical data frame

now we need to make a data frame with only the numerical data for the ease of analyzes

```
# first making a data frame with only the numerical data, samples start at column number 4 til the end
proteomes_data_numerical <- proteomes_data[4:86]
```

Transposing

transposing the created data frame “proteomes_data_numerical”, and adding the refseq ID as column name

```
proteomes_data_numerical_transposed <- as.data.frame(t(proteomes_data_numerical))
colnames(proteomes_data_numerical_transposed) <- proteomes_data$RefSeq_accession_number

# checking is successful
cat("proteomes_data_numerical_transposed[ number of rows:", nrow(proteomes_data_numerical_transposed),
    "number of columns:",ncol(proteomes_data_numerical_transposed),'\n')
```

```
## proteomes_data_numerical_transposed[ number of rows: 83 number of columns: 12553
```


```
# lets add a healthy group and cancer, the last 3 columns where from healthy people
# *see content section for the reference
proteomes_data_numerical_transposed$sample_type <- "Cancer"
proteomes_data_numerical_transposed$sample_type[81:83] <- "Healthy"
```

cleaning

since there are NA values in the data lets see how much

```
count_na_func <- function(x) sum(is.na(x))
# getting NA values per RefSeqID(column)
Na_per_col <- sapply(proteomes_data_numerical_transposed, count_na_func)

hist(Na_per_col, breaks = 40,
     xlab = "Number of NA in column",
     ylab = "Frequency of pro",
     main = "Frequency of number of NA values per RefSeqID",
     col = "green")
```

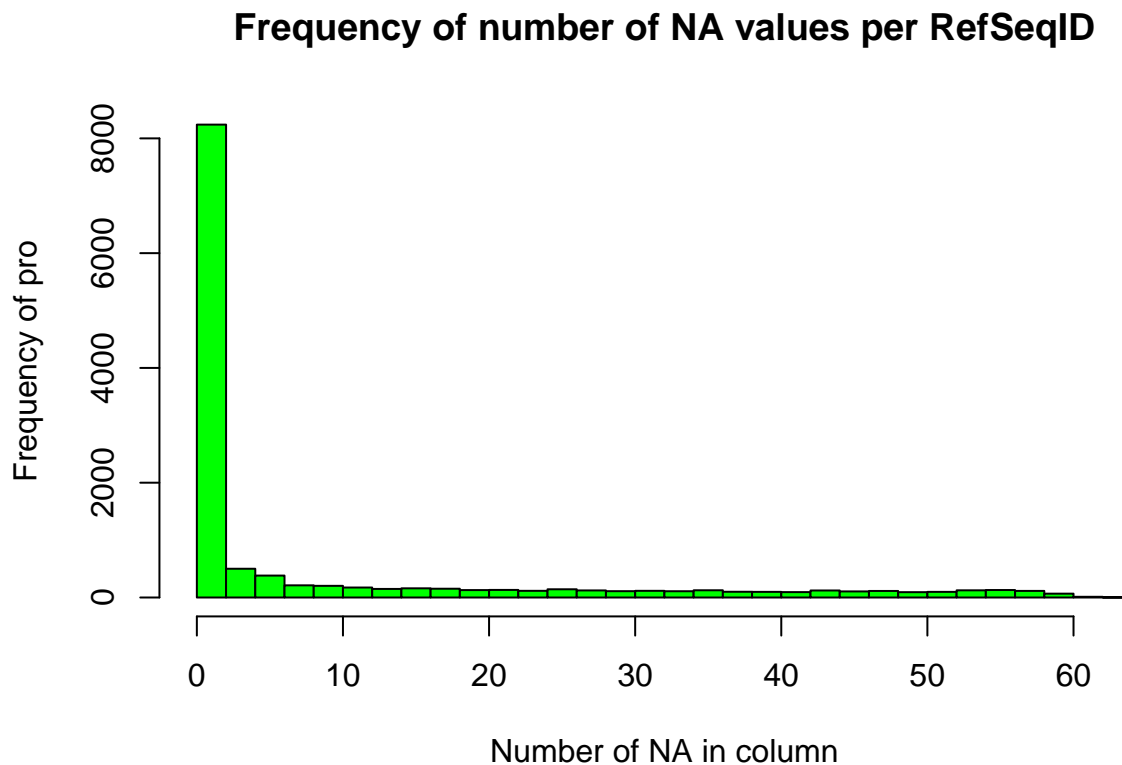

```
cat("number of proteins with NA values in them:", sum(Na_per_col > 0), '\n' )
```

```
## number of proteins with NA values in them: 4559
```

```
# TODO decide how many NA values are permitted per protein
proteomes_filtered_data <- proteomes_data_numerical_transposed[Na_per_col < 8]
cat("number of proteins with 8 or more NA values in them and deleted from data:",
    sum(Na_per_col > 8), '\n')
```

```
## number of proteins with 8 or more NA values in them and deleted from data: 3219
```

```
cat("proteomes_filtered_data[number of rows:",  
    nrow(proteomes_filtered_data),  
    "number of columns:",  
    ncol(proteomes_filtered_data),'\n')
```

```
## proteomes_filtered_data[number of rows: 83 number of columns: 9200
```

as we can see from the reports generated by the code we can see that the filtering of NA was successful.

```
clinical_data$Vital.Status <- factor(clinical_data$Vital.Status)  
summary(clinical_data$Vital.Status)
```

```
## DECEASED    LIVING  
##         11         94
```