


```
2a543d6a14c2: Preparing
2223c3091e67; Preparing
 34f7184834b2: Preparing
 5836ece05bfd: Preparing
72e830a4dff5: Preparing
34f7184834b2: Mounted from library/openjdk
 5836ece05bfd: Mounted from library/openjdk
 72e830a4dff5: Mounted from library/openjdk
2223c3091e67: Pushed
 2a543d6a14c2: Pushed
 latest: digest: sha256:b221b7b8241817f21eb35059fd302c63ec9b0cc75877e57c32ab8b0c687a48ac size: 1365
 [Pipeline] }
 [Pipeline] // withDockerRegistry
 [Pipeline] }
 [Pipeline] // script
 [Pipeline] }
 [Pipeline] // stage
 [Pipeline] )
 [Pipeline] // node
 [Pipeline] End of Pipeline
 Finished: SUCCESS
```



← → ♂ ⊙ localhost:32770



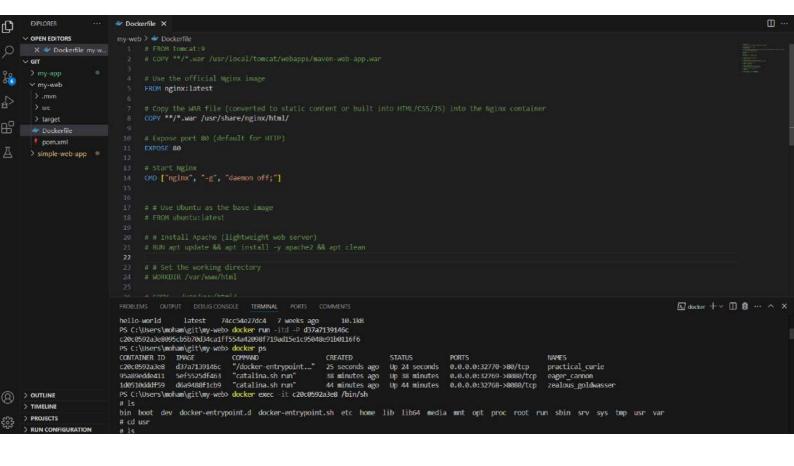



You must use POST method to trigger builds. (From scripts you may instead pass a per-project authentication token, or authenticate with your API token.) If you see this page, it may be because a plugin offered a GET link; file a bug report that plugin.

Proceed

