

DemoDecomp: an R Package for General Demographic Decomposition Methods

redacted

August 10, 2018

Abstract

Background

Most demographic indices are functions of parameters, such as age-structured rates. There are many case-specific methods to decompose differences in indices to differences in parameters, but only a few general methods exist.

Objective

We aim to demonstrate the use of two general decomposition methods available in the R package `DemoDecomp`.

Methods

Two methods are demonstrated: pseudo-continuous decomposition (`horiuchi()`) and stepwise replacement decomposition (`stepwise_replacement()`).

Results

Conclusions

Contribution

R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see <http://rmarkdown.rstudio.com>.


When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

```
summary(cars)
```

```
##      speed      dist
##  Min.   : 4.0    Min.   : 2.00
##  1st Qu.:12.0    1st Qu.: 26.00
##  Median :15.0    Median : 36.00
##  Mean   :15.4    Mean    : 42.98
##  3rd Qu.:19.0    3rd Qu.: 56.00
##  Max.   :25.0    Max.    :120.00
```

Including Plots

You can also embed plots, for example:

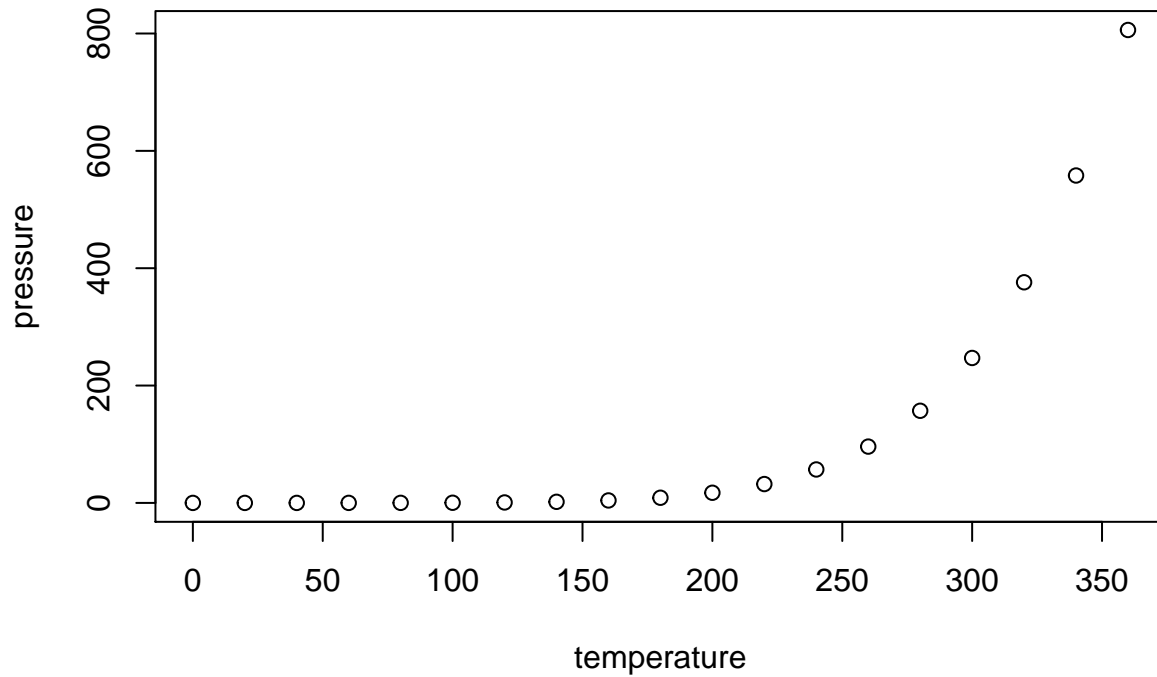

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot.