

Strategic Intelligence in Large Language Models 2

Author Sequence¹

¹The Hague Centre of Strategic Studies, Lange Voorhout 1, The Hague, 2514EA, Netherlands.

²LIACS, Leiden University, Einsteinweg 55, Leiden, 2333CC Netherlands.

Abstract

This study extends recent work on the strategic capacities of large language models (LLMs) by systematically evaluating their performance in the Iterated Prisoner’s Dilemma (IPD). We design an evolutionary tournament framework involving 28 agents, comprising canonical rule-based strategies, synthetic LLM-generated strategies, adaptive learning agents, and contemporary LLMs from four major developers. Agents interact across varying shadow-of-the-future conditions, with performance assessed over multiple evolutionary phases. The analysis investigates how rule-based, adaptive, and LLM-driven approaches compare in terms of resilience, adaptability, and strategic footprint. Results reveal distinct behavioural patterns among LLMs, with temperature variation influencing the exploration–exploitation balance, and highlight conditions under which language-based reasoning outperforms traditional algorithmic strategies. By integrating evolutionary dynamics with cross-model evaluation, this work advances understanding of LLMs as strategic actors and contributes to the broader study of artificial agents in repeated games.

Keywords: Game Theory, Prisoner’s Dilemma, Large Language Models

1 Introduction

Extension of the paper based on earlier work ([Payne and Alloui-Cros, 2025](#)).

2 Literature Review

3 Experimental Design

The experimental framework follows and extends the experimental setup from [Payne and Alloui-Cros \(2025\)](#). Experiments were conducted using a comprehensive suite of 28 agents representing 13 rule-based, 3 adaptive learning, and 12 Large Language Model (LLM) strategies in the Iterated Prisoner’s Dilemma (IPD). Details about the agents are presented in the following section.

3.1 Evolutionary Tournament Design

We exclusively employed an evolutionary tournament framework. Each experiment proceeded over five sequential phases. In every phase, the current population of strategies engaged in a full round-robin tournament, after which population shares were updated according to relative per-move performance. Strategies that underperformed were gradually eliminated, while higher-performing strategies increased their representation in subsequent phases. This iterative process models evolutionary selection dynamics across the phases.

3.2 Tournament Structure

In each phase, all 28 agents faced one another in pairwise matches. The total number of matches per phase was therefore

$$\frac{28 \times (28 - 1)}{2} = 378.$$

Within each match, the repeated game continued according to a stochastic termination rule (the *shadow of the future*), with shadow probabilities of 0.10, 0.25, and 0.75 tested in separate conditions. These correspond to expected round lengths of approximately 1.1, 1.3, and 4.0 moves per match, respectively.

3.3 Concurrent Implementation

To manage the computational scale and mitigate latency from external model calls, tournaments were executed with up to 50 concurrent matches. This concurrency not only accelerated the evaluation of the 378 match pairs per phase but also ensured that other games could proceed while waiting for API responses from LLM agents. In this way, the design maintained efficiency despite the asynchronous nature of interactions with external language models.

4 Agents

We evaluate a comprehensive set of agents across three distinct categories to examine strategic behavior in the Iterated Prisoner’s Dilemma. Our agent pool comprises rule-based strategies that implement deterministic or probabilistic

decision rules, adaptive learning strategies that employ reinforcement learning and machine learning techniques to evolve their behavior over time, and large language model (LLM) agents that leverage natural language reasoning to make strategic decisions. The rule-based strategies include both canonical benchmark strategies from the game theory literature and novel synthetic strategies generated by Claude Opus 4.0. The adaptive learning strategies, also designed by Claude Opus 4.0, demonstrate how AI-generated agents can dynamically adjust their behavior through experience using sophisticated learning algorithms. The LLM agents represent a fundamentally different paradigm where strategic reasoning emerges from language model capabilities rather than explicit algorithmic design. This diverse agent ecosystem, with both LLM-designed algorithmic strategies and LLM-based reasoning agents, enables us to investigate how different computational approaches to strategic decision-making perform against one another in repeated interactions.

4.1 Rule-Based Strategies

We evaluate two distinct categories of rule-based strategies in our IPD experiments. The canonical benchmark strategies are well-established approaches derived from the game theory literature, as comprehensively documented in (Payne and Alloui-Cros, 2025). In contrast, the synthetic strategies are LLM-generated strategies that represent novel behavioral variants created by Claude Opus 4.0. **Maarten: Stephan, please elaborate on the prompt, model and creation of these strategies**, demonstrating the potential for large language models to design sophisticated game-theoretic agents.

4.1.1 Canonical Benchmark Strategies

The following strategies are canonical IPD approaches from (Payne and Alloui-Cros, 2025):

- **Tit for Tat (TFT):** Opens with cooperation, then directly mirrors the opponent’s previous action. This reciprocal mechanism creates immediate feedback between player actions.
- **Grim Trigger:** Maintains cooperation until detecting any defection, then permanently switches to defection. Features a binary state transition with no recovery mechanism.
- **Win-Stay, Lose-Shift (WSLS):** Evaluates the previous round’s payoff outcome and maintains the current action if successful, otherwise switches. The decision rule depends solely on payoff satisfaction rather than opponent behavior.
- **Random:** Selects actions based on a predetermined probability distribution, typically with equal likelihood for cooperation and defection. Operates independently of opponent behavior or game history.
- **Generous Tit for Tat (GTFT):** Mirrors opponent’s previous action but incorporates a forgiveness probability (10%) that overrides retaliation with cooperation. Combines reciprocity with stochastic clemency.

- **Suspicious Tit for Tat:** Initiates with defection, then mirrors opponent's previous moves. Identical reciprocal mechanism to TFT but with opposite starting condition.
- **Prober:** Executes a fixed testing sequence (C-D-C), then switches between two behavioral modes based on opponent's response pattern during the test phase: exploitation mode or TFT mode.
- **Gradual:** Implements escalating retaliation where each opponent defection triggers a punishment sequence equal in length to the cumulative defection count, followed by a single cooperation signal.
- **Alternator:** Follows a predetermined cyclic pattern (C-D-C-D...) independent of opponent actions or game outcomes. Operates as a deterministic finite state machine.
- **Bayesian:** Maintains probability distributions over a set of candidate opponent strategies, updating beliefs through Bayesian inference based on observed actions, then selects optimal responses given the current belief state.

4.1.2 Synthetic Strategies

The following behavioral strategies were designed by Claude Opus 4.0 **Maarten: Stephan, please elaborate on the prompt, model and creation of these strategies**, representing novel approaches that combine elements from classical strategies with innovative mechanisms:

- **Forgiving Grim Trigger:** A modified version of Grim Trigger that incorporates a redemption mechanism. After triggering defection, it monitors for mutual defection and offers forgiveness by returning to cooperation once a threshold of mutual defections is reached (2 rounds), enabling recovery from conflict spirals.
- **Detective:** An investigative strategy that begins with a diagnostic sequence (C-D-C) to classify opponents. Based on the opponent's response pattern, it categorizes them as exploitable "suckers" (leading to consistent defection), "retaliators" (prompting TFT behavior), or unpredictable (resulting in mixed strategies). Details about classification and responses are included in Appendix 1.
- **Soft Grudger:** A measured retaliation strategy that responds to defection with a fixed sequence (D-D-C). Unlike Grim Trigger's permanent retaliation, this provides graduated sanctions followed by an attempt to restore cooperation, balancing punishment with forgiveness.

4.2 Adaptive Learning Strategies

The following adaptive learning strategies were designed by Claude Opus 4.0, demonstrating the application of reinforcement learning and machine learning techniques to the IPD:

- **Q-Learning Agent:** A reinforcement learning strategy that maintains state-action value estimates (Q-values) for decision-making. It defines states based on the previous round’s moves and employs epsilon-greedy exploration with decaying exploration rates over time. The agent uses optimistic initialization (Q-values starting at 10.0) to encourage early exploration of both actions. Learning parameters (α , γ , ϵ) are dynamically adjusted based on expected game length, with shorter games using higher learning rates and lower discount factors to rapidly adapt to opponent behavior. The complete algorithm is detailed in Appendix 2.
- **Thompson Sampling:** A Bayesian exploration-exploitation strategy that maintains Beta distributions for both cooperation and defection actions. It samples from these distributions each round to select actions, naturally balancing exploration of uncertain actions with exploitation of promising ones. The agent employs adaptive learning rates that scale with both payoff magnitude and game length, treating all payoffs as weighted successes while penalizing below-average outcomes. This creates a probabilistic framework that converges toward optimal play while maintaining strategic uncertainty. Algorithmic details are available in Appendix 3.
- **Gradient Meta-Learner:** A policy gradient approach that learns a parameterized policy through feature extraction and gradient ascent. The agent extracts five key features from the game state: first-round indicator, opponent cooperation rate, recent cooperation rate (last 3 moves), mutual cooperation rate, and normalized round count. These features are combined through a linear model with learned weights, passed through a sigmoid function to determine cooperation probability. The policy is updated using advantage-based gradient ascent, where advantages are computed relative to the mean reward baseline, enabling the agent to learn complex strategic patterns beyond simple reactive behaviors. The algorithm is detailed in Appendix 4.

4.3 LLM Agents

We selected state-of-the-art large language models from four leading companies to balance performance quality with computational costs. Our selection criteria prioritized models that demonstrate strong reasoning capabilities on established benchmarks while maintaining reasonable API costs for extensive tournament simulations.

OpenAI Models.

We employ three distinct OpenAI models: o3, gpt-4o, and gpt-5. These models represent different points on the performance-cost spectrum. According to recent benchmarks, these models are among the top performers on the MMLU-Pro leaderboards,¹ where MMLU-Pro is a challenging benchmark that evaluates large language model performance on complex reasoning tasks

¹The MMLU-Pro leaderboard <https://huggingface.co/spaces/TIGER-Lab/MMLU-Pro>, accessed 25-08-2025.

across multiple domains including mathematics, physics, chemistry, biology, and computer science (Wang et al, 2024). Notably, these models are configured with a fixed temperature of 1.0, as o3 and gpt-5 do not support temperature parameter adjustments.

Anthropic Claude.

We utilize `claude-sonnet-4-20250514`, which delivers strong performance on complex reasoning tasks (as evidenced by the MMLU-Pro leaderboard) at significantly more acceptable costs than Claude Opus 4.0, making it well-suited for extensive IPD tournament simulations.

Mistral.

The `mistral-large-instruct` model offers a compelling balance between performance and efficiency. Additionally, Mistral has demonstrated solid performance in strategic game theory settings (Duan et al, 2024).

Google Gemini.

We employ `gemini-2.5-pro`, which is the best-performing Gemini model on the MMLU-Pro leaderboard while maintaining reasonable costs, making it suitable for our extensive tournament simulations.

4.3.1 Temperature Parameter Configuration

Temperature parameters critically influence LLM behavior by controlling the randomness of token sampling during generation. Higher temperatures increase exploration and unpredictability, while lower temperatures promote more deterministic, exploitation-focused strategies. To investigate this effect systematically, we employ model-specific temperature configurations that respect each API’s technical constraints:

- **OpenAI models:** Fixed temperature of 1.0 for all three models (o3, gpt-4o, gpt-5), as o3 and gpt-5 do not accept temperature parameters. This constraint provides an interesting comparison point for evaluating model architecture differences independent of temperature effects.
- **Claude (Anthropic):** Temperatures of [0.2, 0.5, 0.8], spanning the model’s supported range of [0, 1]. This configuration tests low (0.2), medium (0.5), and moderately high (0.8) randomness levels while avoiding extreme values that might produce incoherent strategies.
- **Mistral:** Temperatures of [0.2, 0.7, 1.2], where 1.2 represents an experimental extension beyond the typically recommended range. While Mistral’s API technically accepts values up to 1.0, our testing revealed that it processes temperatures up to 1.2, allowing us to explore the effects of higher randomness levels.
- **Gemini:** Temperatures of [0.2, 0.7, 1.2], leveraging Gemini’s extended temperature range of [0, 2]. This broader range enables investigation of

more extreme behavioral variations, from highly deterministic (0.2) to substantially stochastic (1.2) decision-making.

These temperature variations allow us to examine how the exploration-exploitation trade-off manifests in repeated game scenarios. Lower temperatures (0.2) should produce more consistent, predictable strategies that may excel against deterministic opponents, while higher temperatures (0.7-1.2) introduce strategic variability that could prove advantageous against adaptive opponents or in discovering novel strategy combinations.

4.3.2 Implementation Details

Each LLM agent receives identical game information: the complete history of moves within that game, payoff structure, and termination probability. The agents process this information through a standardized prompt template and return both their reasoning and chosen action. This design ensures that performance differences reflect genuine strategic capabilities rather than prompt engineering artifacts. The implementation creates 12 LLM agent instances total: 3 OpenAI models with fixed temperatures, plus 3 temperature variants each for Claude, Mistral, and Gemini, enabling comprehensive evaluation of both model architecture and temperature effects on strategic gameplay.

5 Results

In addition to examining systemic statistics and agent population evolution across different shadow lengths, we will also explore in greater depth the strategic behaviour of various large language models and the underlying rationale for their responses.

5.1 Scores and Agent Evolution

The evolutionary dynamics of different agent strategies in the iterated prisoner’s dilemma with a shadow length of 75% reveal distinct performance patterns across classical, adaptive, and large language model-based approaches. Table A1 of Appendix A shows the performance metrics for all tested strategies over the five evolutionary phases and Figure 1 shows the population evolution. Non-cooperative strategies dominate the evolutionary landscape, as evidenced by the gradually decreasing mean score per move across phases, dropping from initial values around 2.8 to approximately 1.1 by the final phase.

Figure 1 illustrates dramatic shifts in strategy dominance over the five evolutionary phases. Initially diverse, the population experienced a consolidation by phase 3, with **gemini-2.5-pro** strategies rapidly expanding (all temperatures) to dominate the ecosystem, together with suspicious tit-for-that and OpenAI model o3. Other classical strategies showed general decline, with most traditional approaches being eliminated by the final phases.

Both **mistral-large** and **claude4-sonnet** were consistently outperformed by their competitors, as all of their temperature variants were eliminated

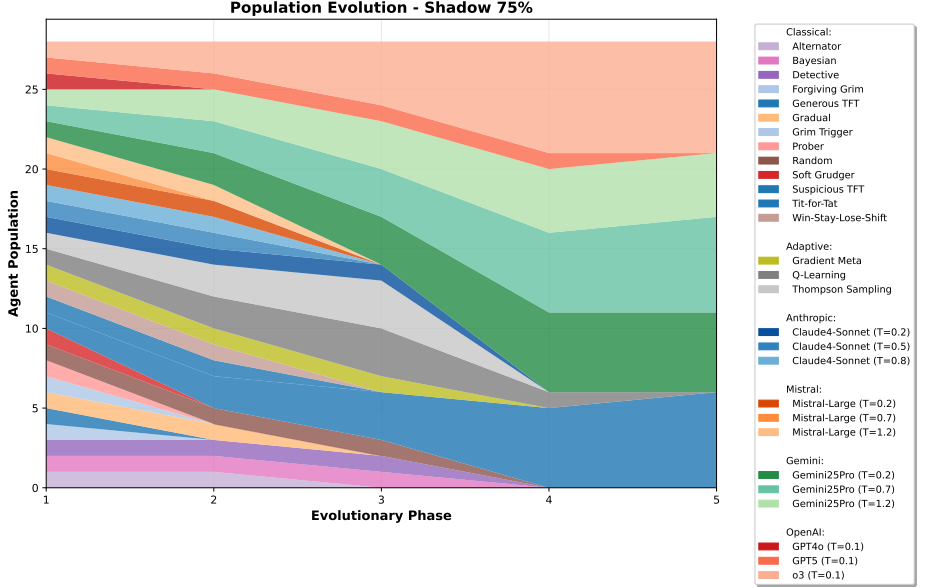


Fig. 1: Population Evolution 75%

by phase 4. Notably, the adaptive strategies—Q-learning, Thompson Sampling, and Gradient Meta—performed surprisingly well given the relatively short learning horizon, maintaining stable populations throughout at least 3 evolutionary phases.

The evolution of the agent composition and score statistics of experiments of shadow length 25% and 10% are given in Figure 2 and Appendix A2 and A3, respectively. As can be observed from the figure, the population remains completely balanced across both experiments. Despite a balanced population distribution across all phases, we do observe significant performance variations across various strategies, with notable differences in how classical algorithmic approaches and large language models respond to varying interaction horizons.

While rule-based cooperative strategies performed poorly under short horizons, medium interaction horizons (Shadow 25%) produced a complete strategic reversal, with classical game-theoretic strategies achieving dominance. The top five positions were occupied exclusively by rule-based agents: Suspicious Tit-For-Tat, Forgiving Grim Trigger, Detective, Grim Trigger, and Prober. This shift demonstrates that moderate future interaction probability enables reputation-building mechanisms and reciprocal cooperation strategies to establish their effectiveness. Notably, Thompson Sampling fell to the bottom quintile, illustrating the liability of excessive exploration in the beginning when consistent cooperative relationships become more valuable, while the learning mechanisms still proved insufficient for tournament-length interactions.

Long interaction horizons (Shadow 10%) further consolidated the advantage of strategies optimized for repeated interactions. Win-Stay-Lose-Shift

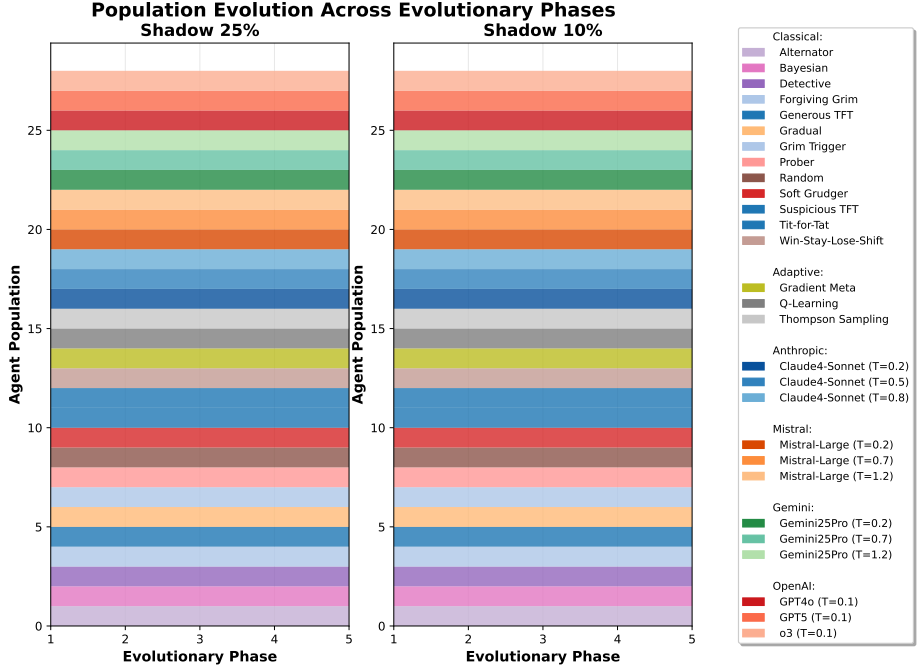


Fig. 2: Population Evolution 25% and 10% shadow length

emerged as the top performer, with strong representation from both classical strategies (Soft Grudger) and select LLM implementations (gemini-2.5-pro variants, gpt-4o).

LLM performance patterns varied significantly across providers and horizon lengths. gemini-2.5-pro demonstrated remarkable adaptability, maintaining competitive performance across all shadow conditions and proving particularly effective in both short-horizon scenarios where rapid response matters and long-horizon settings where sustained cooperation becomes valuable. gpt-4o achieved notable consistency, placing in the top quintile across all three experimental conditions. In contrast, mistral-large variants consistently underperformed regardless of horizon length or temperature settings, while claude4-sonnet models showed particular vulnerability in short-horizon scenarios.

5.2 Strategic Footprints

5.3 Agent Rationale

6 Discussion

References

- Duan J, Zhang R, Diffenderfer J, et al (2024) Gtbench: Uncovering the strategic reasoning capabilities of llms via game-theoretic evaluations. *Advances in Neural Information Processing Systems* 37:28,219–28,253
- Payne K, Alloui-Cros B (2025) Strategic intelligence in large language models: Evidence from evolutionary game theory. *arXiv preprint arXiv:250702618*
- Wang Y, Ma X, Zhang G, et al (2024) Mmlu-pro: A more robust and challenging multi-task language understanding benchmark. *arXiv preprint arXiv:240601574*

Appendix A Comprehensive Results

Table A1: Performance Metrics (Shadow=75%). Score represents the average payoff per move per phase.

Strategy	P1		P2		P3		P4		P5	
	Score	Matches	Score	Matches	Score	Matches	Score	Matches	Score	Matches
TFT	2.417	27	1.667	27	-	-	-	-	-	-
Grim	2.032	27	-	-	-	-	-	-	-	-
Suspicious TFT	3.237	27	2.547	53	1.829	78	1.326	125	1.113	147
Generous TFT	1.941	27	-	-	-	-	-	-	-	-
Forgiving Grim	2.030	27	-	-	-	-	-	-	-	-
Gradual	2.114	27	1.649	27	-	-	-	-	-	-
Soft Grudger	2.032	27	-	-	-	-	-	-	-	-
Prober	2.000	27	-	-	-	-	-	-	-	-
Defective	2.070	27	1.737	27	0.750	27	-	-	-	-
Alternator	2.244	27	1.541	27	-	-	-	-	-	-
Random	2.676	27	2.147	27	1.207	27	-	-	-	-
WSLS	2.256	27	1.667	27	-	-	-	-	-	-
Bayesian	2.212	27	1.857	27	1.000	27	-	-	-	-
Q-Learning	3.455	27	2.338	53	1.470	78	1.100	27	-	-
Thompson	3.133	27	2.414	53	1.464	78	-	-	-	-
Gradient Meta	2.860	27	1.794	27	1.265	27	-	-	-	-
Anthropic										
Claude4-Sonnet (T=0.2)	2.289	27	1.950	27	1.056	27	-	-	-	-
Claude4-Sonnet (T=0.5)	2.324	27	1.659	27	-	-	-	-	-	-
Claude4-Sonnet (T=0.8)	2.200	27	1.568	27	-	-	-	-	-	-
Mistral										
Mistral-Large (T=0.2)	2.114	27	1.211	27	-	-	-	-	-	-
Mistral-Large (T=0.7)	1.892	27	-	-	-	-	-	-	-	-
Mistral-Large (T=1.2)	2.075	27	1.703	27	-	-	-	-	-	-
Gemini										
Gemini25Pro (T=0.2)	3.462	27	2.680	53	1.933	78	1.222	125	1.186	125
Gemini25Pro (T=0.7)	3.211	27	2.549	53	1.916	78	1.302	125	1.096	147
Gemini25Pro (T=1.2)	3.500	27	2.630	53	1.777	78	1.240	102	1.313	102
OpenAI										
GPT4o (T=0.1)	2.028	27	-	-	-	-	-	-	-	-
GPT5 (T=0.1)	3.000	27	2.400	27	1.737	27	0.975	27	-	-
o3 (T=0.1)	3.231	27	2.892	53	1.900	102	1.168	168	1.068	168

Table A2: Performance Metrics (Shadow=25%). Score represents the average payoff per move per phase.

Strategy	P1		P2		P3		P4		P5	
	Score	Matches	Score	Matches	Score	Matches	Score	Matches	Score	Matches
TFT	2.702	27	2.661	27	2.533	27	2.776	27	2.702	27
Grim	2.778	27	2.805	27	2.610	27	2.814	27	2.629	27
Suspicious TFT	2.868	27	2.650	27	3.000	27	2.867	27	3.094	27
Generous TFT	2.593	27	2.582	27	2.767	27	2.716	27	2.688	27
Forgiving Grim	2.893	27	2.812	27	2.626	27	2.628	27	2.794	27
Gradual	2.809	27	2.761	27	2.547	27	2.573	27	2.702	27
Soft Grudger	2.690	27	2.684	27	2.703	27	2.655	27	2.722	27
Prober	2.800	27	2.865	27	2.868	27	2.663	27	2.402	27
Detective	2.674	27	2.883	27	2.546	27	2.802	27	2.759	27
Alternator	2.673	27	2.565	27	2.872	27	2.529	27	2.375	27
Random	2.634	27	2.628	27	2.644	27	2.423	27	2.696	27
WSLS	2.830	27	2.604	27	2.482	27	2.756	27	2.790	27
Bayesian	2.721	27	2.685	27	2.619	27	2.681	27	2.718	27
Q-Learning	2.522	27	2.567	27	2.688	27	2.800	27	2.648	27
Thompson	2.631	27	2.473	27	2.522	27	2.477	27	2.529	27
Gradient Meta	2.588	27	2.347	27	2.500	27	2.649	27	2.777	27
Anthropic										
Claude4-Sonnet (T=0.2)	2.372	27	2.754	27	2.500	27	2.612	27	2.647	27
Claude4-Sonnet (T=0.5)	2.477	27	2.615	27	2.649	27	2.779	27	2.629	27
Claude4-Sonnet (T=0.8)	2.574	27	2.602	27	2.819	27	2.515	27	2.371	27
Mistral										
Mistral-Large (T=0.2)	2.504	27	2.627	27	2.642	27	2.330	27	2.101	27
Mistral-Large (T=0.7)	2.135	27	2.343	27	2.644	27	2.587	27	2.787	27
Mistral-Large (T=1.2)	2.435	27	2.608	27	2.203	27	2.590	27	2.362	27
Gemini										
Gemini25Pro (T=0.2)	2.644	27	2.639	27	2.709	27	2.500	27	2.896	27
Gemini25Pro (T=0.7)	2.663	27	2.645	27	2.677	27	2.702	27	2.516	27
Gemini25Pro (T=1.2)	2.677	27	2.748	27	2.717	27	2.653	27	2.648	27
OpenAI										
GPT4o (T=0.1)	2.684	27	2.441	27	2.679	27	2.530	27	2.698	27
GPT5 (T=0.1)	2.598	27	2.644	27	2.528	27	2.523	27	2.726	27
o3 (T=0.1)	2.700	27	2.388	27	2.669	27	2.606	27	2.676	27

Table A3: Performance Metrics (Shadow=10%). Score represents the average payoff per move per phase.

Strategy	P1		P2		P3		P4		P5	
	Score	Matches	Score	Matches	Score	Matches	Score	Matches	Score	Matches
TFT	2.431	27	2.738	27	2.820	27	2.746	27	2.819	27
Grim	2.173	27	2.809	27	2.726	27	2.871	27	2.855	27
Suspicious TFT	2.406	27	2.571	27	2.655	27	2.515	27	2.594	27
Generous TFT	2.682	27	2.566	27	2.749	27	2.646	27	2.673	27
Forgiving Grim	2.323	27	2.724	27	2.611	27	2.735	27	2.948	27
Gradual	2.272	27	2.583	27	2.710	27	2.675	27	2.544	27
Soft Grudger	2.718	27	2.696	27	2.786	27	2.704	27	2.695	27
Prober	2.467	27	2.464	27	2.270	27	2.554	27	2.734	27
Detective	2.484	27	2.451	27	2.408	27	2.344	27	2.470	27
Alternator	2.349	27	1.878	27	2.176	27	2.177	27	2.488	27
Random	2.543	27	2.291	27	2.208	27	2.224	27	2.491	27
WSLS	2.492	27	2.760	27	2.913	27	2.787	27	2.847	27
Bayesian	2.430	27	2.742	27	2.723	27	2.721	27	2.722	27
Q-Learning	2.502	27	2.566	27	2.354	27	2.618	27	2.166	27
Thompson	2.138	27	2.428	27	2.218	27	2.337	27	2.412	27
Gradient Meta	2.454	27	2.308	27	2.297	27	2.100	27	2.950	27
Anthropic										
Claude4-Sonnet (T=0.2)	2.346	27	2.645	27	2.795	27	2.856	27	2.759	27
Claude4-Sonnet (T=0.5)	2.572	27	2.806	27	2.727	27	2.769	27	2.625	27
Claude4-Sonnet (T=0.8)	2.669	27	2.675	27	2.756	27	2.731	27	2.712	27
Mistral										
Mistral-Large (T=0.2)	2.384	27	2.368	27	2.366	27	2.005	27	1.766	27
Mistral-Large (T=0.7)	2.310	27	2.711	27	2.483	27	2.330	27	2.056	27
Mistral-Large (T=1.2)	2.435	27	2.460	27	2.696	27	2.526	27	2.137	27
Gemini										
Gemini25Pro (T=0.2)	2.731	27	2.698	27	2.760	27	2.653	27	2.766	27
Gemini25Pro (T=0.7)	2.628	27	2.809	27	2.705	27	2.795	27	2.739	27
Gemini25Pro (T=1.2)	2.578	27	2.592	27	2.781	27	2.734	27	2.685	27
OpenAI										
GPT4o (T=0.1)	2.725	27	2.798	27	2.586	27	2.604	27	2.631	27
GPT5 (T=0.1)	2.510	27	2.825	27	2.710	27	2.830	27	2.715	27
o3 (T=0.1)	2.673	27	2.728	27	2.646	27	2.801	27	2.803	27

Appendix B Algorithmic Agents

Algorithm 1 Detective Agent Strategy

Require: History vectors $H_{\text{own}}, H_{\text{opp}}$

Ensure: $\text{Move} \in \{C, D\}$

```
1: test  $\leftarrow [C, D, C]$ , type  $\leftarrow \text{None}$ 
2:  $r \leftarrow |H_{\text{own}}|$ 
3: if  $r < 3$  then
4:   return test[ $r$ ]
5: end if
6: if  $r = 3$  then ▷ Classify opponent
7:   retaliated  $\leftarrow H_{\text{opp}}[2] = D$ 
8:   cooperate  $\leftarrow \frac{|\{i: H_{\text{opp}}[i] = C\}|}{|H_{\text{opp}}|}$ 
9:   if  $\neg \text{retaliated} \wedge \text{cooperate} \geq 0.67$  then
10:    type  $\leftarrow$  'sucker'
11:   else if retaliated then
12:    type  $\leftarrow$  'retaliator'
13:   else
14:    type  $\leftarrow$  'random'
15:   end if
16: end if
17: if type = 'sucker' then ▷ Make move after classification
18:   return  $D$ 
19: else if type = 'retaliator' then
20:   return  $H_{\text{opp}}[-1]$ 
21: else
22:   return  $C$  w.p. 0.6, else  $D$ 
23: end if
```

Algorithm 2 Q-Learning Agent Strategy

Require: History vectors $H_{\text{own}}, H_{\text{opp}}$, parameters α, γ, ϵ

Ensure: Move $\in \{C, D\}$

```
1:  $r \leftarrow |H_{\text{own}}|$ 
2: if  $r = 0$  then ▷ Initial state
3:    $s \leftarrow (\text{START}, \text{START})$ 
4: else
5:    $s \leftarrow (H_{\text{own}}[r-1], H_{\text{opp}}[r-1])$ 
6: end if
7: if  $s_{\text{last}} \neq \text{None} \wedge r > 0$  then ▷ Update Q-value from last round
8:   reward  $\leftarrow \text{PayoffMatrix}(H_{\text{own}}[r-1], H_{\text{opp}}[r-1])$ 
9:    $Q_{\text{current}} \leftarrow Q(s_{\text{last}}, a_{\text{last}})$ 
10:   $Q_{\text{max}} \leftarrow \max\{Q(s, C), Q(s, D)\}$ 
11:   $Q(s_{\text{last}}, a_{\text{last}}) \leftarrow Q_{\text{current}} + \alpha(\text{reward} + \gamma \cdot Q_{\text{max}} - Q_{\text{current}})$ 
12: end if
13:  $\epsilon_{\text{current}} \leftarrow \epsilon \cdot 0.99^r$  ▷ Decay exploration
14: if Random()  $< \epsilon_{\text{current}}$  then ▷ Epsilon-greedy selection
15:    $a \leftarrow \text{Random}\{C, D\}$ 
16: else
17:    $a \leftarrow \arg \max_{a' \in \{C, D\}} Q(s, a')$  ▷ Ties broken toward D
18: end if
19:  $s_{\text{last}} \leftarrow s, a_{\text{last}} \leftarrow a$ 
20: return  $a$ 
```

Algorithm 3 Thompson Sampling Agent Strategy

Require: History vectors $H_{\text{own}}, H_{\text{opp}}$, parameters $lr_{\text{base}}, lr_{\text{scale}}$

Ensure: Move $\in \{C, D\}$

```
1:  $r \leftarrow |H_{\text{own}}|$ 
2: if  $r > 0$  then ▷ Update Beta parameters from last round
3:    $p \leftarrow \text{PayoffMatrix}(H_{\text{own}}[r-1], H_{\text{opp}}[r-1])$ 
4:    $lr \leftarrow lr_{\text{base}} + \frac{p}{5} \cdot lr_{\text{scale}}$  ▷ Adaptive learning rate
5:   if  $H_{\text{own}}[r-1] = C$  then
6:      $\alpha_C \leftarrow \alpha_C + lr$ 
7:     if  $p < 2.5$  then ▷ Penalty for below-average payoff
8:        $\text{penalty} \leftarrow (2.5 - p) \cdot lr_{\text{base}}$ 
9:        $\beta_C \leftarrow \beta_C + \text{penalty}$ 
10:    end if
11:  else ▷ Last move was D
12:     $\alpha_D \leftarrow \alpha_D + lr$ 
13:    if  $p < 2.5$  then
14:       $\text{penalty} \leftarrow (2.5 - p) \cdot lr_{\text{base}}$ 
15:       $\beta_D \leftarrow \beta_D + \text{penalty}$ 
16:    end if
17:  end if
18: end if
19:  $\theta_C \leftarrow \text{Beta}(\alpha_C, \beta_C)$  ▷ Sample cooperation reward
20:  $\theta_D \leftarrow \text{Beta}(\alpha_D, \beta_D)$  ▷ Sample defection reward
21: if  $\theta_C > \theta_D$  then
22:   return  $C$ 
23: else
24:   return  $D$ 
25: end if
```

Algorithm 4 Gradient Meta-Learner Agent Strategy

Require: History vectors $H_{\text{own}}, H_{\text{opp}}$, weights $\mathbf{w} \in \mathbb{R}^5$, learning rate α

Ensure: Move $\in \{C, D\}$

```
1:  $r \leftarrow |H_{\text{own}}|$ 
2:  $\mathbf{f} \leftarrow \mathbf{0}$  ▷ Initialize feature vector
3: if  $r = 0$  then ▷ Extract features from game state
4:    $\mathbf{f}[0] \leftarrow 1$  ▷ First round indicator
5: else
6:    $\mathbf{f}[1] \leftarrow \frac{\{i : H_{\text{opp}}[i] = C\}}{r}$  ▷ Opponent cooperation rate
7:    $\text{recent} \leftarrow H_{\text{opp}}[\max(0, r - 3) : r]$  ▷ Last 3 moves
8:    $\mathbf{f}[2] \leftarrow \frac{\{i : \text{recent}[i] = C\}}{\text{recent}}$  ▷ Recent cooperation rate
9:    $\text{mutual} \leftarrow |\{i : H_{\text{own}}[i] = C \wedge H_{\text{opp}}[i] = C\}|$ 
10:   $\mathbf{f}[3] \leftarrow \frac{\text{mutual}}{r}$  ▷ Mutual cooperation rate
11:   $\mathbf{f}[4] \leftarrow \min(\frac{r}{5}, 1)$  ▷ Normalized round count
12: end if
13:  $p_C \leftarrow \sigma(\mathbf{w}^T \mathbf{f})$  ▷ Sigmoid policy:  $\sigma(x) = \frac{1}{1+e^{-x}}$ 
14: if Random()  $< p_C$  then
15:    $a \leftarrow C, a_{\text{bin}} \leftarrow 1$ 
16: else
17:    $a \leftarrow D, a_{\text{bin}} \leftarrow 0$ 
18: end if
19: Store  $(\mathbf{f}, a_{\text{bin}})$  in history ▷ For policy gradient update
20: if End of game then ▷ Policy gradient update
21:    $\mathbf{R} \leftarrow [\text{reward}_1, \text{reward}_2, \dots, \text{reward}_r]$ 
22:    $\text{baseline} \leftarrow \frac{1}{r} \sum_{i=1}^r \mathbf{R}[i]$ 
23:    $\text{advantages} \leftarrow \mathbf{R} - \text{baseline}$ 
24:   for  $i = 1$  to  $r$  do
25:      $p_i \leftarrow \sigma(\mathbf{w}^T \mathbf{f}_i)$ 
26:      $\nabla \leftarrow \mathbf{f}_i \cdot (a_{\text{bin},i} - p_i)$  ▷ Policy gradient
27:      $\mathbf{w} \leftarrow \mathbf{w} + \alpha \cdot \text{advantages}[i] \cdot \nabla$ 
28:   end for
29: end if
30: return  $a$ 
```
