

Right Platform

- Use GCP by default during the early stage.
- Use AWS if we secure meaningful AWS nonprofit credits

Situation	Choice	Reason
Early stage / bootstrapping	GCP	Lower initial cost
Research / experimentation	GCP	Cost-effective
AWS nonprofit credits secured	AWS	Credits can significantly reduce infrastructure cost
Production with high reliability requirements	AWS	AWS has generally demonstrated stronger resilience and reliability at large production scale, which can sometimes justify the higher cost

- Both AWS and GCP can support great production systems.
- But in our earlier testing of tokenized project in february, **AWS's Low tier Regional load balancers** has shown better resilience than GCP's High tier Global Loadbalancer that justifies.

Nonprofit Credits

Because this is a nonprofit/community project, we should apply for available nonprofit programs from both providers.

- **AWS nonprofit/cloud-credit programs**
 - Securing \$2000 a year is easier than \$200,000 from AWS.
 - <https://www.techsoup.org/amazon-web-services>
- **Google Ad Grants:**
 - offers up to **\$10,000 USD per month in Ad credit.**
- **AWS Imagine Grant**
 - Up to \$200,000 USD of unrestricted financial support
 - Up to \$100,000 USD in AWS Promotional Credit


Price Comparison

Price comparison of each service we would need in this project

Service	AWS	GCP
Serverless compute	Lambda \$0.20/1M req + \$0.0000166667/GB-sec	Cloud Run Jobs \$0.40/1M req + \$0.000024/vCPU-sec
Container hosting	ECS Fargate \$0.04048/vCPU-hr + \$0.004445/GB-hr	Cloud Run \$0.0864/vCPU-hr + \$0.009/GB-hr
Job scheduler	EventBridge Scheduler \$1.00/1M invocations	Cloud Scheduler \$0.10/job/mo (flat, not per-invocation)
NoSQL database	DynamoDB (on-demand) \$0.625/1M writes, \$0.125/1M reads, \$0.25/GB-mo	Firestore \$0.18/1M writes, \$0.06/1M reads, \$0.18/GB-mo
Relational DB	RDS db.t3.micro ~\$13–15/mo	Cloud SQL db-f1-micro ~\$8–10/mo
Auth	Cognito \$0.015/MAU	Firebase Auth \$0.0055/MAU
Frontend hosting	Amplify Hosting \$0.023/GB storage + \$0.15/GB transfer	Firebase Hosting \$0.026/GB storage + \$0.15/GB transfer
Real-time (DMs/chat)	AppSync \$4.00/1M ops + \$2.00/1M updates	Firestore listeners billed as Firestore reads/writes, no separate rate
Message queue (1KB avg msg)	SQS \$0.40/1M messages	Pub/Sub ~\$0.04/1M messages
LLM API (per 1M tokens)	Bedrock — Haiku 4.5 \$1.00 input / \$5.00 output	Vertex AI — Gemini Flash-Lite \$0.10 input / \$0.40 output
Object storage	S3 \$0.023/GB-mo	Cloud Storage \$0.020/GB-mo

MCP for scrapping

We can use Firecrawl MCP : <https://www.firecrawl.dev/>, or just claude code, the current claude code can analyze a webpage and make a script for you to scrape it.

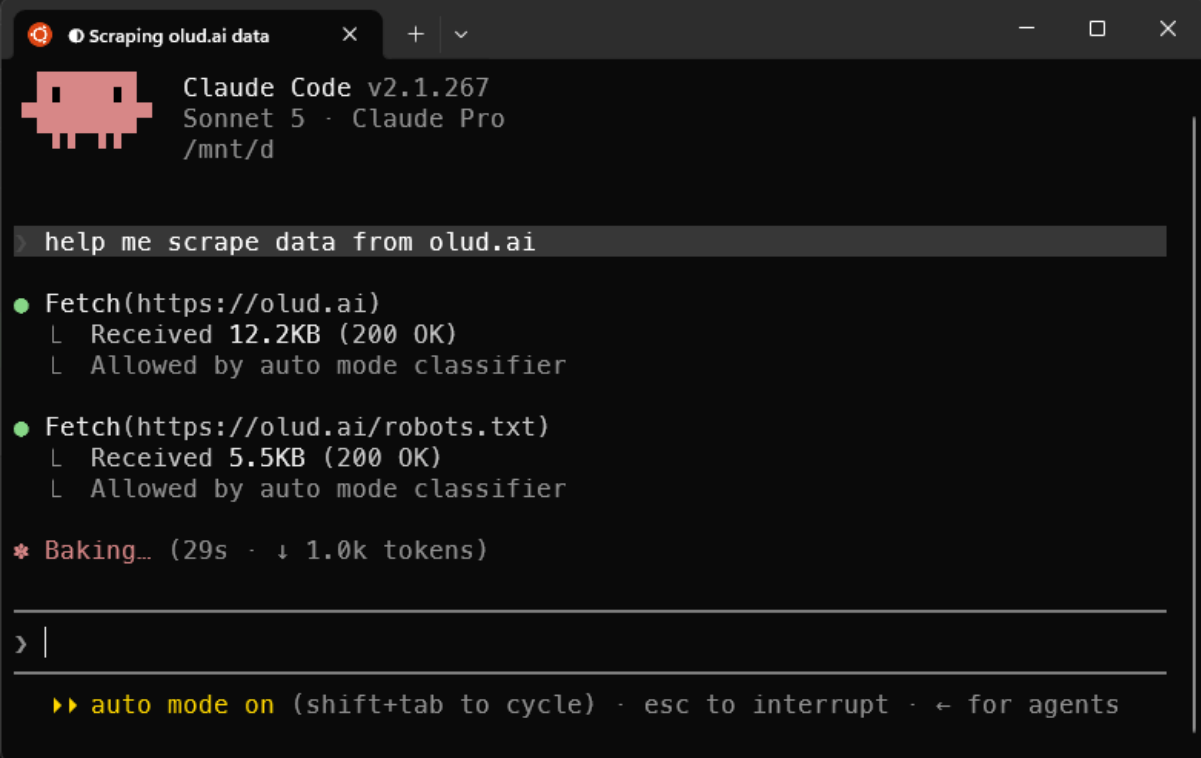

```
Scraping olud.ai data x + v
Claude Code v2.1.267
Sonnet 5 · Claude Pro
/mnt/d

> help me scrape data from olud.ai

● Fetch(https://olud.ai)
  L Received 12.2KB (200 OK)
  L Allowed by auto mode classifier

● Fetch(https://olud.ai/robots.txt)
  L Received 5.5KB (200 OK)
  L Allowed by auto mode classifier

* Baking... (29s · ↓ 1.0k tokens)

> |

>> auto mode on (shift+tab to cycle) · esc to interrupt · ← for agents
```

Database

I strongly suggest using **NoSQL**.

1. **It's serverless & scalable with DynamoDB.**
2. **Our use cases are an AI directory & social platform.** A key-based schema is the best fit here.
3. **For real-time:** We can also use NoSQL, like all dating apps use NoSQL databases for messaging on them in real time.

Storage

- S3

Authentication

- Cognito
- We can also cross-use **Firebase with AWS infrastructure.**

Real notification

- AWS App sync or Firestore listener