

Quotation Documents



Shandong Supermally Generating Equipment Co.,Ltd

Date: 2025.11

Address: Weifang City, Shandong Province, China



Quotation Scheme of Supermaly– Natural-gas generator set (kW)

单机	额定功率	持续功率	Engine	发电机	类型
潍柴	1000KW	1000KW	潍柴 16M33D1280NG10	利莱森玛 LSA50.2 M6	开架式
含加热器1交流发电机：利莱森玛2水箱为50摄氏度铜水箱。					

Require:

1. Methane content>95%,
2. Temperature shall not be lower than 0℃ and not higher than 40℃
3. The fuel gas does not contain other impurities (impurity particle size should be less than 5 μm). Impurity content ≤0.03g/m³. Other CmHn and heavy hydrocarbon content ≤1% (volume percentage).
4. Fuel gas calorific value ≥8500kcal/m³. If low calorific value fuel gas (calorific value <8500kcal/m³) is used, the unit power will drop slightly.
5. The fuel gas pressure entering the engine is 1.5KPa.
6. The fuel gas must be desulfurized and dehydrated. Hydrogen sulfide <50mg/Nm³.

要求:

1. 甲烷含量>95%
2. 温度不低于0℃，不高于40℃
3. 燃气不含其他杂质（杂质粒径小于 5 μm）。杂质含量≤0.03g/m³。其他 CmHn 及重烃含量≤1%（体积百分比）。
4. 燃气热值≥8500kcal/m³。若使用低热值燃气（热值<8500kcal/m³），机组功率会略有下降。
5. 进入发动机的燃气压力为 30 到50KPa。
6. 燃气必须经过脱硫脱水处理。硫化氢<50mg/Nm³。



一. 供货范围 Main Scope of Supply

序号 NO.	名称 Name	参数 Specification	单位 Unit	数量 QTY	备注 Remark
1	燃气发动机 Natural Gas Engine	潍柴 16M33D1280NG10 WEICHA1 16M33D1280NG10	套 Set	1	撬装 Skid-mounted
2	发电机 Alternator	利莱森玛 LSA50.2 M6 (1000KW, 50HZ) LeroysonerLSA50.2 M6 (1000KW, 50HZ)	套 Set	1	撬装 Skid-mounted
3	底盘 Base Chassis	钢制底盘 Steel chassis	套 Set	1	撬装 Skid-mounted
4	减震器 Absorber	高弹性橡胶减震器 High elastic rubber shock absorber	套 Set	1	撬装 Skid-mounted
5	散热器 Radiator	原装水箱 Cooling radiator	套 Set	1	撬装 Skid-mounted
6	控制柜 Parallel control cabinet	深海 7320 DSE7320	套 Set	1	撬装 Skid-mounted
7		断路器 Customized circuit breaker	套 Set	1	
8	电瓶、连接线 Battery and battery cable	免维护电瓶 Maintenance-free battery	套 Set	1	电启动系统 Electric start system
9	燃气进气阀组 Intake valve group for Natural engine	电磁阀、阻火器、减压阀、截止阀等 Solenoid valve, flame arrester, pressure reducing valve, cut-off valve, etc	套 Set	1	撬装 Skid-mounted
11	波纹管 and 消音器 Bellow, Silencer	标准配置 Standard configuration	套 Set	1	随机发货 Random shipment
12	文件和技术资料 document and Technical file	标准 Standard	套 Set	1	随机发货 Random shipment
13	随机配件 Random accessories	空滤芯, 机油滤芯 Air filter element, oil filter element,	套 Set	1	随机发货 Random shipment



二、主要技术参数 Main Technical Parameters

1. 机组的主要技术参数 Main technical parameters of the unit	
机组型号 Unit Model	SW1375NFJ
额定功率 (kW/KVA) Rated Power (kW/KVA)	1000KW
持续功率 (kW/KVA) Continuous Power (kW/KVA)	1000KW
机组参考重量 (kg) Unit reference net weight (kg)	10000kg (开架式重量)
机组参考尺寸 (L *W* H mm) Unit Reference outside size (L *W* H mm)	4350*1700 (+400) *2450 (开架式尺寸)
额定电压 (V) Rated Voltage (V)	400/230
额定电流 (A) Rated Current (A)	1800
频率 (Hz) Frequency (Hz)	50
额定转速 (rpm) Rated Speed (rpm)	1500
功率因数 Rated Power Factor	0.8 (lag)
励磁方式 Exciting Mode	无刷, 自励磁 Brushless, Self-exciting
启动方式 Starting Mode	DC24V 电启动 DC24V electrical Starter
冷却方式 Cooling Type	闭式水冷 Closed fan water cooling
最低负载要求 (%) Minimum load requirement (%)	≥30
2、机组主要性能指标 Main performance index of unit	
频率降 (%)	0-5



Frequency drop (%)		
稳态频率带 (%)		
Steady state frequency band (%)		≤1.5
瞬态频率 偏差 Transient frequency deviation	100%突减功率 (%) 100% The sharp reduction power (%)	≤+12
	突加功率 (%) Suddenly applied load (%)	≤-20
频率恢复时间(S)		
Frequency recovery time (S)		≤5
相对的频率容差带 (%)		
Relative frequency tolerance band (%)		2
稳态电压偏差 (%)		
Steady state voltage deviation (%)		≤±2.5
瞬态电压偏差 Transient voltage deviation	100%突减功率 (%) 100% The sharp reduction power (%)	≤+25
	突加功率 (%) Suddenly applied load (%)	≤-20
电压恢复时间(S)		
Voltage recovery time (S)		≤6

3、发动机主要技术参数 Main technical parameters of natural gas Engine

基础发动机系列 Basic Engine Series	潍柴 16M33D1280NG10 WEICHA16M33D1280NG10
额定功率 (KW) Rated Power (kW)	1280KW 持续功率
备用功率 (KW) Standby Power (kW)	1408kw
额定转速 (rpm) Rated Speed (rpm)	1500
形式 Type	V 型, 增压中冷 In-line, Supercharged inter-cooling
缸数/气门数 Number Cylinders	16
排量 Displacement	52.3L



压缩比 Compress Ratio	12.5:1
缸径/行程 Bore/Stroke	150*185
调速方式 Speed regulation	ECU
燃气要求 Requirement for Natural Gas	甲烷含量>95%，Methane content>95%，
启动电瓶 Start-up Battery	免维护电瓶 Maintenance-free Battery
4、发电机主要技术参数 Main technical parameters of Alternator	
发电机品牌 Alternator Brand	利莱森玛 LSA50.2 M6 (1000KW, 50HZ) Leroysoner LSA50.2 M6 (1000KW, 50HZ)
发电机功率(KW/KVA) Alternator Power (KW/KVA)	1000KW
电压 (V) Rated Voltage (V)	380V
额定频率 (Hz) Rated Frequency (Hz)	50
绝缘等级 Insulation Grade	H
防护等级 Level of Protection	IP23
相数 Phrase	Three-phase four-wire
电压调节 Voltage regulation	AVR
励磁方式 Way of excitation	纯铜、无刷、自励磁 Pure copper wire, Brushless, self-excitation





Open type Reference images



Quotation instructions

- ①The offer is valid for three months;
- ②Delivery time: delivery within 30 days after receiving the advance payment or bilateral consultation.
- ③Quality assurance: Supermal is an advantageous enterprise in the generator set industry. The generator set provided has passed the CE certification, ISO9001 international quality system certification, can ensure to meet the various requirements of customers;
- ④Warranty period: **one year or 1500 working hours** (whichever comes first) for the gas generator set from the date of delivery; The company shall be responsible for all generator set failures caused by the quality problems of the factory's products or improper selection of raw materials; If the products are damaged due to improper use by Party A, Party B shall provide paid maintenance services and charge the cost; The equipment outside the warranty period will be paid for life, and the cost will be charged.
- ⑤Terms of payment: the down payment shall be 30% of the total contract amount, and the balance shall be paid before delivery;
- ⑥Manufacturer: Shandong Supermal



二、 Wide range of application cases

Kazakh associated gas power projects

Kazakhstan 8X1.2MW associated gas power station, the equipment began to be installed one after another from the beginning of the spring of 2017, and on 10 March officially began the stand-alone commissioning work of the generating unit, put into operation.



Niger Gas-fired Power Station Projects

Niger AGADEM Oil Field Ground Works FPF Power Station Project, Gas Genset Power Station, located in Shahara Desert. (6X1.2MW gas gensets and 1X800kW diesel genset)



Peru Oilfield Associated Gas Power Projects

CNPC PERU power station in South America, the project unit installed capacity of 4,800kW, for five sets of 1,000kW gas-fired generator sets, responsible for the operation and maintenance of the site to meet the requirements of the production of electricity to date.



Iran Gas-fired Power Station Projects

Iran gas-fired power plant project, installed capacity: 14.4MW, using 12 sets of 1200kw high-pressure natural gas generator sets and designed with CHP waste heat boiler unit. The project provides production power for Iranian plants and equipment, and is connected to the Iranian national power grid.



Indian oilfield natural compressor set projects

The company purchased five sets of 1000kW natural gas generator sets and four sets of gas engine supporting compressor sets, and the formal installation and commissioning was completed in April 2019, with all technical data on site meeting the design indicators. The successful operation of this project marks the formal entry of gas engine products into the Indian oilfield market, laying a good foundation for the later continuous development of the market.



Gas-fired power plant projects in Colombia

Installed capacity: 10MW, using a single 1000kw natural gas-fired generator set for use as the plant's main power supply.





Gas-fired power
generation projects
in South America

Installed capacity: 8 sets of 1200KW
natural gas generator sets, 8 sets of
1200KW (400V, 60Hz) natural gas
generator sets parallel and
grid-connected operation, running
from 2014 to present.





Company Profile

The company was established in 2007 with a registered capital of 91 million yuan. It is mainly engaged in the research and development, production and sales of gas and gas generator sets. It has passed ISO9001 quality management system certification, SGS, CE certification product certificate, CCS certificate, and occupational health and safety management system certification. , Environmental management system certification, the first batch of national "specialized, refined and new" little giants, single champion enterprises in Shandong Province, hidden champion enterprises of small and medium-sized enterprises in Shandong Province, and gazelle enterprises in Shandong Province. Qiyi Technology R&D Center, Provincial International Sino-Russian New Energy R&D Center.

The production workshop is 18,000 square meters, with an annual sales of 700 million yuan. It has complete office and production equipment, and has an annual production capacity of 4,000 sets of generator sets. It has a complete set of equipment such as high-precision laser cutting machine, CNC plasma, CNC bending machine, CNC punching machine, sheet metal production line, plastic spraying line, and testing line.

It has the only municipal gas transmission station dedicated to gas generator sets in Shandong Province, which ensures the factory test of gas generator sets, and has rich experience in the design and production of gas generator sets in desert areas.







Production Capacity


After unremitting efforts, the company's technical research and development department has developed new products such as automated (parallel) power stations, remote control and telemetry power stations, low noise power stations, high altitude power stations, medium frequency power stations, high voltage power stations, power generation welding vehicles, and more than 100 specifications of series products. Among them, four products have won national patents, and eight products have won the national silver medal, provincial quality product award and provincial and municipal science and technology progress award. The annual comprehensive production capacity can reach 200,000 kilowatts.

Specific design and manufacturing capabilities:

- ①, can design and manufacture 10kw-4000kW generator sets;
- ②, can design and manufacture various output 10500V/400V high-voltage power stations




Automatic spraying production line

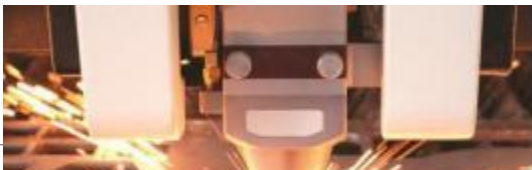

Automatic laser cutting machine



Automated CNC bending

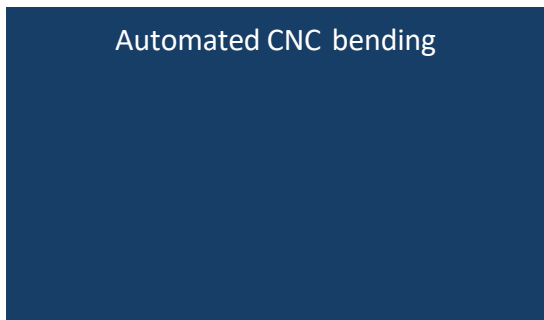



With 4 test benches, the total test power can reach 4000KW



Production process



laser cutting



CNC Bending



Welding



Plastic spraying



Internal wiring



Assembly



Test



Package



SUPERMALLY

Top Ten Export Enterprises

production workshop



ISO 9001

ISO14001

ISO45001



SUPERMALLY

Top Ten Export Enterprises

production workshop



Gas gensets production workshop



ISO 9001

ISO14001

ISO45001



SUPERMALLY

Top Ten Export Enterprises



ISO 9001

ISO14001

ISO45001



After-sales service

Thank you for choosing SUPERMALY generator set. When you choose us, you will also get the best after-sales service and remote technical consultation we provide. Our company will strictly abide by the content, plan and commitment of the company's service department to provide you with perfect technical support.

Upon receiving the user's maintenance notice, the after-sales service department will dispatch engineering and technical personnel within 1 hour and arrive at the location of the equipment to be repaired within 24 hours. The after-sales service department will complete the mechanical failure caused by the machinery within 6 hours, including its cooling system, lubricating oil system, fuel system, and exhaust system, complete the electrical failure caused by the electrical control part within 4 hours, and complete the failure caused by the starting part within 2 hours. Saimali has established the user's technical files, and regularly or irregularly consults and understands the use of the user's equipment, so that your generator set is in good standby condition.



Power Solutions

As a professional power solutions expert, provides safe, intelligent, reliable and environmentally friendly solutions. It provides excellent products and services according to different environments and working conditions to meet customer needs, reduce customer operating costs and provide users with the best power supply mode.





SUPERMALY

Top Ten Export Enterprises

燃气领域
Gas field



ISO 9001

ISO14001

ISO45001



电站领域
Power station field





备用电源
emergency
power supply





电信领域
Telecom field





油田领域
Oilfield field





军队领域
Military field





电源车领域
Power vehicle field





Shipping





Shipping

