

# Statistics for Machine Learning

---

Moritz Wolter

March 15, 2023

High-Performance Computing and Analytics Lab, University of Bonn

Foundational Statistical Concepts

Gaussian mixture models

# Why statistics?


- Its useful and can help us make decisions when outcomes are uncertain.
- Like getting a vaccination.
- Statistics is also an integral part of machine learning. Without it, we won't understand many machine learning methods.
- Neural networks, for example, model class probabilities in the classification case.

Today's talk is mostly based on [Has22] and some [Unp22].

# Foundational Statistical Concepts

---

# Foundational Statistical Concepts

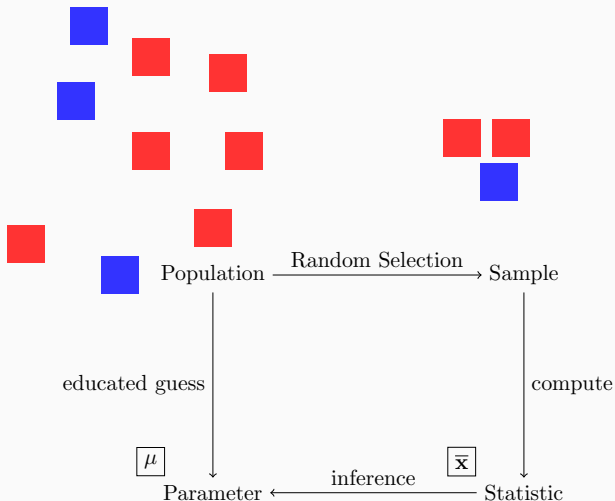

**Figure 1:** Statistical inference means inferring something about a population using information from samples [Has22].

## Random Variable

A random variable  $X$  is an uncertain quantity. Its value depends on random events. A good example is the result of a dice roll.

## Probability Distribution

Probability density functions are a mathematical tool to describe the randomness of data in populations and samples.

# Mean

Typically everyone means the arithmetic mean when speaking about the mean,

$$\hat{\mu}_x = \frac{\sum_{i=1}^n x_i}{n}. \quad (1)$$

For the sample size  $n \in 0, 1, 2, 3, \dots$  or  $\mathbb{N}$ .

`np.mean` allows you to compute the mean.

## Variance

Variance measures the spread in the measurements of a random variable. It is defined as:

$$\hat{\sigma}_x^2 = \frac{\sum_{i=1}^n (x_i - \hat{\mu}_x)^2}{n - 1}. \quad (2)$$

Again  $n \in \mathbb{N}$  denotes the sample size. `np.var` implements this. The standard deviation is defined as the square root of the variance. Its main advantage is that it has the same dimension as the original data [Has22],


$$\hat{\sigma}_x = \sqrt{\frac{\sum_{i=1}^n (x_i - \hat{\mu}_x)^2}{n - 1}}. \quad (3)$$

`np.std` implements the computation of the standard deviation.

[Has22] uses  $\bar{x}$  for  $\hat{\mu}_x$  and  $s$  for  $\hat{\sigma}_x$ . Our notation is consistent with [McN16].



# The Probability Density Function

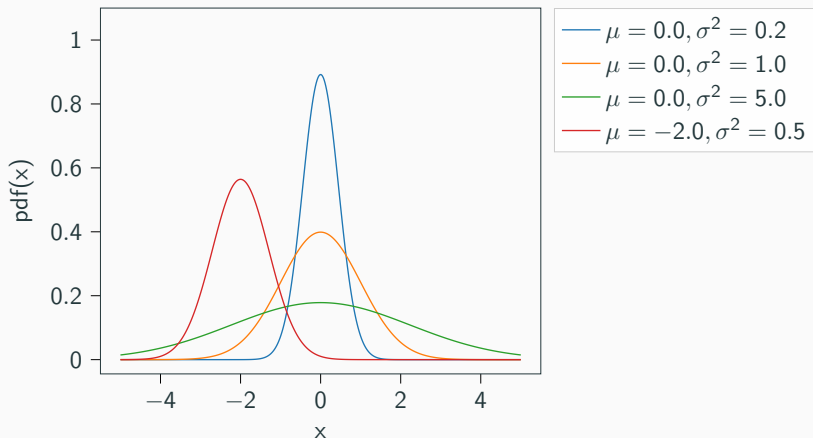

**Figure 2:** Normal distribution density functions for different values of  $\mu$  and  $\sigma$ . Integrating between two points on  $x$  tells us how likely the random variable will end up between those two points.

# The Probability Density Function

Let  $p(x)$  be the Probability Density Function (PDF) of a random variable  $X$ . The integral over  $p(x)$  between  $a$  and  $b$  represents the probability of finding the value of  $X$  in that range [Has22].

# The Probability Density Function

More formally, pdfs  $p(x)$  are always positive

$$p(x) \geq 0 \quad \forall x \in \mathbb{R}, \quad (4)$$


The probability for a value to end up between  $a$  and  $b$  is

$$p(a < x < b) = \int_a^b p(x) dx, \quad (5)$$

and the area under its curve must sum up to one,

$$\int_{-\infty}^{\infty} p(x) dx = 1. \quad (6)$$

# The Cumulative distribution function

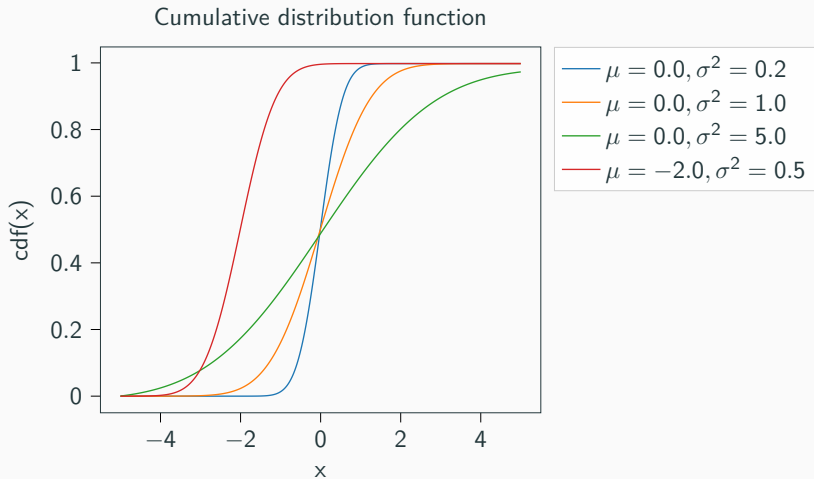


# The Cumulative distribution function

The cumulative distribution function  $P(x)$  allows us to compute the probability for a random variable  $X$  to be in a certain range.

$$P[a < X < b] = \int_a^b p(x)dx = P(b) - P(a). \quad (7)$$

# Gaussian Distribution


$$f(x|\mu, \sigma) = \frac{1}{\sqrt{2\pi\sigma^2}} e^{-\frac{1}{2}\left(\frac{x-\mu}{\sigma}\right)^2} \quad (8)$$

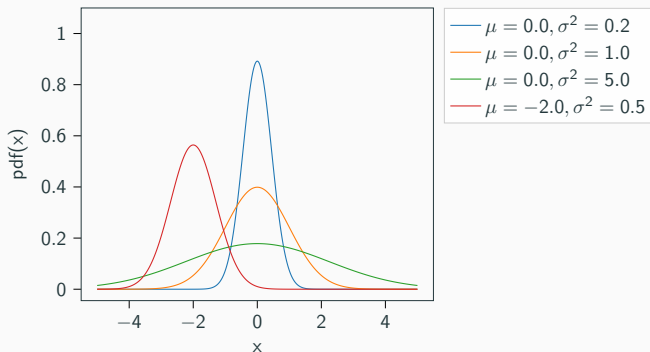

**Figure 3:** Plot of a Gaussian probability density function.

# Uniform Distribution

$$f(x) = \begin{cases} 1/(b-a) & \text{for } a \leq x \leq b \\ 0 & \text{otherwise} \end{cases} \quad (9)$$

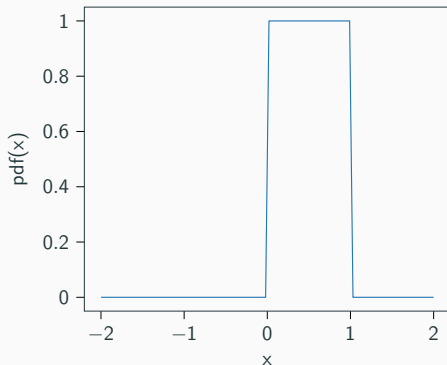

**Figure 4:** Plot of a uniform probability density function.

# Multidimensional Gaussians


N-dimensional gaussian pdf are defined as [McN16],

$$\phi_2(\mathbf{x}|\mu_g, \Sigma_g) = \frac{1}{\sqrt{(2\pi)^N \|\Sigma_g\|}} \exp\left(-\frac{1}{2}(\mathbf{x} - \mu_g)^T \Sigma_g^{-1}(\mathbf{x} - \mu_g)\right). \quad (10)$$

$\mu_g \in \mathbb{R}^N$  denotes the mean vector,  $\Sigma_g \in \mathbb{R}^{N \times N}$  the covariance matrix,  $^{-1}$  the matrix inverse,  $T$  the transpose and  $g \in \mathbb{N}$  the number of the distribution, which will be important later.



## The Bell curve in two dimensions

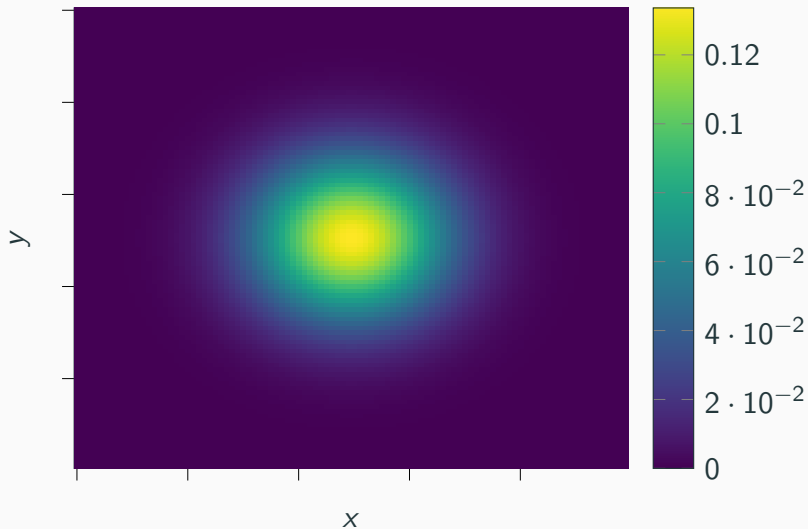

Covariance describes how two random variables "vary together"[Has22]. More formally,

$$\hat{\sigma}_{xy} = \frac{1}{n-1} \sum_{i=1}^n (x_i - \hat{\mu}_x)(y_i - \hat{\mu}_y) \quad (11)$$

For two  $n$  sized samples  $x$  and  $y$  and real numbers  $x, y$  and  $\mu$ .

The covariance matrix of a multidimensional variables is filled with individual variables, consider the two-dimensional case:

$$\Sigma = \begin{pmatrix} \hat{\sigma}_{xx} & \hat{\sigma}_{xy} \\ \hat{\sigma}_{yx} & \hat{\sigma}_{yy} \end{pmatrix} \quad (12)$$

Correlation tells us how much the relationship between two random variables is linearly connected [Has22]

$$r_{xy} = \frac{\hat{\sigma}_{xy}}{\hat{\sigma}_x \hat{\sigma}_y} \quad (13)$$

$$= \frac{1}{(n-1)\hat{\sigma}_x \hat{\sigma}_y} \sum_{i=1}^n (x_i - \hat{\mu}_x)(y_i - \hat{\mu}_y). \quad (14)$$

Auto-correlation [Has22] is correlation of a time delayed signal with itself. The operation is typically written as a function of the delay.

$$c_k = \frac{1}{N} \sum_{t=1}^{N-k} (x_t - \hat{\mu}_x)(x_{t+k} - \hat{\mu}_x) \quad (15)$$

For a signal of length  $N$ . To allow  $k$  to move to all possible positions zeros are typically added on both sides. In the engineering literature the normalization is typically dropped [Has22].

autocorrelation

# Gaussian mixture models

---

# Gaussian mixture models

A Gaussian mixture model has the density [McN16]

$$f(\mathbf{x}|\theta) = \sum_{g=1}^G \rho_g \phi(\mathbf{x}|\mu_g, \Sigma_g). \quad (16)$$

With the normal distribution  $\phi$  defined as before.  $\rho_g$  denotes the global probability with which a data value could originate from gaussian  $g$ . The  $g$ s number the gaussians, and  $G$  is the total number of Gaussians in the mix. We will use two.  $\phi$  denotes the parameters  $\mu_g$  and  $\Sigma_g$ .



Likelihood models the probability of data originating from a distribution as a function of the parameters. The gaussian case is modelled by [McN16]

$$\mathcal{L}_c(\theta) = \prod_{i=1}^n \prod_{g=1}^G [\rho_g \phi(\mathbf{x}_i | \mu_g, \Sigma_g)]^{z_{ig}}. \quad (17)$$

We want to maximize the likelihood.

In other words, we want to transform the bells in such a way, that they explain the points as plausible as possible.

The log-likelihood is easier to work with consider,

$$l_c(\theta) = \sum_{i=1}^n \sum_{g=1}^G z_{ig} [\log \rho_g + \log \phi(\mathbf{x}_i | \mu_g, \Sigma_g)]. \quad (18)$$

Now the exponent is gone, and the products turned into sums.  
The logs rescale the bells but do not change their maxima.

# Clustering using a GMM

After guessing an initial choice for all  $\hat{\mu}_g$  and  $\hat{\Sigma}_g$  [McN16],

$$\hat{z}_{ig} = \frac{\rho_g \phi(\mathbf{x}_i | \hat{\mu}_g, \hat{\Sigma}_g)}{\sum_{h=1}^G \rho_h \phi(\mathbf{x}_i | \hat{\mu}_h, \hat{\Sigma}_h)} \quad (19)$$

tells us the probability with which point  $x_i$  came from gaussian  $g$ . It creates an association between the data points and the Gaussians. Numerically evaluation results in a matrix  $\mathbf{Z} \in \mathbb{R}^{G \times n}$ . Use it's output to select the points which belong to each class.

## Fitting a GMM

Use its output to select the points which belong to each class. Optimizing the gaussian parameters  $\theta$ , requires four steps per gaussian and iteration,

1. update  $\hat{z}_{ig}$ .
2. update  $\hat{\rho}_g = n_g/n$ .
3. update  $\hat{\mu}_g = \frac{1}{n_g} \sum_{i=1}^n \hat{z}_{ig} \mathbf{x}_i$ .
4. update  $\hat{\Sigma}_g = \frac{1}{n_g} (\mathbf{x}_i - \hat{\mu}_g)(\mathbf{x}_i - \hat{\mu}_g)^T$ .

Above  $n_g$  denotes the number of points in class  $g$ . These four steps must be repeated until the solution is good enough.

Gauss optimization

## References

---

- [Has22] Thomas Haslwanter. *An Introduction to Statistics with Python With Applications in the Life Sciences*. 2nd ed. Springer, 2022.
- [McN16] Paul D McNicholas. *Mixture model-based classification*. Chapman and Hall/CRC, 2016.
- [Unp22] José Unpingco. *Python for probability, statistics, and machine learning*. 3rd ed. Springer, 2022.