

```
In [1]: import pandas as pd  
import numpy as np
```

```
In [13]: titanic = pd.read_csv(r'C:\Users\user\Documents\titanic dataset.csv', header = 0  
titanic.tail()
```

Out[13]:

	PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare
886	887	0	2	Montvila, Rev. Juozas	male	27.0	0	0	211536	13.0
887	888	1	1	Graham, Miss. Margaret Edith	female	19.0	0	0	112053	30.0
888	889	0	3	Johnston, Miss. Catherine Helen "Carrie"	female	NaN	1	2	W./C. 6607	23.4
889	890	1	1	Behr, Mr. Karl Howell	male	26.0	0	0	111369	30.0
890	891	0	3	Dooley, Mr. Patrick	male	32.0	0	0	370376	7.7

Performing Data Cleaning and Analysis

1.Understanding meaning of each column: Data Dictionary: Variable Description

Survived - Survived (1) or died (0)

Pclass - Passenger's class (1 = 1st, 2 = 2nd, 3 = 3rd)

Name - Passenger's name

Sex - Passenger's sex

Age - Passenger's age

SibSp - Number of siblings/spouses aboard

Parch - Number of parents/children aboard (Some children travelled only with a nanny, therefore parch=0 for them.)

Ticket - Ticket number

Fare - Fare

Cabin - Cabin

Embarked - Port of embarkation (C = Cherbourg, Q = Queenstown, S = Southampton)

Analysing which columns are completely useless in predicting the survival and deleting them Note - Don't just delete the columns because you are not finding it useful. Or focus is not on deleting the columns. Our focus is on analysing how each column is affecting the result or the prediction and in accordance with that deciding whether to keep the column or to delete the column or fill the null values of the column by some values and if yes, then what values.

In [17]: `titanic.describe()`

Out[17]:

	PassengerId	Survived	Pclass	Age	SibSp	Parch	
count	891.000000	891.000000	891.000000	714.000000	891.000000	891.000000	891.000000
mean	446.000000	0.383838	2.308642	29.699118	0.523008	0.381594	32.200000
std	257.353842	0.486592	0.836071	14.526497	1.102743	0.806057	49.693000
min	1.000000	0.000000	1.000000	0.420000	0.000000	0.000000	0.000000
25%	223.500000	0.000000	2.000000	20.125000	0.000000	0.000000	7.910000
50%	446.000000	0.000000	3.000000	28.000000	0.000000	0.000000	14.450000
75%	668.500000	1.000000	3.000000	38.000000	1.000000	0.000000	31.000000
max	891.000000	1.000000	3.000000	80.000000	8.000000	6.000000	512.320000

In [19]: `# Name column can never decide survival of a person, hence we can safely delete
del titanic["Name"]
titanic.head()`

Out[19]:

	PassengerId	Survived	Pclass	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin
0	1	0	3	male	22.0	1	0	A/5 21171	7.2500	NaN
1	2	1	1	female	38.0	1	0	PC 17599	71.2833	C85
2	3	1	3	female	26.0	0	0	STON/O2. 3101282	7.9250	NaN
3	4	1	1	female	35.0	1	0	113803	53.1000	C123
4	5	0	3	male	35.0	0	0	373450	8.0500	NaN

In [22]: `del titanic["Ticket"]
titanic.head()`

Out[22]:

	PassengerId	Survived	Pclass	Sex	Age	SibSp	Parch	Fare	Cabin	Embarked
0	1	0	3	male	22.0	1	0	7.2500	NaN	S
1	2	1	1	female	38.0	1	0	71.2833	C85	C
2	3	1	3	female	26.0	0	0	7.9250	NaN	S
3	4	1	1	female	35.0	1	0	53.1000	C123	S
4	5	0	3	male	35.0	0	0	8.0500	NaN	S

In [24]: `del titanic["Fare"]`
`titanic.head()`

Out[24]:

	PassengerId	Survived	Pclass	Sex	Age	SibSp	Parch	Cabin	Embarked
0	1	0	3	male	22.0	1	0	NaN	S
1	2	1	1	female	38.0	1	0	C85	C
2	3	1	3	female	26.0	0	0	NaN	S
3	4	1	1	female	35.0	1	0	C123	S
4	5	0	3	male	35.0	0	0	NaN	S

In [26]: `del titanic['Cabin']`
`titanic.head()`

Out[26]:

	PassengerId	Survived	Pclass	Sex	Age	SibSp	Parch	Embarked
0	1	0	3	male	22.0	1	0	S
1	2	1	1	female	38.0	1	0	C
2	3	1	3	female	26.0	0	0	S
3	4	1	1	female	35.0	1	0	S
4	5	0	3	male	35.0	0	0	S

In [28]: *# Changing Value for "Male, Female" string values to numeric values , male=1 and*
`def getNumber(str):`
 `if str=="male":`
 `return 1`
 `else:`
 `return 2`
`titanic["Gender"]=titanic["Sex"].apply(getNumber)`
#We have created a new column called "Gender" and
#filling it with values 1,2 based on the values of sex column
`titanic.head()`

Out[28]:

	PassengerId	Survived	Pclass	Sex	Age	SibSp	Parch	Embarked	Gender
0	1	0	3	male	22.0	1	0	S	1
1	2	1	1	female	38.0	1	0	C	2
2	3	1	3	female	26.0	0	0	S	2
3	4	1	1	female	35.0	1	0	S	2
4	5	0	3	male	35.0	0	0	S	1

In [30]: *#Deleting Sex column, since no use of it now*
`del titanic["Sex"]`
`titanic.head()`

Out[30]:

	PassengerId	Survived	Pclass	Age	SibSp	Parch	Embarked	Gender
0	1	0	3	22.0	1	0	S	1
1	2	1	1	38.0	1	0	C	2
2	3	1	3	26.0	0	0	S	2
3	4	1	1	35.0	1	0	S	2
4	5	0	3	35.0	0	0	S	1

In [32]: `titanic.isnull().sum()`

Out[32]:

PassengerId	0
Survived	0
Pclass	0
Age	177
SibSp	0
Parch	0
Embarked	2
Gender	0

dtype: int64

Fill the null values of the Age column. Fill mean Survived age(mean age of the survived people) in the column where the person has survived and mean not Survived age (mean age of the people who have not survived) in the column where person has not survived###

In [35]: `meanS= titanic[titanic.Survived==1].Age.mean()`
`meanS`

Out[35]: 28.343689655172415

Creating a new "Age" column , filling values in it with a condition if goes True then given values (here meanS) is put in place of last values else nothing happens, simply the values are copied from the "Age" column of the dataset###

In [38]: `titanic["age"]=np.where(pd.isnull(titanic.Age) & titanic["Survived"]==1 ,meanS,`
np.where(condition, value_if_true, value_if_false):
#If both conditions are met, it assigns meanS (the mean age of survivors) to the

```
#If the conditions are not met (either Age is not null or the passenger did not
titanic.head()
```

```
Out[38]:
```

	PassengerId	Survived	Pclass	Age	SibSp	Parch	Embarked	Gender	age
0	1	0	3	22.0	1	0	S	1	22.0
1	2	1	1	38.0	1	0	C	2	38.0
2	3	1	3	26.0	0	0	S	2	26.0
3	4	1	1	35.0	1	0	S	2	35.0
4	5	0	3	35.0	0	0	S	1	35.0

```
In [40]: titanic.isnull().sum()
```

```
Out[40]: PassengerId      0
Survived      0
Pclass      0
Age      177
SibSp      0
Parch      0
Embarked      2
Gender      0
age      125
dtype: int64
```

```
In [42]: # Finding the mean age of "Not Survived" people
meanNS=titanic[titanic.Survived==0].Age.mean()
meanNS
```

```
Out[42]: 30.62617924528302
```

```
In [44]: titanic.age.fillna(meanNS,inplace=True)
titanic.head()
```

C:\Users\user\AppData\Local\Temp\ipykernel_8212\1157731433.py:1: FutureWarning: A value is trying to be set on a copy of a DataFrame or Series through chained assignment using an inplace method.

The behavior will change in pandas 3.0. This inplace method will never work because the intermediate object on which we are setting values always behaves as a copy.

For example, when doing 'df[col].method(value, inplace=True)', try using 'df.method({col: value}, inplace=True)' or df[col] = df[col].method(value) instead, to perform the operation inplace on the original object.

```
titanic.age.fillna(meanNS,inplace=True)
```

```
Out[44]:
```

	PassengerId	Survived	Pclass	Age	SibSp	Parch	Embarked	Gender	age
0	1	0	3	22.0	1	0	S	1	22.0
1	2	1	1	38.0	1	0	C	2	38.0
2	3	1	3	26.0	0	0	S	2	26.0
3	4	1	1	35.0	1	0	S	2	35.0
4	5	0	3	35.0	0	0	S	1	35.0

```
In [46]: titanic.isnull().sum()
```

```
Out[46]: PassengerId      0
Survived      0
Pclass        0
Age          177
SibSp         0
Parch         0
Embarked      2
Gender        0
age           0
dtype: int64
```

```
In [48]: del titanic['Age']
titanic.head()
```

```
Out[48]:
```

	PassengerId	Survived	Pclass	SibSp	Parch	Embarked	Gender	age
0	1	0	3	1	0	S	1	22.0
1	2	1	1	1	0	C	2	38.0
2	3	1	3	0	0	S	2	26.0
3	4	1	1	1	0	S	2	35.0
4	5	0	3	0	0	S	1	35.0

We want to check if "Embarked" column is important for analysis or not, that is whether survival of the person depends on the Embarked column value or not###

```
In [51]: # Finding the number of people who have survived
# given that they have embarked or boarded from a particular port

survivedQ = titanic[titanic.Embarked == 'Q'][titanic.Survived == 1].shape[0]
survivedC = titanic[titanic.Embarked == 'C'][titanic.Survived == 1].shape[0]
survivedS = titanic[titanic.Embarked == 'S'][titanic.Survived == 1].shape[0]
print(survivedQ)
print(survivedC)
print(survivedS)
```

```
30
93
217
```

```
C:\Users\user\AppData\Local\Temp\ipykernel_8212\3300902897.py:4: UserWarning: Boolean Series key will be reindexed to match DataFrame index.
  survivedQ = titanic[titanic.Embarked == 'Q'][titanic.Survived == 1].shape[0]
C:\Users\user\AppData\Local\Temp\ipykernel_8212\3300902897.py:5: UserWarning: Boolean Series key will be reindexed to match DataFrame index.
  survivedC = titanic[titanic.Embarked == 'C'][titanic.Survived == 1].shape[0]
C:\Users\user\AppData\Local\Temp\ipykernel_8212\3300902897.py:6: UserWarning: Boolean Series key will be reindexed to match DataFrame index.
  survivedS = titanic[titanic.Embarked == 'S'][titanic.Survived == 1].shape[0]
```

```
In [53]: survivedQ = titanic[titanic.Embarked == 'Q'][titanic.Survived == 0].shape[0]
survivedC = titanic[titanic.Embarked == 'C'][titanic.Survived == 0].shape[0]
survivedS = titanic[titanic.Embarked == 'S'][titanic.Survived == 0].shape[0]
print(survivedQ)
print(survivedC)
print(survivedS)
```

```
47
75
427
```

```
C:\Users\user\AppData\Local\Temp\ipykernel_8212\3240960939.py:1: UserWarning: Boolean Series key will be reindexed to match DataFrame index.
  survivedQ = titanic[titanic.Embarked == 'Q'][titanic.Survived == 0].shape[0]
C:\Users\user\AppData\Local\Temp\ipykernel_8212\3240960939.py:2: UserWarning: Boolean Series key will be reindexed to match DataFrame index.
  survivedC = titanic[titanic.Embarked == 'C'][titanic.Survived == 0].shape[0]
C:\Users\user\AppData\Local\Temp\ipykernel_8212\3240960939.py:3: UserWarning: Boolean Series key will be reindexed to match DataFrame index.
  survivedS = titanic[titanic.Embarked == 'S'][titanic.Survived == 0].shape[0]
```

As there are significant changes in the survival rate based on which port the passengers aboard the ship. We cannot delete the whole embarked column(It is useful). Now the Embarked column has some null values in it and hence we can safely say that deleting some rows from total rows will not affect the result. So rather than trying to fill those null values with some values. We can simply remove them.

```
In [56]: titanic.dropna(inplace=True)
titanic.head()
```

```
Out[56]:
```

	PassengerId	Survived	Pclass	SibSp	Parch	Embarked	Gender	age
0	1	0	3	1	0	S	1	22.0
1	2	1	1	1	0	C	2	38.0
2	3	1	3	0	0	S	2	26.0
3	4	1	1	1	0	S	2	35.0
4	5	0	3	0	0	S	1	35.0

```
In [58]: titanic.isnull().sum()
```

```
Out[58]: PassengerId    0
         Survived      0
         Pclass       0
         SibSp        0
         Parch        0
         Embarked     0
         Gender       0
         age          0
         dtype: int64
```

```
In [60]: #Renaming "age" and "gender" columns
         titanic.rename(columns={'age':'Age'}, inplace=True)
         titanic.head()
```

```
Out[60]:
```

	PassengerId	Survived	Pclass	SibSp	Parch	Embarked	Gender	Age
0	1	0	3	1	0	S	1	22.0
1	2	1	1	1	0	C	2	38.0
2	3	1	3	0	0	S	2	26.0
3	4	1	1	1	0	S	2	35.0
4	5	0	3	0	0	S	1	35.0

```
In [62]: titanic.rename(columns={'Gender':'Sex'}, inplace=True)
         titanic.head()
```

```
Out[62]:
```

	PassengerId	Survived	Pclass	SibSp	Parch	Embarked	Sex	Age
0	1	0	3	1	0	S	1	22.0
1	2	1	1	1	0	C	2	38.0
2	3	1	3	0	0	S	2	26.0
3	4	1	1	1	0	S	2	35.0
4	5	0	3	0	0	S	1	35.0

```
In [64]: def getEmb(str):
         if str=="S":
             return 1
         elif str=="Q":
             return 2
         else:
             return 3
         titanic["Embark"]=titanic["Embarked"].apply(getEmb)
         titanic.head()
```


Out[64]:

	PassengerId	Survived	Pclass	SibSp	Parch	Embarked	Sex	Age	Embark
0	1	0	3	1	0	S	1	22.0	1
1	2	1	1	1	0	C	2	38.0	3
2	3	1	3	0	0	S	2	26.0	1
3	4	1	1	1	0	S	2	35.0	1
4	5	0	3	0	0	S	1	35.0	1

In [66]: `del titanic['Embarked']`
`titanic.rename(columns={'Embark':'Embarked'}, inplace=True)`
`titanic.head()`

Out[66]:


	PassengerId	Survived	Pclass	SibSp	Parch	Sex	Age	Embarked
0	1	0	3	1	0	1	22.0	1
1	2	1	1	1	0	2	38.0	3
2	3	1	3	0	0	2	26.0	1
3	4	1	1	1	0	2	35.0	1
4	5	0	3	0	0	1	35.0	1

In [68]: *#Drawing a pie chart for number of males and females aboard*
`import matplotlib.pyplot as plt`
`from matplotlib import style`

`males = (titanic['Sex'] == 1).sum()`
#Summing up all the values of column gender with a
#condition for male and similary for females
`females = (titanic['Sex'] == 2).sum()`
`print(males)`
`print(females)`
`p = [males, females]`
`plt.pie(p, #giving array`
`labels = ['Male', 'Female'], #Correspndingly giving labels`
`colors = ['green', 'yellow'], # Corresponding colors`
`explode = (0.15, 0), #How much the gap should me there between the pie`
`startangle = 0) #what start angle should be given`
`plt.axis('equal')`
`plt.show()`

577

312

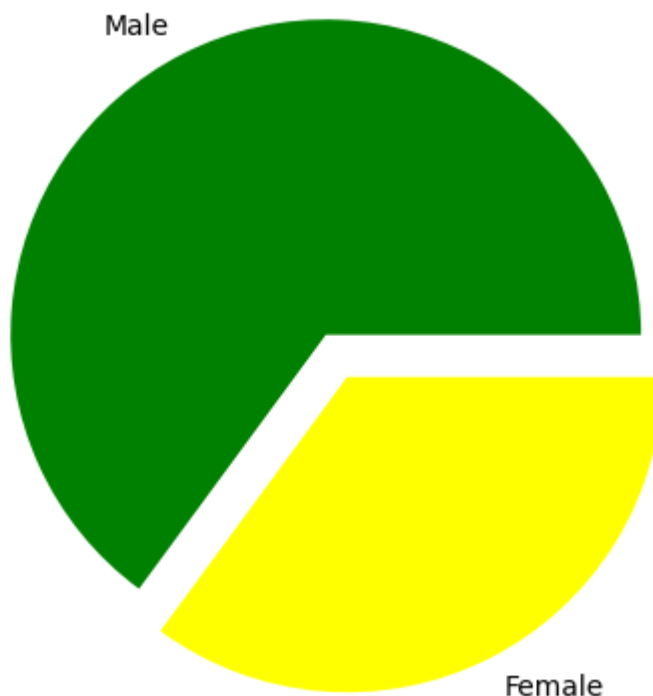

```
In [70]: # More Precise Pie Chart
MaleS=titanic[titanic.Sex==1][titanic.Survived==1].shape[0]
print(MaleS)
MaleN=titanic[titanic.Sex==1][titanic.Survived==0].shape[0]
print(MaleN)
FemaleS=titanic[titanic.Sex==2][titanic.Survived==1].shape[0]
print(FemaleS)
FemaleN=titanic[titanic.Sex==2][titanic.Survived==0].shape[0]
print(FemaleN)
```

```
109
468
231
81
```

```
C:\Users\user\AppData\Local\Temp\ipykernel_8212\3105620411.py:2: UserWarning: Boolean Series key will be reindexed to match DataFrame index.
```

```
MaleS=titanic[titanic.Sex==1][titanic.Survived==1].shape[0]
```

```
C:\Users\user\AppData\Local\Temp\ipykernel_8212\3105620411.py:4: UserWarning: Boolean Series key will be reindexed to match DataFrame index.
```

```
MaleN=titanic[titanic.Sex==1][titanic.Survived==0].shape[0]
```


```
C:\Users\user\AppData\Local\Temp\ipykernel_8212\3105620411.py:6: UserWarning: Boolean Series key will be reindexed to match DataFrame index.
```

```
FemaleS=titanic[titanic.Sex==2][titanic.Survived==1].shape[0]
```

```
C:\Users\user\AppData\Local\Temp\ipykernel_8212\3105620411.py:8: UserWarning: Boolean Series key will be reindexed to match DataFrame index.
```

```
FemaleN=titanic[titanic.Sex==2][titanic.Survived==0].shape[0]
```

```
In [72]: chart=[MaleS, MaleN, FemaleS, FemaleN]
colors=['lightskyblue', 'yellowgreen', 'Yellow', 'Orange']
labels=["Survived Male", "Not Survived Male", "Survived Female", "Not Survived Female"]
explode=[0, 0.05, 0, 0.1]
plt.pie(chart, labels=labels, colors=colors, explode=explode, startangle=100, counter
plt.axis("equal")
plt.show()
#autopct: This parameter formats the display of percentages on the pie chart. In
```

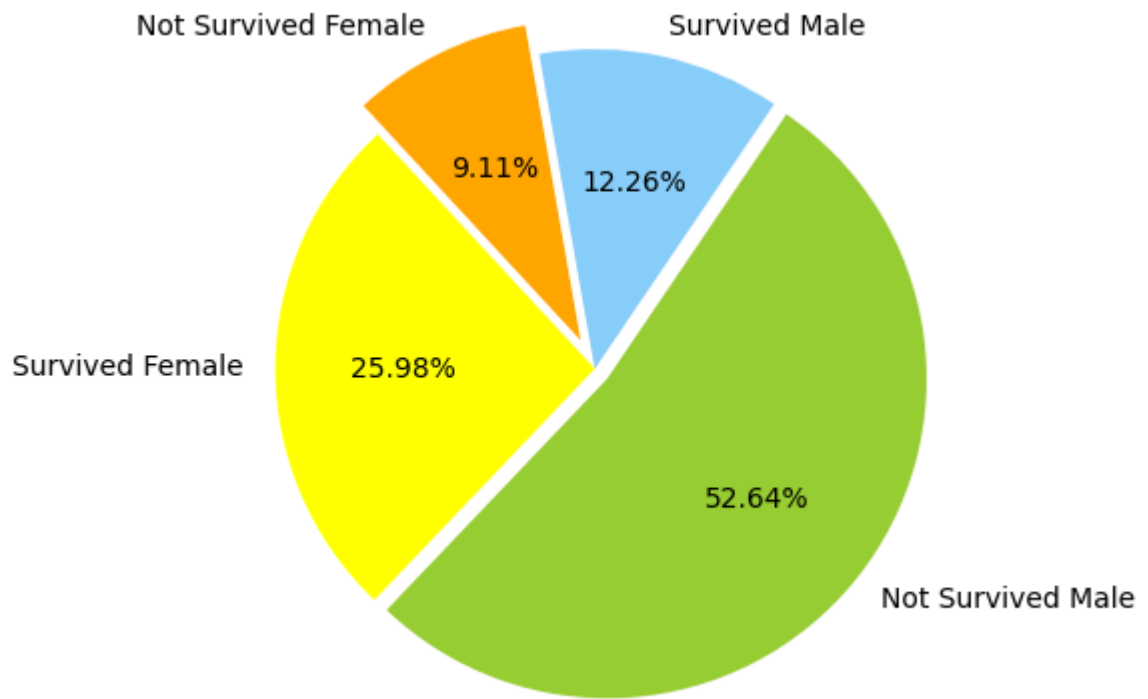

In []: