

JAVASCRIPT & JQUERY

interactive front-end
web development

JON DUCKETT

JAVASCRIPT & JQUERY

Interactive Front-End Web Development

JON DUCKETT

Additional material by:

GILLES RUPPERT & JACK MOORE

WILEY



The text stock is SFI certified

Published by

John Wiley & Sons, Inc.
10475 Crosspoint Boulevard
Indianapolis, IN 46256
www.wiley.com

©2014 by John Wiley & Sons, Inc., Indianapolis, Indiana

ISBN: 978-1-118-53164-8

Manufactured in the United States of America

10 9 8 7 6 5 4 3 2 1

No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, scanning or otherwise, except as permitted under Sections 107 or 108 of the 1976 United States Copyright Act, without either the prior written permission of the Publisher, or authorization through payment of the appropriate per-copy fee to the Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923, (978) 750-8400, fax (978) 646-8600. Requests to the Publisher for permission should be addressed to the Permissions Department, John Wiley & Sons, Inc., 111 River Street, Hoboken, NJ 07030, (201) 748-6011, fax (201) 748-6008, or online at <http://www.wiley.com/go/permissions>.

Limit of Liability/Disclaimer of Warranty: The publisher and the author make no representations or warranties with respect to the accuracy or completeness of the contents of this work and specifically disclaim all warranties, including without limitation warranties of fitness for a particular purpose. No warranty may be created or extended by sales or promotional materials. The advice and strategies contained herein may not be suitable for every situation. This work is sold with the understanding that the publisher is not engaged in rendering legal, accounting, or other professional services. If professional assistance is required, the services of a competent professional person should be sought. Neither the publisher nor the author shall be liable for damages arising herefrom. The fact that an organization or Web site is referred to in this work as a citation and/or a potential source of further information does not mean that the author or the publisher endorses the information the organization or website may provide or recommendations it may make. Further, readers should be aware that Internet websites listed in this work may have changed or disappeared between when this work was written and when it is read.

For general information on our other products and services please contact our Customer Care Department within the United States at (877) 762-2974, outside the United States at (317) 572-3993 or fax (317) 572-4002.

Wiley publishes in a variety of print and electronic formats and by print-on-demand. Some material included with standard print versions of this book may not be included in e-books or in print-on-demand. If this book refers to media such as a CD or DVD that is not included in the version you purchased, you may download this material at <http://booksupport.wiley.com>. For more information about Wiley products, visit www.wiley.com.

Library of Congress Control Number: 2013933932

Trademarks: Wiley and the Wiley logo are trademarks or registered trademarks of John Wiley & Sons, Inc. and/or its affiliates, in the United States and other countries, and may not be used without written permission. JavaScript is a registered trademark of Oracle America, Inc. All other trademarks are the property of their respective owners. John Wiley & Sons, Inc. is not associated with any product or vendor mentioned in this book.

TABLE OF CONTENTS

Introduction	1
Chapter 1: The ABC of Programming	11
Chapter 2: Basic JavaScript Instructions	53
Chapter 3: Functions, Methods & Objects	85
Chapter 4: Decisions & Loops	145
Chapter 5: Document Object Model	183
Chapter 6: Events	243
Chapter 7: jQuery	293
Chapter 8: Ajax & JSON	367
Chapter 9: APIs	409
Chapter 10: Error Handling & Debugging	449
Chapter 11: Content Panels	487
Chapter 12: Filtering, Searching & Sorting	527
Chapter 13: Form Enhancement & Validation	567
Index	623



Try out & download the code in this book
www.javascriptbook.com

CREDITS

For John Wiley & Sons, Inc.

Executive Editor

Carol Long

Project Editor

Kevin Kent

Production Editor

Daniel Scribner

Editorial Manager

Mary Beth Wakefield

Associate Director of Marketing

David Mayhew

Marketing Manager

Lorna Mein

Business Manager

Amy Kries

Vice President and Executive

Group Publisher

Richard Swadley

Associate Publisher

Jim Minatel

Project Coordinator, Cover

Todd Klemme

For Wagon Ltd.

Author

Jon Duckett

Co-Authors

Jack Moore
(Chapters 11 & 12)

Gilles Ruppert

(Chapter 13)

Technical Review

Mathias Bynens

Review Team

Chris Ullman
David Lean
Harrison Thrift
Jay Bursky
Richard Eskins
Scott Robin
Stachu Korick

Thank you

Annette Loudon
Michael Tomko
Michael Vella Zarb
Pam Coca
Rishabh Pugalia

Cover Design

Emme Stone

Design

Emme Stone
Jon Duckett

Photography

John Stewardson
johnstewardson.com

Illustration

Matthew Cencich
(Hotel in Chapter 3)

Emme Stone


(Teacher in Chapter 4)

Additional Photography


Electronics in Chapters 8 & 9:

Aaron Nielsen
Arkadiusz Jan Sikorski
Matt Mets
Mirsad Dedović
Steve Lodefink

javascriptbook.com/credits

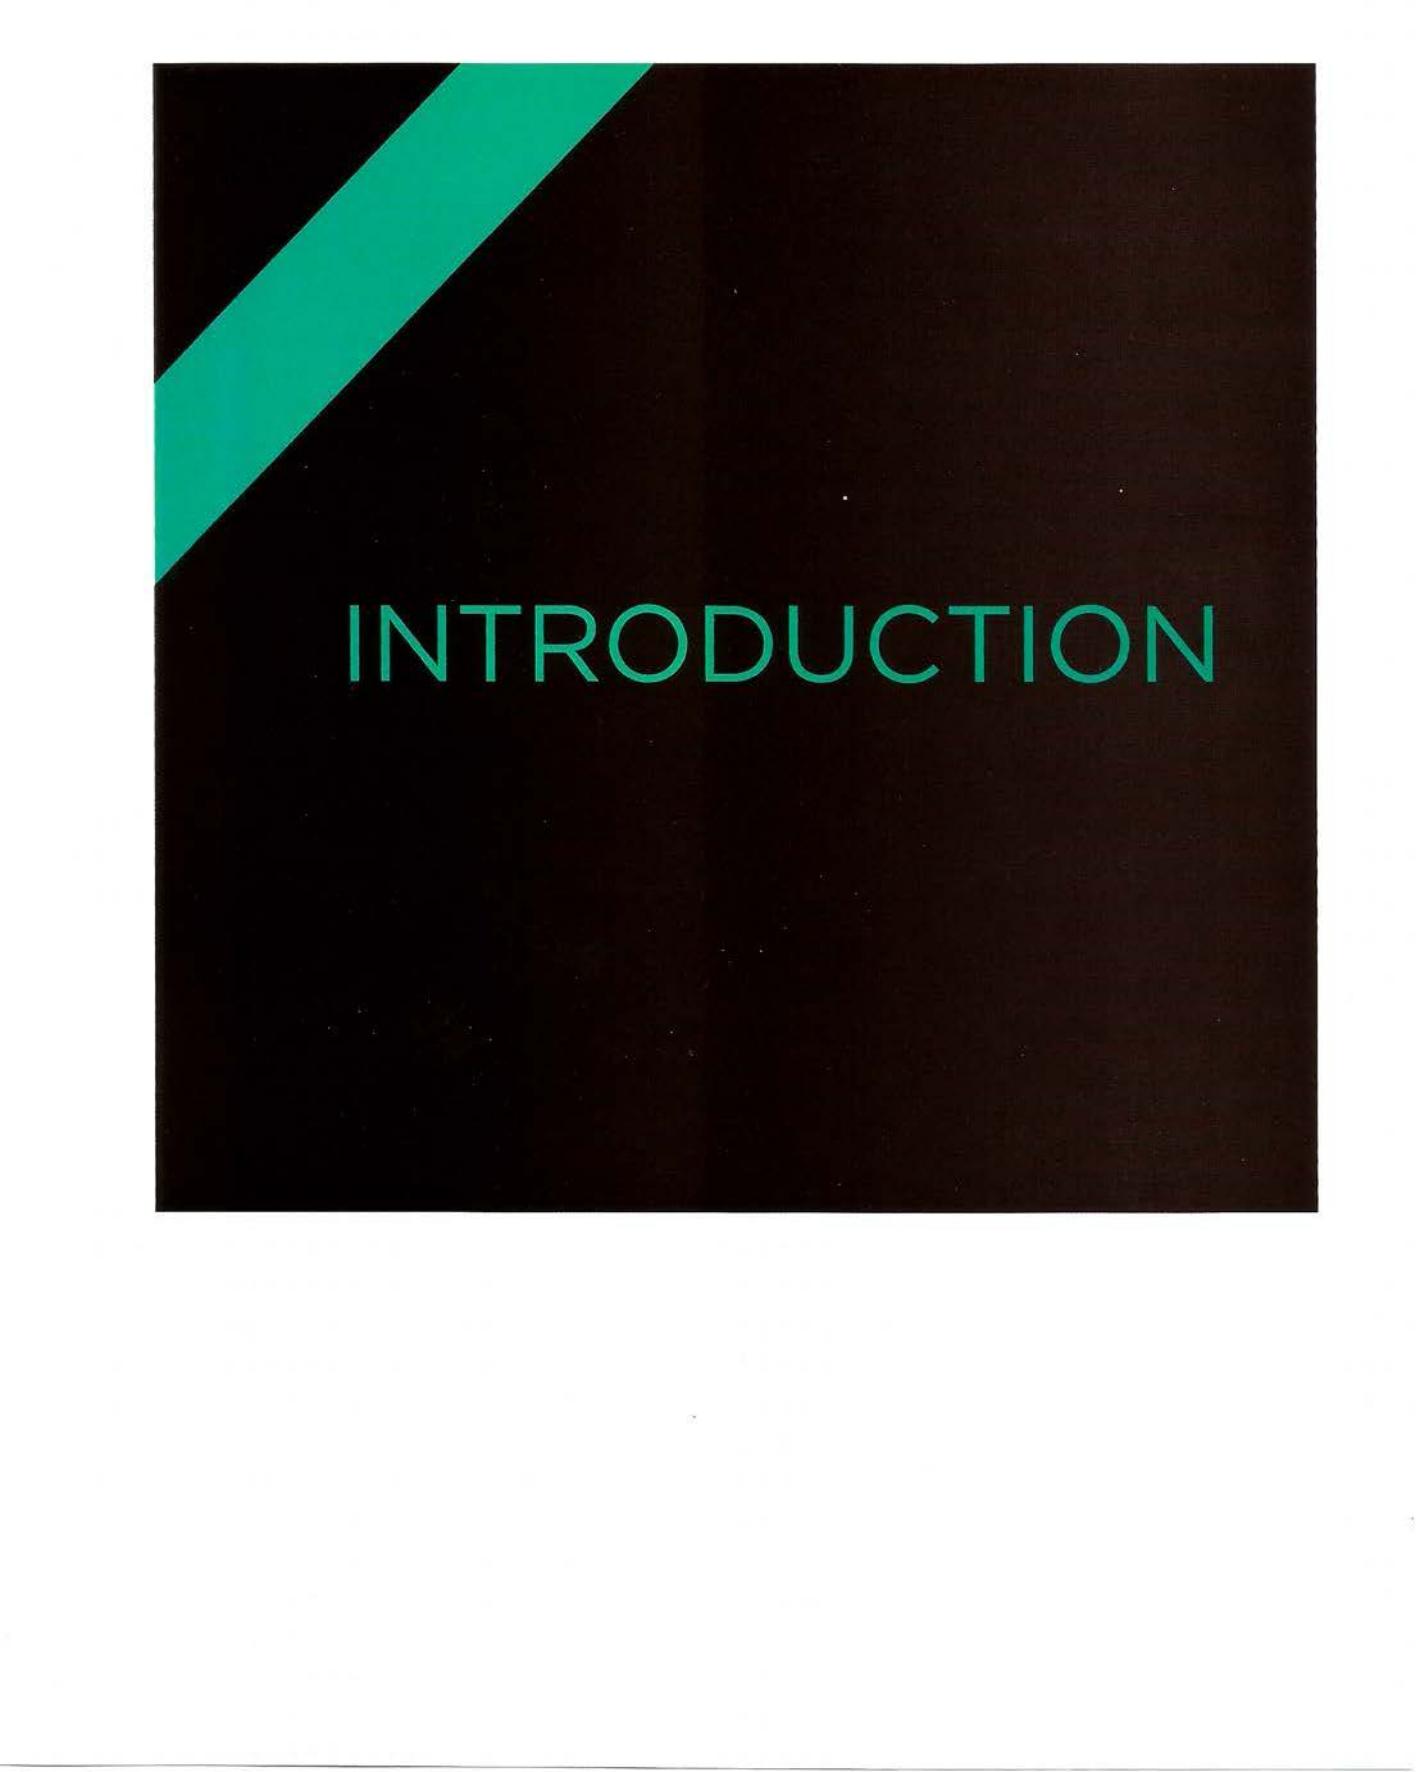

INTRODUCTION

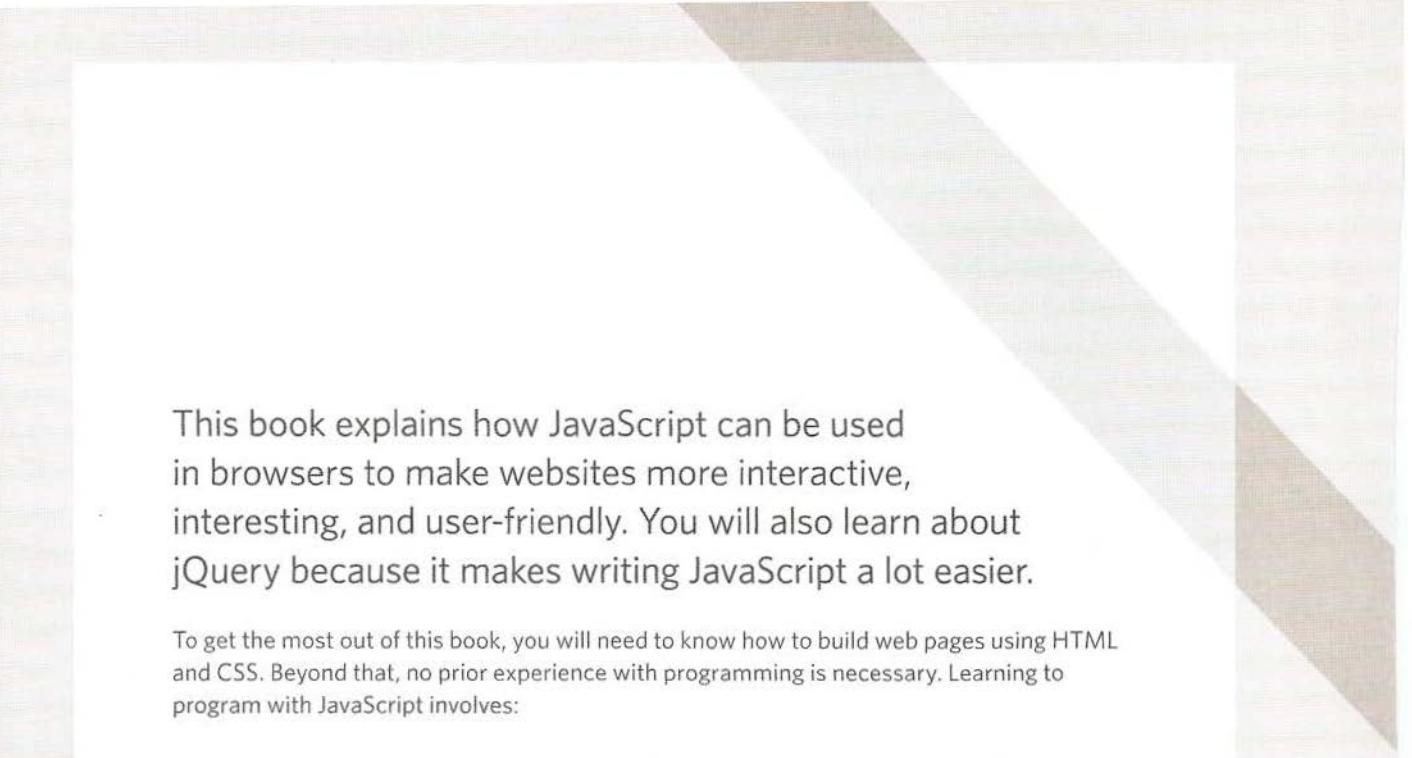

This book explains how JavaScript can be used in browsers to make websites more interactive, interesting, and user-friendly. You will also learn about jQuery because it makes writing JavaScript a lot easier.

To get the most out of this book, you will need to know how to build web pages using HTML and CSS. Beyond that, no prior experience with programming is necessary. Learning to program with JavaScript involves:

1

Understanding some **basic programming concepts** and the terms that JavaScript programmers use to describe them.


2

Learning **the language** itself, and, like all languages, you need to know its vocabulary and how to structure your sentences.

3

Becoming familiar with **how it is applied** by looking at examples of how JavaScript is commonly used in websites today.

The only equipment you need to use this book are a computer with a modern web browser installed, and your favorite code editor, (e.g., Notepad,TextEdit, Sublime Text, or Coda).

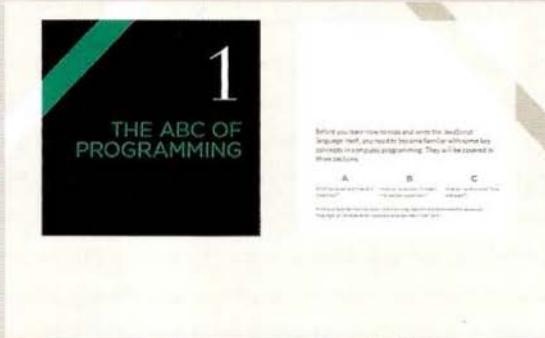

Introduction pages come at the beginning of each chapter. They introduce the key topics you will learn about.

Background pages appear on white. They explain the context of the topics covered that are discussed in each chapter.



Example pages bring together the topics you have learned in that chapter and demonstrate how they can be applied.

Reference pages introduce key pieces of JavaScript. HTML code is shown in blue, CSS code in pink, and JavaScript in green.

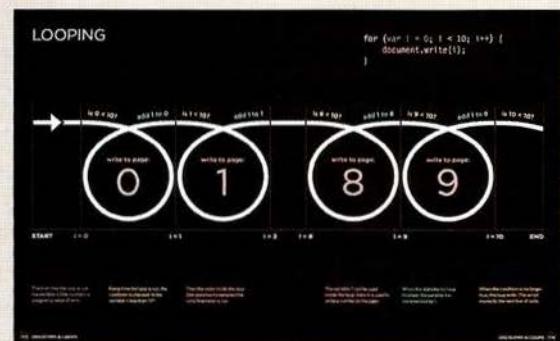


Diagram and infographics pages are shown on a dark background. They provide a simple, visual reference to topics discussed.

- ▶ A script is made up of a series of statements. Each statement is like a step in a process.
- ▶ Scripts contain many types of structures. For example, you might want to make sure a value must be remembered before creating a calculation using that value.
- ▶ Variables are used to temporarily store pieces of information used in the script.
- ▶ Arrays are special types of variables that store more than one piece of related information.
- ▶ JavaScript distinguishes between numbers (0-9), strings (data), and Boolean values (true or false).
- ▶ Expressions evaluate into a single value.
- ▶ Functions rely on operators to calculate a value.

Summary pages come at the end of each chapter. They remind you of the key topics that were covered in each chapter.

HOW JAVASCRIPT MAKES WEB PAGES MORE INTERACTIVE

A photograph of a light-colored wooden desk surface. On the desk, from left to right, is a small white cup filled with a yellowish liquid (likely tea), a red pencil with a white eraser, and an open notebook. The notebook has a dark green cover with a floral pattern and a light-colored page visible. A pair of black-handled scissors lies across the top of the notebook's page.

1

ACCESS CONTENT

You can use JavaScript to select any element, attribute, or text from an HTML page. For example:

- Select the text inside all of the `<h1>` elements on a page
- Select any elements that have a `class` attribute with a value of `note`
- Find out what was entered into a text input whose `id` attribute has a value of `email`

JavaScript allows you to make web pages more interactive by accessing and modifying the content and markup used in a web page while it is being viewed in the browser.

2

MODIFY CONTENT

You can use JavaScript to add elements, attributes, and text to the page, or remove them. For example:

- Add a paragraph of text after the first `<h1>` element
- Change the value of `class` attributes to trigger new CSS rules for those elements
- Change the size or position of an `` element

3

PROGRAM RULES

You can specify a set of steps for the browser to follow (like a recipe), which allows it to access or change the content of a page. For example:

- A gallery script could check which image a user clicked on and display a larger version of that image.
- A mortgage calculator could collect values from a form, perform a calculation, and display repayments.
- An animation could check the dimensions of the browser window and move an image to the bottom of the viewable area (also known as the viewport).

JavaScript
encompasses many
of the traditional rules of
programming.

It can make the web page feel
interactive by responding
to what the user does.

4

REACT TO EVENTS

You can specify that a script should run when a specific event has occurred. For example, it could be run when:

- A button is pressed
- A link is clicked (or tapped) on
- A cursor hovers over an element
- Information is added to a form
- An interval of time has passed
- A web page has finished loading



EXAMPLES OF JAVASCRIPT IN THE BROWSER

Being able to change the content of an HTML page while it is loaded in the browser is very powerful. The examples below rely on the ability to:

Access the content of the page

Modify the content of the page

Program rules or instructions the browser can follow

React to events triggered by the user or browser



SLIDESHOWS

Shown in Chapter 11

Slideshows can display a number of different images (or other HTML content) within the same space on a given page. They can play automatically as a sequence, or users can click through the slides manually. They allow more content to be displayed within a limited amount of space.

React: Script triggered when the page loads

Access: Get each slide from the slideshow

Modify: Only show the first slide (hide others)

Program: Set a timer; when to show next slide

Modify: Change which slide is shown

React: When user clicks button for different slide

Program: Determine which slide to show

Modify: Show the requested slide



FORMS

Shown in Chapter 13

Validating forms (checking whether they have been filled in correctly) is important when information is supplied by users. JavaScript lets you alert the user if mistakes have been made. It can also perform sophisticated calculations based on any data entered and reveal the results to the user.

React: User presses the submit button when they have entered their name

Access: Get value from form field

Program: Check that the name is long enough

Modify: Show a warning message if the name is not long enough

The examples on these two pages give you a taste of what JavaScript can do within a web page, and of the techniques you will be learning throughout this book.

In the coming chapters, you will learn how and when to access or modify content, add programming rules, and react to events.

The screenshot shows a website for "THE MAKER BUS". At the top, there's a logo of a stylized bus and navigation links: HOME, ROUTE, TOYS, and TIMETABLE. Below this, a banner says "Roll up! Roll up! It's the maker bus...". Underneath, there are three circular icons representing stops: SAN FRANCISCO, CA; AUSTIN, TX; and NEW YORK, NY. To the right of these icons is a detailed schedule:

Time	Activity
9:00	Make the Future
10:00	Circuit Hacking
11:00	Brain Hacking
12:00	The Printed Lunch
1:00	Drawing On
3:00	Intro to 3D Modeling

Next to the schedule is a small blurb about "Intro to 3D Modeling": "Come learn how to create 3D models of parts you can then print and build. Bring your own laptop or use the same 3D modeling software that is used worldwide in professional settings like engineering, product design, architecture, and game development. In a fun and informative session hosted by Bella Stone, professional modeler."

RELOAD PART OF PAGE

Shown in Chapter 8

You might not want to force visitors to reload the content of an entire web page, particularly if you only need to refresh a small portion of a page. Just reloading a section of the page can make a site feel like it is faster to load and more like an application.

React: Script triggered when user clicks on link

Access: The link that they clicked on

Program: Load the new content that was requested from that link

Access: Find the element to replace in the page

Modify: Replace that content with the new content

The screenshot shows a website for "CreativeFolk". At the top, there's a header with the site name and a search bar labeled "Filter By Keyword". Below this is a grid of nine images, each with a small button below it. The images include a rabbit, a landscape, a plant, a map of New York City, a yellow object, a geometric drawing, a person swimming, a tree, and a character. The bottom right image has the word "Aqua" written next to it.

FILTERING DATA

Shown in Chapter 12

If you have a lot of information to display on a page, you can help users find information they need by providing filters. Here, buttons are generated using data in the attributes of the HTML `` elements. When the user clicks on one of the buttons, they are only shown the images with that keyword.

React: Script triggered when page loads

Program: Collect keywords from images

Program: Turn the keywords into buttons the user can click on

React: User clicks on one of the buttons

Program: Find the relevant subset of images that should be shown

Modify: Show the subset of images that use that tag

THE STRUCTURE OF THIS BOOK

In order to teach you JavaScript, this book is divided into two sections:

CORE CONCEPTS

The first nine chapters introduce you to the basics of programming and the JavaScript language. Along the way you will learn how it is used to create more engaging, interactive, and usable websites.

Chapter 1 looks at some key concepts in computer programming, showing you how computers create models of the world using data, and how JavaScript is used to change the contents of an HTML page.

Chapters 2-4 cover the basics of the JavaScript language.

Chapter 5 explains how the Document Object Model (DOM) lets you access and change a document's contents while it is loaded into the browser.

Chapter 6 discusses how events can be used to trigger code.

Chapter 7 shows you how jQuery can make the process of writing scripts faster and easier.

Chapter 8 introduces you to Ajax, a set of techniques that allow you to just change part of a web page without reloading the entire page.

Chapter 9 covers Application Programming Interfaces (APIs), including new APIs that are part of HTML5 and those of sites like Google Maps.

PRACTICAL APPLICATIONS

By this point you will already have seen many examples of how JavaScript is used on popular websites. This section brings together all of the techniques you have learned so far, to give you practical demonstrations of how JavaScript is used by professional developers. Not only will you see a selection of in-depth examples, you will also learn more about the process of designing and writing scripts from scratch.

Chapter 10 deals with error-handling and debugging, and explains more about how JavaScript is processed.

Chapter 11 shows you techniques for creating content panels such as sliders, modal windows, tabbed panels, and accordions.

Chapter 12 demonstrates several techniques for filtering and sorting data. This includes filtering a gallery of images, and re-ordering the rows of a table by clicking on the column headings.

Chapter 13 deals with form enhancements and how to validate form entries.

Unless you are already a confident programmer, you will probably find it helpful to read the book from start to finish the first time. However, once you have grasped the basics, we hope it will continue to be a helpful reference as you create your own scripts.

HTML & CSS: A QUICK REFRESHER

Before looking at JavaScript, let's clarify some HTML & CSS terms. Note how HTML attributes and CSS properties use name/value pairs.

HTML ELEMENTS

HTML elements are added to the content of a page to describe its structure. An element consists of the opening and closing tags, plus its content.

Tags usually come in pairs with an opening tag and a closing tag. There are a few empty elements with no content, (e.g., ``). They have one self-closing tag.

Opening tags can carry attributes, which tell us more about that element. Attributes have a name and a value. The value is usually given in quotes.



CSS RULES

CSS uses rules to indicate how the contents of one or more elements should be displayed in the browser. Each rule has a selector and a declaration block.

The CSS selector indicates which element(s) the rule applies to. The declaration block contains rules that indicate how those elements should appear.

Each declaration in the declaration block has a property (the aspect you want to control), and a value, which is the setting for that property.



BROWSER SUPPORT

Some early examples in this book do not work with Internet Explorer 8 and earlier (but alternative code samples that work in IE8 are available to download from <http://javascriptbook.com>). We explain techniques for dealing with older browsers in later chapters.

Each version of a web browser adds new features. Often these new features make tasks easier, or are considered better, than using older techniques.

But, website visitors do not always keep up with the latest browser releases, so website developers cannot always rely upon the latest technologies.

As you will see, there are many inconsistencies between browsers that affect JavaScript developers. jQuery will help you deal with cross-browser inconsistencies (it is one of the major reasons why jQuery rapidly gained popularity amongst web developers). But, before you learn jQuery, it helps to know what it is helping you to achieve.

To make JavaScript easier to learn, the first few chapters use some features of JavaScript that are not supported in IE8. But:

- You **will** learn how to deal with IE8 and older browsers in later chapters (because we know that many clients expect sites to work in IE8). It just requires knowledge of some extra code or requires you to be aware of some additional issues.
- Online, you will find alternatives available for each example that does not work in IE8. But please check the comments in those code samples to make sure you know about the about issues involved in using them.

1

THE ABC OF
PROGRAMMING

Before you learn how to read and write the JavaScript language itself, you need to become familiar with some key concepts in computer programming. They will be covered in three sections:

A

What is a script and how do I
create one?

B

How do computers fit in with
the world around them?

C

How do I write a script for a
web page?

Once you have learned the basics, the following chapters will show how the JavaScript language can be used to tell browsers what you want them to do.

1/a

WHAT IS A SCRIPT
AND HOW DO I
CREATE ONE?

A SCRIPT IS A SERIES OF INSTRUCTIONS


A script is a series of instructions that a computer can follow to achieve a goal.
You could compare scripts to any of the following:

RECIPES

By following the instructions in a recipe, one-by-one in the order set out, cooks can create a dish they have never made before.

Some scripts are simple and only deal with one individual scenario, like a simple recipe for a basic dish. Other scripts can perform many tasks, like a recipe for a complicated three-course meal.

Another similarity is that, if you are new to cooking or programming, there is a lot of new terminology to learn.

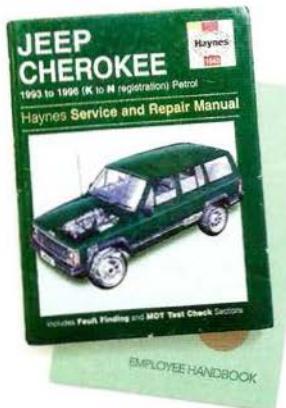

HANDBOOKS

Large companies often provide handbooks for new employees that contain procedures to follow in certain situations.

For example, hotel handbooks may contain steps to follow in different scenarios such as when a guest checks in, when a room needs to be tidied, when a fire alarm goes off, and so forth.

In any of these scenarios, the employees need to follow only the steps for that one type of event. (You would not want someone going through every single step in the entire handbook while you were waiting to check in.) Similarly, in a complex script, the browser might use only a subset of the code available at any given time.


MANUALS

Mechanics often refer to car repair manuals when servicing models they are not familiar with. These manuals contain a series of tests to check the key functions of the car are working, along with details of how to fix any issues that arise.

For example, there might be details about how to test the brakes. If they pass this test, the mechanic can then go on to the next test without needing to fix the brakes. But, if they fail, the mechanic will need to follow the instructions to repair them.

The mechanic can then go back and test the brakes again to see if the problem is fixed. If the brakes now pass the test, the mechanic knows they are fixed and can move onto the next test.

Similarly, scripts can allow the browser to check the current situation and only perform a set of steps if that action is appropriate.

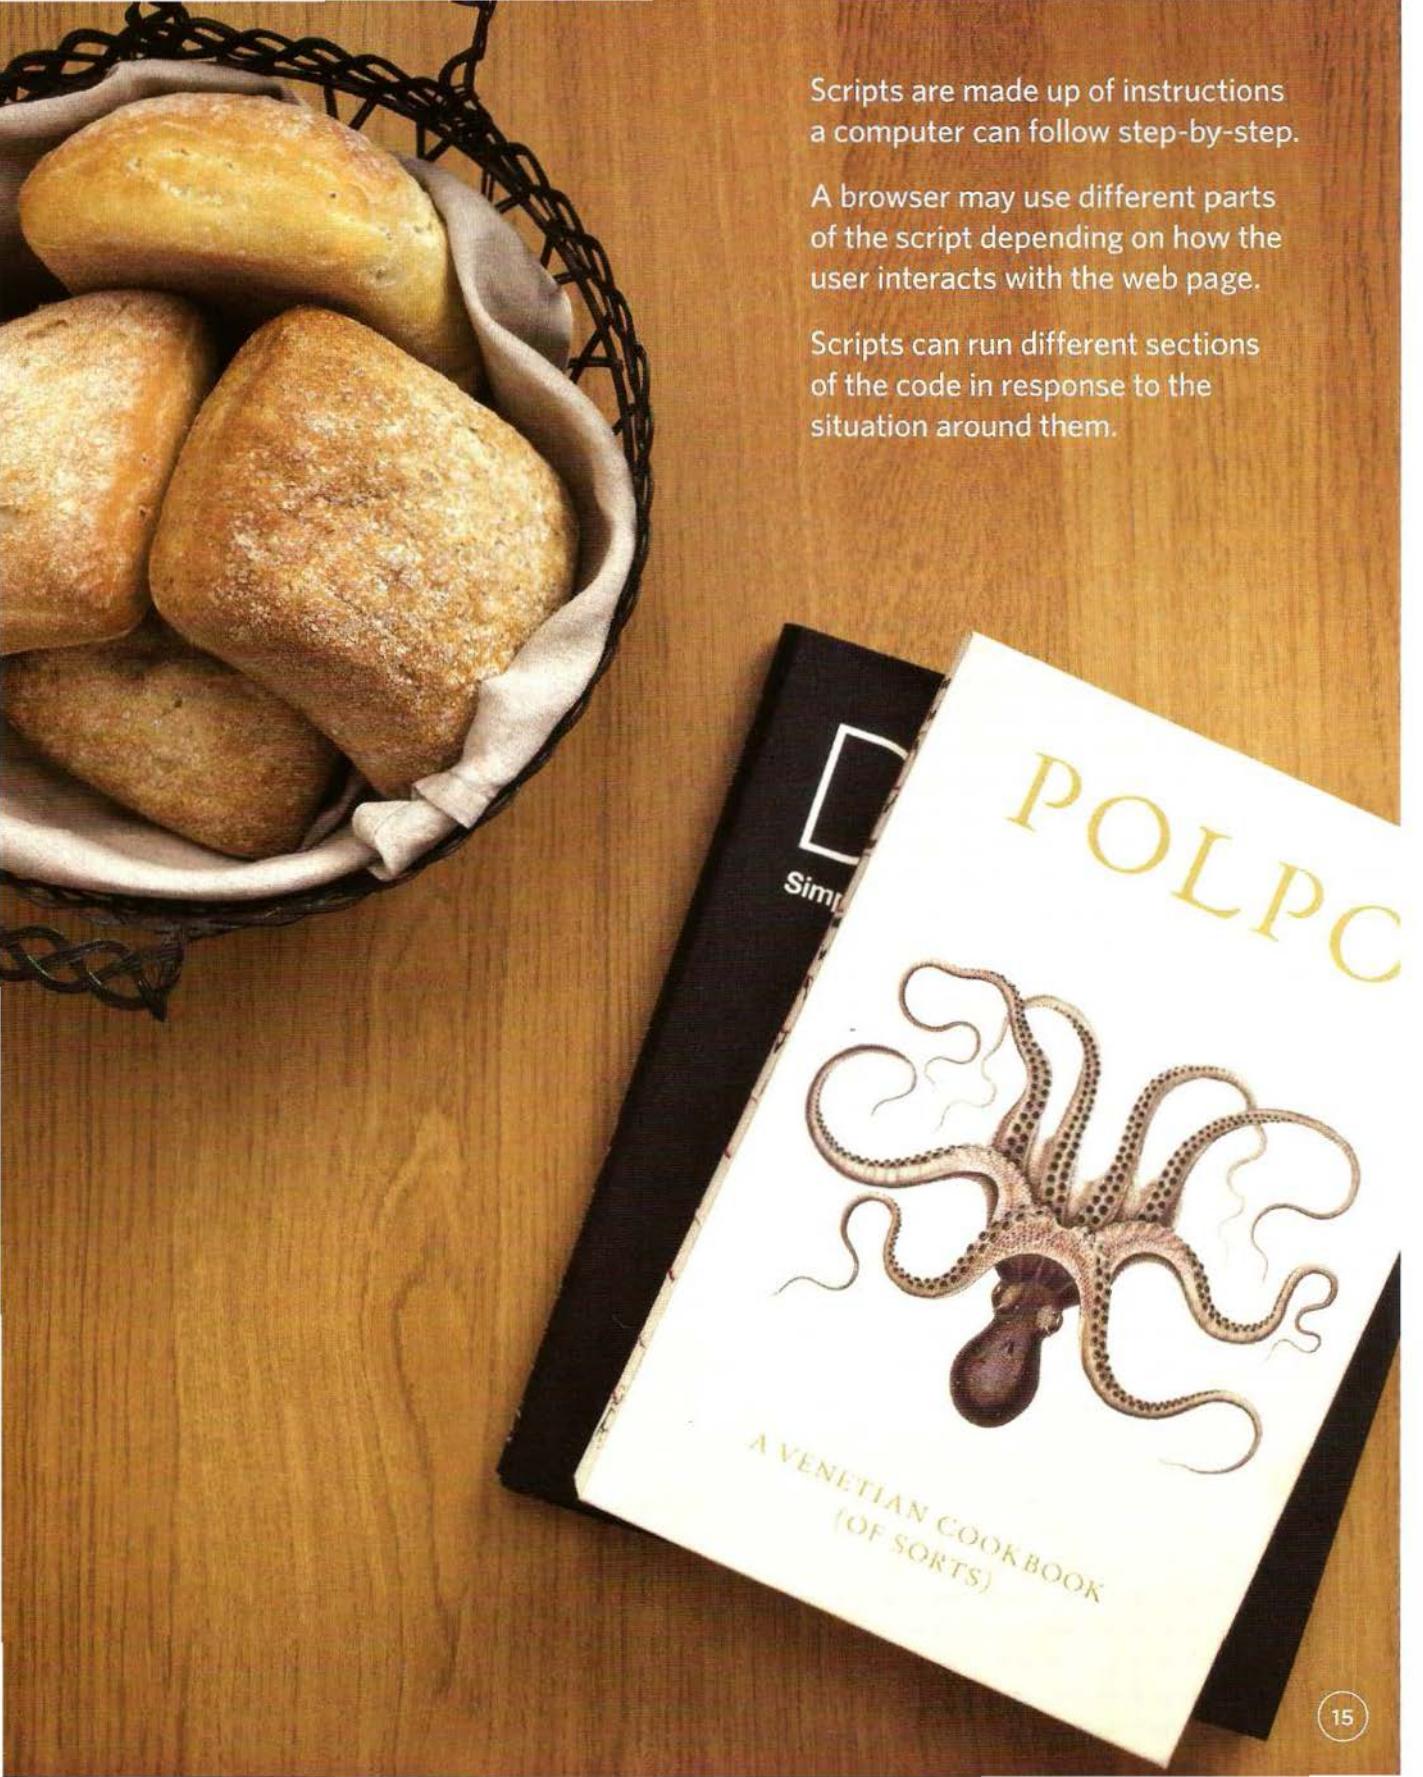A photograph of a wire basket filled with golden-brown bread rolls sits on a wooden surface. To its right is a white book with gold lettering. The title 'POLPO' is written in large, stylized letters at the top. Below it is a detailed illustration of an octopus. At the bottom of the book cover, the text 'A VENETIAN COOKBOOK (OF SORTS)' is visible.

Scripts are made up of instructions
a computer can follow step-by-step.

A browser may use different parts
of the script depending on how the
user interacts with the web page.

Scripts can run different sections
of the code in response to the
situation around them.


WRITING A SCRIPT


To write a script, you need to first state your goal and then list the tasks that need to be completed in order to achieve it.

Humans can achieve complex goals without thinking about them too much, for example you might be able to drive a car, cook breakfast, or send an email without a set of detailed instructions. But the first time we do these things they can seem daunting. Therefore, when learning a new skill, we often break it down into smaller tasks, and learn one of these at a time. With experience these individual tasks grow familiar and seem simpler.

Some of the scripts you will be reading or writing when you have finished this book will be quite complicated and might look intimidating at first. However, a script is just a series of short instructions, each of which is performed in order to solve the problem in hand. This is why creating a script is like writing a recipe or manual that allows a computer to solve a puzzle one step at a time.

It is worth noting, however, that a computer doesn't learn how to perform tasks like you or I might; it needs to follow instructions every time it performs the task. So a program must give the computer enough detail to perform the task as if every time were its first time.

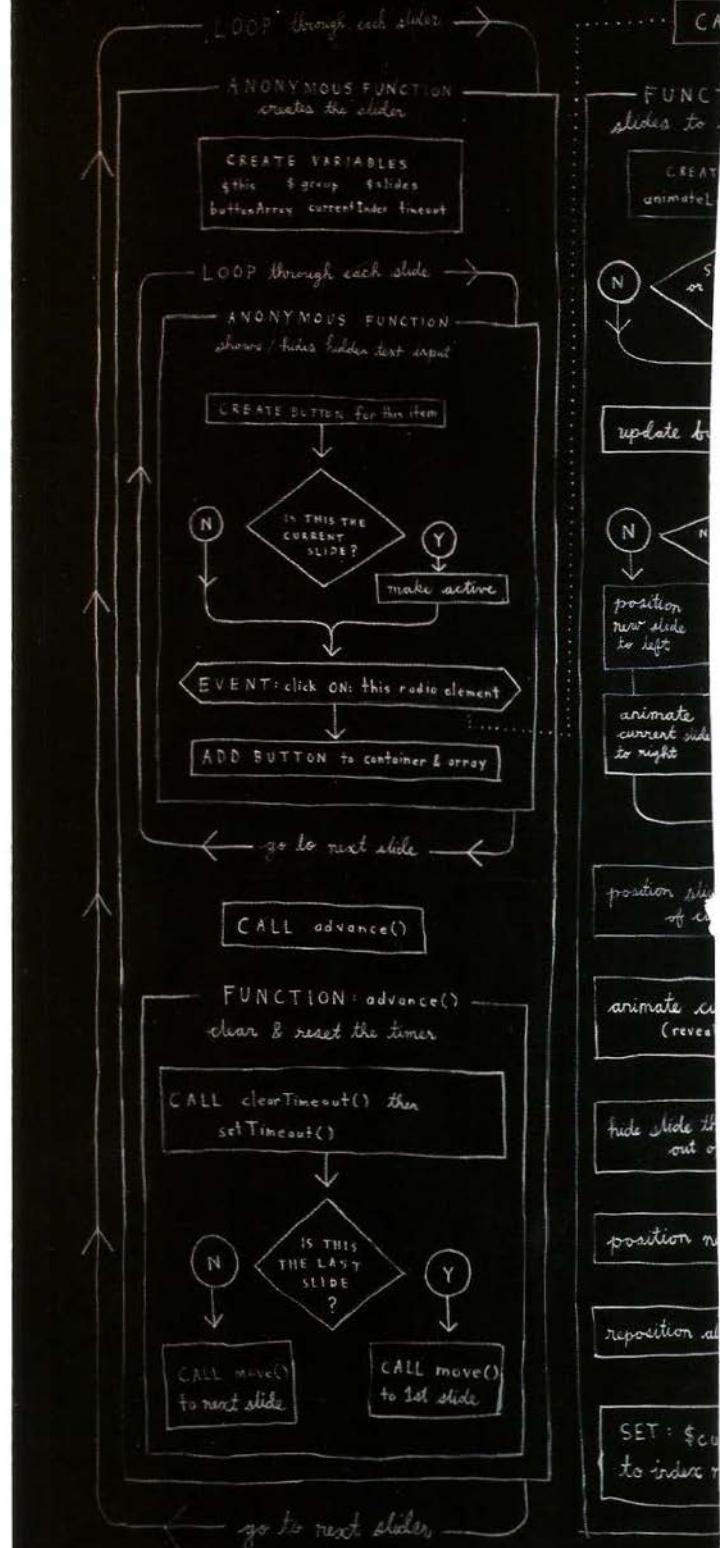

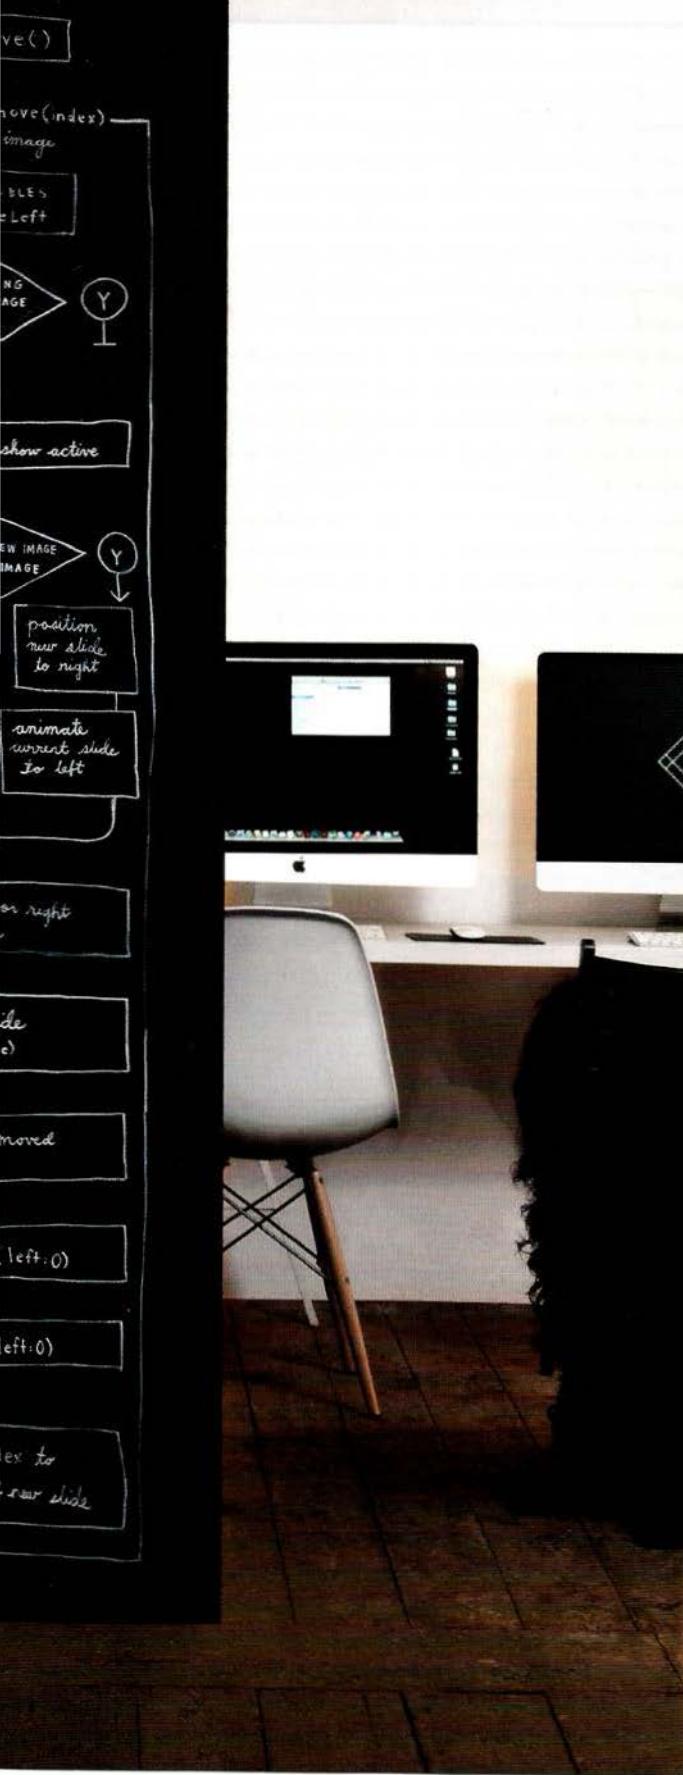

Start with the big picture of what you want to achieve, and break that down into smaller steps.

1: DEFINE THE GOAL

First, you need to define the task you want to achieve. You can think of this as a puzzle for the computer to solve.

2: DESIGN THE SCRIPT

To design a script you split the goal out into a series of tasks that are going to be involved in solving this puzzle. This can be represented using a flowchart.

You can then write down individual steps that the computer needs to perform in order to complete each individual task (and any information it needs to perform the task), rather like writing a recipe that it can follow.

3: CODE EACH STEP


Each of the steps needs to be written in a programming language that the computer understands. In our case, this is JavaScript.

As tempting as it can be to start coding straight away, it pays to spend time designing your script before you start writing it.

DESIGNING A SCRIPT: TASKS

Once you know the **goal** of your script, you can work out the individual tasks needed to achieve it. This high-level view of the tasks can be represented using a flowchart.

FLOWCHART: TASKS OF A HOTEL CLEANER

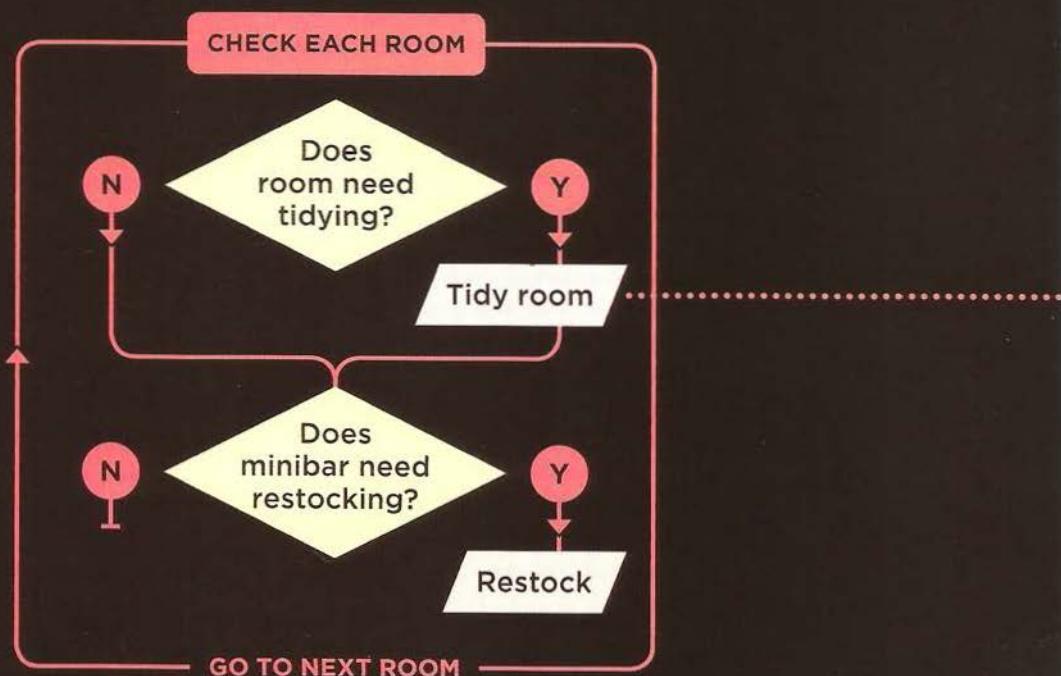

DESIGNING A SCRIPT: STEPS

Each individual task may be broken down into a sequence of steps. When you are ready to code the script, these steps can then be translated into individual lines of code.

LIST: STEPS REQUIRED TO TIDY A ROOM

- STEP 1** Remove used bedding
- STEP 2** Wipe all surfaces
- STEP 3** Vacuum floors
- STEP 4** Fit new bedding
- STEP 5** Remove used towels and soaps
- STEP 6** Clean toilet, bath, sink, surfaces
- STEP 7** Place new towels and soaps
- STEP 8** Wipe bathroom floor

As you will see on the next page, the steps that a computer needs to follow in order to perform a task are often very different from those that you or I might take.

FROM STEPS TO CODE

Every step for every task shown in a flowchart needs to be written in a language the computer can understand and follow.

In this book, we are focussing on the JavaScript language and how it is used in web browsers.

Just like learning any new language, you need to get to grips with the:

- **Vocabulary:** The words that computers understand
- **Syntax:** How you put those words together to create instructions computers can follow

Along with learning the language itself, if you are new to programming, you will also need to learn how a computer achieves different types of goals using a **programmatic** approach to problem-solving.

Computers are very logical and obedient. They need to be told every detail of what they are expected to do, and they will do it without question. Because they need different types of instructions compared to you or I, everyone who learns to program makes lots of mistakes at the start. Don't be disheartened; in Chapter 10 you will see several ways to discover what might have gone wrong – programmers call this **debugging**.





You need to learn to “think” like a computer because they solve tasks in different ways than you or I might approach them.

Computers solve problems **programmatically**; they follow series of instructions, one after another. The type of instructions they need are often different to the type of instructions you might give to another human. Therefore, throughout the book you will not only learn the vocabulary and syntax that JavaScript uses, but you will also learn how to write instructions that computers can follow.

For example, when you look at the picture on the left how do you tell which person is the tallest? A computer would need explicit, step-by-step instructions, such as:

1. Find the height of the first person
2. Assume he or she is the “tallest person”
3. Look at the height of the remaining people one-by-one and compare their height to the “tallest person” you have found so far
4. At each step, if you find someone whose height is greater than the current “tallest person”, he or she becomes the new “tallest person”
5. Once you have checked all the people, tell me which one is the tallest

So the computer needs to look at each person in turn, and for each one it performs a test (“Are they taller than the current tallest person?”). Once it has done this for each person it can give its answer.

DEFINING A GOAL & DESIGNING THE SCRIPT

Consider how you might approach a different type of script.
This example calculates the cost of a name plaque.
Customers are charged by the letter.

The first thing you should do is detail your goals for the script (what you want it to achieve):

Customers can have a name added to a plaque; each letter costs \$5. When a user enters a name, show them how much it will cost.

Next, break it into a series of tasks that have to be performed in order to achieve the goals:

1. The script is triggered when the button is clicked.
2. It collects the name entered into the form field.
3. It checks that the user has entered a value.
4. If the user has not entered anything, a message will appear telling them to enter a name.
5. If a name has been entered, calculate the cost of the sign by multiplying the number of letters by the cost per letter.
6. Show how much the plaque costs.


(These numbers correspond with the flowchart on the right-hand page.)

The figure consists of three vertically stacked rectangular boxes, each representing a state of a software application window titled "CUSTOM SIGNAGE".

- Top Box:** Shows an empty input field labeled "Enter name:" and a black "SHOW COST" button below it.
- Middle Box:** Shows the input field containing the name "THOMAS" and the same "SHOW COST" button. Above the input field, a red error message reads "Enter name: Please enter a name below...".
- Bottom Box:** Shows the input field containing "THOMAS" and a red "SHOW COST" button. To the right of the input field, a red box displays the cost "\$30".

SKETCHING OUT THE TASKS IN A FLOWCHART

Often scripts will need to perform different tasks in different situations. You can use flowcharts to work out how the tasks fit together. The flowcharts show the paths between each step.

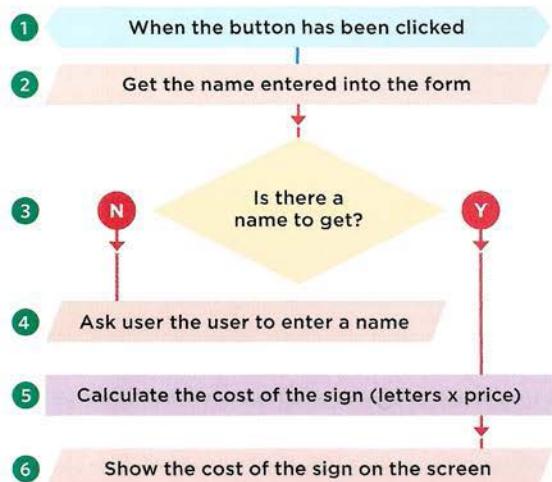

Arrows show how the script moves from one task to the next. The different shapes represent different types of tasks. In some places there are decisions which cause the code to follow different paths.

You will learn how to turn this example into code in Chapter 2. You will also see many more examples of different flowcharts throughout the book, and you will meet code that helps you deal with each of these types of situations.

Some experienced programmers use more complex diagram styles that are specifically designed to represent code - however, they have a steeper learning curve. These informal flowcharts will help you understand how scripts work while you are in the process of learning the language.

FLOWCHART KEY

Generic step	Event
Input or output	Decision

SUMMARY

THE ABC OF PROGRAMMING

A: What is a script and how do I create one?

- ▶ A script is a series of instructions that the computer can follow in order to achieve a goal.
- ▶ Each time the script runs, it might only use a subset of all the instructions.
- ▶ Computers approach tasks in a different way than humans, so your instructions must let the computer solve the task programmatically.
- ▶ To approach writing a script, break down your goal into a series of tasks and then work out each step needed to complete that task (a flowchart can help).

1/b

HOW DO COMPUTERS
FIT IN WITH THE
WORLD AROUND
THEM?

COMPUTERS CREATE MODELS OF THE WORLD USING DATA

Here is a model of a hotel, along with some model trees, model people, and model cars. To a human, it is clear what kind of real-world object each one represents.



A computer has no predefined concept of what a hotel or car is. It does not know what they are used for. Your laptop or phone will not have a favorite brand of car, nor will it know what star rating your hotel is.

So how do we use computers to create hotel booking apps, or video games where players can race a car? The answer is that programmers create a very different kind of model, especially for computers.

Programmers make these models using data. That is not as strange or as scary as it sounds because the data is all the computer needs in order to follow the instructions you give it to carry out its tasks.



OBJECTS & PROPERTIES

If you could not see the picture of the hotel and cars, the data in the information boxes alone would still tell you a lot about this scene.

OBJECTS (THINGS)

In computer programming, each physical thing in the world can be represented as an **object**. There are two different **types** of objects here: a hotel and a car.

Programmers might say that there is one **instance** of the hotel object, and two **instances** of the car object.

Each object can have its own:

- Properties
- Events
- Methods

Together they create a working model of that object.

PROPERTIES (CHARACTERISTICS)

Both of the cars share common characteristics. In fact, all cars have a make, a color, and engine size. You could even determine their current speed. Programmers call these characteristics the **properties** of an object.

Each property has a **name** and a **value**, and each of these name/value pairs tells you something about each individual instance of the object.

The most obvious property of this hotel is its name. The value for that property is Quay. You can tell the number of rooms the hotel has by looking at the value next to the **rooms** property.


The idea of name/value pairs is used in both HTML and CSS. In HTML, an attribute is like a property; different attributes have different names, and each attribute can have a value. Similarly, in CSS you can change the color of a heading by creating a rule that gives the **color** property a specific value, or you can change the typeface it is written in by giving the **font-family** property a specific value. Name/value pairs are used a lot in programming.

HOTEL OBJECT

The hotel object uses property names and values to tell you about this particular hotel, such as the hotel's name, its rating, the number of rooms it has, and how many of these are booked. You can also tell whether or not this hotel has certain facilities.

CAR OBJECTS

The car objects both share the same properties, but each one has different values for those properties. They tell you the make of car, what speed each car is currently traveling at, what color it is, and what type of fuel it requires.

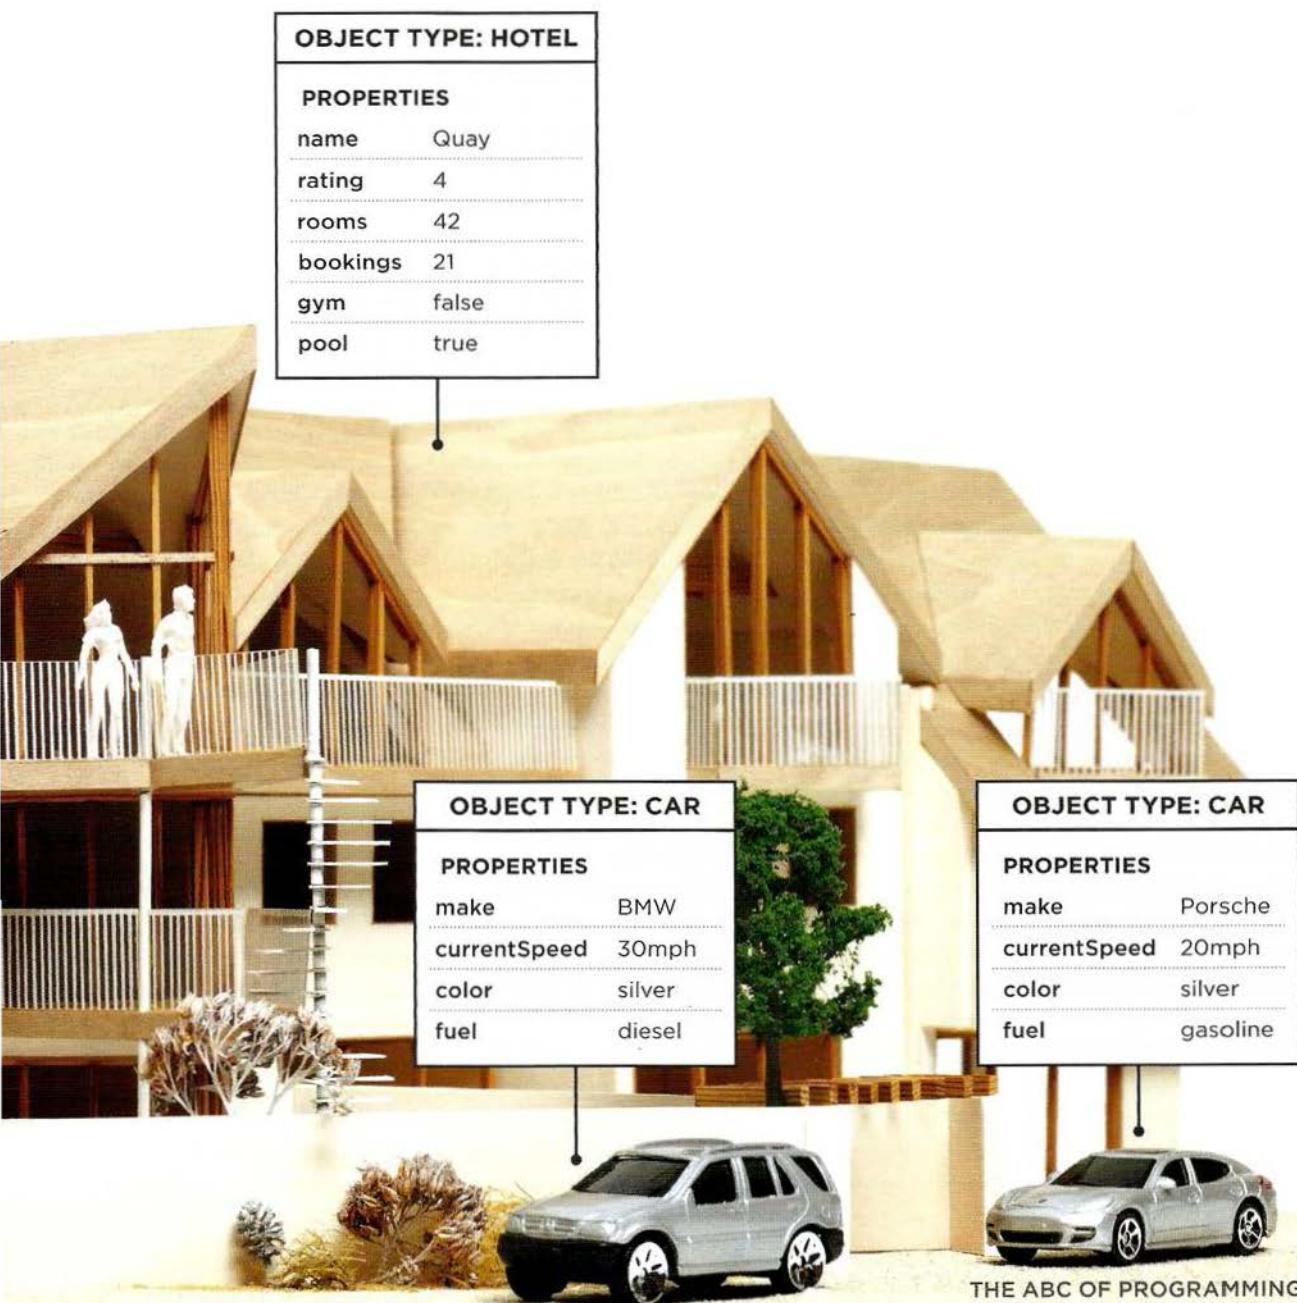

EVENTS

In the real world, people interact with objects. These interactions can change the values of the properties in these objects.

WHAT IS AN EVENT?

There are common ways in which people interact with each type of object. For example, in a car a driver will typically use at least two pedals. The car has been designed to respond differently when the driver interacts with each of the different pedals:

- The accelerator makes the car go faster
- The brake slows it down

Similarly, programs are designed to do different things when users interact with the computer in different ways. For example, clicking on a contact link on a web page could bring up a contact form, and entering text into a search box may automatically trigger the search functionality.

An **event** is the computer's way of sticking up its hand to say, "Hey, this just happened!"

WHAT DOES AN EVENT DO?

Programmers choose which events they respond to. When a specific event happens, that event can be used to trigger a specific section of the code.

Scripts often use different events to trigger different types of functionality.


So a script will state which events the programmer wants to respond to, and what part of the script should be run when each of those events occur.

HOTEL OBJECT

A hotel will regularly have bookings for rooms. Each time a room is reserved, an event called book can be used to trigger code that will increase the value of the bookings property. Likewise, a cancel event can trigger code that decreases the value of the bookings property.

CAR OBJECTS

A driver will accelerate and brake throughout any car journey. An accelerate event can trigger code to increase the value of the currentSpeed property and a brake event can trigger code to decrease it. You will learn about the code that responds to the events and changes these properties on the next page.

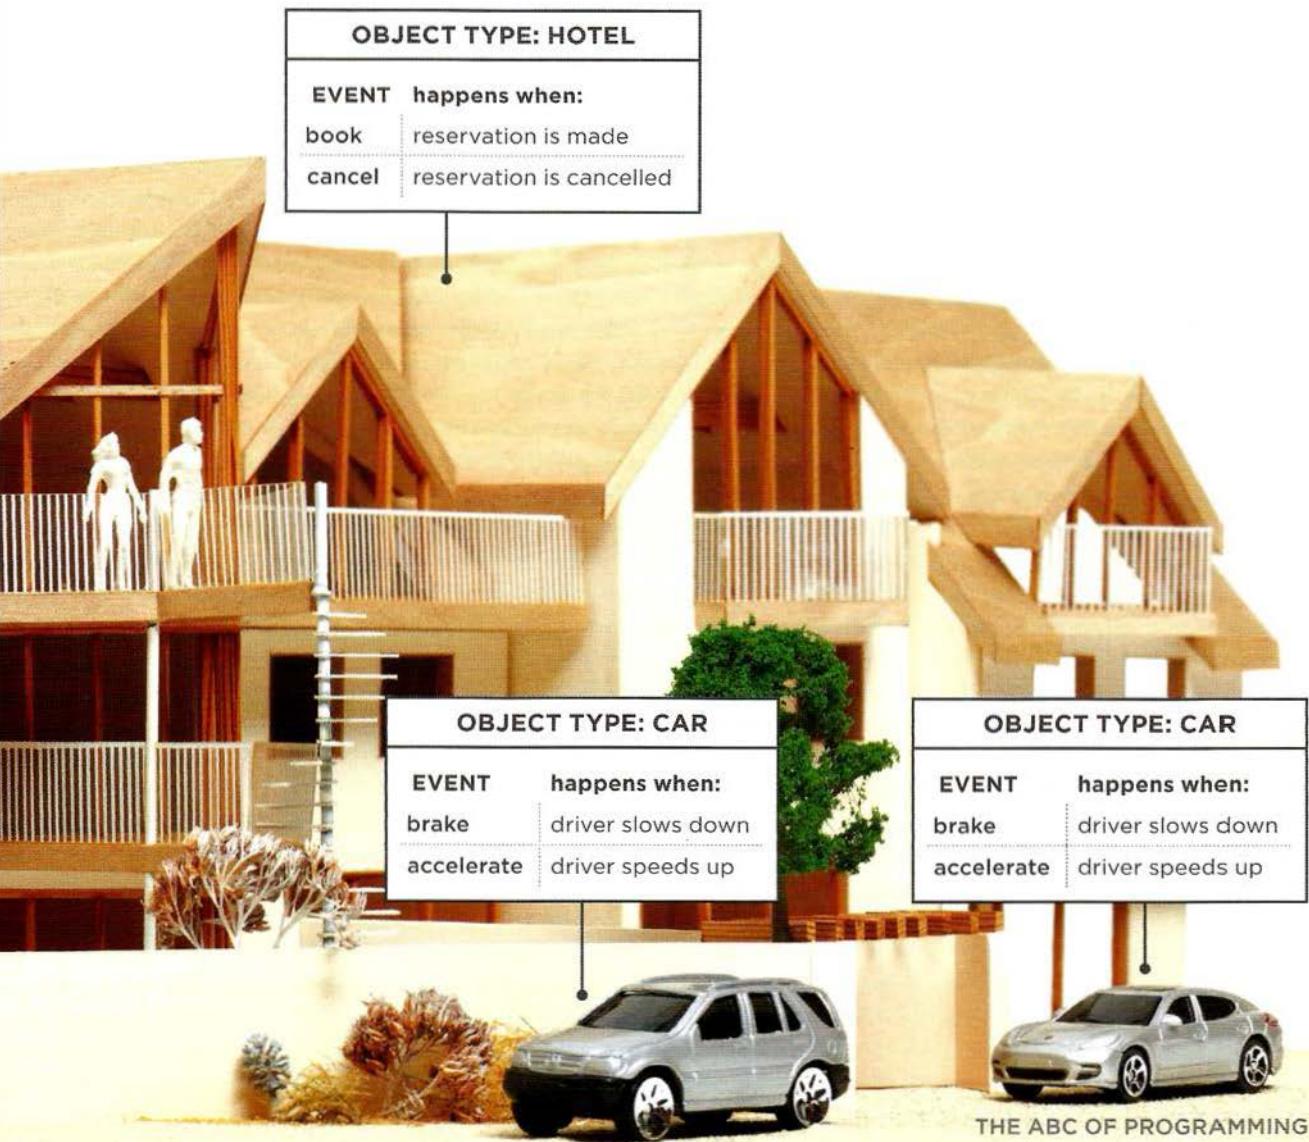

METHODS

Methods represent things people need to do with objects. They can retrieve or update the values of an object's properties.

WHAT IS A METHOD?

Methods typically represent how people (or other things) interact with an object in the real world.

They are like questions and instructions that:

- Tell you something about that object (using information stored in its properties)
- Change the value of one or more of that object's properties

WHAT DOES A METHOD DO?

The code for a method can contain lots of instructions that together represent one task.

When you use a method, you do not always need to know *how* it achieves its task; you just need to know how to ask the question and how to interpret any answers it gives you.


HOTEL OBJECT

Hotels will commonly be asked if any rooms are free. To answer this question, a method can be written that subtracts the number of bookings from the total number of rooms. Methods can also be used to increase and decrease the value of the bookings property when rooms are booked or cancelled.

CAR OBJECTS

The value of the `currentSpeed` property needs to go up and down as the driver accelerates and brakes. The code to increase or decrease the value of the `currentSpeed` property could be written in a method, and that method could be called `changeSpeed()`.

OBJECT TYPE: HOTEL	
METHOD	what it does:
<code>makeBooking()</code>	increases value of <code>bookings</code> property
<code>cancelBooking()</code>	decreases value of <code>bookings</code> property
<code>checkAvailability()</code>	subtracts value of <code>bookings</code> property from value of <code>rooms</code> property and returns number of rooms available

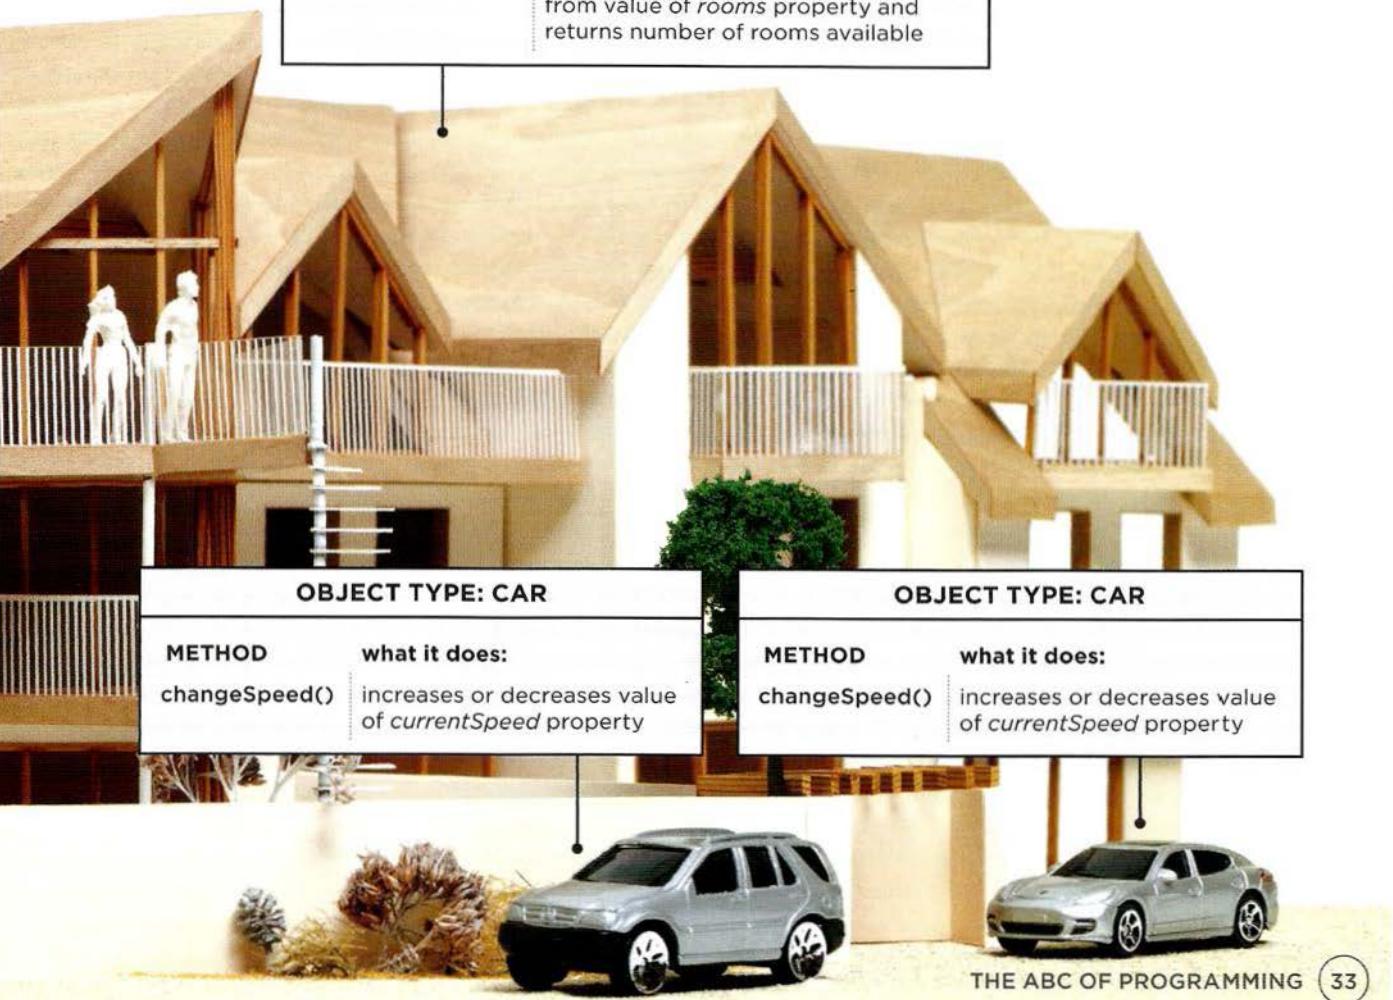

PUTTING IT ALL TOGETHER

Computers use data to create models of things in the real world.

The events, methods, and properties of an object all relate to each other:
Events can trigger methods, and methods can retrieve or update an
object's properties.

OBJECT TYPE: HOTEL				
1	EVENT	happens when:	method called:	PROPERTIES
	book	reservation is made	makeBooking()	name Quay
	cancel	reservation is cancelled	cancelBooking()	rating 4
2	METHOD	what it does:		
	makeBooking()	increases value of <i>bookings</i> property		
	cancelBooking()	decreases value of <i>bookings</i> property		
	checkAvailability()	subtracts value of <i>bookings</i> property from value of <i>rooms</i> property and returns number of rooms available		
3				rooms 42
				bookings 22
				gym false
				pool true

HOTEL OBJECT

1. When a reservation is made, the book event fires.
2. The book event triggers the `makeBooking()` method, which increases the value of the `bookings` property.
3. The value of the `bookings` property is changed to reflect how many rooms the hotel has available.

CAR OBJECTS

1. As a driver speeds up, the accelerate event fires.
2. The accelerate event calls the `changeSpeed()` method, which in turn increases the value of the `currentSpeed` property.
3. The value of the `currentSpeed` property reflects how fast the car is traveling.



WEB BROWSERS ARE PROGRAMS BUILT USING OBJECTS

You have seen how data can be used to create a model of a hotel or a car. Web browsers create similar models of the web page they are showing and of the browser window that the page is being shown in.

WINDOW OBJECT

On the right-hand page you can see a model of a computer with a browser open on the screen.

The browser represents each window or tab using a **window object**. The **location** property of the **window object** will tell you the URL of the current page.

DOCUMENT OBJECT

The current web page loaded into each window is modelled using a **document object**.

The **title** property of the **document object** tells you what is between the opening `<title>` and closing `</title>` tag for that web page, and the **lastModified** property of the **document object** tells you the date this page was last updated.

OBJECT TYPE: WINDOW

PROPERTIES

location http://www.javascriptbook.com/



OBJECT TYPE: DOCUMENT

PROPERTIES

URL	http://www.javascriptbook.com/
lastModified	09/04/2014 15:33:37
title	Learn JavaScript & jQuery - A book that teaches you in a nicer way

THE DOCUMENT OBJECT REPRESENTS AN HTML PAGE

Using the document object, you can access and change what content users see on the page and respond to how they interact with it.

Like other objects that represent real-world things, the document object has:

PROPERTIES

Properties describe characteristics of the current web page (such as the title of the page).

METHODS

Methods perform tasks associated with the document currently loaded in the browser (such as getting information from a specified element or adding new content).

EVENTS

You can respond to events, such as a user clicking or tapping on an element.

Because all major web browsers implement the document object in the same way, the people who create the browsers have already:

- Implemented properties that you can access to find out about the current page in the browser
- Written methods that achieve some common tasks that you are likely to want to do with an HTML page

So you will be learning how to work with this object. In fact, the document object is just one of a set of objects that all major browsers support. When the browser creates a model of a web page, it not only creates a document object, but it also creates a new object for each element on the page. Together these objects are described in the **Document Object Model**, which you will meet in Chapter 5.

OBJECT TYPE: DOCUMENT

PROPERTIES



URL	http://www.javascriptbook.com/
lastModified	09/04/2014 15:33:37
title	Learn JavaScript & jQuery - A book that teaches you in a nicer way

EVENT happens when:

load	page and assets have finished loading
click	user clicks the mouse over the page
keypress	user presses down on a key

METHOD what it does:

write()	adds new content to the document
getElementById()	accesses an element when you state its id attribute

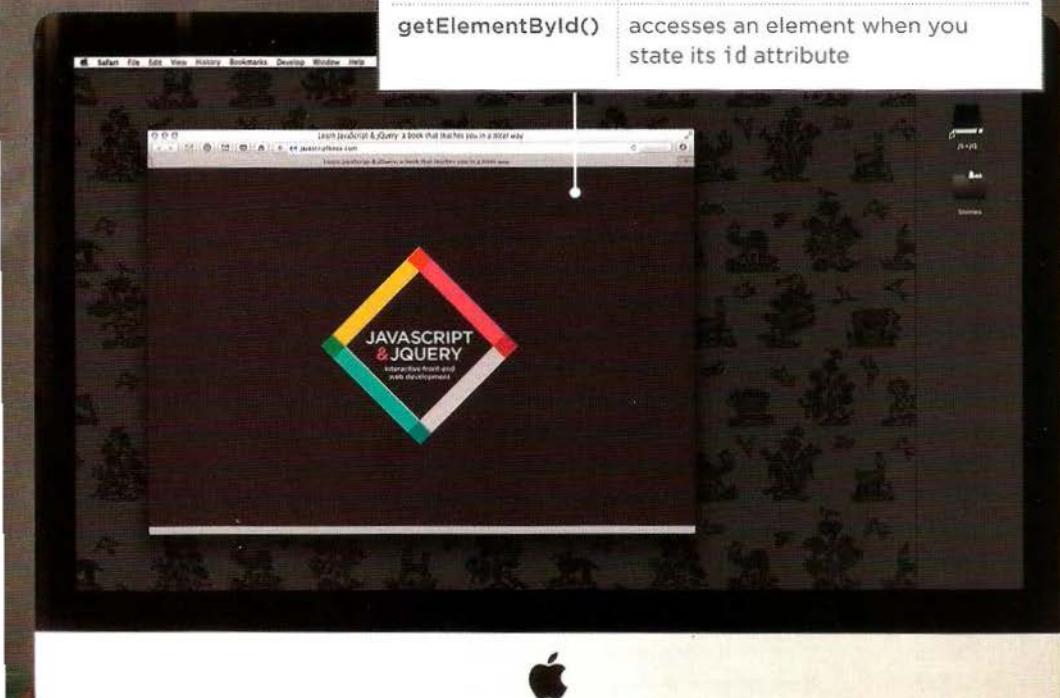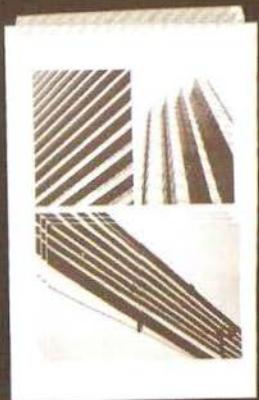

HOW A BROWSER SEES A WEB PAGE

In order to understand how you can change the content of an HTML page using JavaScript, you need to know how a browser interprets the HTML code and applies styling to it.

1: RECEIVE A PAGE AS HTML CODE

Each page on a website can be seen as a separate **document**. So, the web consists of many sites, each made up of one or more documents.

2: CREATE A MODEL OF THE PAGE AND STORE IT IN MEMORY

The model shown on the right hand page is a representation of one very basic page. Its structure is reminiscent of a family tree. At the top of the model is a **document object**, which represents the whole document.

Beneath the **document object** each box is called a **node**. Each of these nodes is another object. This example features three types of nodes representing elements, text within the elements, and attribute.

3: USE A RENDERING ENGINE TO SHOW THE PAGE ON SCREEN

If there is no CSS, the rendering engine will apply default styles to HTML elements. However, the HTML code for this example links to a CSS style sheet, so the browser requests that file and displays the page accordingly.

When the browser receives CSS rules, the rendering engine processes them and applies each rule to its corresponding elements. This is how the browser positions the elements in the correct place, with the right colors, fonts, and so on.

All major browsers use a JavaScript interpreter to translate your instructions (in JavaScript) into instructions the computer can follow.

When you use JavaScript in the browser, there is a part of the browser that is called an **interpreter** (or scripting engine).

The interpreter takes your instructions (in JavaScript) and translates them into instructions the browser can use to achieve the tasks you want it to perform.

In an **interpreted programming language**, like JavaScript, each line of code is translated one-by-one as the script is run.


```

<!DOCTYPE html>
<html>
  <head>
    <title>Constructive & Co.</title>
    <link rel="stylesheet" href="css/c01.css" />
  </head>
  <body>
    <h1>Constructive & Co.</h1>
    <p>For all orders and inquiries please call
      <em>555-3344</em></p>
  </body>
</html>

```


1

The browser receives an HTML page.

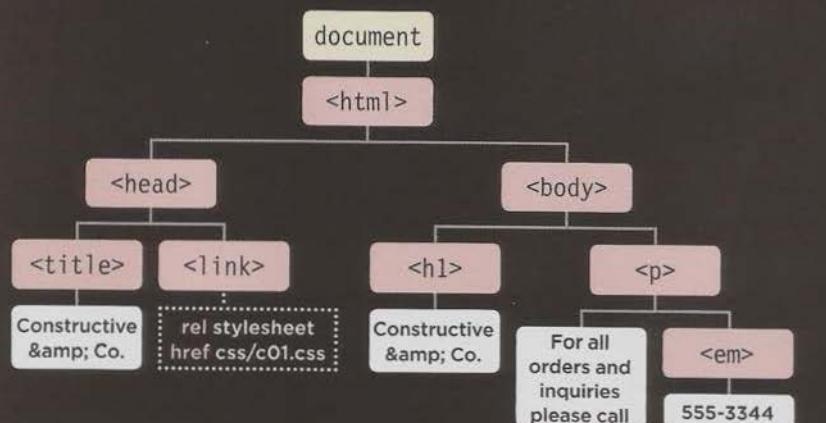

2

It creates a model of the page and stores it in memory.

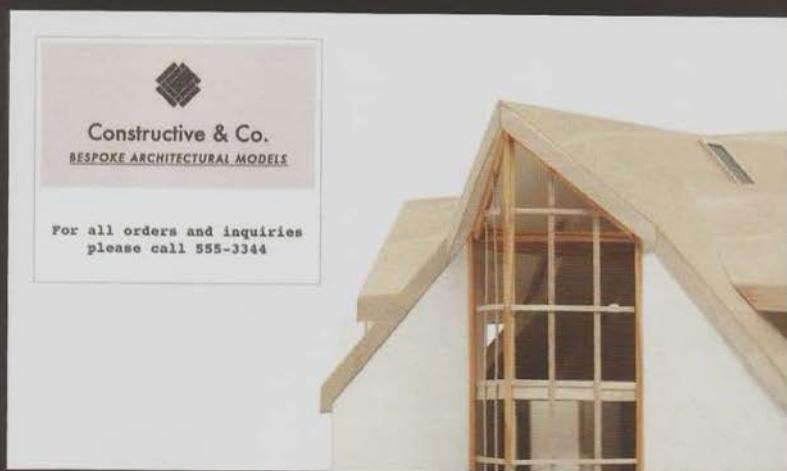

3

It shows the page on screen using a rendering engine.

SUMMARY

THE ABC OF PROGRAMMING

B: How do computers fit in with the world around them?

- ▶ Computers create models of the world using data.
- ▶ The models use objects to represent physical things. Objects can have: properties that tell us about the object; methods that perform tasks using the properties of that object; events which are triggered when a user interacts with the computer.
- ▶ Programmers can write code to say "When this event occurs, run that code."
- ▶ Web browsers use HTML markup to create a model of the web page. Each element creates its own node (which is a kind of object).
- ▶ To make web pages interactive, you write code that uses the browser's model of the web page.

1/c

HOW DO I WRITE A SCRIPT FOR A WEB PAGE?

HOW HTML, CSS, & JAVASCRIPT FIT TOGETHER

Before diving into the JavaScript language, you need to know how it will fit together with the HTML and CSS in your web pages.

Web developers usually talk about three languages that are used to create web pages: HTML, CSS, and JavaScript.

Where possible, aim to keep the three languages in separate files, with the HTML page linking to CSS and JavaScript files.

Each language forms a separate **layer** with a different purpose. Each layer, from left to right, builds on the previous one.



CONTENT LAYER

.html files

This is where the content of the page lives. The HTML gives the page structure and adds semantics.

PRESENTATION LAYER

.css files

The CSS enhances the HTML page with rules that state how the HTML content is presented (backgrounds, borders, box dimensions, colors, fonts, etc.).

BEHAVIOR LAYER

.js files

This is where we can change how the page behaves, adding interactivity. We will aim to keep as much of our JavaScript as possible in separate files.

Programmers often refer to this as a **separation of concerns**.

PROGRESSIVE ENHANCEMENT

These three layers form the basis of a popular approach to building web pages called progressive enhancement.

As more and more web-enabled devices come onto the market, this concept is becoming more widely adopted.

It's not just screen sizes that are varied - connection speeds and capabilities of each device can also differ.

Also, some people browse with JavaScript turned off, so you need to make sure that the page still works for them.

Constructive & Co.

For all orders and inquiries please call 555-3344



HTML ONLY

Starting with the HTML layer allows you to focus on the most important thing about your site: its content.

Being plain HTML, this layer should work on all kinds of devices, be accessible to all users, and load quite quickly on slow connections.

HTML+CSS

Adding the CSS rules in a separate file keeps rules regarding how the page looks away from the content itself.

You can use the same style sheet with all of your site, making your sites faster to load and easier to maintain. Or you can use different style sheets with the same content to create different views of the same data.

HTML+CSS+JAVASCRIPT

The JavaScript is added last and enhances the usability of the page or the experience of interacting with the site.

Keeping it separate means that the page still works if the user cannot load or run the JavaScript. You can also reuse the code on several pages (making the site faster to load and easier to maintain).

CREATING A BASIC JAVASCRIPT

JavaScript is written in plain text, just like HTML and CSS, so you do not need any new tools to write a script. This example adds a greeting into an HTML page. The greeting changes depending on the time of day.

- ① Create a folder to put the example in called c01, then start up your favorite code editor, and enter the text to the right.

A JavaScript file is just a text file (like HTML and CSS files are) but it has a `.js` file extension, so save this file with the name `add-content.js`

Don't worry about what the code means yet, for now we will focus on how the script is created and how it fits with an HTML page.

- ② Get the CSS and images for this example from the website that accompanies the book: www.javascriptbook.com

To keep the files organized, in the same way that CSS files often live in a folder called `styles` or `css`, your JavaScript files can live in a folder called `scripts`, `javascript`, or `js`. In this case, save your file in a folder called `js`

```
var today = new Date();
var hourNow = today.getHours();
var greeting;

if (hourNow > 18) {
    greeting = 'Good evening!';
} else if (hourNow > 12) {
    greeting = 'Good afternoon!';
} else if (hourNow > 0) {
    greeting = 'Good morning!';
} else {
    greeting = 'Welcome!';
}

document.write('<h3>' + greeting + '</h3>');
```



Here you can see the file structure that you will end up with when you finish the example. Always treat file names as being case-sensitive.

LINKING TO A JAVASCRIPT FILE FROM AN HTML PAGE


When you want to use JavaScript with a web page, you use the HTML `<script>` element to tell the browser it is coming across a script. Its `src` attribute tells people where the JavaScript file is stored.

```
<!DOCTYPE html>
<html>
  <head>
    <title>Constructive & Co.</title>
    <link rel="stylesheet" href="css/c01.css" />
  </head>
  <body>
    <h1>Constructive & Co.</h1>
    <script src="js/add-content.js"></script>
    <p>For all orders and inquiries please call
      <em>555-3344</em></p>
  </body>
</html>
```

- ③ In your code editor, enter the HTML shown on the left. Save this file with the name `add-content.html`

The HTML `<script>` element is used to load the JavaScript file into the page. It has an attribute called `src`, whose value is the path to the script you created.

This tells the browser to find and load the script file (just like the `src` attribute on an `` tag).

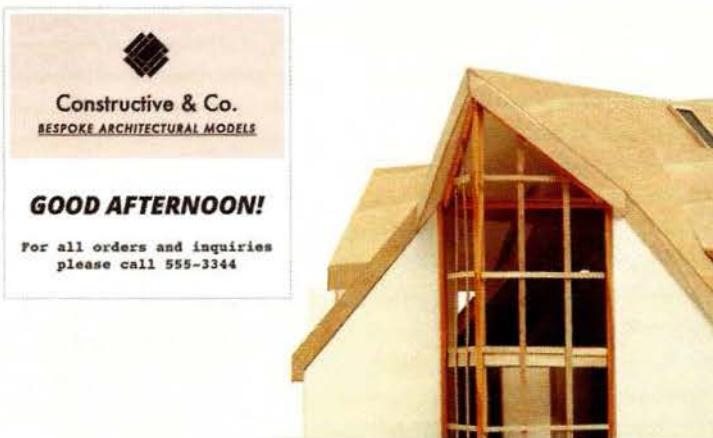

- ④ Open the HTML file in your browser. You should see that the JavaScript has added a greeting (in this case, *Good Afternoon!*) to the page. (These greetings are coming from the JavaScript file; they are not in the HTML file.)

Please note: Internet Explorer sometimes prevents JavaScript running when you open a page stored on your hard drive. If this affects you, please try Chrome, Firefox, Opera, or Safari instead.

THE SOURCE CODE IS NOT AMENDED

If you look at the source code for the example you just created, you will see that the HTML is still exactly the same.

- Once you have tried the example in your browser, view the source code for the page. (This option is usually under the *View*, *Tools* or *Develop* menu of the browser.)



- The source of the web page does not actually show the new element that has been added into the page; it just shows the link to the JavaScript file.

As you move through the book, you will see most of the scripts are added just before the closing `</body>` tag (this is often considered a better place to put your scripts).



PLACING THE SCRIPT IN THE PAGE

You may see JavaScript in the HTML between opening `<script>` and closing `</script>` tags (but it is better to put scripts in their own files).

```
<!DOCTYPE html>
<html>
  <head>
    <title>Constructive & Co.</title>
    <link rel="stylesheet" href="css/c01.css" />
  </head>
  <body>
    <h1>Constructive & Co.</h1>
    <script>document.write('<h3>Welcome!</h3>');
    </script>
    <p>For all orders and inquiries please call
      <em>555-3344</em></p>
  </body>
</html>
```

- 7 Finally, try opening the HTML file, removing the `src` attribute from the opening `<script>` tag, and adding the new code shown on the left between the opening `<script>` tag and the closing `</script>` tag. The `src` attribute is no longer needed because the JavaScript is in the HTML page.

As noted on p44, it is better not to mix JavaScript in your HTML pages like this, but it is mentioned here as you may come across this technique.

- 8 Open the HTML file in your web browser and the welcome greeting is written into the page.

As you may have guessed, `document.write()` writes content into the *document* (the web page). It is a simple way to add content to a page, but not always the best. Chapter 5 discusses various ways to update the content of a page.



HOW TO USE OBJECTS & METHODS

This one line of JavaScript shows how to use objects and methods. Programmers refer to this as **calling** a method of an object.

The **document** object represents the entire web page. All web browsers implement this object, and you can use it just by giving its name.

OBJECT

document.write('Good afternoon!');

MEMBER OPERATOR

The **document** object has several methods and properties. They are known as **members** of that object.

You can access the members of an object using a dot between the object name and the member you want to access. It is called a **member operator**.

The **write()** method of the **document** object allows new content to be written into the page where the **<script>** element sits.

METHOD

PARAMETERS

Whenever a method requires some information in order to work, the data is given inside the parentheses.

Each piece of information is called a **parameter** of the method. In this case, the **write()** method needs to know what to write into the page.

Behind the scenes, the browser uses a lot more code to make the words appear on the screen, but you don't need to know how the browser does this.

You only need to know how to call the object and method, and how to tell it the information it needs to do the job you want it to. It will do the rest.

There are lots of objects like the **document** object, and lots of methods like the **write()** method that will help you write your own scripts.

JAVASCRIPT RUNS WHERE IT IS FOUND IN THE HTML

When the browser comes across a `<script>` element, it stops to load the script and then checks to see if it needs to do anything.

```
<!DOCTYPE html>
<html>
  <head>
    <title>Constructive & Co.</title>
    <link rel="stylesheet" href="css/c01.css" />
  </head>
  <body>
    <h1>Constructive & Co.</h1>
    <p>For all orders and inquiries please call <em>555-3344</em></p>
    <script src="js/add-content.js"></script>
  </body>
</html>
```

Note how the `<script>` element can be moved below the first paragraph, and this affects where the new greeting is written into the page.

This has implications for where `<script>` elements should be placed, and can affect the loading time of pages (see p356).


The image shows a screenshot of a web browser displaying a website for 'Constructive & Co.'. The site features a large image of a wooden architectural model with a gabled roof and glass walls. At the top, the company name 'Constructive & Co.' is displayed above a horizontal line, followed by the text 'BESPOKE ARCHITECTURAL MODELS'. Below this, there is a paragraph of text: 'For all orders and inquiries please call 555-3344'. A green arrow points from the text 'GOOD AFTERNOON!' at the bottom left towards the phone number. The overall aesthetic is clean and professional.

SUMMARY

THE ABC OF PROGRAMMING

C: How do I write a script for a web page?

- ▶ It is best to keep JavaScript code in its own JavaScript file. JavaScript files are text files (like HTML pages and CSS style sheets), but they have the `.js` extension.
- ▶ The HTML `<script>` element is used in HTML pages to tell the browser to load the JavaScript file (rather like the `<link>` element can be used to load a CSS file).
- ▶ If you view the source code of the page in the browser, the JavaScript will not have changed the HTML, because the script works with the model of the web page that the browser has created.

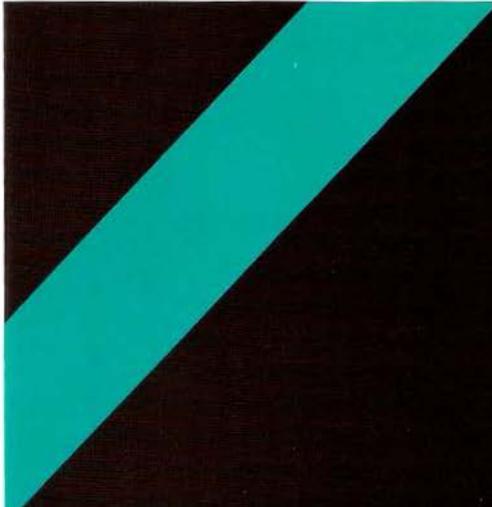

2

BASIC
JAVASCRIPT
INSTRUCTIONS

In this chapter, you will start learning to read and write JavaScript. You will also learn how to give a web browser instructions you want it to follow.


THE LANGUAGE: SYNTAX AND GRAMMAR

Like any new language, there are new words to learn (the vocabulary) and rules for how these can be put together (the grammar and syntax of the language).

We will start with a few of the key building blocks of the language and look at how they can be used to write some very basic scripts (consisting of a few simple steps) before going on to look at some more complex concepts in subsequent chapters.

GIVING INSTRUCTIONS: FOR A BROWSER TO FOLLOW

Web browsers (and computers in general) approach tasks in a very different way than a human might. Your instructions need to reflect how computers get things done.

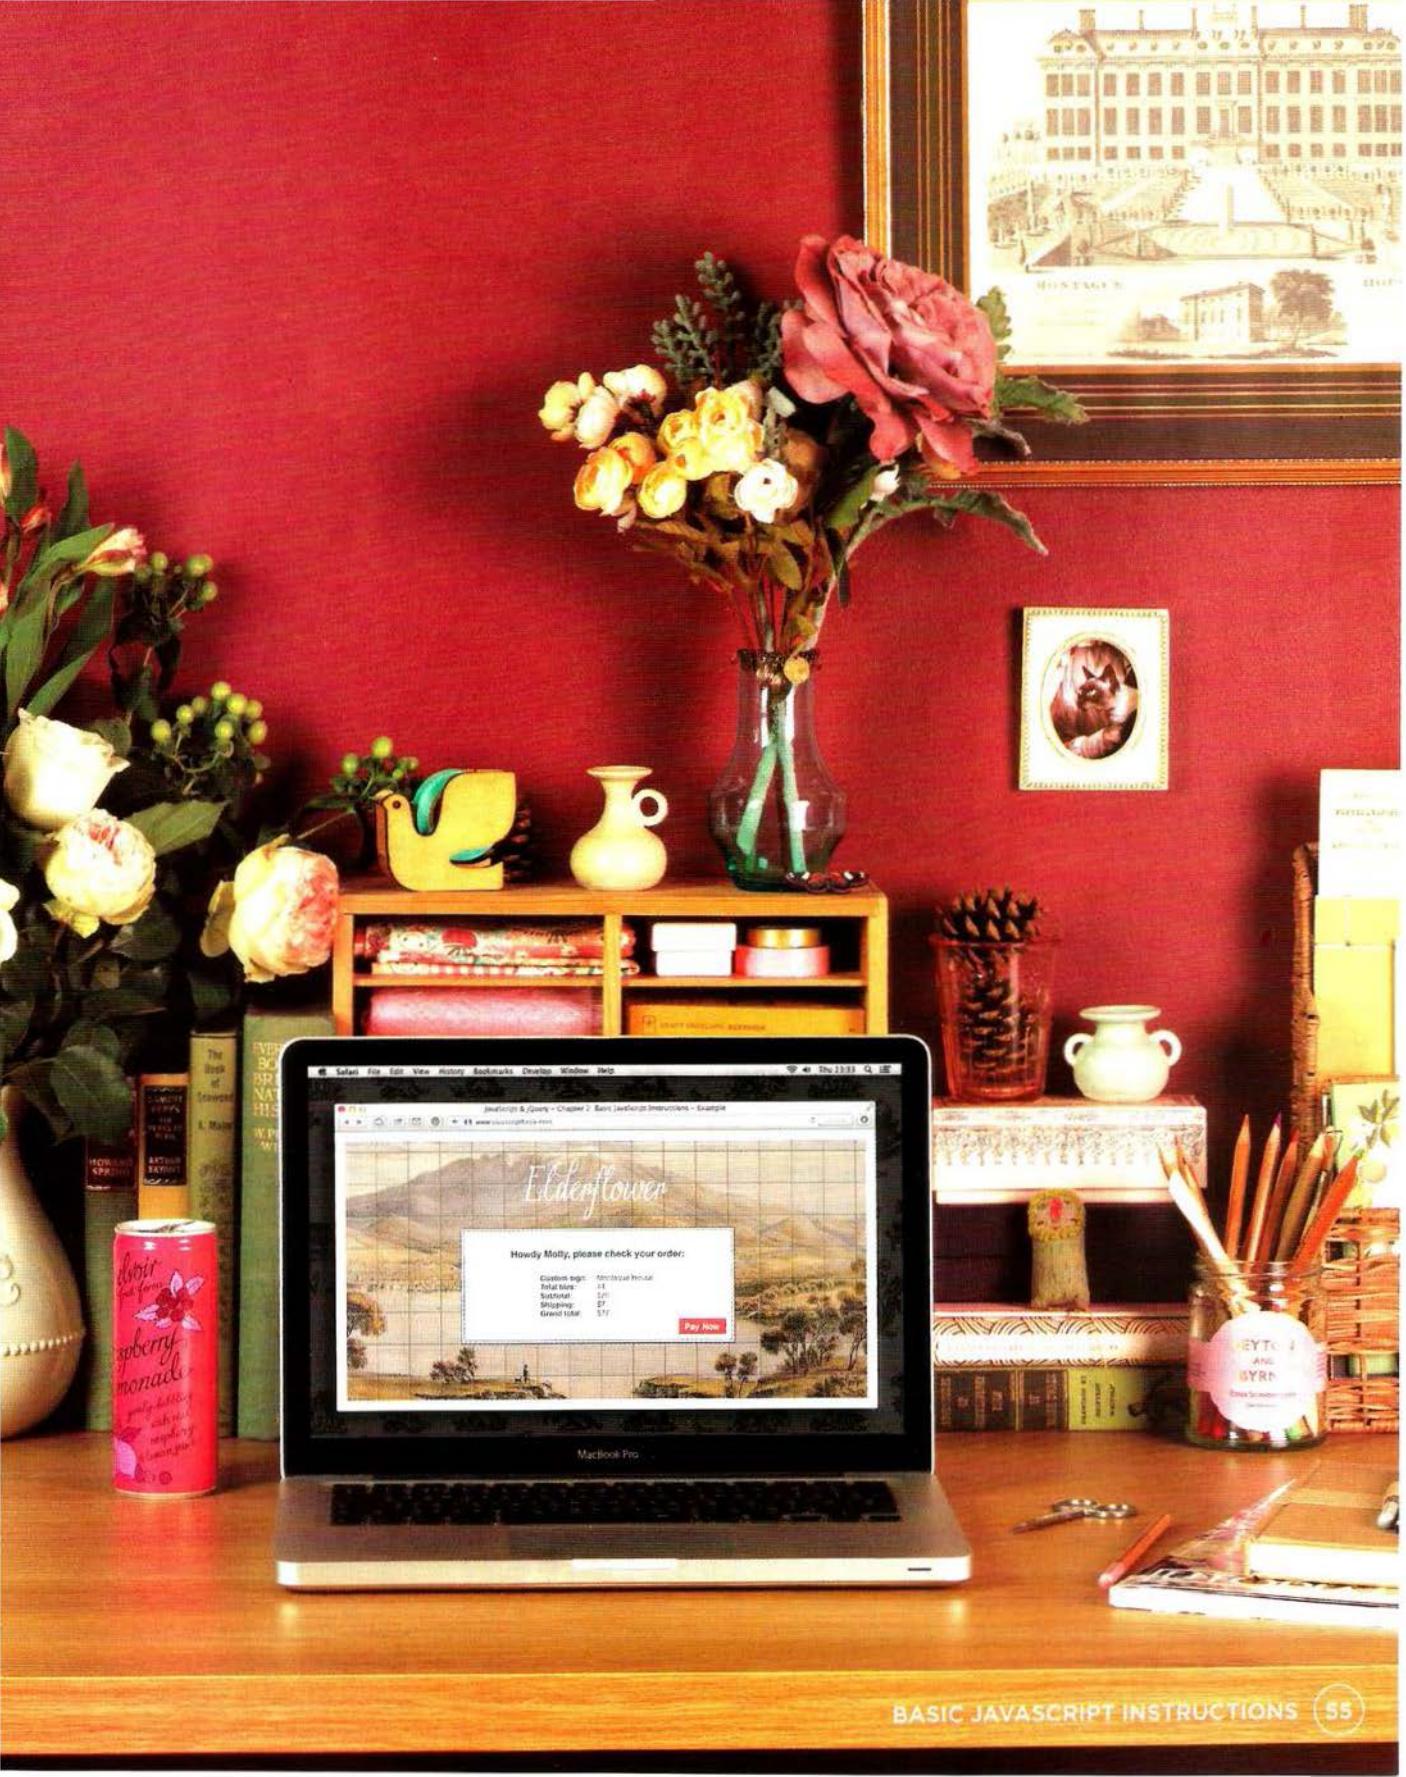

STATEMENTS

A script is a series of instructions that a computer can follow one-by-one. Each individual instruction or step is known as a **statement**. Statements should end with a semicolon.

We will look at what the code on the right does shortly, but for the moment note that:

- Each of the lines of code in **green** is a **statement**.
- The **pink** curly braces indicate the start and end of a **code block**. (Each code block could contain many more statements.)
- The code in **purple** determines which code should run (as you will see on p149).

JAVASCRIPT IS CASE SENSITIVE

JavaScript is case sensitive so `hourNow` means something different to `HourNow` or `HOURNOW`.

```
var today = new Date();
var hourNow = today.getHours();
var greeting;

if (hourNow > 18) {
    greeting = 'Good evening';
} else if (hourNow > 12) {
    greeting = 'Good afternoon';
} else if (hourNow > 0) {
    greeting = 'Good morning';
} else {
    greeting = 'Welcome';
}
document.write(greeting);
```

STATEMENTS ARE INSTRUCTIONS AND EACH ONE STARTS ON A NEW LINE

A statement is an individual instruction that the computer should follow. Each one should start on a new line and end with a semicolon. This makes your code easier to read and follow.



The semicolon also tells the JavaScript interpreter when a step is over, indicating that it should move to the next step.

STATEMENTS CAN BE ORGANIZED INTO CODE BLOCKS

Some statements are surrounded by curly braces; these are known as **code blocks**. The closing curly brace is not followed by a semicolon.

Above, each code block contains one statement related to what the current time is. Code blocks will often be used to group together many more statements. This helps programmers organize their code and makes it more readable.

COMMENTS

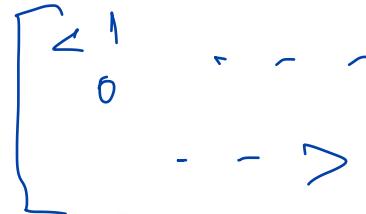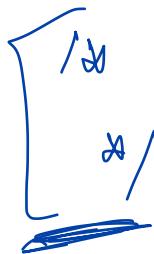

You should write **comments** to explain what your code does.
They help make your code easier to read and understand.
This can help you and others who read your code.

/1

/d

```
/* This script displays a greeting to the user based upon the current time.  
It is an example from JavaScript & jQuery book */  
  
var today = new Date(); // Create a new date object  
var hourNow = today.getHours(); // Find the current hour  
var greeting;  
  
// Display the appropriate greeting based on the current time  
if (hourNow > 18) {  
    greeting = 'Good evening';  
} else if (hourNow > 12) {  
    greeting = 'Good afternoon';  
} else if (hourNow > 0) {  
    greeting = 'Good morning';  
} else {  
    greeting = 'Welcome';  
}  
document.write(greeting);
```

JavaScript code is **green**

Multi-line comments are **pink**

Single-line comments are **gray**

MULTI-LINE COMMENTS

To write a comment that stretches over more than one line, you use a **multi-line** comment, starting with the `/*` characters and ending with the `*/` characters. Anything between these characters is not processed by the JavaScript interpreter.

Multi-line comments are often used for descriptions of how the script works, or to prevent a section of the script from running when testing it.

SINGLE-LINE COMMENTS

In a **single-line** comment, anything that follows the two forward slash characters `//` on that line will not be processed by the JavaScript interpreter. Single-line comments are often used for short descriptions of what the code is doing.

Good use of comments will help you if you come back to your code after several days or months. They also help those who are new to your code.

WHAT IS A VARIABLE?

A script will have to temporarily store the bits of information it needs to do its job. It can store this data in **variables**.

When you write JavaScript, you have to tell the interpreter every individual step that you want it to perform. This sometimes involves more detail than you might expect.


Think about calculating the area of a wall; in math the area of a rectangle is obtained by multiplying two numbers:

$$\text{width} \times \text{height} = \text{area}$$

You may be able to do calculations like this in your head, but when writing a script to do this calculation, you need to give the computer very detailed instructions. You might tell it to perform the following four steps in order:

1. Remember the value for *width*
2. Remember the value for *height*
3. Multiply *width* by *height* to get the *area*
4. Return the result to the user

In this case, you would use variables to "remember" the values for *width* and *height*. (This also illustrates how a script contains very explicit instructions about exactly what you want the computer to do.) You can compare variables to short-term memory, because once you leave the page, the browser will forget any information it holds.

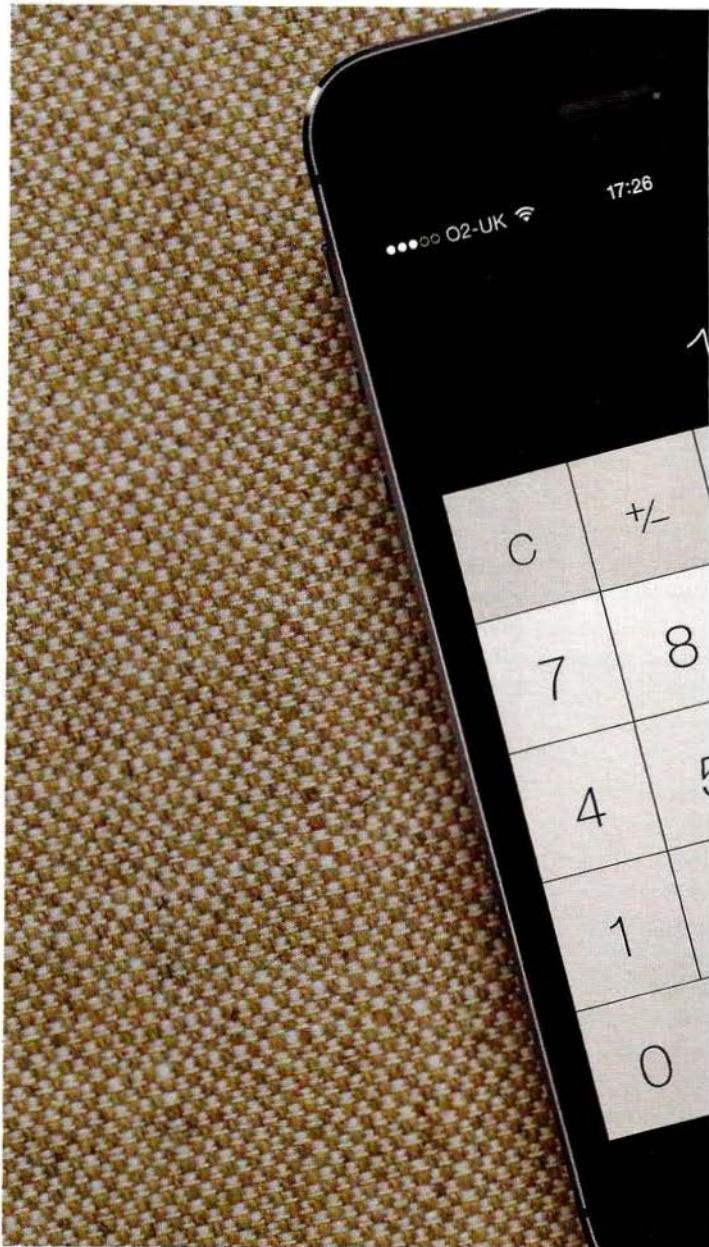



A variable is a good name for this concept because the data stored in a variable can change (or vary) each time a script runs.

No matter what the dimensions of any individual wall are, you know that you can find its *area* by multiplying the *width* of that wall by its *height*. Similarly, scripts often need to achieve the same goal even when they are run with different data, so variables can be used to represent values in your scripts that are likely to change. The result is said to be **calculated** or **computed** using the data stored in the variables.

The use of variables to represent numbers or other kinds of data is very similar to the concept of algebra (where letters are used to represent numbers). There is one key difference, however. The equals sign does something very different in programming (as you will see on the next two pages).

VARIABLES: HOW TO DECLARE THEM

Before you can use a variable, you need to announce that you want to use it. This involves creating the variable and giving it a name. Programmers say that you **declare** the variable.

sh
over
word

var quantity;

VARIABLE KEYWORD VARIABLE NAME


`var` is an example of what programmers call a **keyword**. The JavaScript interpreter knows that this keyword is used to create a variable.

In order to use the variable, you must give it a name. (This is sometimes called an **identifier**.) In this case, the variable is called `quantity`.

If a variable name is more than one word, it is usually written in **camelCase**. This means the first word is all lowercase and any subsequent words have their first letter capitalized.

VARIABLES: HOW TO ASSIGN THEM A VALUE

Once you have created a variable, you can tell it what information you would like it to store for you. Programmers say that you **assign a value** to the variable.

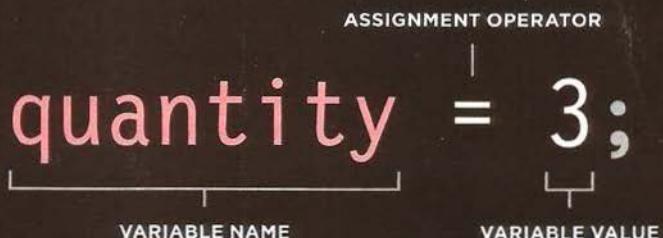

You can now use the variable by its name. Here we set a value for the variable called **quantity**. Where possible, a variable's name should describe the kind of data the variable holds.

The equals sign (=) is an **assignment operator**. It says that you are going to assign a value to the variable. It is also used to update the value given to a variable (see p68).

Until you have assigned a value to a variable, programmers say the value is **undefined**.

Where a variable is declared can have an effect upon whether the rest of the script can use it. Programmers call this the **scope** of a variable and it is covered on p98.

DATA TYPES

JavaScript distinguishes between numbers, strings, and true or false values known as Booleans.

NUMERIC DATA TYPE

The numeric data type handles numbers.

0.75

For tasks that involve counting or calculating sums, you will use numbers 0-9. For example, five thousand, two hundred and seventy-two would be written 5272 (note there is no comma between the thousands and the hundreds). You can also have negative numbers (such as -23678) and decimals (three quarters is written as 0.75).

Numbers are not only used for things like calculators; they are also used for tasks such as determining the size of the screen, moving the position of an element on a page, or setting the amount of time an element should take to fade in.

STRING DATA TYPE

The strings data type consists of letters and other characters.

'Hi, Ivy!'

Note how the string data type is enclosed within a pair of quotes. These can be single or double quotes, but the opening quote must match the closing quote.

Strings can be used when working with any kind of text. They are frequently used to add new content into a page and they can contain HTML markup.

BOOLEAN DATA TYPE

Boolean data types can have one of two values: true or false.

true

It might seem a little abstract at first, but the Boolean data type is actually very helpful.

You can think of it a little like a light switch – it is either on or off. As you will see in Chapter 4, Booleans are helpful when determining which part of a script should run.

In addition to these three data types, JavaScript also has others (arrays, objects, undefined, and null) that you will meet in later chapters.

Unlike some other programming languages, when declaring a variable in JavaScript, you do not need to specify what type of data it will hold.

USING A VARIABLE TO STORE A NUMBER

JAVASCRIPT

```
var price;  
var quantity;  
var total;  
  
price = 5;  
quantity = 14;  
total = price * quantity;  
  
var el = document.getElementById('cost');  
el.textContent = '$' + total;
```

c02/js/numeric-variable.js

HTML

```
<h1>Elderflower</h1>  
<div id="content">  
  <h2>Custom Signage</h2>  
  <div id="cost">Cost: $5 per tile</div>  
    
</div>  
<script src="js/numeric-variable.js"></script>
```

c02/numeric-variable.html

RESULT



Here, three variables are created and values are assigned to them.

- `price` holds the price of an individual tile
- `quantity` holds the number of tiles a customer wants
- `total` holds the total cost of the tiles

Note that the numbers are not written inside quotation marks. Once a value has been assigned to a variable, you can use the variable name to represent that value (much like you might have done in algebra). Here, the total cost is calculated by multiplying the price of a single tile by the number of tiles the customer wants.

The result is then written into the page on the final two lines. You see this technique in more detail on p194 and p216.

The first of these two lines finds the element whose `id` attribute has a value of `cost`, and the final line replaces the content of that element with new content.

Note: There are many ways to write content into a page, and several places you can place your script. The advantages and disadvantages of each technique are discussed on p226. This technique will not work in IE8.

USING A VARIABLE TO STORE A STRING

For the moment, concentrate on the first four lines of JavaScript.

Two variables are declared (`username` and `message`), and they are used to hold strings (the user's name and a message for that user).

The code to update the page (shown in the last four lines) is discussed fully in Chapter 5. This code selects two elements using the values of their `id` attributes. The text in those elements is updated using the values stored in these variables.

Note how the string is placed inside quote marks. The quotes can be single or double quotes, but they must match. If you start with a single quote, you must end with a single quote, and if you start with a double quote, you must end with a double quote:

- ✓ "hello" ✗ "hello"
- ✓ 'hello' ✗ 'hello"

Quotes should be straight (not curly) quotes:

- ✓ " " ✗ “ ”
- ✓ ‘ ’ ✗ ‘ ’

Strings must always be written on one line:

- ✓ 'See our upcoming range'
- ✗ 'See our
upcoming range'

c02/js/string-variable.js

JAVASCRIPT


```
var username;  
var message;  
username = 'Molly';  
message = 'See our upcoming range';  
  
var elName = document.getElementById('name');  
elName.textContent = username;  
var elNote = document.getElementById('note');  
elNote.textContent = message;
```

c02/string-variable.html

HTML

```
<h1>Elderflower</h1>  
<div id="content">  
  <div id="title">Howdy  
    <span id="name">friend</span>!</div>  
    <div id="note">Take a look around...</div>  
  </div>  
<script src="js/string-variable.js"></script>
```

RESULT

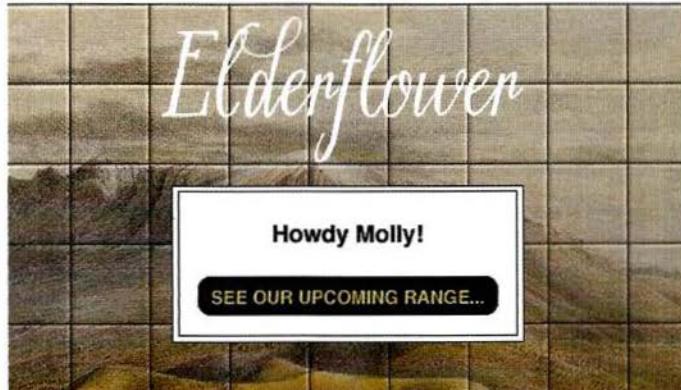

USING QUOTES INSIDE A STRING

JAVASCRIPT

```
var title;
var message;
title = "Molly's Special Offers";
message = '<a href=\"sale.html\">25% off!</a>';

var elTitle = document.getElementById('title');
elTitle.innerHTML = title;
var elNote = document.getElementById('note');
elNote.innerHTML = message;
```

c02/js/string-with-quotes.js

HTML

```
<h1>Elderflower</h1>
<div id="content">
  <div id="title">Special Offers</div>
  <div id="note">Sign-up to receive personalized
  offers!</div>
</div>
<script src="js/string-with-quotes.js"></script>
```

c02/string-with-quotes.html

RESULT



Sometimes you will want to use a double or single quote mark *within* a string.

Because strings can live in single or double quotes, if you just want to use double quotes in the string, you could surround the entire string in single quotes.

If you just want to use single quotes in the string, you could surround the string in double quotes (as shown in the third line of this code example).

You can also use a technique called **escaping** the quotation characters. This is done by using a **backwards slash** (or "backslash") before any type of quote mark that appears within a string (as shown on the fourth line of this code sample).

The backwards slash tells the interpreter that the following character is part of the string, rather than the end of it.

Techniques for adding content to a page are covered in Chapter 5. This example uses a property called `innerHTML` to add HTML to the page. In certain cases, this property *can* pose a security risk (discussed on p228 - p231).

USING A VARIABLE TO STORE A BOOLEAN


A Boolean variable can only have a value of true or false, but this data type is very helpful.

In the example on the right, the values true or false are used in the class attributes of HTML elements. These values trigger different CSS class rules: true shows a check, false shows a cross. (You learn how the class attribute is set in Chapter 5.)

It is rare that you would want to write the words true or false into the page for the user to read, but this data type does have two very popular uses:

First, Booleans are used when the value can only be true/false. You could also think of these values as on/off or 0/1: true is equivalent to on or 1, false is equivalent to off or 0

Second, Booleans are used when your code can take more than one path. Remember, different code may run in different circumstances (as shown in the flowcharts throughout the book).

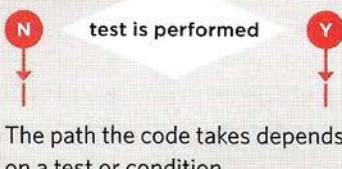

c02/js/boolean-variable.js

JAVASCRIPT

```
var inStock;  
var shipping;  
inStock = true;  
shipping = false;  
  
var elStock = document.getElementById('stock');  
elStock.className = inStock;  
  
var elShip = document.getElementById('shipping');  
elShip.className = shipping;
```

c02/boolean-variable.html

HTML

```
<h1>Elderflower</h1>  
<div id="content">  
  <div class="message">Available:  
    <span id="stock"></span></div>  
  <div class="message">Shipping:  
    <span id="shipping"></span></div>  
</div>  
<script src="js/boolean-variable.js"></script>
```

RESULT



SHORTHAND FOR CREATING VARIABLES

JAVASCRIPT

c02/js/shorthand-variable.js

- ①

```
var price = 5;
var quantity = 14;
var total = price * quantity;
```

- ②

```
var price, quantity, total;
price = 5;
quantity = 14;
total = price * quantity;
```


- ③

```
var price = 5, quantity = 14;
var total = price * quantity;
```

- ④ // Write total into the element with id of cost

```
var el = document.getElementById('cost');
el.textContent = '$' + total;
```

RESULT

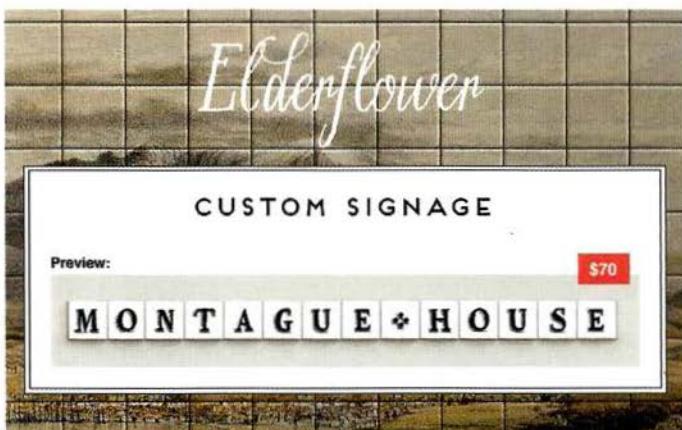

Programmers sometimes use shorthand to create variables. Here are three variations of how to declare variables and assign them values:

1. Variables are declared and values assigned in the same statement.
2. Three variables are declared on the same line, then values assigned to each.
3. Two variables are declared and assigned values on the same line. Then one is declared and assigned a value on the next line.

(The third example shows two numbers, but you can declare variables that hold different types of data on the same line, e.g., a string and a number.)

4. Here, a variable is used to hold a reference to an element in the HTML page. This allows you to work directly with the element stored in that variable. (See more about this on p190.)

While the shorthand might save you a little bit of typing, it can make your code a little harder to follow. So, when you are starting off, you will find it easier to spread your code over a few more lines to make it easier to read and understand.

CHANGING THE VALUE OF A VARIABLE

Once you have assigned a value to a variable, you can then change what is stored in the variable later in the same script.

Once the variable has been created, you do not need to use the `var` keyword to assign it a new value. You just use the variable name, the equals sign (also known as the assignment operator), and the new value for that attribute.

For example, the value of a `shipping` variable might start out as being `false`. Then something in the code might change the ability to ship the item and you could therefore change the value to `true`.

In this code example, the values of the two variables are both swapped from being `true` to `false` and vice versa.

c02/js/update-variable.js

JAVASCRIPT

```
var inStock;  
var shipping;  
  
inStock = true;  
shipping = false;  
  
/* Some other processing might go here and, as  
a result, the script might need to change these  
values */  
  
inStock = false;  
shipping = true;  
  
var elStock = document.getElementById('stock');  
elStock.className = inStock;  
var elShip = document.getElementById('shipping');  
elShip.className = shipping;
```

RESULT



RULES FOR NAMING VARIABLES

Here are six rules you must always follow when giving a variable a name:

1

The name must begin with a letter, dollar sign (\$), or an underscore (_). It must **not** start with a number.

2

The name can contain letters, numbers, dollar sign (\$), or an underscore (_). Note that you must not use a dash (-) or a period (.) in a variable name.

3

You cannot use **keywords** or **reserved** words. Keywords are special words that tell the interpreter to do something. For example, var is a keyword used to declare a variable. Reserved words are ones that may be used in a *future* version of JavaScript.

ONLINE EXTRA

View a full list of keywords and reserved words in JavaScript.

4

All variables are case sensitive, so score and Score would be different variable names, but it is bad practice to create two variables that have the same name using different cases.

5

Use a name that describes the kind of information that the variable stores. For example, firstName might be used to store a person's first name, lastName for their last name, and age for their age.

6

If your variable name is made up of more than one word, use a capital letter for the first letter of every word *after* the first word. For example, firstName rather than firstname (this is referred to as camel case). You can also use an underscore between each word (you cannot use a dash).

ARRAYS

An array is a special type of variable. It doesn't just store one value; it stores a list of values.

You should consider using an array whenever you are working with a **list** or a set of values that are **related** to each other.

Arrays are especially helpful when you do not know how many items a list will contain because, when you create the array, you do not need to specify how many values it will hold.

If you don't know how many items a list will contain, rather than creating enough variables for a long list (when you might only use a small percentage of them), using an array is considered a better solution.

For example, an array can be suited to storing the individual items on a shopping list because it is a list of related items.

Additionally, each time you write a new shopping list, the number of items on it may differ.

As you will see on the next page, values in an array are separated by commas.

In Chapter 12, you will see that arrays can be very helpful when representing complex data.



CREATING AN ARRAY


↑ ' _____ '

JAVASCRIPT

c02/js/array-literal.js

```
var colors;           ↓  
colors = ['white', 'black', 'custom'];  
  
var el = document.getElementById('colors');  
el.textContent = colors[0];
```

RESULT

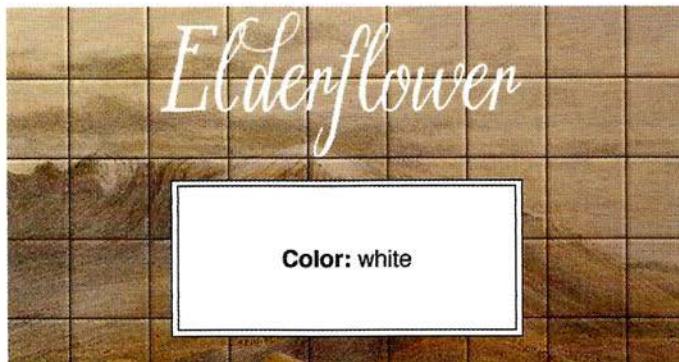

JAVASCRIPT

c02/js/array-constructor.js

```
var colors = new Array('white',  
                      'black',  
                      'custom');  
  
var el = document.getElementById('colors');  
el.innerHTML = colors.item(0);
```

The array literal (shown in the first code sample) is preferred over the array constructor when creating arrays.

You create an array and give it a name just like you would any other variable (using the var keyword followed by the name of the array).

The values are assigned to the array inside a pair of square brackets, and each value is separated by a comma. The values in the array do not need to be the same data type, so you can store a string, a number and a Boolean all in the same array.

This technique for creating an array is known as an **array literal**. It is usually the preferred method for creating an array. You can also write each value on a separate line:

```
colors = ['white',  
         'black',  
         'custom'];
```

On the left, you can see an array created using a different technique called an **array constructor**. This uses the new keyword followed by Array();. The values are then specified in parentheses (not square brackets), and each value is separated by a comma. You can also use a method called item() to retrieve data from the array. (The index number of the item is specified in the parentheses.)

VALUES IN ARRAYS

Values in an array are accessed as if they are in a numbered list. It is important to know that the numbering of this list starts at zero (not one).

NUMBERING ITEMS IN AN ARRAY

Each item in an array is automatically given a number called an **index**. This can be used to access specific items in the array. Consider the following array which holds three colors:

```
var colors;  
colors = ['white',  
          'black',  
          'custom'];
```

Confusingly, index values start at 0 (not 1), so the following table shows items from the array and their corresponding index values:

INDEX	VALUE
0	'white'
1	'black'
2	'custom'

ACCESSING ITEMS IN AN ARRAY

To retrieve the third item on the list, the array name is specified along with the index number in square brackets.

Here you can see a variable called `itemThree` is declared. Its value is set to be the third color from the `colors` array.

```
var itemThree;  
itemThree = colors[2];
```

NUMBER OF ITEMS IN AN ARRAY

Each array has a property called `length`, which holds the number of items in the array.

Below you can see that a variable called `numColors` is declared. Its value is set to be the number of the items in the array.

The name of the array is followed by a period symbol (or full stop) which is then followed by the `length` keyword.

```
var numColors;  
numColors = colors.length;
```

Throughout the book (especially in Chapter 12) you meet more features of arrays, which are a very flexible and powerful feature of JavaScript.

ACCESSING & CHANGING VALUES IN AN ARRAY

JAVASCRIPT

c02/js/update-array.js

```
// Create the array  
var colors = ['white',  
              'black',  
              'custom'];  
  
// Update the third item in the array  
colors[2] = 'beige';  
  
// Get the element with an id of colors  
var el = document.getElementById('colors');  
  
// Replace with third item from the array  
el.textContent = colors[2];
```

RESULT



The first lines of code on the left create an array containing a list of three colors. (The values can be added on the same line or on separate lines as shown here.)

Having created the array, the third item on the list is changed from 'custom' to 'beige'.

To access a value from an array, after the array name you specify the index number for that value inside square brackets.

You can change the value of an item in an array by selecting it and assigning it a new value just as you would any other variable (using the equals sign and the new value for that item).

In the last two statements, the newly updated third item in the array is added to the page.

If you wanted to write out *all* of the items in an array, you would use a loop, which you will meet on p170.

EXPRESSIONS

An **expression** evaluates into (results in) a single value. Broadly speaking there are two types of expressions.

1

EXPRESSIONS THAT JUST ASSIGN A VALUE TO A VARIABLE

In order for a variable to be useful, it needs to be given a value. As you have seen, this is done using the assignment operator (the equals sign).

```
var color = 'beige';
```

The value of color is now beige.

When you first declare a variable using the var keyword, it is given a special value of undefined. This will change when you assign a value to it. Technically, undefined is a data type like a number, string, or Boolean.

2

EXPRESSIONS THAT USE TWO OR MORE VALUES TO RETURN A SINGLE VALUE

You can perform operations on any number of individual values (see next page) to determine a single value. For example:

```
var area = 3 * 2;
```

The value of area is now 6.

Here the expression $3 * 2$ evaluates into 6. This example also uses the assignment operator, so the result of the expression $3 * 2$ is stored in the variable called area.

Another example where an expression uses two values to yield a single value would be where two strings are joined to create a single string.

OPERATORS

Expressions rely on things called **operators**; they allow programmers to create a single value from one or more values.

Covered in this chapter:

ASSIGNMENT OPERATORS

Assign a value to a variable

```
color = 'beige';
```

The value of color is now beige.
(See p61)

ARITHMETIC OPERATORS

Perform basic math

```
area = 3 * 2;
```

The value of area is now 6.
(See p76)

STRING OPERATORS

Combine two strings

```
greeting = 'Hi ' + 'Molly';
```

The value of greeting is now Hi Molly.
(See p78)

Covered in Chapter 4:

COMPARISON OPERATORS

Compare two values and return true or false

```
buy = 3 > 5;
```

The value of buy is false.
(See p150)

LOGICAL OPERATORS

Combine expressions and return true or false

```
buy = (5 > 3) && (2 < 4);
```

The value of buy is now true.
(See p156)

ARITHMETIC OPERATORS

JavaScript contains the following mathematical operators, which you can use with numbers. You may remember some from math class.

NAME	OPERATOR	PURPOSE & NOTES	EXAMPLE	RESULT
ADDITION	+	Adds one value to another	10 + 5	15
SUBTRACTION	-	Subtracts one value from another	10 - 5	5
DIVISION	/	Divides two values	10 / 5	2
MULTIPLICATION	*	Multiplies two values using an asterisk (Note that this is not the letter x)	10 * 5	50
INCREMENT	++	Adds one to the current number	i = 10; i++;	11
DECREMENT	--	Subtracts one from the current number	i = 10; i--;	9
MODULUS	%	Divides two values and returns the remainder	10 % 3	1

ORDER OF EXECUTION

Several arithmetic operations can be performed in one expression, but it is important to understand how the result will be calculated. Multiplication and division are performed *before* addition or subtraction. This can affect the number that you expect to see. To illustrate this effect, look at the following examples.

Here the numbers are calculated left to right, so the total is 16:
`total = 2 + 4 + 10;`

But in the following example the total is 42 (not 60):
`total = 2 + 4 * 10;`

This is because multiplication and division happen *before* addition and subtraction.

To change the order in which operations are performed, place the calculation you want done *first* inside parentheses. So for the following, the total is 60:
`total = (2 + 4) * 10;`

The parentheses indicate that the 2 is added to the 4, and *then* the resulting figure is multiplied by 10.

USING ARITHMETIC OPERATORS

JAVASCRIPT

c02/js/arithmetic-operator.js

```
var subtotal = (13 + 1) * 5;      // Subtotal is 70
var shipping = 0.5 * (13 + 1);    // Shipping is 7

var total = subtotal + shipping; // Total is 77

var elSub = document.getElementById('subtotal');
elSub.textContent = subtotal;

var elShip = document.getElementById('shipping');
elShip.textContent = shipping;

var elTotal = document.getElementById('total');
elTotal.textContent = total;
```

RESULT



This example demonstrates how mathematical operators are used with numbers to calculate the combined values of two costs.

The first couple of lines create two variables: one to store the subtotal of the order, the other to hold the cost of shipping the order; so the variables are named accordingly: `subtotal` and `shipping`.

On the third line, the total is calculated by adding together these two values.

This demonstrates how the mathematical operators can use variables that represent numbers. (That is, the numbers do not need to be written explicitly into the code.)

The remaining six lines of code write the results to the screen.

STRING OPERATOR

There is just one string operator: the + symbol.
It is used to join the strings on either side of it.

There are many occasions where you may need to join two or more strings to create a single value. Programmers call the process of joining together two or more strings to create one new string **concatenation**.

For example, you might have a first and last name in two separate variables and want to join them to show a full name. In this example, the variable called `fullName` would hold the string 'Ivy Stone'.

```
var firstName = 'Ivy ';
var lastName = 'Stone';
var fullName = firstName + lastName;
```

MIXING NUMBERS AND STRINGS TOGETHER

When you place quotes around a number, it is a string (not a numeric data type), and you cannot perform addition operations on strings.

```
var cost1 = '7';
var cost2 = '9';
var total = cost1 + cost2;
```

You would end up with a string saying '79'.

If you try to add a numeric data type to a string, then the number becomes part of the string, e.g., adding a house number to a street name:

```
var number = 12;
var street = 'Ivy Road';
var add = number + street;
```

You would end up with a string saying '12Ivy Road'.

If you try to use any of the other arithmetic operators on a string, then the value that results is usually a value called NaN. This means "not a number."

```
var score = 'seven';
var score2 = 'nine';
var total = score * score2;
```

You would end up with the value NaN.

USING STRING OPERATORS

JAVASCRIPT

c02/js/string-operator.js


```
var greeting = 'Howdy ';  
var name = 'Molly';  
  
var welcomeMessage = greeting + name + '!';  
  
var el = document.getElementById('greeting');  
el.textContent = welcomeMessage;
```

HTML

c02/string-operator.html

```
<h1>Elderflower</h1>  
<div id="content">  
  <div id="greeting" class="message">Hello  
    <span id="name">friend</span>!  
  </div>  
</div>  
<script src="js/string-operator.js"></script>
```

RESULT

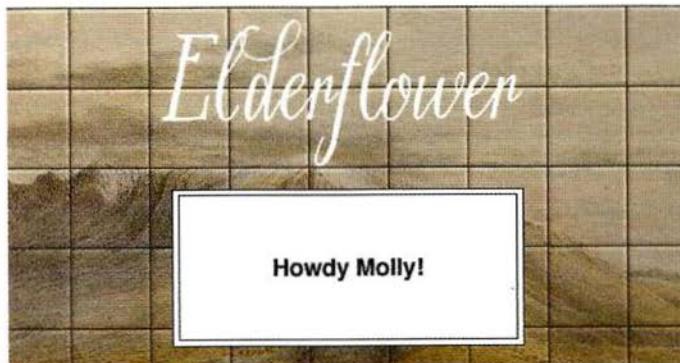

This example will display a personalized welcome message on the page.

The first line creates a variable called `greeting`, which stores the message for the user. Here the greeting is the word `Howdy`.

The second line creates a variable that stores the name of the user. The variable is called `name`, and the user in this case is `Molly`.

The personal welcome message is created by concatenating (or joining) these two variables, adding an exclamation mark, and storing them in a new variable called `welcomeMessage`.

Look back at the `greeting` variable on the first line, and note how there is a space after the word `Howdy`. If the space was omitted, the value of `welcomeMessage` would be "HowdyMolly!"

KRAFT ENVELOPE 85576006


The
Book
of
Seaweed

A. Major

EVERY
BO
BRI
NAT
HIS

W.P.
WE

THE
SEASIDE
LIBRARY

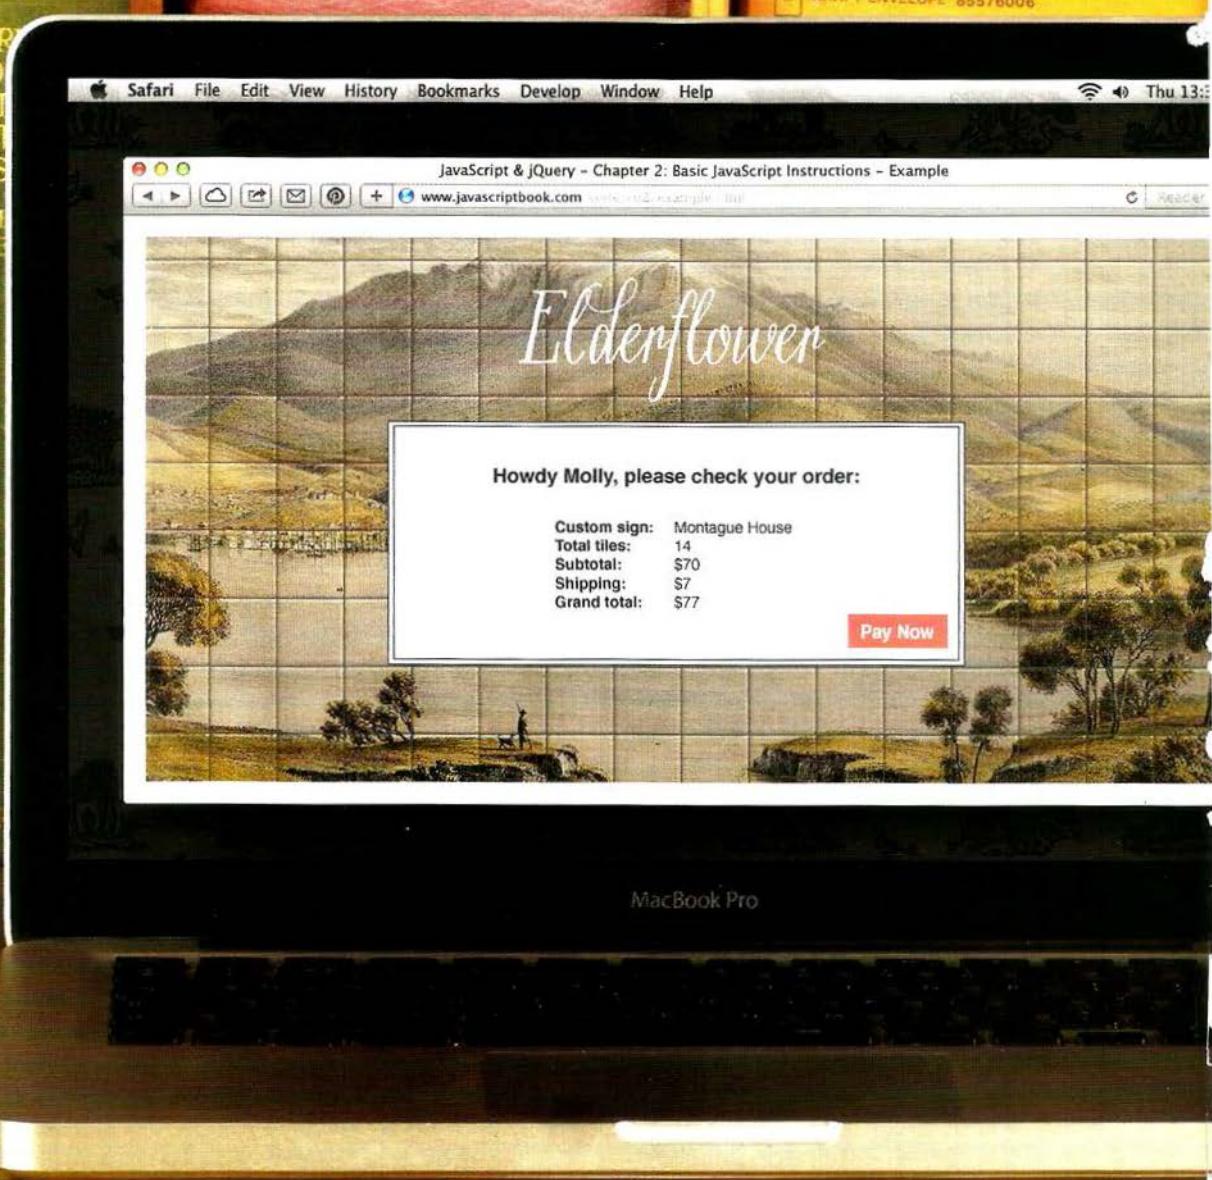


EXAMPLE

BASIC JAVASCRIPT INSTRUCTIONS

c02/example.html

HTML

```
<!DOCTYPE html>
<html>
  <head>
    <title>JavaScript & jQuery - Chapter 2: Basic JavaScript Instructions - Example</title>
    <link rel="stylesheet" href="css/c02.css" />
  </head>
  <body>
    <h1>Elderflower</h1>
    <div id="content">
      <div id="greeting" class="message">Hello!</div>
      <table>
        <tr>
          <td>Custom sign:</td>
          <td id="userSign"></td>
        </tr>
        <tr>
          <td>Total tiles:</td>
          <td id="tiles"></td>
        </tr>
        <tr>
          <td>Subtotal:</td>
          <td id="subTotal">$</td>
        </tr>
        <tr>
          <td>Shipping:</td>
          <td id="shipping">$</td>
        </tr>
        <tr>
          <td>Grand total:</td>
          <td id="grandTotal">$</td>
        </tr>
      </table>
      <a href="#" class="action">Pay Now</a>
    </div>
    <script src="js/example.js"></script>
  </body>
</html>
```

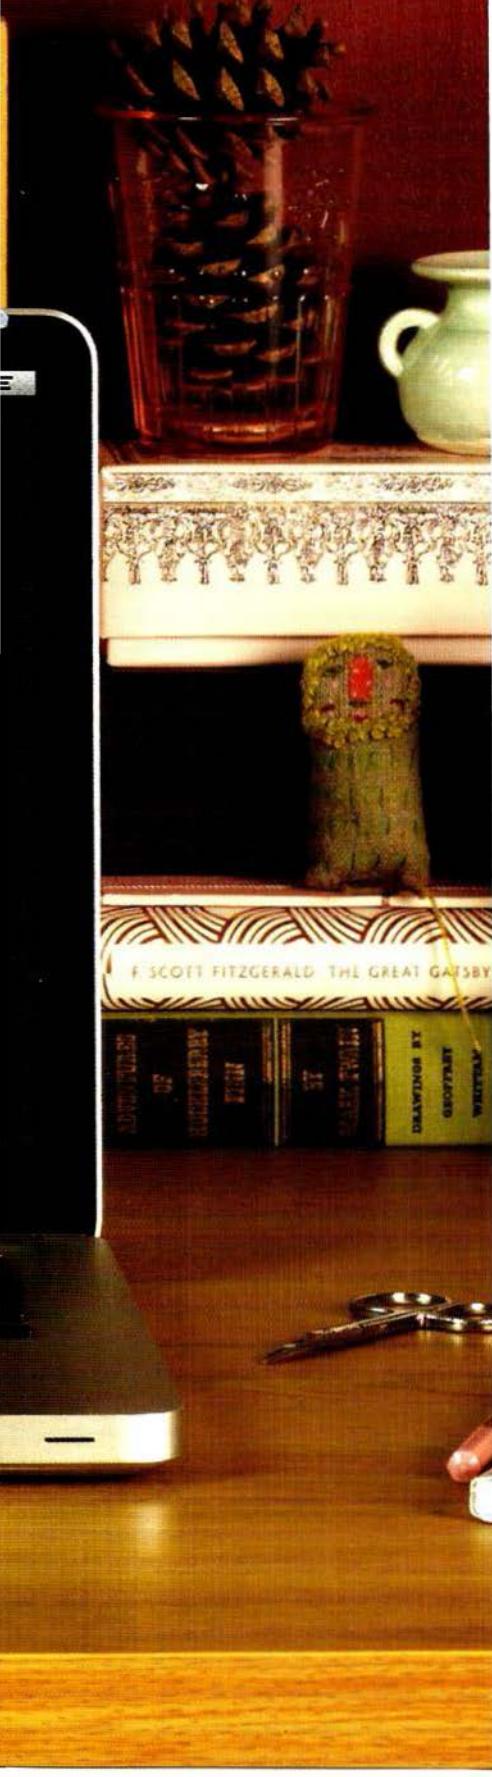

EXAMPLE

BASIC JAVASCRIPT INSTRUCTIONS

This example combines several techniques that you have seen throughout this chapter.

You can see the code for this example on the next two pages. Single line comments are used to describe what each section of the code does.

To start, three variables are created that store information that is used in the welcome message. These variables are then concatenated (joined together) to create the full message the user sees.

The next part of the example demonstrates how basic math is performed on numbers to calculate the cost of a sign.

- A variable called `sign` holds the text the sign will show.
- A property called `length` is used to determine how many characters are in the string (you will meet this property on p128).
- The cost of the sign (`the subtotal`) is calculated by multiplying the number of tiles by the cost of each one.
- The grand total is created by adding \$7 for shipping.

Finally, the information is written into the page by selecting elements and then replacing the content of that element (using a technique you meet fully in Chapter 5). It selects elements from the HTML page using the value of their `id` attributes and then updates the text inside those elements.

Once you have worked your way through this example, you should have a good basic understanding of how data is stored in variables and how to perform basic operations with the data in those variables.

EXAMPLE

BASIC JAVASCRIPT INSTRUCTIONS

c02/example.html

HTML

```
<!DOCTYPE html>
<html>
  <head>
    <title>JavaScript & jQuery - Chapter 2: Basic JavaScript Instructions - Example</title>
    <link rel="stylesheet" href="css/c02.css" />
  </head>
  <body>
    <h1>Elderflower</h1>
    <div id="content">
      <div id="greeting" class="message">Hello!</div>
      <table>
        <tr>
          <td>Custom sign:</td>
          <td id="userSign"></td>
        </tr>
        <tr>
          <td>Total tiles:</td>
          <td id="tiles"></td>
        </tr>
        <tr>
          <td>Subtotal:</td>
          <td id="subTotal">$</td>
        </tr>
        <tr>
          <td>Shipping:</td>
          <td id="shipping">$</td>
        </tr>
        <tr>
          <td>Grand total:</td>
          <td id="grandTotal">$</td>
        </tr>
      </table>
      <a href="#" class="action">Pay Now</a>
    </div>
    <script src="js/example.js"></script>
  </body>
</html>
```

SUMMARY

BASIC JAVASCRIPT INSTRUCTIONS

- ▶ A script is made up of a series of statements. Each statement is like a step in a recipe.
- ▶ Scripts contain very precise instructions. For example, you might specify that a value must be remembered before creating a calculation using that value.
- ▶ Variables are used to temporarily store pieces of information used in the script.
- ▶ Arrays are special types of variables that store more than one piece of related information.
- ▶ JavaScript distinguishes between numbers (0-9), strings (text), and Boolean values (true or false).
- ▶ Expressions evaluate into a single value.
- ▶ Expressions rely on operators to calculate a value.

EXAMPLE

BASIC JAVASCRIPT INSTRUCTIONS

JAVASCRIPT

c02/js/example.js

```
// Create variables for the welcome message
var greeting = 'Howdy ';
var name = 'Molly';
var message = ', please check your order:';
// Concatenate the three variables above to create the welcome message
var welcome = greeting + name + message;

// Create variables to hold details about the sign
var sign = 'Montague House';
var tiles = sign.length;
var subTotal = tiles * 5;
var shipping = 7;
var grandTotal = subTotal + shipping;

// Get the element that has an id of greeting
var el = document.getElementById('greeting');
// Replace the content of that element with the personalized welcome message
el.textContent = welcome;

// Get the element that has an id of userSign then update its contents
var elSign = document.getElementById('userSign');
elSign.textContent = sign;

// Get the element that has an id of tiles then update its contents
var elTiles = document.getElementById('tiles');
elTiles.textContent = tiles;

// Get the element that has an id of subTotal then update its contents
var elSubTotal = document.getElementById('subTotal');
elSubTotal.textContent = '$' + subTotal;

// Get the element that has an id of shipping then update its contents
var elShipping = document.getElementById('shipping');
elShipping.textContent = '$' + shipping;

// Get the element that has an id of grandTotal then update its contents
var elGrandTotal = document.getElementById('grandTotal');
elGrandTotal.textContent = '$' + grandTotal;
```

SUMMARY

BASIC JAVASCRIPT INSTRUCTIONS

- ▶ A script is made up of a series of statements. Each statement is like a step in a recipe.
- ▶ Scripts contain very precise instructions. For example, you might specify that a value must be remembered before creating a calculation using that value.
- ▶ Variables are used to temporarily store pieces of information used in the script.
- ▶ Arrays are special types of variables that store more than one piece of related information.
- ▶ JavaScript distinguishes between numbers (0-9), strings (text), and Boolean values (true or false).
- ▶ Expressions evaluate into a single value.
- ▶ Expressions rely on operators to calculate a value.

3

FUNCTIONS,
METHODS &
OBJECTS

Browsers require very detailed instructions about what we want them to do. Therefore, complex scripts can run to hundreds (even thousands) of lines. Programmers use functions, methods, and objects to organize their code. This chapter is divided into three sections that introduce:

FUNCTIONS & METHODS

Functions consist of a series of statements that have been grouped together because they perform a specific task. A method is the same as a function, except methods are created inside (and are part of) an object.

OBJECTS

In Chapter 1 you saw that programmers use objects to create models of the world using data, and that objects are made up of properties and methods. In this section, you learn how to create your own objects using JavaScript.

BUILT-IN OBJECTS

The browser comes with a set of objects that act like a toolkit for creating interactive web pages. This section introduces you to a number of built-in objects, which you will then see used throughout the rest of the book.



WHAT IS A FUNCTION?

Functions let you group a series of statements together to perform a specific task. If different parts of a script repeat the same task, you can reuse the function (rather than repeating the same set of statements).

Grouping together the statements that are required to answer a question or perform a task helps organize your code.

Furthermore, the statements in a function are not always executed when a page loads, so functions also offer a way to store the steps needed to achieve a task. The script can then ask the function to perform all of those steps as and when they are required. For example, you might have a task that you only want to perform if the user clicks on a specific element in the page.

If you are going to ask the function to perform its task later, you need to give your function a name. That name should describe the task it is performing. When you ask it to perform its task, it is known as **calling** the function.

The steps that the function needs to perform in order to perform its task are packaged up in a code block. You may remember from the last chapter that a code block consists of one or more statements contained within curly braces. (And you do not write a semicolon after the closing curly brace – like you do after a statement.)

Some functions need to be provided with information in order to achieve a given task. For example, a function to calculate the area of a box would need to know its width and height. Pieces of information passed to a function are known as **parameters**.

When you write a function and you expect it to provide you with an answer, the response is known as a **return value**.

On the right, there is an example of a function in the JavaScript file. It is called `updateMessage()`.

Don't worry if you do not understand the syntax of the example on the right; you will take a closer look at how to write and use functions in the pages that follow.

Remember that programming languages often rely upon name/value pairs. The function has a name, `updateMessage`, and the value is the code block (which consists of statements). When you call the function by its name, those statements will run.

You can also have anonymous functions. They do not have a name, so they cannot be called. Instead, they are executed as soon as the interpreter comes across them.

A BASIC FUNCTION

In this example, the user is shown a message at the top of the page. The message is held in an HTML element whose id attribute has a value of message. The message is going to be changed using JavaScript.

Before the closing </body> tag, you can see the link to the JavaScript file. The JavaScript file starts with a variable used to hold a new message, and is followed by a function called updateMessage().

You do not need to worry about how this function works yet - you will learn about that over the next few pages. For the moment, it is just worth noting that inside the curly braces of the function are two statements.


HTML

c03/basic-function.html

```
<!DOCTYPE html>
<html>
  <head>
    <title>Basic Function</title>
    <link rel="stylesheet" href="css/c03.css" />
  </head>
  <body>
    <h1>TravelWorthy</h1>
    <div id="message">Welcome to our site!</div>
    <script src="js/basic-function.js"></script>
  </body>
</html>
```

JAVASCRIPT

c03/js/basic-function.js

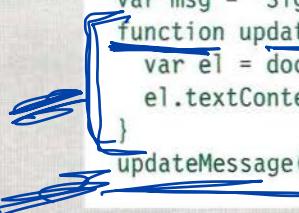

```
var msg = 'Sign up to receive our newsletter for 10% off!';
function updateMessage() {
  var el = document.getElementById('message');
  el.textContent = msg;
}
updateMessage();
```

RESULT



Sign up to receive our newsletter for 10% off!

These statements update the message at the top of the page. The function acts like a store; it holds the statements that are contained in the curly braces until you are ready to use them. Those statements are not run until the function is **called**. The function is only called on the last line of this script.

DECLARING A FUNCTION

To create a function, you give it a name and then write the statements needed to achieve its task inside the curly braces.

This is known as a **function declaration**.

You declare a function using the **function** keyword.

You give the function a **name** (sometimes called an **identifier**) followed by parentheses.

The statements that perform the task sit in a code block. (They are inside curly braces.)

A diagram illustrating the structure of a function declaration. It shows the code: `function sayHello() { document.write('Hello!'); }`. Brackets above the code point to specific parts: one bracket spans from the start of the word "function" to the opening parenthesis, labeled "FUNCTION KEYWORD"; another bracket spans from the end of the word "sayHello" to the opening brace, labeled "FUNCTION NAME"; a third bracket spans from the closing brace to the end of the code, labeled "CODE BLOCK (IN CURLY BRACES)".

```
function sayHello() {
  document.write('Hello!');
}
```

This function is very basic (it only contains one statement), but it illustrates how to write a function. Most functions that you will see or write are likely to consist of more statements.

The point to remember is that functions store the code required to perform a specific task, and that the script can ask the function to perform that task whenever needed.

If different parts of a script need to perform the same task, you do not need to repeat the same statements multiple times – you use a function to do it (and reuse the same code).

CALLING A FUNCTION

Having declared the function, you can then execute all of the statements between its curly braces with just one line of code.

This is known as **calling the function**.

To run the code in the function, you use the function name followed by parentheses.

In programmer-speak, you would say that this code **calls** a function.

You can call the same function as many times as you want within the same JavaScript file.

FUNCTION NAME
sayHello();

1. The function can store the instructions for a specific task.
2. When you need the script to perform that task, you call the function.
3. The function executes the code in that code block.
4. When it has finished, the code continues to run from the point where it was initially called.

```
① function sayHello() {  
③   document.write('Hello!');  
② }—————  
    // Code before hello...  
② sayHello();  
④ // Code after hello...  
↑
```

Sometimes you will see a function called *before* it has been declared. This still works because the interpreter runs through a script before executing each statement, so it will know that a function declaration appears later in the script. But for the moment, we will declare the function before calling it.

DECLARING FUNCTIONS THAT NEED INFORMATION

Sometimes a function needs specific information to perform its task. In such cases, when you declare the function you give it **parameters**. Inside the function, the parameters act like variables.

If a function needs information to work, you indicate what it needs to know in parentheses after the function name.

The items that appear inside these parentheses are known as the **parameters** of the function. Inside the function those words act like variable names.

```
PARAMETERS  
function getArea(width, height) {  
    return width * height;  
}  
THE PARAMETERS ARE USED LIKE  
VARIABLES WITHIN THE FUNCTION
```

This function will calculate and return the area of a rectangle. To do this, it needs the rectangle's width and height. Each time you call the function these values could be different.

This demonstrates how the code can perform a task without knowing the *exact* details in advance, as long as it has rules it can follow to achieve the task.

So, when you design a script, you need to note the information the function will require in order to perform its task.

If you look inside the function, the parameter names are used just as you would use variables. Here, the parameter names **width** and **height** represent the width and height of the wall.

CALLING FUNCTIONS THAT NEED INFORMATION

When you call a function that has parameters, you specify the values it should use in the parentheses that follow its name. The values are called **arguments**, and they can be provided as values or as variables.

ARGUMENTS AS VALUES

When the function below is called, the number 3 will be used for the width of the wall, and 5 will be used for its height.

```
getArea(3, 5);
```

ARGUMENTS AS VARIABLES

You do not have to specify actual values when calling a function – you can use variables in their place. So the following does the same thing.

```
wallWidth = 3;  
wallHeight = 5;  
getArea(wallWidth, wallHeight);
```

PARAMETERS VS ARGUMENTS

People often use the terms **parameter** and **argument** interchangeably, but there *is* a subtle difference.

On the left-hand page, when the function is declared, you can see the words **width** and **height** used (in parentheses on the first line). Inside the curly braces of the function, those words act like variables. These names are the **parameters**.

On this page, you can see that the **getArea()** function is being called and the code specifies real numbers that will be used to perform the calculation (or variables that hold real numbers).

These values that you pass into the code (the information it needs to calculate the size of this particular wall) are called **arguments**.

GETTING A SINGLE VALUE OUT OF A FUNCTION

Some functions return information to the code that called them. For example, when they perform a calculation, they return the result.

This `calculateArea()` function returns the area of a rectangle to the code that called it.

Inside the function, a variable called `area` is created. It holds the calculated area of the box.

The `return` keyword is used to return a value to the code that called the function.

```
function calculateArea(width, height) {  
    var area = width * height;  
    return area;  
}  
  
var wallOne = calculateArea(3, 5);  
var wallTwo = calculateArea(8, 5);
```

Note that the interpreter leaves the function when `return` is used. It goes back to the statement that called it. If there had been any subsequent statements in this function, they would not be processed.

The `wallOne` variable holds the value **15**, which was calculated by the `calculateArea()` function.

The `wallTwo` variable holds the value **40**, which was calculated by the same `calculateArea()` function.

This also demonstrates how the same function can be used to perform the same steps with different values.

GETTING MULTIPLE VALUES OUT OF A FUNCTION

Functions can return more than one value using an array.

For example, this function calculates the area and volume of a box.

First, a new function is created called `getSize()`. The area of the box is calculated and stored in a variable called `area`.

The volume is calculated and stored in a variable called `volume`. Both are then placed into an array called `sizes`.

This array is then returned to the code that called the `getSize()` function, allowing the values to be used.

```
function getSize(width, height, depth) {  
    var area = width * height;  
    var volume = width * height * depth;  
    var sizes = [area, volume];  
    return sizes;  
}  
  
var areaOne = getSize(3, 2, 3)[0];  
var volumeOne = getSize(3, 2, 3)[1];
```

return more than one value

The `areaOne` variable holds the area of a box that is 3×2 . The area is the *first* value in the `sizes` array.

The `volumeOne` variable holds the volume of a box that is $3 \times 2 \times 3$. The volume is the *second* value in the `sizes` array.

ANONYMOUS FUNCTIONS & FUNCTION EXPRESSIONS

function with no name

Expressions produce a value. They can be used where values are expected. If a function is placed where a browser expects to see an expression, (e.g., as an argument to a function), then it gets treated as an expression.

FUNCTION DECLARATION

A **function declaration** creates a function that you can call later in your code. It is the type of function you have seen so far in this book.

In order to call the function later in your code, you must give it a name, so these are known as **named functions**. Below, a function called `area()` is declared, which can then be called using its name.

```
function area(width, height) {  
    return width * height;  
}  
  
var size = area(3, 4);
```

FUNCTION EXPRESSION

If you put a function where the interpreter would expect to see an expression, then it is treated as an expression, and it is known as a **function expression**.

In function expressions, the name is usually omitted. A function with no name is called an **anonymous function**. Below, the function is stored in a variable called `area`. It can be called like any function created with a function declaration.

```
var area = function(width, height) {  
    return width * height;  
};  
  
var size = area(3, 4); // calling
```

In a function expression, the function is not processed until the interpreter gets to that statement. This means you cannot call this function before the interpreter has discovered it. It also means that any code that appears up to that point could potentially alter what goes on inside this function.

As you will see on p456, the interpreter always looks for variables and function declarations *before* going through each section of a script, line-by-line. This means that a function created with a function declaration can be called *before* it has even been declared.

For more information about how variables and functions are processed first, see the discussion about execution context and hoisting on p452 - p457.

IMMEDIATELY INVOKED FUNCTION EXPRESSIONS

This way of writing a function is used in several different situations. Often functions are used to ensure that the variable names do not conflict with each other (especially if the page uses more than one script).

IIFE

IMMEDIATELY INVOKED FUNCTION EXPRESSIONS (IIFE)

Pronounced "iffy," these functions are not given a name. Instead, they are executed once as the interpreter comes across them.

Below, the variable called area will hold the value returned from the function (rather than storing the function itself so that it can be called later).

```
var area = (function() {  
    var width = 3;  
    var height = 2;  
    return width * height;  
}());
```

The **final parentheses** (shown on green) after the closing curly brace of the code block tell the interpreter to call the function immediately.

The **grouping operators** (shown on pink) are parentheses there to ensure the interpreter treats this as an expression.

You may see the final parentheses in an IIFE placed after the closing grouping operator but it is commonly considered better practice to place the **final parentheses before the closing grouping operator**, as shown in the code above.

WHEN TO USE ANONYMOUS FUNCTIONS AND IIFES

You will see many ways in which anonymous function expressions and IIFEs are used throughout the book.

They are used for code that only needs to run once within a task, rather than repeatedly being called by other parts of the script. For example:

- As an argument when a function is called (to calculate a value for that function).
- To assign the value of a property to an object.
- In event handlers and listeners (see Chapter 6) to perform a task when an event occurs.
- To prevent conflicts between two scripts that might use the same variable names (see p99).

IIFEs are commonly used as a wrapper around a set of code. Any variables declared within that anonymous function are effectively protected from variables in other scripts that might have the same name. This is due to a concept called scope, which you meet on the next page. It is also a very popular technique with jQuery.

VARIABLE SCOPE

The location where you declare a variable will affect where it can be used within your code. If you declare it within a function, it can only be used within that function. This is known as the variable's **scope**.

LOCAL VARIABLES

When a variable is created inside a function using the `var` keyword, it can only be used in that function.

It is called a **local** variable or **function-level** variable. It is said to have **local scope** or **function-level scope**. It cannot be accessed outside of the function in which it was declared. Below, `area` is a local variable.

The interpreter creates local variables when the function is run, and removes them as soon as the function has finished its task. This means that:

- If the function runs twice, the variable can have different values each time.
- Two different functions can use variables with the same name without any kind of naming conflict.

GLOBAL VARIABLES

If you create a variable outside of a function, then it can be used anywhere within the script. It is called a **global** variable and has **global scope**. In the example shown, `wallSize` is a global variable.

Global variables are stored in memory for as long as the web page is loaded into the web browser.

This means they take up more memory than local variables, and it also increases the risk of naming conflicts (see next page). For these reasons, you should use local variables wherever possible.

If you forget to declare a variable using the `var` keyword, the variable will work, but it will be treated as a **global** variable (this is considered bad practice).

```
function getArea(width, height) {  
    var area = width * height;  
    return area;  
}  
  
var wallSize = getArea(3, 2);  
document.write(wallSize);
```

● LOCAL (OR FUNCTION-LEVEL) SCOPE

● GLOBAL SCOPE

HOW MEMORY & VARIABLES WORK

Global variables use more memory. The browser has to remember them for as long as the web page using them is loaded. Local variables are only remembered during the period of time that a function is being executed.

CREATING THE VARIABLES IN CODE

Each variable that you declare takes up memory. The more variables a browser has to remember, the more memory your script requires to run. Scripts that require a lot of memory can perform slower, which in turn makes your web page take longer to respond to the user.

```
var width = 15;  
var height = 30;  
var isWall = true;  
var canPaint = true;
```

A variable actually references a value that is stored in memory. The same value can be used with more than one variable:

```
var width = 15;—————→ 15  
var height = 30;—————→ 30  
var isWall = true;—————→ true  
var canPaint = true;—————→ true
```

Here the values for the width and height of the wall are stored separately, but the same value of true can be used for both isWall and canPaint.

NAMING COLLISIONS

You might think you would avoid naming collisions; after all *you* know which variables you are using. But many sites use scripts written by several people. If an HTML page uses two JavaScript files, and both have a global variable with the same name, it can cause errors. Imagine a page using these two scripts:

```
// Show size of the building plot  
function showPlotSize(){  
    var width = 3;  
    var height = 2;  
    return 'Area: ' + (width * height);  
}  
var msg = showArea()
```

```
// Show size of the garden  
function showGardenSize() {  
    var width = 12;  
    var height = 25;  
    return width * height;  
}  
var msg = showGardenSize();
```

- Variables in global scope: have naming conflicts.
- Variables in function scope: there is no conflict between them.


WHAT IS AN OBJECT?



Objects group together a set of variables and functions to create a model of something you would recognize from the real world. In an object, variables and functions take on new names.

IN AN OBJECT, VARIABLES BECOME KNOWN AS PROPERTIES

If a variable is part of an object, it is called a **property**. Properties tell us about the object, such as the name of a hotel or the number of rooms it has. Each individual hotel might have a different name and a different number of rooms.

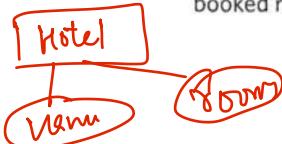

IN AN OBJECT, FUNCTIONS BECOME KNOWN AS METHODS

If a function is part of an object, it is called a **method**. Methods represent tasks that are associated with the object. For example, you can check how many rooms are available by subtracting the number of booked rooms from the total number of rooms.


Methods
e.g. How many rooms are vacant

This object represents a hotel. It has five properties and one method. The object is in curly braces. It is stored in a variable called hotel.

Like variables and named functions, properties and methods have a name and a value. In an object, that name is called a **key**.

An object cannot have two keys with the same name. This is because keys are used to access their corresponding values.

The value of a property can be a string, number, Boolean, array, or even another object. The value of a method is always a function.

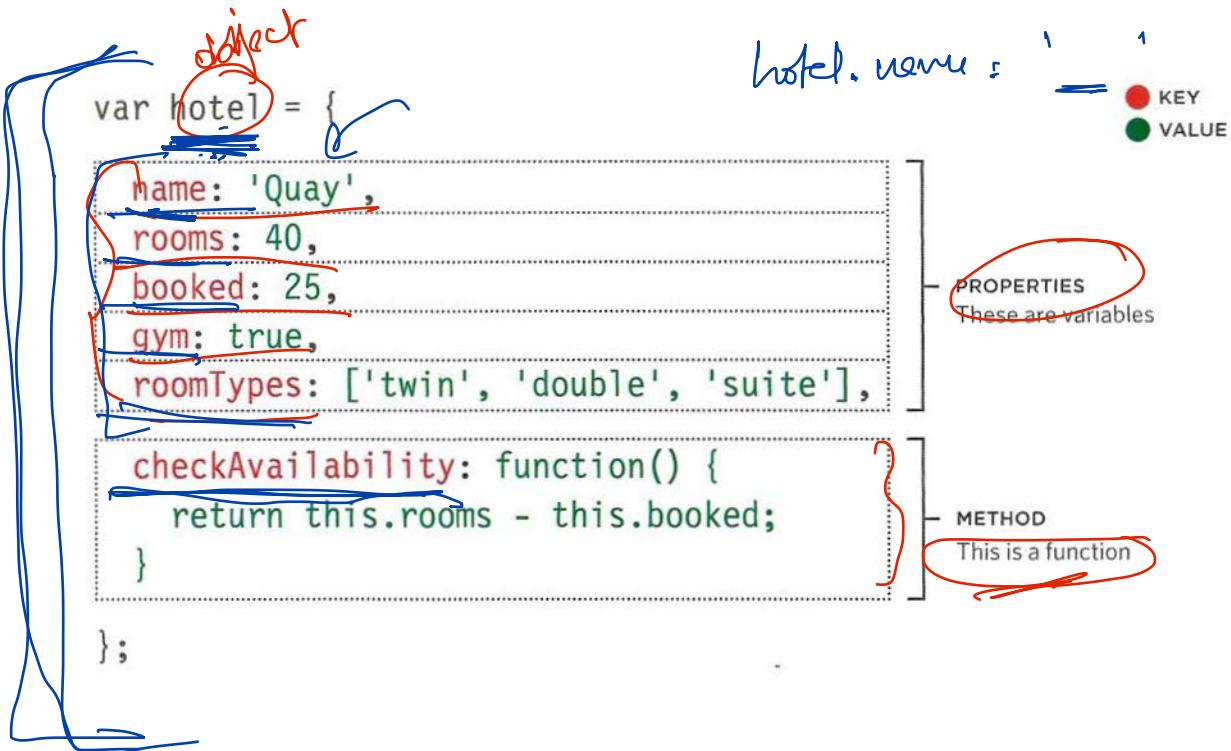

Above you can see a **hotel** object. The object contains the following key/value pairs:

PROPERTIES:	KEY	VALUE
	name	string
	rooms	number
	booked	number
	gym	Boolean
	roomTypes	array

METHODS: `checkAvailability` function

As you will see over the next few pages, this is just one of the ways you can create an object.

Programmers use a lot of name/value pairs:

- HTML uses attribute names and values.
- CSS uses property names and values.

In JavaScript:

- Variables have a name and you can assign them a value of a string, number, or Boolean.
- Arrays have a name and a group of values. (Each item in an array is a name/value pair because it has an index number and a value.)
- Named functions have a name and value that is a set of statements to run if the function is called.
- Objects consist of a set of name/value pairs (but the names are referred to as keys).

CREATING AN OBJECT: LITERAL NOTATION

Literal notation is the easiest and most popular way to create objects.
(There are several ways to create objects.)

The object is the curly braces and their contents.
The object is stored in a variable called `hotel`,
so you would refer to it as the `hotel` object.

Separate each key from its value using a colon.
Separate each property and method with a comma
(but not after the last value).

```
var hotel = {
```

```
  name: 'Quay',  
  rooms: 40,  
  booked: 25,
```

```
  checkAvailability: function() {  
    return this.rooms - this.booked;  
  }
```

```
};
```

PROPERTIES

METHOD

- OBJECT
- KEY
- VALUE

In the `checkAvailability()` method, the `this` keyword is used to indicate that it is using the `rooms` and `booked` properties of `this` object.

When setting properties, treat the values like you would do for variables: strings live in quotes and arrays live in square brackets.


ACCESSING AN OBJECT AND DOT NOTATION

You access the properties or methods of an object using dot notation.
You can also access properties using square brackets.

To access a property or method of an object you use the name of the object, followed by a period, then the name of the property or method you want to access. This is known as **dot notation**.

The period is known as the **member operator**. The property or method on its right is a member of the object on its left. Here, two variables are created to hold the hotel name and number of vacant rooms.

```
var hotelName = hotel.name;  
var roomsFree = hotel.checkAvailability();
```

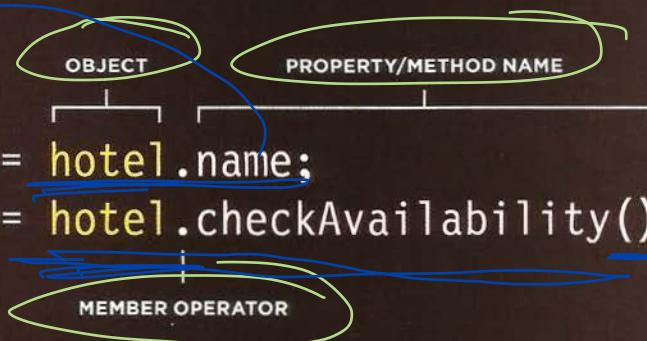

You can also access the properties of an object (but not its methods) using square bracket syntax.

This time the object name is followed by square brackets, and the property name is inside them.

```
var hotelName = hotel['name'];
```

This notation is most commonly used when:

- The name of the property is a **number** (technically allowed, but should generally be avoided)
- A variable is being used in place of the property name (you will see this technique used in Chapter 12)

only to
access
properties
when
property
is
a
number

CREATING OBJECTS USING LITERAL NOTATION

This example starts by creating an object using literal notation.

This object is called hotel which represents a hotel called Quay with 40 rooms (25 of which have been booked).

Next, the content of the page is updated with data from this object. It shows the name of the hotel by accessing the object's name property and the number of vacant rooms using the checkAvailability() method.

To access a property of this object, the object name is followed by a dot (the period symbol) and the name of the property that you want.

Similarly, to use the method, you can use the object name followed by the method name.

hotel.checkAvailability()

If the method needs parameters, you can supply them in the parentheses (just like you can pass arguments to a function).

c3/js/object-literal.js

JAVASCRIPT

```
var hotel = {  
    name: 'Quay',  
    rooms: 40,  
    booked: 25,  
    checkAvailability: function() {  
        return this.rooms - this.booked;  
    }  
};  
  
var elName = document.getElementById('hotelName');  
elName.textContent = hotel.name;  
  
var elRooms = document.getElementById('rooms');  
elRooms.textContent = hotel.checkAvailability();
```

RESULT



CREATING MORE OBJECT LITERALS

JAVASCRIPT

```
var hotel = {  
    name: 'Park',  
    rooms: 120,  
    booked: 77,  
    checkAvailability: function() {  
        return this.rooms - this.booked;  
    }  
};  
  
var elName = document.getElementById('hotelName');  
elName.textContent = hotel.name;  
  
var elRooms = document.getElementById('rooms');  
elRooms.textContent = hotel.checkAvailability();
```

c03/js/object-literal12.js

RESULT



for
all hotels
Only these three
properties need to
change.
(code will rename)

Here you can see another object. Again it is called hotel, but this time the model represents a different hotel. For a moment, imagine that this is a different page of the same travel website.

The Park hotel is larger. It has 120 rooms and 77 of them are booked.

The only things changing in the code are the values of the hotel object's properties:

- The name of the hotel
- How many rooms it has
- How many rooms are booked

The rest of the page works in exactly the same way. The name is shown using the same code. The checkAvailability() method has not changed and is called in the same way.

If this site had 1,000 hotels, the only thing that would need to change would be the three properties of this object. Because we created a model for the hotel using data, the same code can access and display the details for any hotel that follows the same data model.

If you had two objects on the same page, you would create each one using the same notation but store them in variables with different names.

CREATING AN OBJECT: CONSTRUCTOR NOTATION

The new keyword and the object constructor create a blank object.
You can then add properties and methods to the object.

First, you create a new object using a combination of the new keyword and the Object() constructor function. (This function is part of the JavaScript language and is used to create objects.)

Next, having created the blank object, you can add properties and methods to it using dot notation. Each statement that adds a property or method should end with a semicolon.

var hotel = new Object();

```
hotel.name = 'Quay';
hotel.rooms = 40;
hotel.booked = 25;
```



```
hotel.checkAvailability = function() {
    return this.rooms - this.booked;
};
```

this creates a
blank
object

- OBJECT
- KEY
- VALUE

PROPERTIES

METHOD

You can use this syntax to add properties and methods to any object you have created (no matter which notation you used to create it).

To create an empty object using literal notation use:

var hotel = {};

The curly brackets create an empty object.

this also creates empty object

UPDATING AN OBJECT


To update the value of properties, use dot notation or square brackets.

They work on objects created using literal or constructor notation.

To delete a property, use the **delete** keyword.

To update a property, use the same technique that was shown on the left-hand page to add properties to the object, but give it a new value.

If the object does not have the property you are trying to update, it will be added to the object.

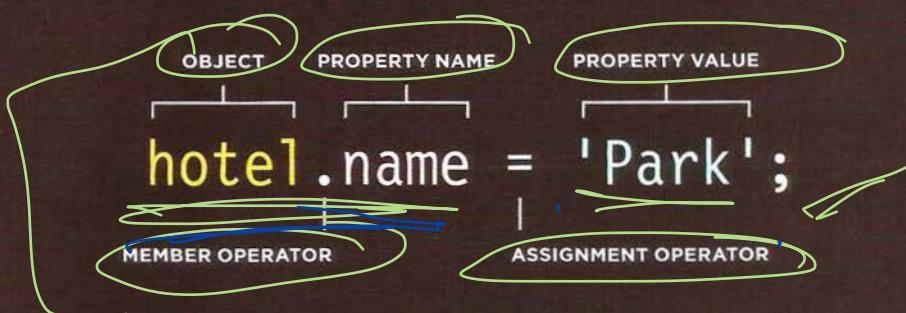

You can also update the properties of an object (but not its methods) using square bracket syntax. The object name is followed by square brackets, and the property name is inside them.

A new value for the property is added after the assignment operator. Again, if the property you are attempting to update does not exist, it will be added to the object.

`hotel['name'] = 'Park';`

To delete a property, use the **delete** keyword followed by the object name and property name.

`delete hotel.name;`

To delete
a property

If you just want to clear the value of a property, you could set it to a blank string.

`hotel.name = '';`

reset

CREATING MANY OBJECTS: CONSTRUCTOR NOTATION

Sometimes you will want several objects to represent similar things.

Object constructors can use a function as a template for creating objects.

First, create the template with the object's properties and methods.

A function called `Hotel` will be used as a template for creating new objects that represent hotels. Like all functions, it contains statements. In this case, they add properties or methods to the object.

The function has three parameters. Each one sets the value of a property in the object. The methods will be the same for each object created using this function.

```
function Hotel(name, rooms, booked) {  
    this.name = name;  
    this.rooms = rooms;  
    this.booked = booked;  
  
    this.checkAvailability = function() {  
        return this.rooms - this.booked;  
    };  
}
```

KEY
VALUE

PROPERTIES

METHOD

The `this` keyword is used instead of the object name to indicate that the property or method belongs to the object that `this` function creates.

Each statement that creates a new property or method for this object ends in a semicolon (not a comma, which is used in the literal syntax).

The name of a constructor function usually begins with a capital letter (unlike other functions, which tend to begin with a lowercase character).

The uppercase letter is supposed to help remind developers to use the `new` keyword when they create an object using that function (see next page).


You create instances of the object using the constructor function.

The new keyword followed by a call to the function creates a new object.

The properties of each object are given as arguments to the function.

Here, two objects are used to represent two hotels, so each object needs a different name. When the `new` keyword calls the constructor function (defined on the left-hand page), it creates a new object.

Each time it is called, the arguments are different because they are the values for the properties of each hotel. Both objects automatically get the same method defined in the constructor function.

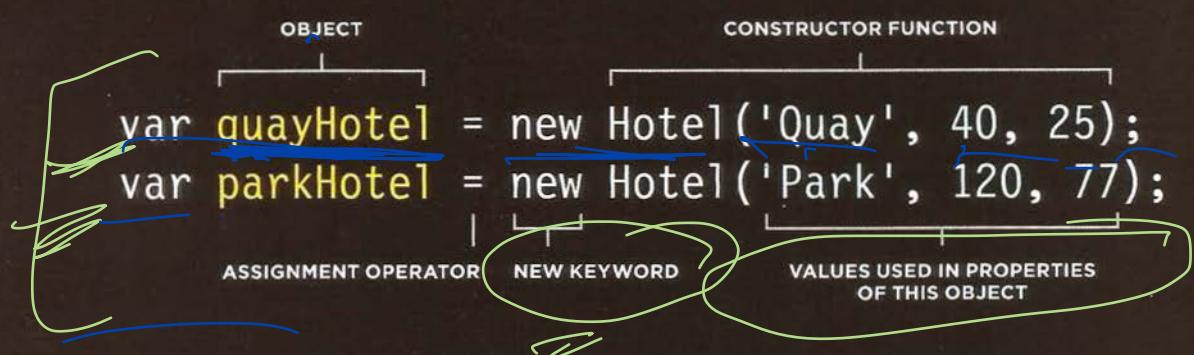

The first object is called `quayHotel`. Its name is 'Quay' and it has 40 rooms, 25 of which are booked.

The second object is called `parkHotel`. Its name is 'Park' and it has 120 rooms, 77 of which are booked.

Even when many objects are created using the same constructor function, the methods stay the same because they access, update, or perform a calculation on the data stored in the properties.

You might use this technique if your script contains a very complex object that needs to be available but might not be used. The object is defined in the function, but it is only created if it is needed.

CREATING OBJECTS USING CONSTRUCTOR SYNTAX

On the right, an empty object called `hotel` is created using the constructor function.

Once it has been created, three properties and a method are then assigned to the object.

(If the object already had any of these properties, this would overwrite the values in those properties.)

To access a property of this object, you can use dot notation, just as you can with any object.

For example, to get the hotel's name you could use:

`hotel.name`

Similarly, to use the method, you can use the object name followed by the method name:
`hotel.checkAvailability()`

c3/js/object-constructor.js

JAVASCRIPT

```
var hotel = new Object();
    hotel.name = 'Park';
    hotel.rooms = 120;
    hotel.booked = 77;
    hotel.checkAvailability = function() {
        return this.rooms - this.booked;
    };

```

```
var elName = document.getElementById('hotelName');
elName.textContent = hotel.name;
var elRooms = document.getElementById('rooms');
elRooms.textContent = hotel.checkAvailability();
```

RESULT



CREATE & ACCESS OBJECTS CONSTRUCTOR NOTATION

JAVASCRIPT

c03/js/multiple-objects.js

```
function Hotel(name, rooms, booked) {  
    this.name = name;  
    this.rooms = rooms;  
    this.booked = booked;  
    this.checkAvailability = function() {  
        return this.rooms - this.booked;  
    };  
  
    var quayHotel = new Hotel('Quay', 40, 25);  
    var parkHotel = new Hotel('Park', 120, 77);  
  
    var details1 = quayHotel.name + ' rooms: ';  
    details1 += quayHotel.checkAvailability();  
    var elHotel1 = document.getElementById('hotel1');  
    elHotel1.textContent = details1;  
  
    var details2 = parkHotel.name + ' rooms: ';  
    details2 += parkHotel.checkAvailability();  
    var elHotel2 = document.getElementById('hotel2');  
    elHotel2.textContent = details2;
```

RESULT



To get a better idea of why you might want to create multiple objects on the same page, here is an example that shows room availability in two hotels.

First, a constructor function defines a template for the hotels. Next, two different instances of this type of hotel object are created. The first represents a hotel called Quay and the second a hotel called Park.

Having created instances of these objects, you can then access their properties and methods using the same dot notation that you use with all other objects.

In this example, data from both objects is accessed and written into the page. (The HTML for this example changes to accommodate the extra hotel.)

For each hotel, a variable is created to hold the hotel name, followed by space, and the word rooms.

The line after it adds to that variable with the number of available rooms in that hotel.

(The += operator is used to add content to an existing variable.)

ADDING AND REMOVING PROPERTIES

Once you have created an object (using literal or constructor notation), you can add new properties to it.

You do this using the dot notation that you saw for adding properties to objects on p103.

In this example, you can see that an instance of the `hotel` object is created using an object literal.

Immediately after this, the `hotel` object is given two extra properties that show the facilities (whether or not it has a gym and/or a pool). These properties are given values that are Booleans (true or false).

Having added these properties to the object, you can access them just like any of the objects other properties. Here, they update the value of the `className` attribute on their respective elements to show either a check mark or a cross mark.

To delete a property, you use the keyword `delete`, and then use dot notation to identify the property or method you want to remove from the object.

In this case, the `booked` property is removed from the object.

c3/js/adding-and-removing-properties.js

JAVASCRIPT

```
var hotel = {  
    name : 'Park',  
    rooms : 120,  
    booked : 77,  
};
```

```
hotel.gym = true;  
hotel.pool = false;  
delete hotel.booked;
```

```
var elName = document.getElementById('hotelName');  
elName.textContent = hotel.name;
```

```
var elPool = document.getElementById('pool');  
elPool.className = 'Pool: ' + hotel.pool;
```

```
var elGym = document.getElementById('gym');  
elGym.className = 'Gym: ' + hotel.gym;
```

RESULT



If an object is created using a constructor function, this syntax only adds or removes the properties from the one instance of the object (not all objects created with that function).

RECAP: WAYS TO CREATE OBJECTS

CREATE THE OBJECT, THEN ADD PROPERTIES & METHODS

In both of these examples, the object is created on the first line of the code sample. The properties and methods are then added to it afterwards.

LITERAL NOTATION

```
var hotel = {}  
  
hotel.name = 'Quay';  
hotel.rooms = 40;  
hotel.booked = 25;  
hotel.checkAvailability = function() {  
    return this.rooms - this.booked;  
};
```

Once you have created an object, the syntax for adding or removing any properties and methods from that object is the same.

OBJECT CONSTRUCTOR NOTATION

```
var hotel = new Object();  
  
hotel.name = 'Quay';  
hotel.rooms = 40;  
hotel.booked = 25;  
hotel.checkAvailability = function() {  
    return this.rooms - this.booked;  
},
```

CREATING AN OBJECT WITH PROPERTIES & METHODS

LITERAL NOTATION

A colon separates the key/value pairs.
There is a comma between each key/value pair.

```
var hotel = {  
    name: 'Quay',  
    rooms: 40,  
    booked: 25,  
    checkAvailability: function() {  
        return this.rooms - this.booked;  
    }  
};
```

OBJECT CONSTRUCTOR NOTATION

The function can be used to create multiple objects.
The `this` keyword is used instead of the object name.

```
function Hotel(name, rooms, booked) {  
    this.name = name;  
    this.rooms = rooms;  
    this.booked = booked;  
    this.checkAvailability = function() {  
        return this.rooms - this.booked;  
    };  
}  
  
var quayHotel = new Hotel('Quay', 40, 25);  
var parkHotel = new Hotel('Park', 120, 77);
```

THIS (IT IS A KEYWORD)

The keyword `this` is commonly used inside functions and objects. Where the function is declared alters what `this` means. It always refers to one object, usually the object in which the function operates.

A FUNCTION IN GLOBAL SCOPE

When a function is created at the top level of a script (that is, not inside another object or function), then it is in the **global scope** or **global context**.

The default object in this context is the `window` object, so when `this` is used inside a function in the global context it refers to the `window` object.

Below, `this` is being used to return properties of the `window` object (you meet these properties on p124).

```
function windowSize() {  
  var width = this.innerWidth;  
  var height = this.innerHeight;  
  return [height, width];  
}
```

Under the hood, the `this` keyword is a reference to the object that the function is created inside.

GLOBAL VARIABLES

All global variables also become properties of the `window` object, so when a function is in the global context, you can access global variables using the `window` object, as well as its other properties.

Here, the `showWidth()` function is in global scope, and `this.width` refers to the `width` variable:

```
var width = 600;  
var shape = {width: 300};  
  
var showWidth = function() {  
  document.write(this.width);  
};  
  
showWidth();
```

Here, the function would write a value of 600 into the page (using the `document` object's `write()` method).

↑ a function in
global context
can access

global
variables
why
this

As you can see, the value of `this` changes in different situations. But don't worry if you do not follow these two pages on your first read through. As you write more functions and objects, these concepts will become more familiar, and if this is not returning the value you expected, these pages will help you work out why.

Another scenario to mention is when one function is nested inside another function. It is only done in more complicated scripts, but the value of `this` can vary (depending on which browser you are using). You could work around this by storing the value of `this` in a variable in the first function and using the variable name in child functions instead of `this`.

A METHOD OF AN OBJECT

When a function is defined *inside* an object, it becomes a method. In a method, `this` refers to the containing object.

In the example below, the `getArea()` method appears inside the `shape` object, so `this` refers to the `shape` object it is contained in:

```
var shape = {  
    width: 600,  
    height: 400,  
    getArea: function() {  
        return this.width * this.height;  
    }  
};
```

Because the `this` keyword here refers to the `shape` object, it would be the same as writing:

```
return shape.width * shape.height;
```

If you were creating several objects using an object constructor (and each shape had different dimensions), `this` would refer to the individual instance of the new object you are creating. When you called `getArea()`, it would calculate the dimensions of that particular instance of the object.

FUNCTION EXPRESSION AS METHOD

If a named function has been defined in global scope, and it is then used as a method of an object, this refers to the object it is contained within.

The next example uses the same `showWidth()` function expression as the one on the left-hand page, but it is assigned as a method of an object.

```
var width = 600;           ↓  
var shape = {width: 300};  
  
var showWidth = function() {  
    document.write(this.width);  
};  
  
shape.getWidth = showWidth;  
shape.getWidth();
```

The last but one line indicates that the `showWidth()` function is used as a method of the `shape` object. The method is given a different name: `getWidth()`.

When the `getWidth()` method is called, even though it uses the `showWidth()` function, `this` now refers to the `shape` object, not the global context (and `this.width` refers to the `width` property of the `shape` object). So it writes a value of 300 to the page.

RECAP: STORING DATA

In JavaScript, data is represented using name/value pairs.

To organize your data, you can use an array or object to group a set of related values. In arrays and objects the name is also known as a key.

VARIABLES

A variable has just one key (the variable name) and one value.

Variable names are separated from their value by an equals sign (the assignment operator):

```
var hotel = 'Quay';
```

To retrieve the value of a variable, use its name:

```
// This retrieves Quay:  
hotel;
```

When a variable has been declared but has not yet been assigned a value, it is `undefined`.

If the `var` keyword is not used, the variable is declared in global scope (you should always use it).

ARRAYS

Arrays can store multiple pieces of information. Each piece of information is separated by a comma. The order of the values is important because items in an array are assigned a number (called an index).

Values in an array are put in square brackets, separated by commas:

```
var hotels = [  
    'Quay',  
    'Park',  
    'Beach',  
    'Bloomsbury'  
]
```

You can think of each item in the array as another key/value pair, the key is the index number, and the values are shown in the comma-separated list.

To retrieve an item, use its index number:

```
// This retrieves Park:  
hotels[1];
```

If a key is a number, to retrieve the value you must place the number in square brackets.

Generally speaking, arrays are the only times when the key would be a number.

Note: This recap specifically relate to storing data.
You cannot store rules to perform a task in an array.
They can only be stored in a function or method.

If you want to access items via a property name or key, use an object
(but note that each key in the object must be unique).

If the order of the items is important, use an array.

INDIVIDUAL OBJECTS

Objects store sets of name/value pairs. They can be properties (variables) or methods (functions).

The order of them is not important (unlike the array).
You access each piece of data by its key.

In object literal notation, properties and methods of an object are given in curly braces:

```
var hotel = {  
    name: 'Quay',  
    rooms: 40  
};
```

Objects created with literal notation are good:

- When you are storing / transmitting data between applications
- For global or configuration objects that set up information for the page

To access the properties or methods of the object, use dot notation:

```
// This retrieves Quay:  
hotel.name;
```

MULTIPLE OBJECTS

When you need to create multiple objects within the same page, you should use an object constructor to provide a template for the objects.

```
function Hotel(name, rooms) {  
    this.name = name;  
    this.rooms = rooms;  
}
```

You then create instances of the object using the new keyword and then a call to the constructor function.

```
var hotel1 = new Hotel('Quay', 40);  
var hotel2 = new Hotel('Park', 120);
```

Objects created with constructors are good when:

- You have lots of objects used with similar functionality (e.g., multiple slideshows / media players / game characters) within a page
- A complex object might not be used in code

To access the properties or methods of the object, use dot notation:

```
// This retrieves Park:  
hotel2.name;
```

ARRAYS ARE OBJECTS

Arrays are actually a special type of object. They hold a related set of key/value pairs (like all objects), but the key for each value is its index number.

As you saw (on p72), arrays have a **length** property telling you how many items are in the array. In Chapter 12, you will see that arrays also have several other helpful methods.


AN OBJECT

PROPERTY: VALUE:

room1	⋮	420
room2	⋮	460
room3	⋮	230
room4	⋮	620

Here, hotel room costs are stored in an object. The example covers four rooms, and the cost for each room is a property of the object:

```
costs = {  
    room1: 420,  
    room2: 460,  
    room3: 230,  
    room4: 620  
};
```

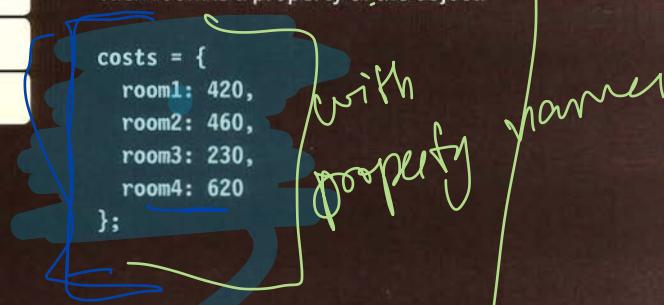

AN ARRAY

INDEX NUMBER: VALUE:

0	⋮	420
1	⋮	460
2	⋮	230
3	⋮	620

Here is the same data in an array. Instead of property names, it has index numbers:

```
costs = [420, 460, 230, 620];
```



without
property names

ARRAYS OF OBJECTS & OBJECTS IN ARRAYS

You can combine arrays and objects to create complex data structures:
Arrays can store a series of objects (and remember their order).
Objects can also hold arrays (as values of their properties).

In an object, the order in which the properties appear is not important. In an array, the index numbers dictate the order of the properties. You will see more examples of these data structures in Chapter 12.

ARRAYS IN AN OBJECT

The property of any object can hold an array.
On the left, each item on a hotel bill is stored
separately in an array. To access the first charge for
room1 you would use:

~~costs.room1.items[0];~~

PROPERTY:	VALUE:
room1	items[420, 40, 10]
room2	items[460, 20, 20]
room3	items[230, 0, 0]
room4	items[620, 150, 60]

costs.room1()


OBJECTS IN AN ARRAY

The value of any element in an array can be an
object (written using the object literal syntax).
Here, to access the phone charge for room three,
you would use:

~~costs[2].phone;~~

INDEX NUMBER:	VALUE:
0	{accom: 420, food: 40, phone: 10}
1	{accom: 460, food: 20, phone: 20}
2	{accom: 230, food: 0, phone: 0}
3	{accom: 620, food: 150, phone: 60}

WHAT ARE BUILT-IN OBJECTS?

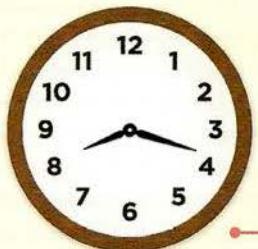

Browsers come with a set of built-in objects that represent things like the browser window and the current web page shown in that window. These built-in objects act like a toolkit for creating interactive web pages.

The objects you create will usually be specifically written to suit your needs. They model the data used within, or contain functionality needed by, your script. Whereas, the built-in objects contain functionality commonly needed by many scripts.

As soon as a web page has loaded into the browser, these objects are available to use in your scripts.

These built-in objects help you get a wide range of information such as the width of the browser window, the content of the main heading in the page, or the length of text a user entered into a form field.

You access their properties or methods using dot notation, just like you would access the properties or methods of an object you had written yourself.

Objects
→ Built-in → contain functionality commonly needed by many scripts.
→ user-defined → written acc. to user needs.

The first thing you need to do is get to know what tools are available.
You can imagine that your new toolkit has three compartments:

1 BROWSER OBJECT MODEL

The Browser Object Model contains objects that represent the current browser window or tab. It contains objects that model things like browser history and the device's screen.



2 DOCUMENT OBJECT MODEL

The Document Object Model uses objects to create a representation of the current page. It creates a new object for each element (and each individual section of text) within the page.

3

GLOBAL JAVASCRIPT OBJECTS

The global JavaScript objects represent things that the JavaScript language needs to create a model of. For example, there is an object that deals only with dates and times.

WHAT DOES THIS SECTION COVER?

You have already seen how to access the properties and methods of an object, so the purpose of this section is to let you know:

- What built-in objects are available to you
- What their main properties and methods do

There will be a few examples in the remaining part of this chapter to ensure you know how to use them. Then, throughout the rest of the entire book, you will see many practical examples of how they are used in a range of situations.

WHAT IS AN OBJECT MODEL?

You have seen that an object can be used to create a model of something from the real world using data.

An **object model** is a group of objects, each of which represent related things from the real world. Together they form a model of something larger.

Two pages back, it was noted that an array can hold a set of objects, or that the property of an object could be an array. It is also possible for the property of an object to be another object. When an object is nested inside another object, you may hear it referred to as a child object.

nested objects

THREE GROUPS OF BUILT-IN OBJECTS

USING BUILT-IN OBJECTS:

The three sets of built-in objects each offer a different range of tools that help you write scripts for web pages.


Chapter 5 is dedicated to the Document Object Model because it is needed to access and update the contents of a web page.

The other two sets of objects will be introduced in this chapter, and then you will see them used throughout the rest of the book.

BROWSER OBJECT MODEL

The Browser Object Model creates a model of the browser tab or window.

The topmost object is the `window` object, which represents current browser window or tab. Its child objects represent other browser features.

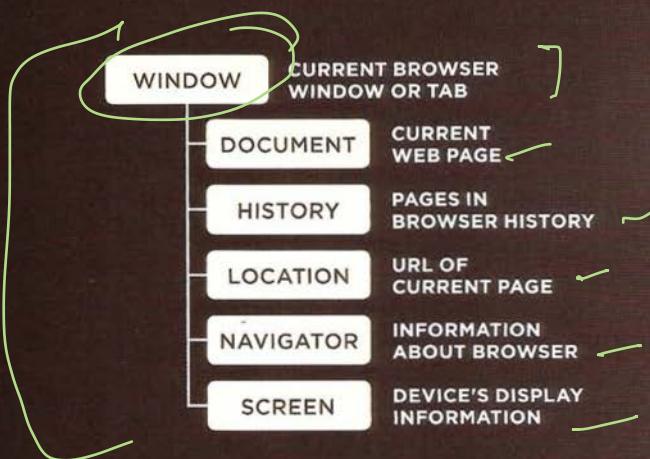

EXAMPLES

The `window` object's `print()` method will cause the browser's print dialog box to be shown:
`window.print();`

The `screen` object's `width` property will let you find the width of the device's screen in pixels:
`window.screen.width;`

You meet the `window` object on p124 along with some properties of the `screen` and `history` objects.


This book will teach you how to use these built-in objects and what type of information you can get from each one. You will also see examples that use many of their most popular features.

We do not have space to exhaustively document every object in each of these models in this book, so you can find a list of links to online resources at: <http://javascriptbook.com/resources>

DOCUMENT OBJECT MODEL

The Document Object Model (DOM) creates a model of the current web page.

The topmost object is the **document** object, which represents the page as a whole. Its child objects represent other items on the page.

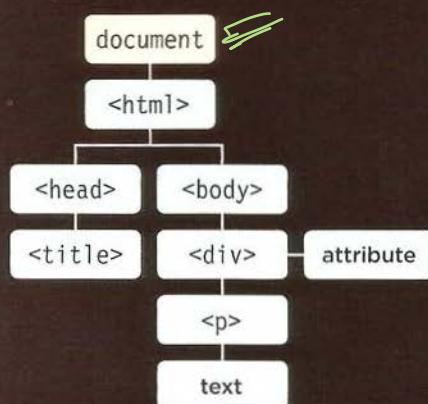

EXAMPLES

The **document** object's **getElementById()** method gets an element by the value of its **id** attribute:
`document.getElementById('one');`

The **document** object's **lastModified** property will tell you the date that the page was last updated:
`document.lastModified;`

You meet the **document** object on p126.
Chapter 5 goes into this object model in depth.

GLOBAL JAVASCRIPT OBJECTS

The global objects do not form a single model. They are a group of individual objects that relate to different parts of the JavaScript language.

The names of the global objects usually start with a capital letter, e.g., the **String** and **Date** objects.

These objects represent basic data types:

- STRING FOR WORKING WITH STRING VALUES
- NUMBER FOR WORKING WITH NUMERIC VALUES
- BOOLEAN FOR WORKING WITH BOOLEAN VALUES

These objects help deal with real-world concepts:

- DATE TO REPRESENT AND HANDLE DATES
- MATH FOR WORKING WITH NUMBERS AND CALCULATIONS
- REGEX FOR MATCHING PATTERNS WITHIN STRINGS OF TEXT

EXAMPLES

The **String** object's **toUpperCase()** method makes all letters in the following variable uppercase:
`hotel.toUpperCase();`

The **Math** object's **PI** property will return the value of pi:
`Math.PI();`

You meet the **String**, **Number**, **Date**, and **Math** objects later in this chapter.

THE BROWSER OBJECT MODEL: THE WINDOW OBJECT

The window object represents the current browser window or tab. It is the topmost object in the Browser Object Model, and it contains other objects that tell you about the browser.

Here are a selection of the window object's properties and methods. You can also see some properties of the screen and history objects (which are children of the window object).

PROPERTY	DESCRIPTION
window.innerHeight	Height of window (excluding browser chrome/user interface) (in pixels)
window.innerWidth	Width of window (excluding browser chrome/user interface) (in pixels)
window.pageXOffset	Distance document has been scrolled horizontally (in pixels)
window.pageYOffset	Distance document has been scrolled vertically (in pixels)
window.screenX	X-coordinate of pointer, relative to top left corner of screen (in pixels)
window.screenY	Y-coordinate of pointer, relative to top left corner of screen (in pixels)
window.location	Current URL of window object (or local file path)
window.document	Reference to document object, which is used to represent the current page contained in window
window.history	Reference to history object for browser window or tab, which contains details of the pages that have been viewed in that window or tab
window.history.length	Number of items in history object for browser window or tab
window.screen	Reference to screen object
window.screen.width	Accesses screen object and finds value of its width property (in pixels)
window.screen.height	Accesses screen object and finds value of its height property (in pixels)

METHOD	DESCRIPTION
window.alert()	Creates dialog box with message (user must click OK button to close it)
window.open()	Opens new browser window with URL specified as parameter (if browser has pop-up blocking software installed, this method may not work)
window.print()	Tells browser that user wants to print contents of current page (acts like user has clicked a print option in the browser's user interface)

USING THE BROWSER OBJECT MODEL

Here, data about the browser is collected from the window object and its children, stored in the msg variable, and shown in the page. The += operator adds data onto the end of the msg variable.

1. Two of the window object's properties, innerWidth and innerHeight, show width and height of the browser window.

2. Child objects are stored as properties of their parent object. So dot notation is used to access them, just like you would access any other property of that object.

In turn, to access the properties of the child object, another dot is used between the child object's name and its properties, e.g., window.history.length

3. The element whose id attribute has a value of info is selected, and the message that has been built up to this point is written into the page.

See p228 for notes on using innerHTML because it can be a security risk if it is not used correctly.

JAVASCRIPT

c03/js/window-object.js

```
① var msg = '<h2>browser window</h2><p>width: ' + window.innerWidth + '</p>';
msg += '<p>height: ' + window.innerHeight + '</p>';
msg += '<h2>history</h2><p>items: ' + window.history.length + '</p>';
② msg += '<h2>screen</h2><p>width: ' + window.screen.width + '</p>';
msg += '<p>height: ' + window.screen.height + '</p>';
③ var el = document.getElementById('info');
el.innerHTML = msg;
④ alert('Current page: ' + window.location);
```

RESULT



wholen object is
default object

4. The window object's alert() method is used to create a dialog box shown on top of the page. It is known as an alert box. Although this is a method of the window object, you may see it used on its own (as shown here) because the window object is treated as the default object if none is specified. (Historically, the alert() method was used to display warnings to users. These days there are better ways to provide feedback.)

THE DOCUMENT OBJECT MODEL: THE DOCUMENT OBJECT

The topmost object in the Document Object Model (or DOM) is the document object. It represents the web page loaded into the current browser window or tab. You meet its child objects in Chapter 5.

Here are some properties of the document object, which tell you about the current page.

As you will see in Chapter 5, the DOM also creates an object for each element on the page.

PROPERTY	DESCRIPTION
<code>document.title</code>	Title of current document
<code>document.lastModified</code>	Date on which document was last modified
<code>document.URL</code>	Returns string containing URL of current document
<code>document.domain</code>	Returns domain of current document

The DOM is vital to accessing and amending the contents of the current web page.

The following are a few of the methods that select content or update the content of a page.

METHOD	DESCRIPTION
<code>document.write()</code>	Writes text to document (see restrictions on p226)
<code>document.getElementById()</code>	Returns element, if there is an element with the value of the id attribute that matches (full description see p195)
<code>document.querySelectorAll()</code>	Returns list of elements that match a CSS selector, which is specified as a parameter (see p202)
<code>document.createElement()</code>	Creates new element (see p222)
<code>document.createTextNode()</code>	Creates new text node (see p222)

USING THE DOCUMENT OBJECT

This example gets information about the page, and then adds that information to the footer.

1. The details about the page are collected from properties of the document object.

These details are stored inside a variable called msg, along with HTML markup to display the information. Again, the += operator adds the new value onto the existing content of the msg variable.

2. You have seen the document object's getElementById() method in several examples so far. It selects an element from the page using the value of its id attribute. You will see this method in more depth on p195.


JAVASCRIPT

```
① var msg = '<p><b>page title: </b>' + document.title + '<br />';
  msg += '<b>page address: </b>' + document.URL + '<br />';
  msg += '<b>last modified: </b>' + document.lastModified + '</p>';

② var el = document.getElementById('footer');
  el.innerHTML = msg;
```

c03/js/document-object.js

RESULT

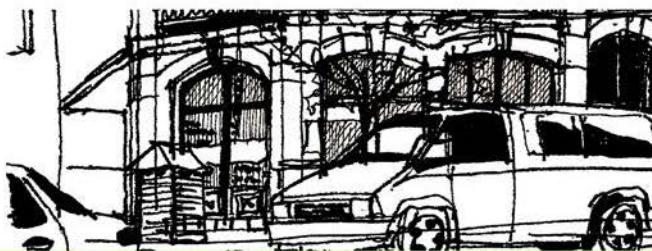

page title: TravelWorthy
page address: <http://javascriptbook.com/code/c03/document-object.html>
last modified: 03/10/2014 14:46:23

See p228 for notes on using innerHTML because it can be a security risk if it is not used correctly.

The URL will look very different if you run this page locally rather than on a web server. It will likely begin with file:/// rather than with http://.

GLOBAL OBJECTS: STRING OBJECT

Whenever you have a value that is a string, you can use the properties and methods of the String object on that value. This example stores the phrase "Home sweet home " in a variable.

```
var saying = 'Home sweet home ';
```

These properties and methods are often used to work with text stored in variables or objects.

On the right-hand page, note how the variable name (`saying`) is followed by a dot, then the property or method that is being demonstrated (like the name of an object is followed by a dot and its properties or methods).

This is why the String object is known as both a **global object**, because it works anywhere within your script, and a **wrapper object** because it acts like a wrapper around any value that is a string – you can use this object's properties and methods on any value that is a string.

The `length` property counts the number of "code units" in a string. In the majority of cases, one character uses one code unit, and most programmers use it like this. But some of the rarely used characters take up two code units.

PROPERTY	DESCRIPTION
<code>length</code>	Returns number of characters in the string in most cases (see note bottom-left)
METHOD	DESCRIPTION
<code>toUpperCase()</code>	Changes string to uppercase characters
<code>toLowerCase()</code>	Changes string to lowercase characters
<code>charAt()</code>	Takes an index number as a parameter, and returns the character found at that position
<code>indexOf()</code>	Returns index number of the first time a character or set of characters is found within the string
<code>lastIndexOf()</code>	Returns index number of the last time a character or set of characters is found within the string
<code>substring()</code>	Returns characters found between two index numbers where the character for the first index number is included and the character for the last index number is not included
<code>split()</code>	When a character is specified, it splits the string each time it is found, then stores each individual part in an array
<code>trim()</code>	Removes whitespace from start and end of string
<code>replace()</code>	Like find and replace, it takes one value that should be found, and another to replace it (by default, it only replaces the first match it finds)

Each character in a string is automatically given a number, called an **index number**. Index numbers always start at zero and not one (just like for items in an array).



EXAMPLE

```
saying.length;
```

Home sweet home

RESULT

16

EXAMPLE

```
saying.toUpperCase();
```

Home sweet home

'HOME SWEET HOME '

```
saying.toLowerCase();
```

Home sweet home

'home sweet home '

```
saying.charAt(12);
```

Home sweet home

'o'

```
saying.indexOf('ee');
```

Home sweet home

7

```
saying.lastIndexOf('e');
```

Home sweet home

14

```
saying.substring(8,14);
```

Home sweet home

'et hom'

```
saying.split(' ');
```

Home sweet home

['Home', 'sweet', 'home', '']

```
saying.trim();
```

Home sweet home

'Home sweet home'

```
saying.replace('me','w');
```

Home sweet home

'How sweet home '

WORKING WITH STRINGS

This example demonstrates the `length` property and many of the string object's methods shown on the previous page.

1. This example starts by storing the phrase "Home sweet home" in a variable called `saying`.

2. The next line tells you how many characters are in the string using the `length` property of the `String` object and stores the result in a variable called `msg`.
3. This is followed by examples showing several of the `String` object's methods.

The name of the variable (`saying`) is followed by a dot, then the property or method that is being demonstrated (in the same way that the other objects in this chapter used the dot notation to indicate a property or method of an object).


JAVASCRIPT

```
① var saying = 'Home sweet home';
② var msg = '<h2>length</h2><p>' + saying.length + '</p>';
  msg += '<h2>uppercase</h2><p>' + saying.toUpperCase() + '</p>';
  msg += '<h2>lowercase</h2><p>' + saying.toLowerCase() + '</p>';
  msg += '<h2>character index: 12</h2><p>' + saying.charAt(12) + '</p>';
③ msg += '<h2>first ee</h2><p>' + saying.indexOf('ee') + '</p>';
  msg += '<h2>last e</h2><p>' + saying.lastIndexOf('e') + '</p>';
  msg += '<h2>character index: 8-14</h2><p>' + saying.substring(8, 14) + '</p>';
  msg += '<h2>replace</h2><p>' + saying.replace('me', 'w') + '</p>';

④ [var el = document.getElementById('info');
  el.innerHTML = msg;
```

c03/js/string-object.js

RESULT

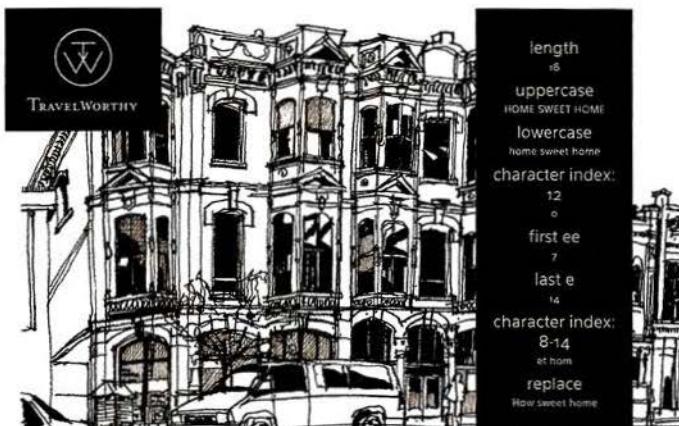

4. The final two lines select the element with an `id` attribute whose value is `info` and then add the value of the `msg` variable inside that element.

(Remember, security issues with using the `innerHTML` property are discussed on p228.)

DATA TYPES REVISITED

In JavaScript there are six data types:

Five of them are described as simple (or primitive) data types.

The sixth is the object (and is referred to as a complex data type).

SIMPLE OR PRIMITIVE DATA TYPES

JavaScript has five **simple** (or **primitive**) data types:

1. String
2. Number
3. Boolean
4. Undefined (variable that has been declared, but no value has been assigned to it yet)
5. Null (a variable with no value – it may have had one at some point, but no longer has a value)

As you have seen, both the web browser and the current document can be modeled using objects (and objects can have methods and properties).

But it can be confusing to discover that a simple value (like a string, a number, or a Boolean) can have methods and properties. Under the hood, JavaScript treats every variable as an object in its own right.

String: If a variable, or the property of an object, contains a string, you can use the properties and methods of the String object on it.

Number: If a variable, or property of an object, stores a number, you can use the properties and methods of the Number object on it (see next page).

Boolean: There is a Boolean object. It is rarely used.

(Undefined and null values do not have objects.)

COMPLEX DATA TYPE

JavaScript also defines a complex data type:

6. Object

Under the hood, arrays and functions are considered types of objects.

ARRAYS ARE OBJECTS

As you saw on p118, an array is a set of key/value pairs (just like any other object). But you do not specify the name in the key/value pair of an array – it is an index number.

Like other objects, arrays have properties and methods. On p72 you saw that arrays have a property called `length`, which tells you how many items are in that array. There is also a set of methods you can use with any array to add items to it, remove items from it, or reorder its contents. You will meet those methods in Chapter 12.

FUNCTIONS ARE OBJECTS

Technically, functions are also objects. But they have an additional feature: they are callable, which means you can tell the interpreter when you want to execute the statements that it contains.

GLOBAL OBJECTS: NUMBER OBJECT

Whenever you have a value that is a number, you can use the methods and properties of the Number object on it.

These methods are helpful when dealing with a range of applications from financial calculations to animations.

Many calculations involving currency (such as tax rates) will need to be rounded to a specific number of decimal places.

Or, in an animation, you might want to specify that certain elements should be evenly spaced out across the page.

METHOD	DESCRIPTION
<code>isNaN()</code>	Checks if the value is not a number
<code>toFixed()</code>	Rounds to specified number of decimal places (returns a string)
<code>toPrecision()</code>	Rounds to total number of places (returns a string)
<code>toExponential()</code>	Returns a string representing the number in exponential notation

COMMONLY USED TERMS:

- An **integer** is a whole number (not a fraction).
- A **real number** is a number that can contain a fractional part.
- A **floating point number** is a real number that uses decimals to represent a fraction. The term *floating point* refers to the decimal point.
- **Scientific notation** is a way of writing numbers that are too big or too small to be conveniently written in decimal form. For example: 3,750,000,000 can be represented as 3.75×10^9 or $3.75e+12$.

WORKING WITH DECIMAL NUMBERS

As with the String object, the properties and methods of the Number object can be used with any value that is a number.

1. In this example, a number is stored in a variable called originalNumber, and it is then rounded up or down using two different techniques.

In both cases, you need to indicate how many digits you want to round to. This is provided as a parameter in the parentheses for that method.

JAVASCRIPT

c03/js/number-object.js

```
① var originalNumber = 10.23456;  
    3 decimal places  
    var msg = '<h2>original number</h2><p>' + originalNumber + '</p>';  
② msg += '<h2>toFixed()</h2><p>' + originalNumber.toFixed(3) + '</p>';  
③ msg += '<h2>toPrecision()</h2><p>' + originalNumber.toPrecision(3) + '</p>';  
    var el = document.getElementById('info');  
    el.innerHTML = msg; 3 digits
```

RESULT



original number
10.23456
3 decimal places
10.235
3 digits
10.2

2. originalNumber.toFixed(3) will round the number stored in the variable originalNumber to three decimal places. (The number of decimal places is specified in the parentheses.) It will return the number as a string. It returns a string because fractions cannot always be accurately represented using floating point numbers.

2. toPrecision(3) uses the number in parentheses to indicate the total number of digits the number should have. It will also return the number as a string. (It may return a scientific notation if there are more digits than the specified number of positions.)

GLOBAL OBJECTS: MATH OBJECT

The Math object has properties and methods for mathematical constants and functions.

PROPERTY	DESCRIPTION
Math.PI	Returns pi (approximately 3.14159265359)
METHOD	DESCRIPTION
Math.round()	Rounds number to the nearest integer
Math.sqrt(<i>n</i>)	Returns square root of positive number, e.g., Math.sqrt(9) returns 3
Math.ceil()	Rounds number up to the nearest integer
Math.floor()	Rounds number down to the nearest integer
Math.random()	Generates a random number between 0 (inclusive) and 1 (not inclusive)

Because it is known as a **global object**, you can just use the name of the Math object followed by the property or method you want to access.

Typically you will then store the resulting number in a variable. This object also has many trigonometric functions such as `sin()`, `cos()`, and `tan()`.

The trigonometric functions return angles in radians which can then be converted into degrees if you divide the number by (pi/ 180).

MATH OBJECT TO CREATE RANDOM NUMBERS

This example is designed to generate a random whole number between 1 and 10.

The Math object's `random()` method generates a random number between 0 and 1 (with many decimal places).

To get a random whole number between 1 and 10, you need to multiply the randomly generated number by 10.

This number will still have many decimal places, so you can round it down to the nearest integer.

The `floor()` method is used to specifically round a number down (rather than up or down).

This will give you a value between 0 and 9. You then add 1 to make it a number between 1 and 10.

JAVASCRIPT

```
var randomNum = Math.floor((Math.random() * 10) + 1);

var el = document.getElementById('info');
el.innerHTML = '<h2>random number</h2><p>' + randomNum + '</p>';
```

c03/js/math-object.js

RESULT



If you used the `round()` method instead of the `floor()` method, the numbers 1 and 10 would be chosen around half of the number of times that 2-9 would be chosen.

Anything between 1.5 and 1.999 would get rounded up to 2, and anything between 9 and 9.5 would be rounded down to 9.

Using the `floor()` method ensures that the number is always rounded down to the nearest integer, and you can then add 1 to ensure the number is between 1 and 10.

CREATING AN INSTANCE OF THE DATE OBJECT

In order to work with dates, you create an instance of the **Date** object. You can then specify the time and date that you want it to represent.

To create a **Date** object, use the **Date()** object constructor. The syntax is the same for creating any object with a constructor function (see p108). You can use it to create more than one **Date** object.

By default, when you create a **Date** object it will hold today's date and the current time. If you want it to store another date, you must explicitly specify the date and time you want it to hold.

The diagram shows the JavaScript code `var today = new Date();` with annotations explaining its components:

- VARIABLE NAME:** `today`
- NEW KEYWORD:** `new`
- VARIABLE DECLARATION:** `var`
- ASSIGNMENT OPERATOR:** `=`
- DATE OBJECT CONSTRUCTOR:** `Date()`

You can think of the above as creating a variable called **today** that holds a number. This is because in JavaScript, dates are stored as a number: specifically the number of milliseconds since midnight on January 1, 1970.

Note that the current date / time is determined by the computer's clock. If the user is in a different time zone than you, their day may start earlier or later than yours. Also, if the internal clock on their computer has the wrong date or time, the **Date** object could reflect this by holding the wrong date.

The **Date()** object constructor tells the JavaScript interpreter that this variable is a date, and this in turn allows you to use the **Date** object's methods to set and retrieve dates and times from this **Date** object (see right-hand page for a list of methods).

You can set the date and/or time using any of the following formats (or methods shown on the right):

```
var dob = new Date(1996, 11, 26, 15, 45, 55);
var dob = new Date('Dec 26, 1996 15:45:55');
var dob = new Date(1996, 11, 26);
```

GLOBAL OBJECTS: DATE OBJECT (AND TIME)

Once you have created a Date object, the following methods let you set and retrieve the time and date that it represents.

METHOD		DESCRIPTION
getDate()	setDate()	Returns / sets the day of the month (1-31)
getDay()		Returns the day of the week (0-6)
getFullYear()	setFullYear()	Returns / sets the year (4 digits)
getHours()	setHours()	Returns / sets the hour (0-23)
getMilliseconds()	setMilliseconds()	Returns / sets the milliseconds (0-999)
getMinutes()	setMinutes()	Returns / sets the minutes (0-59)
getMonth()	setMonth()	Returns / sets the month (0-11)
getSeconds()	setSeconds()	Returns / sets the seconds (0-59)
getTime()	setTime()	Number of milliseconds since January 1, 1970, 00:00:00 UTC (Coordinated Universal Time) and a negative number for any time before
getTimezoneOffset()		Returns time zone offset in mins for locale
toDateString()		Returns "date" as a human-readable string
toTimeString()		Returns "time" as a human-readable string
toString()		Returns a string representing the specified date

The `toDateString()` method will display the date in the following format:

Wed Apr 16 1975.

If you want to display the date in another way, you can construct a different date format using the individual methods listed above to represent the individual parts: day, date, month, year.

`toTimeString()` shows the time. Several programming languages specify dates in milliseconds since midnight on Jan 1, 1970. This is known as Unix time.

A visitor's location may affect time zones and language spoken. Programmers use the term **locale** to refer to this kind of location-based information.

The Date object does not store the names of days or months as they vary between languages.

Instead, it uses a number from 0 to 6 for the days of the week and 0 to 11 for the months.

To show their names, you need to create an array to hold them (see p143).

CREATING A DATE OBJECT

1. In this example, a new Date object is created using the Date() object constructor. It is called today.

If you do not specify a date when creating a Date object, it will contain the date and time when the JavaScript interpreter encounters that line of code.

Once you have an instance of the Date object (holding the current date and time), you can use any of its properties or methods.

JAVASCRIPT

c03/js/date-object.js

```
① var today = new Date();
② var year = today.getFullYear();
③ var el = document.getElementById('footer');
el.innerHTML = '<p>Copyright &copy;' + year + '</p>';
```

RESULT



Copyright ©2014

2. In this example, you can see that getFullYear() is used to return the year of the date being stored in the Date object.

3. In this case, it is being used to write the current year in a copyright statement.

WORKING WITH DATES & TIMES

To specify a date and time, you can use this format:

YYYY, MM, DD, HH, MM, SS
1996, 04, 16, 15, 45, 55

This represents 3:45pm and 55 seconds on April 16, 1996.

The order and syntax for this is:

Year	four digits
Month	0-11 (Jan is 0)
Day	1-31
Hour	0-23
Minutes	0-59
Seconds	0-59
Milliseconds	0-999

Another way to format the date and time is like this:

MMM DD, YYYY HH:MM:SS
Apr 16, 1996 15:45:55

You can omit the time portion if you do not need it.


JAVASCRIPT

c03/js/date-object-difference.js

```
① var today = new Date();
② var year = today.getFullYear();
    var est = new Date('Apr 16, 1996 15:45:55');
③ var difference = today.getTime() - est.getTime();
    difference = (difference / 31556900000);

var elMsg = document.getElementById('message');
elMsg.textContent = Math.floor(difference) + ' years of online travel advice';
```

RESULT

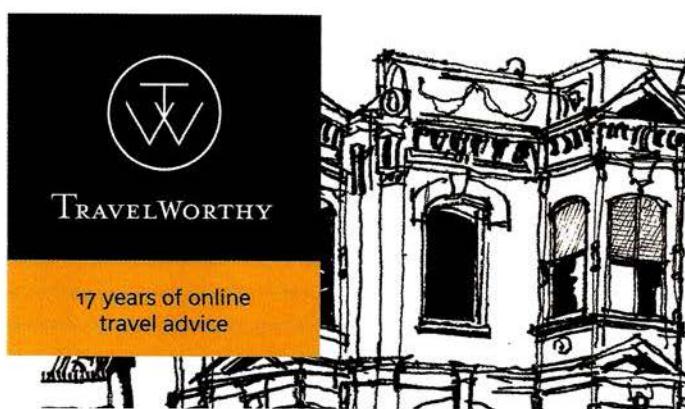


1. In this example, you can see a date being set in the past.

2. If you try to find the difference between two dates, you will end up with a result in milliseconds.

3. To get the difference in days/weeks/years, you divide this number by the number of milliseconds in a day/week/year.

Here the number is divided by 31,556,900,000 – the number of milliseconds in a year (that is not a leap year).

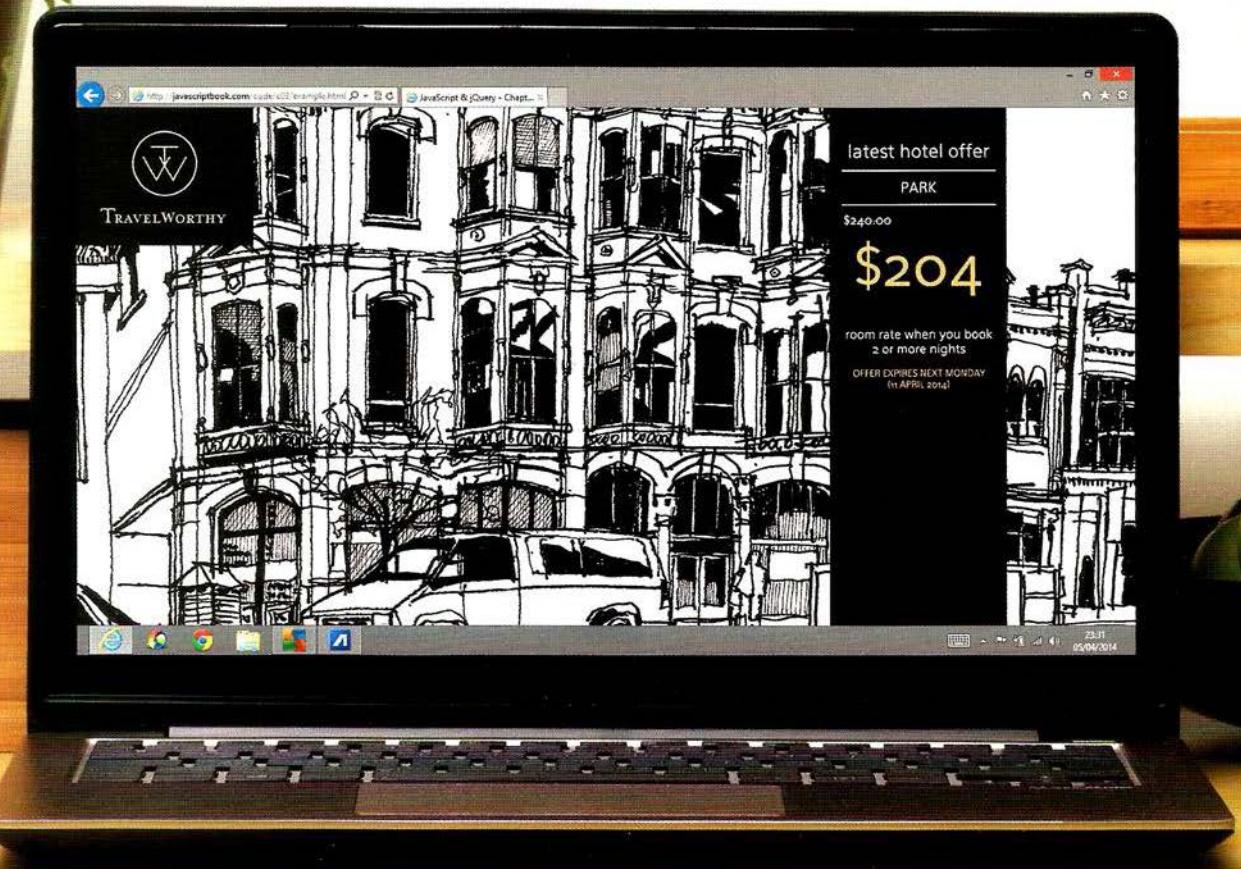



EXAMPLE FUNCTIONS, METHODS & OBJECTS

This example is split into two parts. The first shows you the details about the hotel, room rate, and offer rate. The second part indicates when the offer expires.

All of the code is placed inside an immediately invoked function expression (IIFE) to ensure any variable names used in the script do not clash with variable names used in other scripts.

The first part of the script creates a `hotel` object; it has three properties (the hotel name, room rate, and percentage discount being offered), plus a method to calculate the offer price which is shown to the user.

The details of the discount are written into the page using information from this `hotel` object. To ensure that the discounted rate is shown with two decimal places (like most prices are shown) the `.toFixed()` method of the `Number` object is used.

The second part of the script shows that the offer will expire in seven days. It does this using a function called `offerExpires()`. The date currently set on the user's computer is passed as an argument to the `offerExpires()` function so that it can calculate when the offer ends.

Inside the function, a new `Date` object is created; and seven days is added to today's date. The `Date` object represents the days and months as numbers (starting at 0) so – to show the name of the day and month – two arrays are created storing all possible day and month names. When the message is written, it retrieves the appropriate day/month from those arrays.

The message to show the expiry date is built up inside a variable called `expiryMsg`. The code that calls the `offerExpires()` function and displays the message is at the end of the script. It selects the element where the message should appear and updates its content using the `innerHTML` property, which you will meet in Chapter 5.

EXAMPLE

FUNCTIONS, METHODS & OBJECTS

c03/js/example.js

JAVASCRIPT

```
/* The script is placed inside an immediately invoked function expression
   which helps protect the scope of variables */

(function() {

  // PART ONE: CREATE HOTEL OBJECT AND WRITE OUT THE OFFER DETAILS

  // Create a hotel object using object literal syntax
  var hotel = {
    name: 'Park',
    roomRate: 240, // Amount in dollars
    discount: 15, // Percentage discount
    offerPrice: function() {
      var offerRate = this.roomRate * ((100 - this.discount) / 100);
      return offerRate;
    }
  }

  // Write out the hotel name, standard rate, and the special rate
  var hotelName, roomRate, specialRate; // Declare variables

  hotelName = document.getElementById('hotelName'); // Get elements
  roomRate = document.getElementById('roomRate');
  specialRate = document.getElementById('specialRate');

  hotelName.textContent = hotel.name; // Write hotel name
  roomRate.textContent = '$' + hotel.roomRate.toFixed(2); // Write room rate
  specialRate.textContent = '$' + hotel.offerPrice(); // Write offer price
})()
```

If you read the comments in the code, you can see how this example works.

EXAMPLE

FUNCTIONS, METHODS & OBJECTS

JAVASCRIPT

c03/js/example.js

```
// PART TWO: CALCULATE AND WRITE OUT THE EXPIRY DETAILS FOR THE OFFER
var expiryMsg; // Message displayed to users
var today; // Today's date
var elEnds; // The element that shows the message about the offer ending

function offerExpires(today) {
    // Declare variables within the function for local scope
    var weekFromToday, day, date, month, year, dayNames, monthNames;
    // Add 7 days time (added in milliseconds)
    weekFromToday = new Date(today.getTime() + 7 * 24 * 60 * 60 * 1000);
    // Create arrays to hold the names of days / months
    dayNames = ['Sunday', 'Monday', 'Tuesday', 'Wednesday', 'Thursday',
    ↪ 'Friday', 'Saturday'];
    monthNames = ['January', 'February', 'March', 'April', 'May', 'June',
    ↪ 'July', 'August', 'September', 'October', 'November', 'December'];
    // Collect the parts of the date to show on the page
    day = dayNames[weekFromToday.getDay()];
    date = weekFromToday.getDate();
    month = monthNames[weekFromToday.getMonth()];
    year = weekFromToday.getFullYear();
    // Create the message
    expiryMsg = 'Offer expires next ';
    expiryMsg += day + ' <br />(' + date + ' ' + month + ' ' + year + ')';
    return expiryMsg;
}

today = new Date(); // Put today's date in variable
elEnds = document.getElementById('offerEnds'); // Get the offerEnds element
elEnds.innerHTML = offerExpires(today); // Add the expiry message

// Finish the immediately invoked function expression
}());
```

☞ This symbol indicates that the code is wrapping from the previous line and should not contain line breaks.

This is a good demonstration of several concepts relating to date, but if the user has the wrong date on their computer (perhaps their clock is set incorrectly), it will not show a date seven days from now - it will show a date seven days from the time the computer thinks it is.

SUMMARY

FUNCTIONS, METHODS & OBJECTS

- ▶ Functions allow you to group a set of related statements together that represent a single task.
- ▶ Functions can take parameters (information required to do their job) and may return a value.
- ▶ An object is a series of variables and functions that represent something from the world around you.
- ▶ In an object, variables are known as properties of the object; functions are known as methods of the object.
- ▶ Web browsers implement objects that represent both the browser window and the document loaded into the browser window.
- ▶ JavaScript also has several built-in objects such as String, Number, Math, and Date. Their properties and methods offer functionality that help you write scripts.
- ▶ Arrays and objects can be used to create complex data sets (and both can contain the other).



4

DECISIONS & LOOPS



Looking at a flowchart (for all but the most basic scripts), the code can take more than one path, which means the browser runs different code in different situations. In this chapter, you will learn how to create and control the flow of data in your scripts to handle different situations.

Scripts often need to behave differently depending upon how the user interacts with the web page and/or the browser window itself. To determine which path to take, programmers often rely upon the following three concepts:

EVALUATIONS




You can analyze values in your scripts to determine whether or not they match expected results.

DECISIONS

Using the results of evaluations, you can decide which path your script should go down.

LOOPS

There are also many occasions where you will want to perform the same set of steps repeatedly.

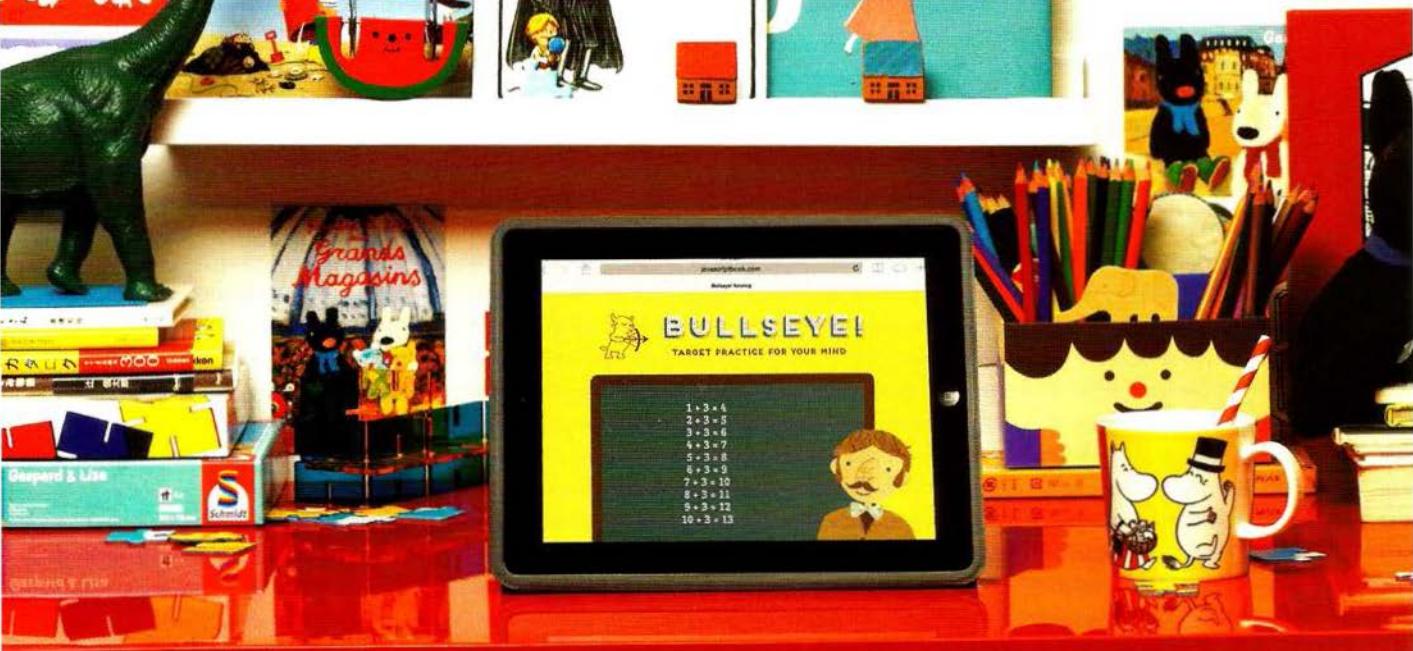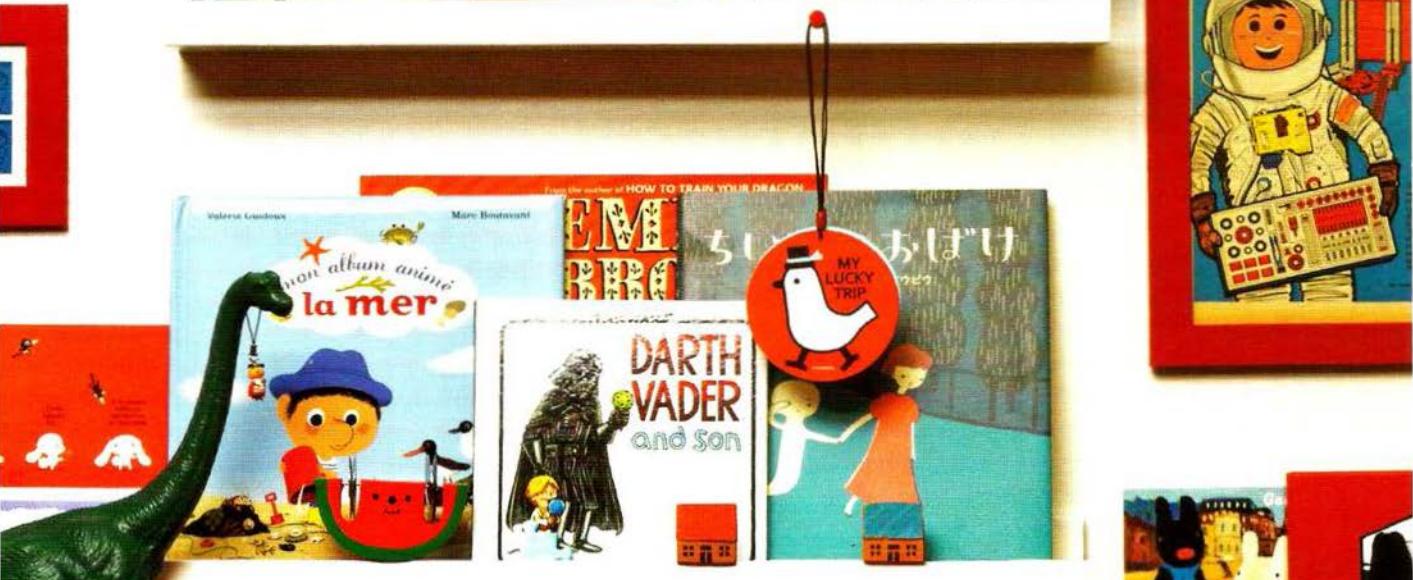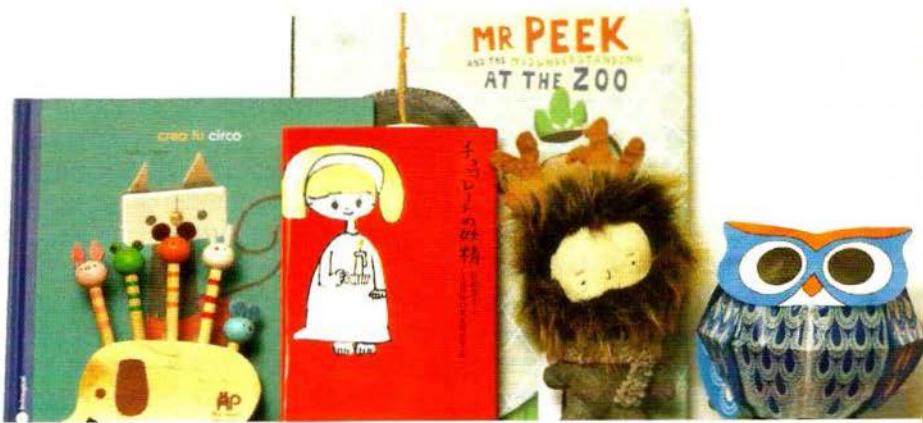


DECISION MAKING

There are often several places in a script where decisions are made that determine which lines of code should be run next. Flowcharts can help you plan for these occasions.

In a flowchart, the diamond shape represents a point where a decision must be made and the code can take one of two different paths. Each path is made up of a different set of tasks, which means you have to write different code for each situation.

In order to determine which path to take, you set a condition. For example, you can check that one value is equal to another, greater than another, or less than another. If the condition returns true, you take one path; if it is false, you take another path.

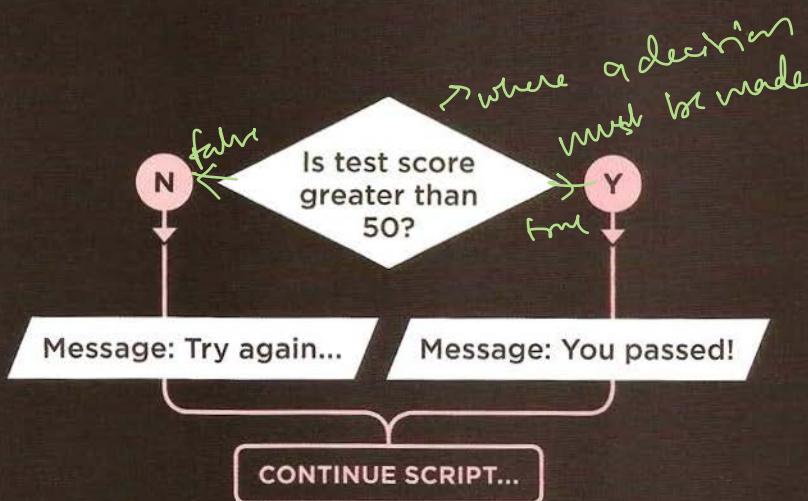

In the same way that there are operators to do basic math, or to join two strings, there are **comparison operators** that allow you to compare values and test whether a condition is met or not.

Examples of comparison operators include the greater than (>) and less than (<) symbols, and double equals sign (==) which checks whether two values are the same.

EVALUATING CONDITIONS & CONDITIONAL STATEMENTS

There are two components to a decision:

- 1: An expression is evaluated, which returns a value
- 2: A conditional statement says what to do in a given situation

EVALUATION OF A CONDITION

In order to make a decision, your code checks the current status of the script. This is commonly done by comparing two values using a comparison operator which returns a value of **true** or **false**.

The diagram illustrates the flow of control in an `if` statement. A green oval labeled "CONDITION" encloses the expression `(score > 50)`. A green arrow labeled "Evaluation" points from this oval to the opening brace of the `if` block. The code itself is as follows:

```
if (score > 50){  
    document.write('You passed!');  
} else {  
    document.write('Try again...');  
}
```

CONDITIONAL STATEMENTS

A conditional statement is based on a concept of `if/then/else`; *if* a condition is met, *then* your code executes one or more statements, *else* your code does something different (or just skips the step).

WHAT THIS IS SAYING:

if the condition returns **true**
execute the statements between
the first set of curly brackets
otherwise
execute the statements between
the second set of curly brackets

(You will also meet **truthy** and **falsy** values on p167. They are treated as if true or false.)

You can also multiple conditions by combining two or more comparison operators. For example, you can check whether two conditions are both met, or if just one of several conditions is met.

Over the next few pages, you will meet several permutations of the `if...` statements, and also a statement called a `switch` statement. Collectively, these are known as **conditional statements**.

COMPARISON OPERATORS: EVALUATING CONDITIONS

You can evaluate a situation by comparing one value in the script to what you expect it might be. The result will be a Boolean: **true** or **false**.

==

IS EQUAL TO

This operator compares two values (numbers, strings, or Booleans) to see if they are the same.

'Hello' == 'Goodbye' returns **false**
because they are *not* the same string.

'Hello' == 'Hello' returns **true**
because they *are* the same string.

It is usually preferable to use the strict method:

== == ==

STRICT EQUAL TO

This operator compares two values to check that both the data type and value are the same.

'3' === 3 returns **false**
because they are *not* the same data type or value.

'3' === '3' returns **true**
because they *are* the same data type and value.

!=

IS NOT EQUAL TO

This operator compares two values (numbers, strings, or Booleans) to see if they are *not* the same.

'Hello' != 'Goodbye' returns **true**
because they are *not* the same string.

'Hello' != 'Hello' returns **false**
because they *are* the same string.

It is usually preferable to use the strict method:

!= == ==

STRICT NOT EQUAL TO

This operator compares two values to check that both the data type and value are *not* the same.

'3' !== 3 returns **true**
because they are *not* the same data type or value.

'3' !== '3' returns **false**
because they *are* the same data type and value.

Programmers refer to the testing or checking of a condition as **evaluating** the condition. Conditions can be much more complex than those shown here, but they usually result in a value of **true** or **false**.

There are a couple of notable exceptions:

- i) Every value can be treated as true or false even if it is not a Boolean **true** or **false** value (see p167).
- ii) In short-circuit evaluation, a condition might not need to run (see p169).



GREATER THAN

This operator checks if the number on the left is *greater than* the number on the right.

$4 > 3$ returns **true**
 $3 > 4$ returns **false**



LESS THAN

This operator checks if the number on the left is *less than* the number on the right.

$4 < 3$ returns **false**
 $3 < 4$ returns **true**



GREATER THAN OR EQUAL TO

This operator checks if the number on the left is *greater than or equal to* the number on the right.

$4 >= 3$ returns **true**
 $3 >= 4$ returns **false**
 $3 >= 3$ returns **true**



LESS THAN OR EQUAL TO


This operator checks if the number on the left is *less than or equal to* the number on the right.

$4 <= 3$ returns **false**
 $3 <= 4$ returns **true**
 $3 <= 3$ returns **true**

STRUCTURING COMPARISON OPERATORS

In any condition, there is usually one operator and two operands.

The operands are placed on each side of the operator. They can be values or variables. You often see expressions enclosed in brackets.

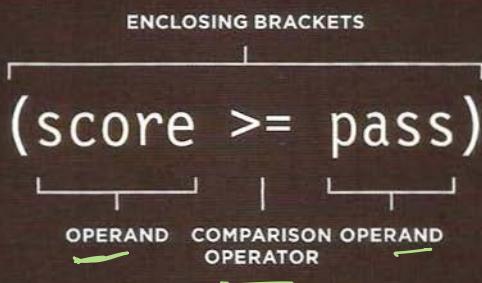

If you remember back to Chapter 2, this is an example of an **expression** because the condition resolves into a single value: in this case it will be either **true** or **false**.

The enclosing brackets are important when the expression is used as a condition in a comparison operator. But when you are assigning a value to a variable, they are not needed (see right-hand page).


USING COMPARISON OPERATORS

JAVASCRIPT

c04/js/comparison-operator.js

```
var pass = 50; // Pass mark  
var score = 90; // Score  
  
// Check if the user has passed  
var hasPassed = score >= pass;  
  
// Write the message into the page  
var el = document.getElementById('answer');  
el.textContent = 'Level passed: ' + hasPassed;
```

RESULT

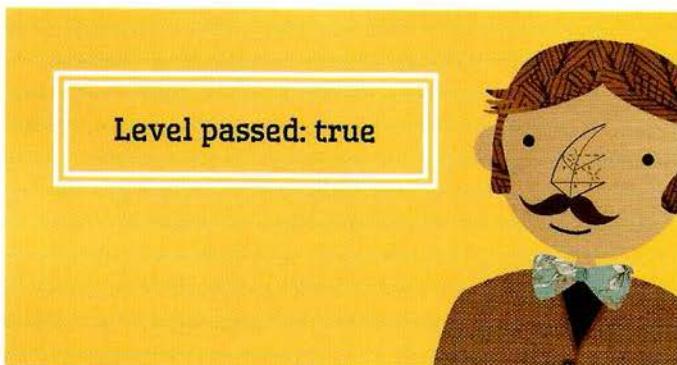

At the most basic level, you can evaluate two variables using a comparison operator to return a true or false value.

In this example, a user is taking a test, and the script tells the user whether they have passed this round of the test.

The example starts by setting two variables:

1. pass to hold the pass mark
2. score to hold the users score


To see if the user has passed, a comparison operator checks whether score is greater than or equal to pass. The result will be true or false, and is stored in a variable called hasPassed. On the next line, the result is written to the screen.

The last two lines select the element whose id attribute has a value of answer, and then updates its contents. You will learn more about this technique in the next chapter.

USING EXPRESSIONS WITH COMPARISON OPERATORS

The operand does not have to be a single value or variable name.

An operand can be an *expression* (because each expression evaluates into a single value).

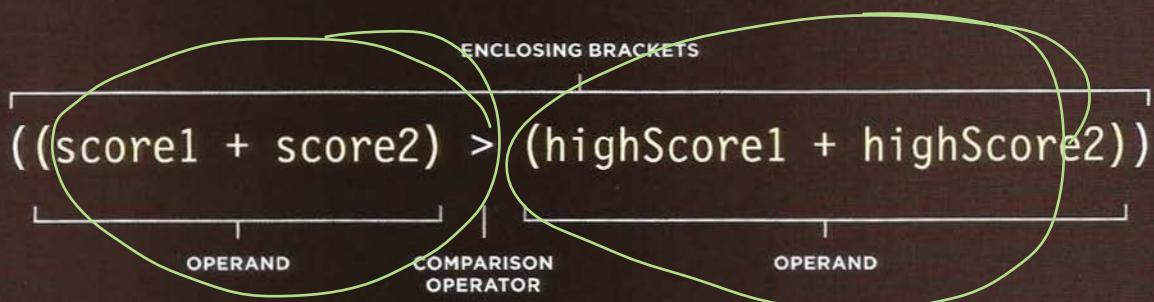

COMPARING TWO EXPRESSIONS

In this example, there are two rounds to the test and the code will check if the user has achieved a new high score, beating the previous record.

The script starts by storing the user's scores for each round in variables. Then the highest scores for each round are stored in two more variables.

The comparison operator checks if the user's total score is greater than the highest score for the test and stores the result in a variable called `comparison`.

JAVASCRIPT

c04/js/comparison-operator-continued.js

```
var score1 = 90;      // Round 1 score
var score2 = 95;      // Round 2 score
var highScore1 = 75; // Round 1 high score
var highScore2 = 95; // Round 2 high score

// Check if scores are higher than current high scores
var comparison = (score1 + score2) > (highScore1 + highScore2);

// Write the message into the page
var el = document.getElementById('answer');
el.textContent = 'New high score: ' + comparison;
```

RESULT



In the comparison operator, the operand on the left calculates the user's total score. The operand on the right adds together the highest scores for each round. The result is then added to the page.

When you assign the result of the comparison to a variable, you do not strictly need the containing parentheses (shown in white on the left-hand page).

Some programmers use them anyway to indicate that the code evaluates into a single value. Others only use containing parentheses when they form part of a condition.

LOGICAL OPERATORS

Comparison operators usually return single values of **true** or **false**. Logical operators allow you to compare the results of more than one comparison operator.

Do expression 1 and expression 2 both evaluate to **true**?

false

EXPRESSION 3
 $((5 < 2) \&\& (2 \geq 3))$

EXPRESSION 1 LOGICAL OPERATOR EXPRESSION 2

AND *&&*
OR *||*

Is five less than two?

false

Is two greater than or equal to three?

false

In this one line of code are three expressions, each of which will resolve to the value **true** or **false**.

The expressions on the left and the right both use comparison operators, and both return **false**.

The third expression uses a logical operator (rather than a comparison operator). The logical AND operator checks to see whether both expressions on either side of it return **true** (in this case they do not, so it evaluates to **false**).

&&

LOGICAL AND

This operator tests more than one condition.

`((2 < 5) && (3 >= 2))`
returns true

If both expressions evaluate to **true** then the expression returns **true**. If just one of these returns **false**, then the expression will return **false**.

`true && true` returns **true**
`true && false` returns **false**
`false && true` returns **false**
`false && false` returns **false**



LOGICAL OR

This operator tests at least one condition.

`((2 < 5) || (2 < 1))`
returns true

If either expression evaluates to **true**, then the expression returns **true**. If both return **false**, then the expression will return **false**.

`true || true` returns **true**
`true || false` returns **true**
`false || true` returns **true**
`false || false` returns **false**

!

LOGICAL NOT

This operator takes a single Boolean value and inverts it.

`!(2 < 1)`
returns **true**

This reverses the state of an expression. If it was **false** (without the **!** before it) it would return **true**. If the statement was **true**, it would return **false**.

`!true` returns **false**
`!false` returns **true**

SHORT-CIRCUIT EVALUATION

Logical expressions are evaluated **left to right**.

If the first condition can provide enough information to get the answer, then there is no need to evaluate the second condition.

false && anything

it has found a **false**

There is no point continuing to determine the other result.
They cannot both be **true**.

true || anything

it has found a **true**

There is no point continuing because at least one of the values is **true**.

USING LOGICAL AND

In this example, a math test has two rounds. For each round there are two variables: one holds the user's score for that round; the other holds the pass mark for that round.

The logical AND is used to see if the user's score is greater than or equal to the pass mark in both of the rounds of the test. The result is stored in a variable called `passBoth`.

The example finishes off by letting the user know whether or not they have passed both rounds.

c04/js/logical-and.js

JAVASCRIPT

```
var score1 = 8;    // Round 1 score
var score2 = 8;    // Round 2 score
var pass1 = 6;     // Round 1 pass mark
var pass2 = 6;     // Round 2 pass mark


// Check whether user passed both rounds, store result in variable
var passBoth = (score1 >= pass1) && (score2 >= pass2);

// Create message
var msg = 'Both rounds passed: ' + passBoth;

// Write the message into the page
var el = document.getElementById('answer');
el.textContent = msg;
```

It is rare that you would ever write the Boolean result into the page (like we are doing here). As you will see later in the chapter, it is more likely that you would check a condition, and if it is true, run other statements.

RESULT

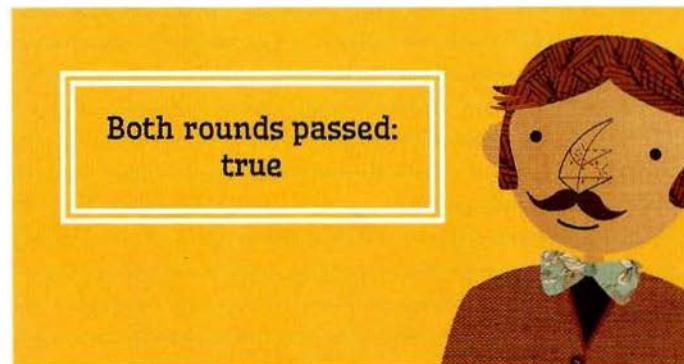

USING LOGICAL OR & LOGICAL NOT

Here is the same test but this time using the logical OR operator to find out if the user has passed at least one of the two rounds. If they pass just one round, they do not need to retake the test.

Look at the numbers stored in the four variables at the start of the example. The user has passed both rounds, so the minPass variable will hold the Boolean value of true.

Next, the message is stored in a variable called msg. At the end of the message, the logical NOT will invert the result of the Boolean variable so it is false. It is then written into the page.

JAVASCRIPT

c04/js/logical-or-logical-not.js

```
var score1 = 8;      // Round 1 score
var score2 = 8;      // Round 2 score
var pass1 = 6;       // Round 1 pass mark
var pass2 = 6;       // Round 2 pass mark

// Check whether user passed one of the two rounds, store result in variable
var minPass = ((score1 >= pass1) || (score2 >= pass2));

// Create message
var msg = 'Resit required: ' + !(minPass);


// Write the message into the page
var el = document.getElementById('answer');
el.textContent = msg;
```

RESULT



IF STATEMENTS

The **if** statement evaluates (or checks) a condition. If the condition evaluates to **true**, any statements in the subsequent code block are executed.

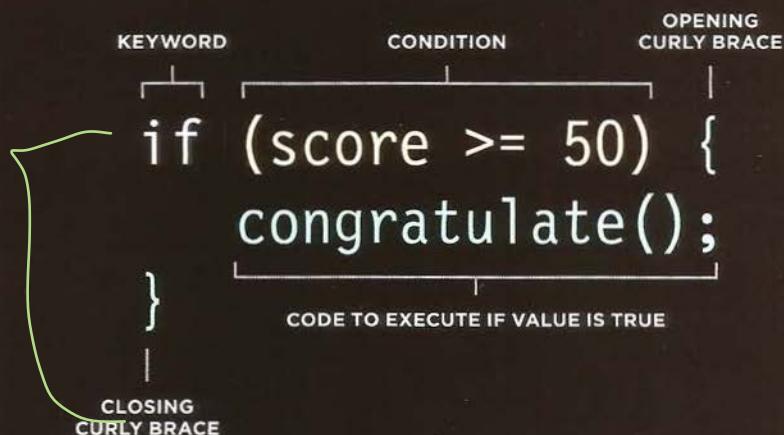

If the condition evaluates to **true**, the following code block (the code in the next set of curly braces) is executed.

If the condition resolves to **false**, the statements in that code block are **not** run. (The script continues to run from the end of the next code block.)

USING IF STATEMENTS

JAVASCRIPT

c04/js/if-statement.js

```
var score = 75;      // Score
var msg;            // Message

if (score >= 50) { // If score is 50 or higher
  msg = 'Congratulations!';
  msg += ' Proceed to the next round.'
}

var el = document.getElementById('answer');
el.textContent = msg;
```

RESULT



JAVASCRIPT

c04/js/if-statement-with-function.js

```
var score = 75;      // Score
var msg = '';        // Message

② function congratulate() {
  msg += 'Congratulations! '
}

if (score >= 50) { // If score is 50 or more
  ① congratulate();
  ③ msg += 'Proceed to the next round.'
}

var el = document.getElementById('answer');
el.innerHTML = msg;
```

In this example, the if statement is checking if the value currently held in a variable called score is 50 or more.

In this case, the statement evaluates to true (because the score is 75, which is greater than 50). Therefore, the contents of the statements within the subsequent code block are run, creating a message that congratulates the user and tells them to proceed.

After the code block, the message is written to the page.

If the value of the score variable had been less than 50, the statements in the code block would not have run, and the code would have continued on to the next line after the code block.

On the left is an alternative version of the same example that demonstrates how lines of code do not always run in the order you expect them to. If the condition is met then:

1. The first statement in the code block calls the `congratulate()` function.
2. The code within the `congratulate()` function runs.
3. The second line within the if statement's code block runs.

IF...ELSE STATEMENTS

The **if...else** statement checks a condition.

If it resolves to **true** the first code block is executed.

If the condition resolves to **false** the second code block is run instead.

```
if (score >= 50) {  
    congratulate();  
}  
else {  
    encourage();  
}
```

CODE TO EXECUTE IF VALUE IS TRUE

CODE TO EXECUTE IF VALUE IS FALSE

● CONDITIONAL STATEMENT

● CONDITION

● IF CODE BLOCK

● ELSE CODE BLOCK

USING IF...ELSE STATEMENTS

JAVASCRIPT

c04/js/if-else-statement.js

```
var pass = 50;          // Pass mark
var score = 75;          // Current score
var msg;                 // Message


// Select message to write based on score
if (score >= pass) {
  msg = 'Congratulations, you passed!';
} else {
  msg = 'Have another go!';
}

var el = document.getElementById('answer');
el.textContent = msg;
```


RESULT



An if statement only runs a set of statements if the condition is true:

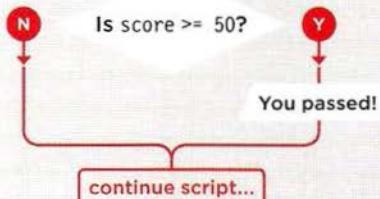

An if...else statement runs one set of code if the condition is true or a different set if it is false:

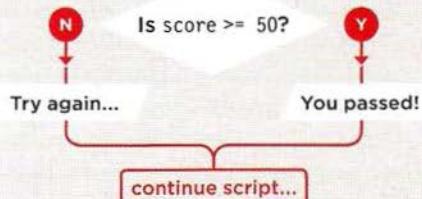

Here you can see that an if...else statement allows you to provide two sets of code:

1. one set if the condition evaluates to true
2. another set if the condition is false

In this test, there are two possible outcomes: a user can either get a score equal to or greater than the pass mark (which means they pass), or they can score less than the pass mark (which means they fail). One response is required for each eventuality. The response is then written to the page.

Note that the statements inside an if statement should be followed by a semicolon, but there is no need to place one after the closing curly brace of the code blocks.

SWITCH STATEMENTS

A **switch** statement starts with a variable called the **switch value**. Each case indicates a possible value for this variable and the code that should run if the variable matches that value.

Here, the variable named **level** is the **switch value**. If the value of the **level** variable is the string **One**, then the code for the first case is executed. If it is **Two**, the second case is executed. If it is **Three**, the third case is executed. If it is none of these, the code for the **default** case is executed.

The entire statement lives in one code block (set of curly braces), and a colon separates the option from the statements that are to be run if the case matches the switch value.

At the end of each case is the **break** keyword. It tells the JavaScript interpreter that it has finished with this **switch** statement and to proceed to run any subsequent code that appears after it.

IF... ELSE

- There is no need to provide an **else** option. (You can just use an **if** statement.)
- With a series of **if** statements, they are all checked even if a match has been found (so it performs more slowly than **switch**).]

VS.

switch (**level**) {
 case 'One':
 title = 'Level 1';
 break;

 case 'Two':
 title = 'Level 2';
 break;

 case 'Three':
 title = 'Level 3';
 break;

 default:
 title = 'Test';
 break;
}

SWITCH

- You have a **default** option that is run if none of the cases match.
- If a match is found, that code is run; then the **break** statement stops the rest of the **switch** statement running (providing better performance than multiple **if** statements).

USING SWITCH STATEMENTS

JAVASCRIPT

```
var msg;           // Message
var level = 2;    // Level

// Determine message based on level
switch (level) {
  case 1:
    msg = 'Good luck on the first test';
    break;

  case 2:
    msg = 'Second of three - keep going!';
    break;

  case 3:
    msg = 'Final round, almost there!';
    break;

  default:
    msg = 'Good luck!';
    break;
}

var el = document.getElementById('answer');
el.textContent = msg;
```

c04/js/switch-statement.js

In this example, the purpose of the switch statement is to present the user with a different message depending on which level they are at. The message is stored in a variable called msg.

The variable called level contains a number indicating which level the user is on. This is then used as the switch value. (The switch value could also be an expression.)

In the following code block (inside the curly braces), there are three options for what the value of the level variable might be: the numbers 1, 2, or 3.

If the value of the level variable is the number 1, the value of the msg variable is set to 'Good luck on the first test'.

If the value is 2, it will read: 'Second of three - keep going!'

If the value is 3, the message will read: 'Final round, almost there!'

If no match is found, then the value of the msg variable is set to 'Good luck!'

Each case ends with the break keyword which will tell the JavaScript interpreter to skip the rest of this code block and continue onto the next.

RESULT



TYPE COERCION & WEAK TYPING

type casting

If you use a data type JavaScript did not expect, it tries to make sense of the operation rather than report an error.

JavaScript can convert data types behind the scenes to complete an operation. This is known as **type coercion**. For example, a string '1' could be converted to a number 1 in the following expression: ('1' > 0). As a result, the above expression would evaluate to true.

JavaScript is said to use **weak typing** because the data type for a value can change. Some other languages require that you specify what data type each variable will be. They are said to use **strong typing**.

Type coercion can lead to unexpected values in your code (and also cause errors). Therefore, when checking if two values are equal, it is considered better to use strict equals operators === and !== rather than == and != as these strict operators check that the value and data types match.

DATA TYPE	PURPOSE
string	Text
number	Number
Boolean	true or false
null	Empty value
undefined	Variable has been declared but not yet assigned a value

NaN is a value that is counted as a number. You may see it when a number is expected, but is not returned, e.g., ('ten')/2 results in NaN.

weak typing

*any which
can convert
data types*

strong typing

*any which
can't convert
data types*

TRUTHY & FALSEY VALUES

Due to type coercion, every value in JavaScript can be treated as if it were true or false; and this has some interesting side effects.

FALSY VALUES

VALUE	DESCRIPTION
<code>var highScore = false;</code>	The traditional Boolean false
<code>var highScore = 0;</code>	The number zero
<code>var highScore = '';</code>	<code>Nan (Not a Number)</code>
<code>var highScore = 10/'score';</code>	Empty value
<code>var highScore;</code>	A variable with no value assigned to it

Almost everything else evaluates to truthy...

TRUTHY VALUES

VALUE	DESCRIPTION
<code>var highScore = true;</code>	The traditional Boolean true
<code>var highScore = 1;</code>	Numbers other than zero
<code>var highScore = 'carrot';</code>	Strings with content
<code>var highScore = 10/5;</code>	Number calculations
<code>var highScore = 'true';</code>	true written as a string
<code>var highScore = '0';</code>	Zero written as a string
<code>var highScore = 'false';</code>	false written as a string

Falsy values are treated as if they are false. The table to the left shows a `highScore` variable with a series of values, all of which are falsy.

Falsy values can also be treated as the number 0.

Truthy values are treated as if they are true. Almost everything that is not in the falsy table can be treated as if it were true.

Truthy values can also be treated as the number 1.

In addition, the presence of an object or an array is usually considered truthy, too. This is commonly used when checking for the presence of an element in a page.

The next page will explain more about why these concepts are important.

CHECKING EQUALITY & EXISTENCE

Because the presence of an object or array can be considered truthy, it is often used to check for the existence of an element within a page.

A unary operator returns a result with just one operand. Here you can see an if statement checking for the presence of an element. If the element is found, the result is truthy, so the first set of code is run. If it is not found, the second set is run instead.

```
if (document.getElementById('header')) {  
    // Found: do something  
} else {  
    // Not found: do something else  
}
```

this will return an object (not boolean)

Those new to JavaScript often think the following would do the same:
`if (document.getElementById('header') == true)`
but `document.getElementById('header')` would return an object which is a truthy value but it is not equal to a Boolean value of true.

Because of type coercion, the strict equality operators `==` and `!=` result in fewer unexpected values than `==` and `!=` do.

If you use `==` the following values can be considered equal: `false`, `0`, and `''` (empty string). However, they are not equivalent when using the strict operators.

EXPRESSION	RESULT
<code>(false == 0)</code>	true
<code>(false === 0)</code>	false
<code>(false == '')</code>	true
<code>(false === '')</code>	false
<code>(0 == '')</code>	true
<code>(0 === '')</code>	false

Although `null` and `undefined` are both falsy, they are not equal to anything other than themselves. Again, they are not equivalent when using strict operators.

EXPRESSION	RESULT
<code>(undefined == null)</code>	true
<code>(null == false)</code>	false
<code>(undefined == false)</code>	false
<code>(null == 0)</code>	false
<code>(undefined == 0)</code>	false
<code>(undefined === null)</code>	false

Although `NaN` is considered falsy, it is not equivalent to anything; it is not even equivalent to itself (since `NaN` is an undefinable number, two cannot be equal).

EXPRESSION	RESULT
<code>(NaN == null)</code>	false
<code>(NaN == NaN)</code>	false

SHORT CIRCUIT VALUES

Logical operators are processed left to right.
They short-circuit (stop) as soon as they have a result – but they return the value that stopped the processing (not necessarily true or false).

On line 1, the variable artist is given a value of Rembrandt.

On line 2, if the variable artist has a value, then artistA will be given the same value as artist (because a non-empty string is truthy).

```
var artist = 'Rembrandt';
```

```
var artistA = (artist || 'Unknown');
```

// Rembrandt

If the string is empty (see below), artistA becomes a string 'Unknown'.

```
var artist = '';
```

```
var artistA = (artist || 'Unknown');
```

// Unknown

You could even create an empty object if artist does not have a value:

```
var artist = '';
```

```
var artistA = (artist || {});
```

// empty object

Logical operators will not always return true or false, because:

- They return the value that stopped processing.
- That value might have been treated as truthy or falsy although it was not a Boolean.

Programmers use this creatively (for example, to set values for variables or even create objects).

Here are three values. If any one of them is considered truthy, the code inside the if statement will execute. When the script encounters valueB in the logical operator, it will short circuit because the number 1 is considered truthy and the subsequent code block is executed.

```
valueA = 0;  
valueB = 1;  
valueC = 2;  
  
if (valueA || valueB || valueC) {  
    // Do something here  
}
```

This technique could also be used to check for the existence of elements within a page, as shown on p168.

As soon as a truthy value is found, the remaining options are not checked. Therefore, experienced programmers often:

- Put the code most likely to return true first in OR operations, and false answers first in AND operations.
- Place the options requiring the most processing power last, just in case another value returns true and they do not need to be run.

LOOPS

Loops check a condition. If it returns **true**, a code block will run. Then the condition will be checked again and if it still returns **true**, the code block will run again. It repeats until the condition returns **false**. There are three common types of loops:

FOR

If you need to run code a specific number of times, use a **for** loop. (It is the most common loop.) In a **for** loop, the condition is usually a counter which is used to tell how many times the loop should run.

WHILE

If you do not know how many times the code should run, you can use a **while** loop. Here the condition can be something other than a counter, and the code will continue to loop for as long as the condition is **true**.

DO WHILE

The **do...while** loop is very similar to the **while** loop, but has one key difference: it will always run the statements inside the curly braces at least once, even if the condition evaluates to **false**.

```
KEYWORD           CONDITION (COUNTER)           OPENING CURLY BRACE  
for (var i = 0; i < 10; i++) {  
    document.write(i);  
}  
CODE TO EXECUTE DURING LOOP  
CLOSING CURLY BRACE
```

This is a **for** loop. The condition is a counter that counts to ten. The result would write "0123456789" to the page.

If the variable **i** is less than ten, the code inside the curly braces is executed. Then the counter is incremented.

The condition is checked again, if **i** is less than ten it runs again. The next three pages show how this loop works in greater detail.

LOOP COUNTERS

A **for** loop uses a counter as a condition.

This instructs the code to run a specified number of times.

Here you can see the condition is made up of three statements:

INITIALIZATION

Create a variable and set it to 0. This variable is commonly called **i**, and it acts as the counter.

`var i = 0;`

The variable is only created the first time the loop is run.
(You may also see the variable called **index**, rather than just **i**.)

You will sometimes see this variable declared before the condition. The following is the same and it is mainly a preference of the coder.

```
var i;  
for (i = 0; i < 10; i++) {  
    // Code goes here  
}
```

CONDITION

The loop should continue to run until the counter reaches a specified number.

`i < 10;`

The value of **i** was initially set to 0, so in this case the loop will run 10 times before stopping.

The condition may also use a variable that holds a number. If a variable called **rounds** held the number of rounds in a test and the loop ran once for each round, the condition would be:

```
var rounds = 3;  
i < (rounds);
```

UPDATE

Every time the loop has run the statements in the curly braces, it adds one to the counter.


`i++`

One is added to the counter using the increment (**++**) operator.

Another way of reading this is that it says, "Take the variable **i**, and add one using the **++** operator."

It is also possible for loops to count downwards using the decrement operator (**--**).

LOOPING

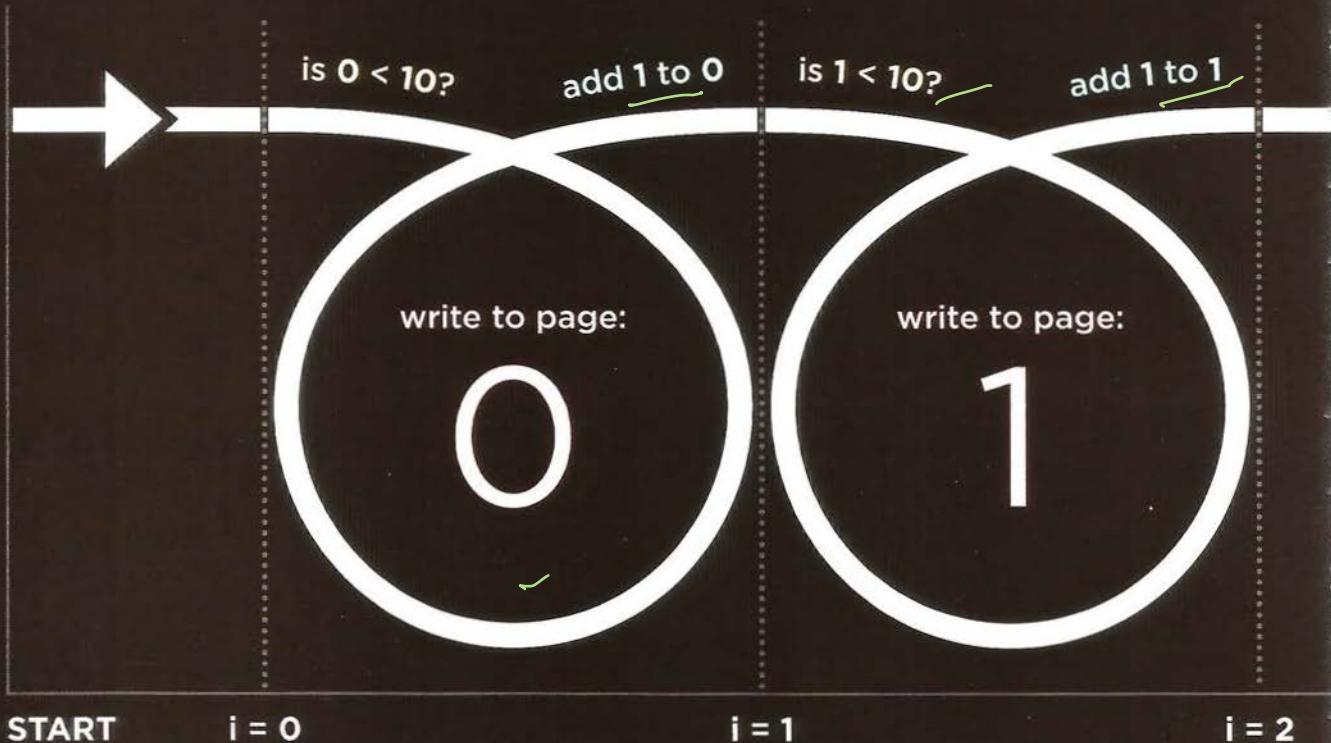


The first time the loop is run, the variable **i** (the counter) is assigned a value of zero.

Every time the loop is run, the condition is checked. Is the variable **i** less than 10?

Then the code inside the loop (the statements between the curly brackets) is run.

```
for (var i = 0; i < 10; i++) {  
    document.write(i);  
}
```

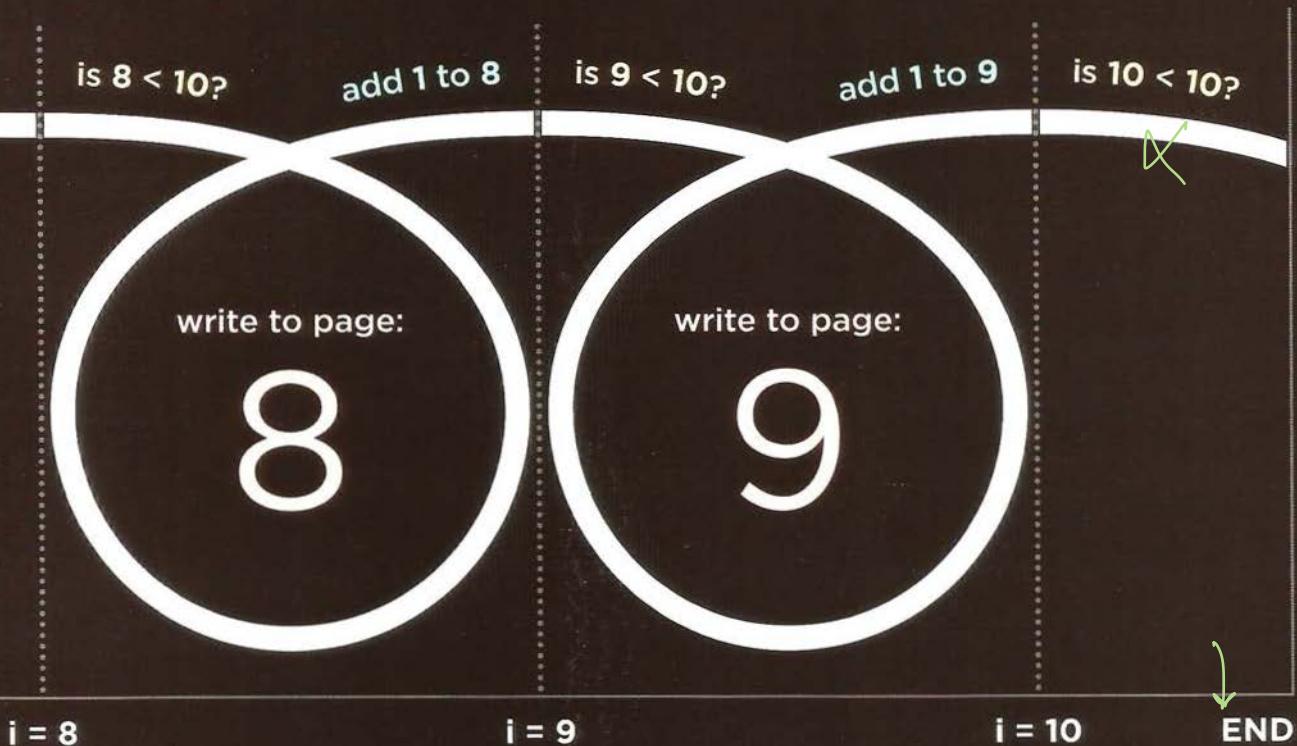

The variable *i* can be used inside the loop. Here it is used to write a number to the page.

When the statements have finished, the variable *i* is incremented by 1.

When the condition is no longer true, the loop ends. The script moves to the next line of code.

KEY LOOP CONCEPTS

Here are three points to consider when you are working with loops. Each is illustrated in examples on the following three pages.

KEYWORDS

You will commonly see these two keywords used with loops:

break

This keyword causes the termination of the loop and tells the interpreter to go onto the next statement of code outside of the loop. (You may also see it used in functions.)

continue

This keyword tells the interpreter to continue with the current iteration, and then check the condition again. (If it is true, the code runs again.)

LOOPS & ARRAYS

Loops are very helpful when dealing with arrays if you want to run the same code for each item in the array.

For example, you might want to write the value of each item stored in an array into the page.

You may not know how many items will be in an array when writing a script, but, when the code runs, it can check the total number of items in a loop. That figure can then be used in the counter to control how many times a set of statements is run.

Once the loop has run the right number of times, the loop stops.

PERFORMANCE ISSUES

It is important to remember that when a browser comes across JavaScript, it will stop doing anything else until it has processed that script.

If your loop is dealing with only a small number of items, this will not be an issue. If, however, your loop contains a lot of items, it can make the page slower to load.

If the condition never returns `false`, you get what is commonly referred to as an **infinite loop**. The code will not stop running until your browser runs out of memory (breaking your script).

Any variable you can define outside of the loop and that does not change *within* the loop should be defined outside of it. If it were declared inside the loop, it would be recalculated every time the loop ran, needlessly using resources.

USING FOR LOOPS

JAVASCRIPT

```
var scores = [24, 32, 17];           // Array of scores
var arrayLength = scores.length;    // Items in array
var roundNumber = 0;                // Current round
var msg = '';                      // Message
var i;                            // Counter

// Loop through the items in the array
for (i = 0; i < arrayLength; i++) {


    // Arrays are zero based (so 0 is round 1)
    // Add 1 to the current round
    roundNumber = (i + 1);

    // Write the current round to message
    msg += 'Round ' + roundNumber + ': ';

    // Get the score from the scores array
    msg += scores[i] + '<br />';
}

document.getElementById('answer').innerHTML = msg;
```

RESULT

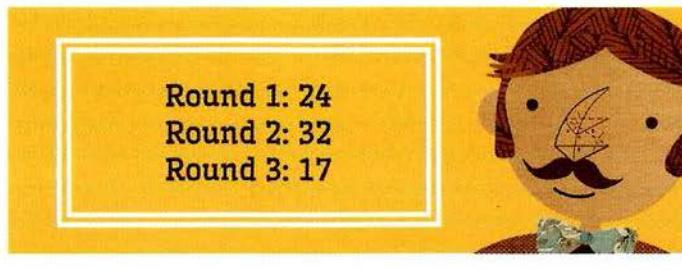

The counter and array both start from 0 (rather than 1). So, within the loop, to select the current item from the array, you use the counter variable `i` to specify the item from the array, e.g., `scores[i]`. But remember that it is a number lower than you might expect (e.g., first iteration is 0, second is 1).

c04/js/for-loop.js

A `for` loop is often used to loop through the items in an array.

In this example, the scores for each round of a test are stored in an array called `scores`.

The total number of items in the array is stored in a variable called `arrayLength`. This number is obtained using the `length` property of the array.

There are three more variables: `roundNumber` holds the round of the test; `msg` holds the message to display; `i` is the counter (declared outside the loop).

The loop starts with the `for` keyword, then contains the condition inside the parentheses. As long as the counter is less than the total number of items in the array, the contents of the curly braces will continue to run. Each time the loop runs, the round number is increased by 1.

Inside the curly braces are rules that write the round number and the score to the `msg` variable. The variables declared outside of the loop are used within the loop.

The `msg` variable is then written into the page. It contains HTML so the `innerHTML` property is used to do this. Remember, p228 will talk about security issues relating to this property.

USING WHILE LOOPS

Here is an example of a `while` loop. It writes out the 5 times table. Each time the loop is run, another calculation is written into the variable called `msg`.

This loop will continue to run for as long as the condition in the parentheses is true. That condition is a counter indicating that, as long as the variable `i` remains less than 10, the statements in the subsequent code block should run.

Inside the code block there are two statements:

The first statement uses the `+=` operator, which is used to add new content to the `msg` variable. Each time the loop runs, a new calculation and line break is added to the end of the message being stored in it. So `+=` works as a shorthand for writing:
`msg = msg + 'new msg'`
(See bottom of the next page for a breakdown of this statement.)

The second statement increments the counter variable by one. (This is done inside the loop rather than with the condition.)

When the loop has finished, the interpreter goes to the next line of code, which writes the `msg` variable to the page.

c04/js/while-loop.js


JAVASCRIPT

```
var i = 1;          // Set counter to 1
var msg = '';       // Message

// Store 5 times table in a variable
while (i < 10) {
    msg += i + ' x 5 = ' + (i * 5) + '<br />';
    i++;
}

document.getElementById('answer').innerHTML = msg;
```

RESULT

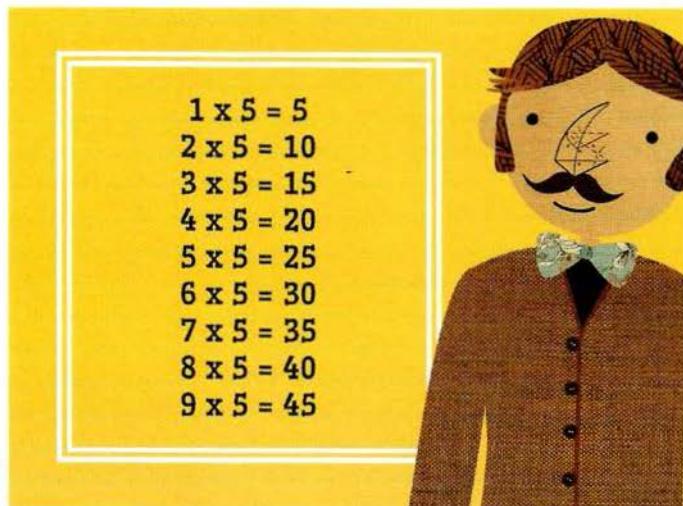

In this example, the condition specifies that the code should run nine times. A more typical use of a `while` loop would be when you *do not* know how many times you want the code to run. It should continue to run as long as a condition is met.

USING DO WHILE LOOPS

JAVASCRIPT


c04/js/do-while-loop.js

```
var i = 1;          // Set counter to 1
var msg = '';       // Message

// Store 5 times table in a variable
do {
    msg += i + ' x 5 = ' + (i * 5) + '<br />';
    i++;
} while (i < 1);
// Note how this is already 1 and it still runs

document.getElementById('answer').innerHTML = msg;
```

RESULT

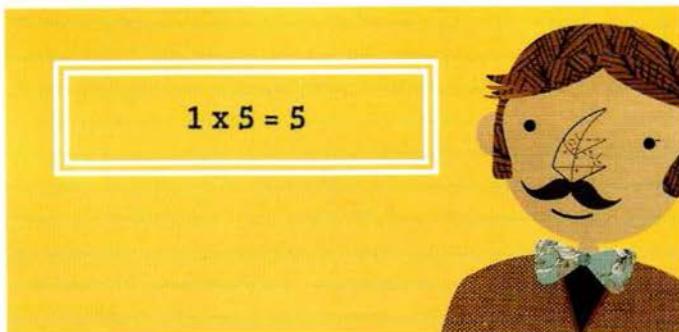

Breaking down the first statement in these examples:

1 2 3 4 5 6
msg += i + ' x 5 = ' + (i * 5) + '
;



1. Take variable called msg
2. Add to the following to its value
3. The number in the counter
4. Write out the string x 5 =
5. The counter multiplied by 5
6. Add a line break

The key difference between a `while` loop and a `do while` loop is that the statements in the code block come *before* the condition. This means that those statements are run once whether or not the condition is met.

If you take a look at the condition, it is checking that the value of the variable called `i` is less than 1, but that variable has already been set to a value of 1.

Therefore, in this example the result is that the 5 times table is written out once, even though the counter is not less than 1.

Some people like to write `while` on a separate line from the closing curly brace before it.

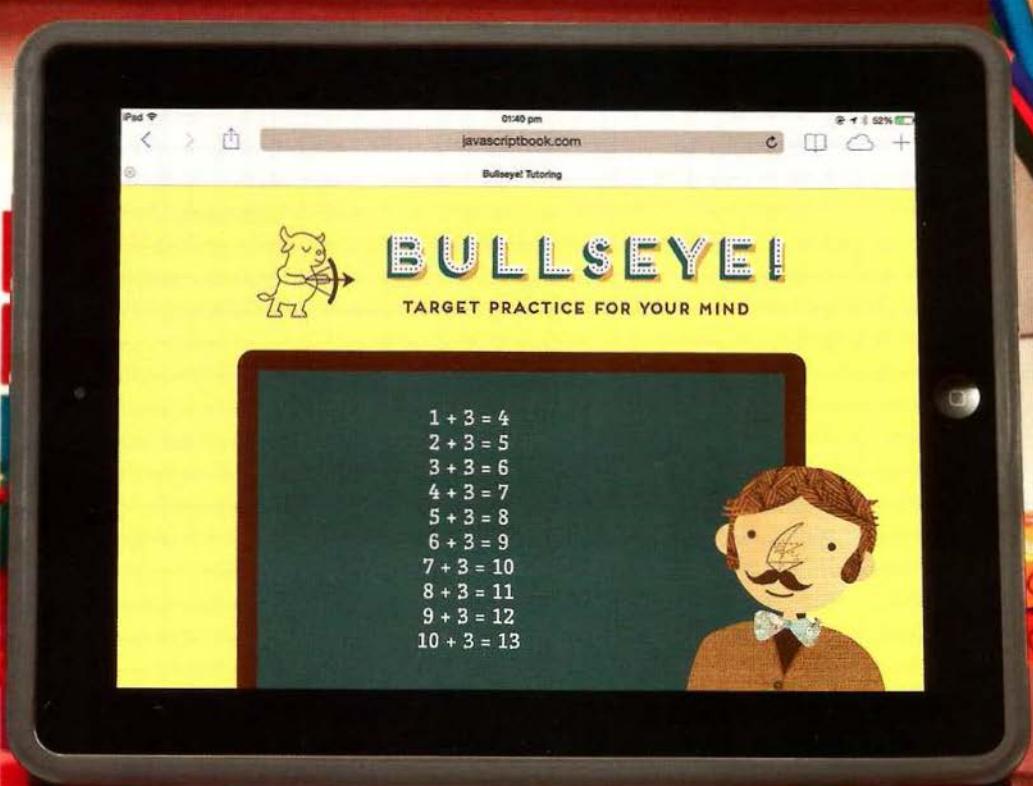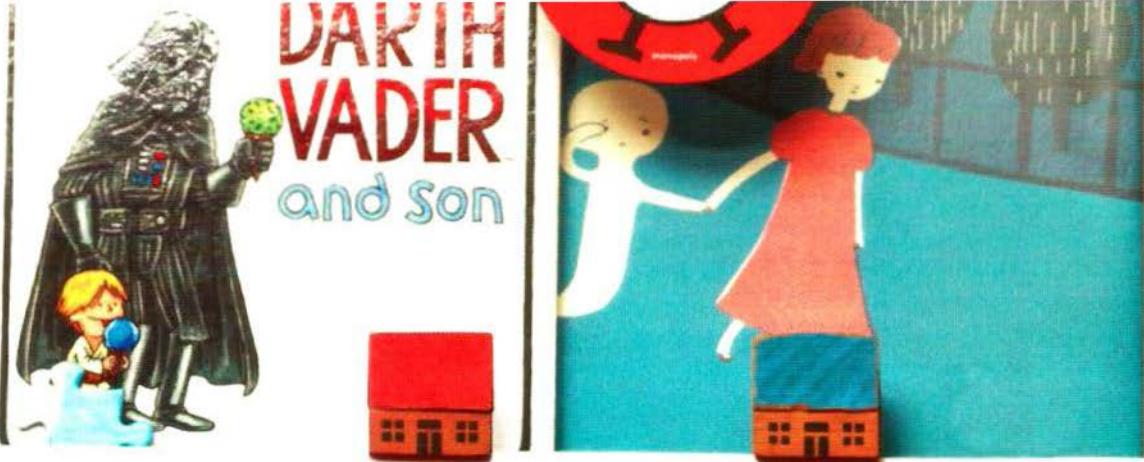

EXAMPLE

DECISIONS & LOOPS



In this example, the user can either be shown addition or multiplication of a given number. The script demonstrates the use of both conditional logic and loops.

The example starts with two variables:

1. `number` holds the number that the calculations will be performed with
(in this case it is the number 3)
2. `operator` indicates whether it should be addition or multiplication
(in this case it is performing addition)

An `if...else` statement is used to decide whether to perform addition or multiplication with the number. If the variable called `operator` has the value `addition`, the numbers will be added together; otherwise they will be multiplied.

Inside the conditional statement, a `while` loop is used to calculate the results. It will run 10 times because the condition is checking whether the value of the counter is less than 11.

EXAMPLE

DECISIONS & LOOPS

c04/example.html

HTML

```
<!DOCTYPE html>
<html>
  <head>
    <title>Bullseye! Tutoring</title>
    <link rel="stylesheet" href="css/c04.css" />
  </head>
  <body>
    <section id="page2">
      <h1>Bullseye</h1>
      
      <section id="blackboard"></section>
    </section>
    <script src="js/example.js"></script>
  </body>
</html>
```

The HTML for this example is very slightly different than the other examples in this chapter because there is a blackboard which the table is written onto.

You can see the script is added to the page just before the closing `</body>` tag.

EXAMPLE

DECISIONS & LOOPS

JAVASCRIPT

c04/js/example.js

```
var table = 3;                                // Unit of table
var operator = 'addition';                      // Type of calculation (defaults to addition)
var i = 1;                                      // Set counter to 1
var msg = '';
```

```
// Message
```

```
if (operator === 'addition') {                // If the operator variable says addition
    while (i < 11) {                          // While counter is less than 11
        msg += i + ' + ' + table + ' = ' + (i + table) + '<br />'; // Calculation
        i++;
    }
} else {                                       // Otherwise
    while (i < 11) {                          // While counter is less than 11
        msg += i + ' x ' + table + ' = ' + (i * table) + '<br />'; // Calculation
        i++;
    }
}

// Write the message into the page
var el = document.getElementById('blackboard');
el.innerHTML = msg;
```

If you read the comments in the code, you can see how this example works. The script starts by declaring four variables and setting values for them.

Then, an `if` statement checks whether the value of the variable called `operator` is `addition`. If it is, it uses a `while` loop to perform the calculations and store the results in a variable called `msg`.

If you change the value of the `operator` variable to anything other than `addition`, the conditional statement will select the second set of statements. These also contain a `while` loop, but this time it will perform multiplication (rather than addition).

When one of the loops has finished running, the last two lines of the script select the element whose `id` attribute has a value of `blackboard`, and updates the page with the content of the `msg` variable.

SUMMARY

DECISIONS & LOOPS

- ▶ Conditional statements allow your code to make decisions about what to do next.
- ▶ Comparison operators (`==`, `!=`, `<`, `>`, `<=`, `>=`) are used to compare two operands.
- ▶ Logical operators allow you to combine more than one set of comparison operators.
- ▶ `if...else` statements allow you to run one set of code if a condition is true, and another if it is false.
- ▶ `switch` statements allow you to compare a value against possible outcomes (and also provides a default option if none match).
- ▶ Data types can be coerced from one type to another.
- ▶ All values evaluate to either truthy or falsy.
- ▶ There are three types of loop: `for`, `while`, and `do...while`. Each repeats a set of statements.

5

DOCUMENT OBJECT MODEL

The Document Object Model (DOM) specifies how browsers should create a model of an HTML page and how JavaScript can access and update the contents of a web page while it is in the browser window.

The DOM is neither part of HTML, nor part of JavaScript; it is a separate set of rules. It is implemented by all major browser makers, and covers two primary areas:

MAKING A MODEL OF THE HTML PAGE

When the browser loads a web page, it creates a model of the page in memory.

The DOM specifies the way in which the browser should structure this model using a DOM tree.

The DOM is called an object model because the model (the DOM tree) is made of objects.

Each object represents a different part of the page loaded in the browser window.

ACCESSING AND CHANGING THE HTML PAGE

The DOM also defines methods and properties to access and update each object in this model, which in turn updates what the user sees in the browser.

You will hear people call the DOM an Application Programming Interface (API).

User interfaces let humans interact with programs; APIs let programs (and scripts) talk to each other. The DOM states what your script can ask the browser about the current page, and how to tell the browser to update what is being shown to the user.

UI → Human interact with programs
API → Let programs talk to each other.

In each example of this chapter, the JavaScript will amend the HTML list shown here. Colors are used to convey the priority and status of each list item:

HOT

COOL

NORMAL

COMPLETE



THE DOM TREE IS A MODEL OF A WEB PAGE

As a browser loads a web page, it creates a model of that page.

The model is called a **DOM tree**, and it is stored in the browsers' memory.

It consists of four main types of nodes.

BODY OF HTML PAGE

```
<html>
  <body>
    <div id="page">
      <h1 id="header">List</h1>
      <h2>Buy groceries</h2>
      <ul>
        <li id="one" class="hot"><em>fresh</em> figs</li>
        <li id="two" class="hot">pine nuts</li>
        <li id="three" class="hot">honey</li>
        <li id="four">balsamic vinegar</li>
      </ul>
      <script src="js/list.js"></script>
    </div>
  </body>
</html>
```

represents the entire page

THE DOCUMENT NODE

Above, you can see the HTML code for a shopping list, and on the right hand page is its **DOM tree**.

Every element, attribute, and piece of text in the HTML is represented by its own DOM node.

At the top of the tree a **document node** is added; it represents the entire page (and also corresponds to the document object, which you first met on p36).

When you access any element, attribute, or text node, you navigate to it via the document node. It is the starting point for all visits to the DOM tree.

ELEMENT NODES

HTML elements describe the structure of an HTML page. (The **<h1>** - **<h6>** elements describe what parts are headings; the **<p>** tags indicate where paragraphs of text start and finish; and so on.)

To access the DOM tree, you start by looking for elements. Once you find the element you want, then you can access its text and attribute nodes if you want to. This is why you start by learning methods that allow you to access element nodes, before learning to access and alter text or attributes.

Note: We will continue to use this list example throughout this chapter and the next two chapters so that you can see how different techniques allow you to access and update the web page (which is represented by this DOM tree).


Relationships between the document and all of the element nodes are described using the same terms as a family tree: parents, children, siblings, ancestors, and descendants. (Every node is a descendant of the document node.)

Each node is an object with methods and properties.

Scripts access and update this DOM tree (not the source HTML file).

Any changes made to the DOM tree are reflected in the browser.

DOM TREE

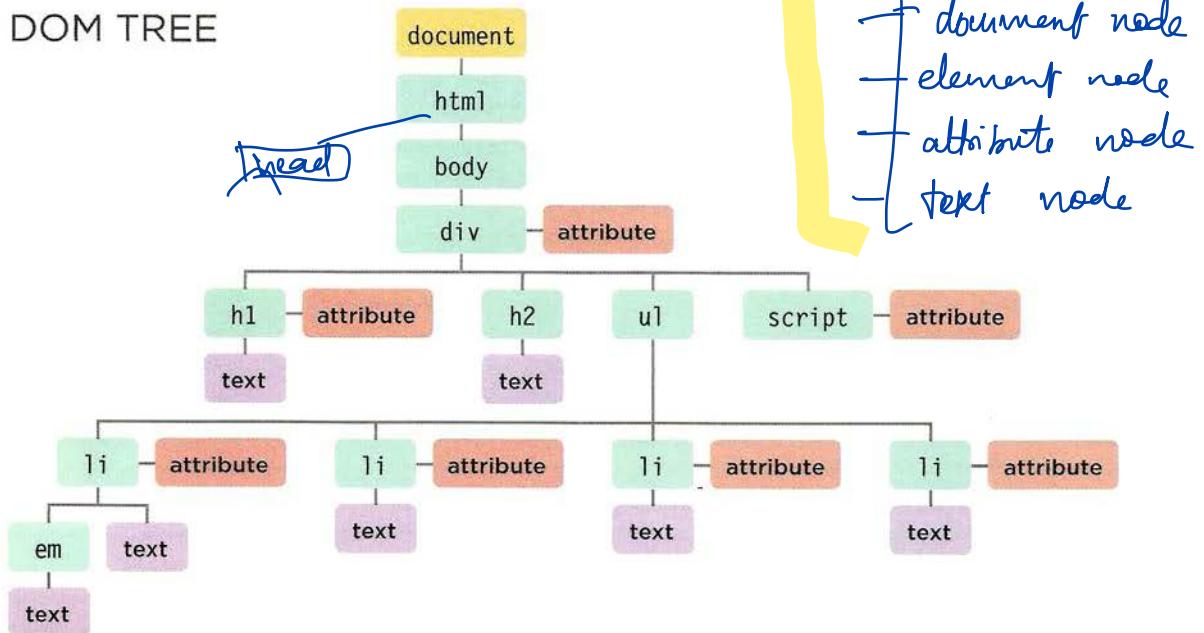

ATTRIBUTE NODES

The opening tags of HTML elements can carry attributes and these are represented by attribute nodes in the DOM tree.

Attribute nodes are not children of the element that carries them; they are part of that element. Once you access an element, there are specific JavaScript methods and properties to read or change that element's attributes. For example, it is common to change the values of class attributes to trigger new CSS rules that affect their presentation.

TEXT NODES

Once you have accessed an element node, you can then reach the text within that element. This is stored in its own text node.

Text nodes cannot have children. If an element contains text and another child element, the child element is not a child of the text node but rather a child of the containing element. (See the element on the first item.) This illustrates how the text node is always a new branch of the DOM tree, and no further branches come off of it.

WORKING WITH THE DOM TREE

Accessing and updating the DOM tree involves **two steps**:


- 1: Locate the node that represents the element you want to work with.
- 2: Use its text content, child elements, and attributes.

STEP 1: ACCESS THE ELEMENTS

Here is an overview of the **methods and properties that access elements** covered on p192 – p211.

The first two columns are known as **DOM queries**. The last column is known as **traversing the DOM**.

SELECT AN INDIVIDUAL ELEMENT NODE

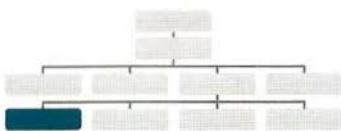

Here are three common ways to select an **individual element**:

`getElementById()`

Uses the value of an element's **id** attribute (which should be unique within the page).

See p195


`querySelector()`

Uses a CSS selector, and returns the **first matching element**.

See p202

You can also select individual elements by **traversing** from one element to another within the DOM tree (see third column).

SELECT MULTIPLE ELEMENTS (NODELISTS)

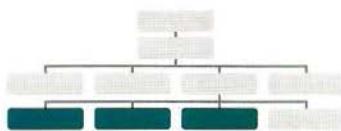

There are three common ways to select **multiple elements**:

`getElementsByClassName()`

Selects all elements that have a specific value for their **class** attribute.

See p200

`getElementsByTagName()`

Selects all elements that have the specified **tag name**.


See p201

`querySelectorAll()`

Uses a CSS selector to select all matching elements.

See p202

TRaversing BETWEEN ELEMENT NODES

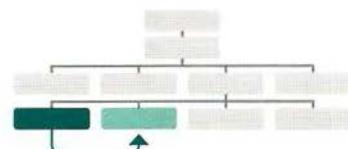

You can move from one element node to a related element node.

`parentNode`

Selects the **parent** of the current element node (which will return just one element).

See p208

`previousSibling / nextSibling`

Selects the previous or next sibling from the DOM tree.

See p210

`firstChild / lastChild`

Select the first or last child of the current element.

See p211

DOM Queries

Traversing the DOM

Throughout the chapter you will see notes where DOM methods only work in certain browsers or are buggy. Inconsistent browser support for the DOM was a key reason why jQuery became so popular.

The terms **elements** and **element nodes** are used interchangeably but when people say the DOM is working with an element, it is actually working with a node that represents that element.

STEP 2: WORK WITH THOSE ELEMENTS

Here is an overview of methods and properties that work with the elements introduced on p186.

ACCESS / UPDATE TEXT NODES	WORK WITH HTML CONTENT	ACCESS OR UPDATE ATTRIBUTE VALUES
<p>The <u>text inside any element is stored inside a text node</u>. To access the text node above:</p> <ol style="list-style-type: none">1. Select the <code></code> element2. Use the <code>firstChild</code> property to get the text node3. Use the <code>text node's only property (nodeValue)</code> to get the text from the element <p>nodeValue This property lets you access or update contents of a text node. See p214</p> <p>The text node <u>does not include text inside any child elements</u>.</p>	<p>One property allows <u>access to child elements and text content</u>: innerHTML See p220</p> <p>Another just the text content: textContent See p216</p> <p>Several methods let you <u>create new nodes, add nodes to a tree, and remove nodes from a tree</u>: createElement() createTextNode() appendChild() / removeChild() This is called <u>DOM manipulation</u>. See p222</p>	<p>Here are some of the properties and methods you can use to work with attributes:</p> <p>className / id Lets you get or update the value of the <code>class</code> and <code>id</code> attributes. See p232</p> <p>hasAttribute() getAttribute() → gets value setAttribute() → update removeAttribute() The first checks if an attribute exists. The second gets its value. The third updates the value. The fourth removes an attribute. See p233</p> <p><i>removes attribute</i></p>

CACHING DOM QUERIES

Method that finds elements in the DOM tree

Methods that find elements in the DOM tree are called DOM queries.

When you need to work with an element more than once, you should use a variable to store the result of this query.

When a script selects an element to access or update, the interpreter must find the element(s) in the DOM tree.

Below, the interpreter is told to look through the DOM tree for an element whose id attribute has a value of one.

Once it has found the node that represents the element(s), you can work with that node, its parent, or any children.

`getElementById('one');`



Interpreter looks through DOM tree for an element who id is 'one'


When people talk about storing elements in variables, they are really storing the location of the element(s) within the DOM tree in a variable. The properties and methods of that element node work on the variable.

If your script needs to use the same element(s) more than once, you can store the location of the element(s) in a variable.

This saves the browser looking through the DOM tree to find the same element(s) again. It is known as caching the selection.

Programmers would say that the variable stores a reference to the object in the DOM tree. (It is storing the location of the node.)

↓
`var itemOne = getElementById('one');`

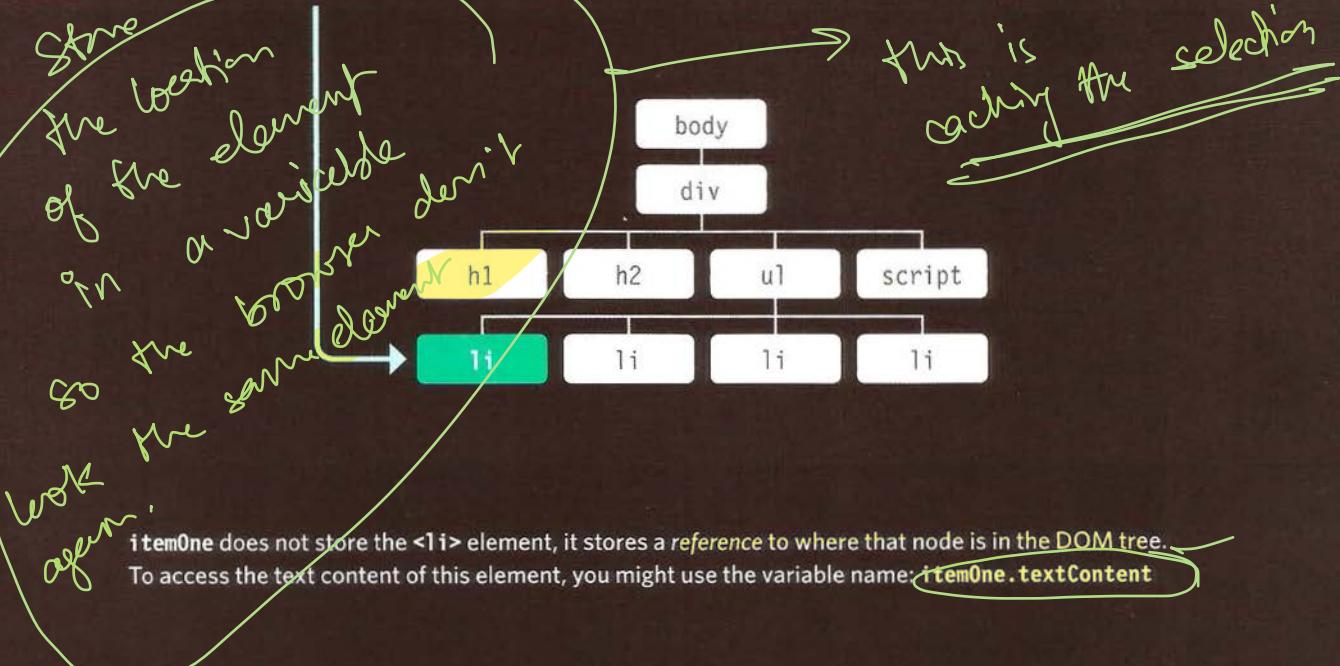


ACCESSING ELEMENTS

DOM queries may return one element, or they may return a NodeList,
which is a collection of nodes.

Sometimes you will just want to access one individual element (or a fragment of the page that is stored within that one element). Other times you may want to select a group of elements, for example, every `<h1>` element in the page or every `` element within a particular list.

Here, the DOM tree shows the body of the page of the list example. We focus on accessing elements first so it only shows element nodes. The diagrams in the coming pages highlight which elements a DOM query would return. (Remember, element nodes are the DOM representation of an element.)

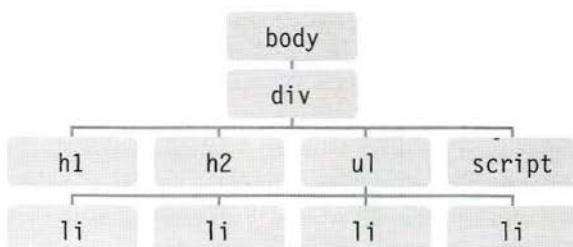

GROUPS OF ELEMENT NODES

If a method *can* return more than one node, it will always return a NodeList, which is a collection of nodes (even if it only finds one matching element). You then need to select the element you want from this list using an index number (which means the numbering starts at 0 like the items in an array).

For example, several elements can have the same tag name, so `getElementsByName()` will always return a NodeList.

FASTEAST ROUTE


Finding the quickest way to access an element within your web page will make the page seem faster and/or more responsive. This usually means evaluating the minimum number of nodes on the way to the element you want to work with. For example, `getElementById()` will quickly return one element (because no two elements on the same page should have the same value for an `id` attribute), but it can only be used when the element you want to access has an `id` attribute.

METHODS THAT RETURN A SINGLE ELEMENT NODE:

```
getElementById('id')
```

Selects an individual element given the value of its `id` attribute.
The HTML must have an `id` attribute in order for it to be selectable.


First supported: IE5.5, Opera 7, all versions of Chrome, Firefox, Safari.

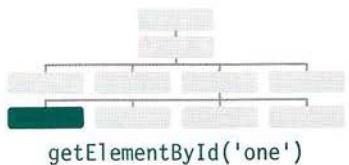

```
querySelector('css selector')
```

Uses CSS selector syntax that would select one or more elements.
This method returns only the first of the matching elements.

First supported: IE8, Firefox 3.5, Safari 4, Chrome 4, Opera 10

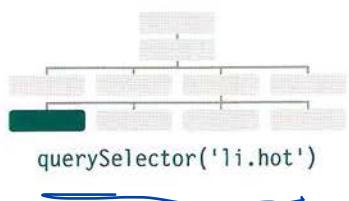


METHODS THAT RETURN ONE OR MORE ELEMENTS (AS A NODELIST):

```
getElementsByClassName('class')
```

Selects one or more elements given the value of their `class` attribute.
The HTML must have a `class` attribute for it to be selectable.
This method is faster than `querySelectorAll()`.


First supported: IE9, Firefox 3, Safari 4, Chrome 4, Opera 10
(Several browsers had partial / buggy support in earlier versions)

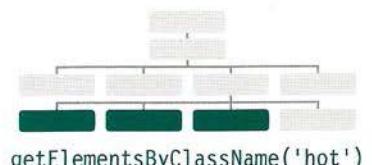

```
getElementsByName('tagName')
```

Selects all elements on the page with the specified tag name. This method is faster than `querySelectorAll()`.


First supported: IE6+, Firefox 3, Safari 4, Chrome, Opera 10
(Several browsers had partial / buggy support in earlier versions)

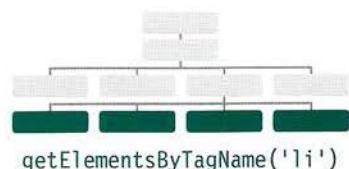

```
querySelectorAll('css selector')
```

Uses CSS selector syntax to select one or more elements and returns all of those that match.

First supported: IE8, Firefox 3.5, Safari 4, Chrome 4, Opera 10

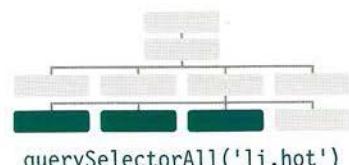

METHODS THAT SELECT INDIVIDUAL ELEMENTS

`getElementById()` and `querySelector()` can both search an entire document and return individual elements. Both use a similar syntax.

`getElementById()` is the quickest and most efficient way to access an element because no two elements can share the same value for their `id` attribute. The syntax for this method is shown below, and an example of its use is on the page to the right.

`querySelector()` is a more recent addition to the DOM, so it is not supported in older browsers. But it is very flexible because its parameter is a CSS selector, which means it can be used to accurately target many more elements.

`document` refers to the `document` object. You always have to access individual elements via the `document` object.

OBJECT

The `getElementById()` method indicates that you want to find an element based upon the value of its `id` attribute.

METHOD

`document.getElementById('one')`

MEMBER OPERATOR

The dot notation indicates that the method (on the right) is being applied to the node on the left of the period.

PARAMETER

The method needs to know the value of the `id` attribute on the element you want. It is the parameter of the method.

This code will return the element node for the element whose `id` attribute has a value of `one`. You often see element nodes stored in a variable for use later in the script (as you saw on p190).

Here the method is used on the `document` object so it looks for that element anywhere within the page. DOM methods can also be used on element nodes within the page to find descendants of that node.

SELECTING ELEMENTS USING ID ATTRIBUTES

HTML

c05/get-element-by-id.html

```
<h1 id="header">List King</h1>
<h2>Buy groceries</h2>
<ul>
  <li id="one" class="hot"><em>fresh</em>
    figs</li>
  <li id="two" class="hot">pine nuts</li>
  <li id="three" class="hot">honey</li>
  <li id="four">balsamic vinegar</li>
</ul>
```

JAVASCRIPT

c05/js/get-element-by-id.js

```
// Select the element and store it in a variable.
var el = document.getElementById('one');

// Change the value of the class attribute.
el.className = 'cool';
```

RESULT



This result window shows the example after the script has updated the first list item. The original state, before the script ran, is shown on p185.

getElementById() allows you to select a single element node by specifying the value of its id attribute.

This method has one parameter: the value of the id attribute on the element you want to select. This value is placed inside quote marks because it is a string. The quotes can be single or double quotes, but they must match.

In the example on the left, the first line of JavaScript code finds the element whose id attribute has a value of one, and stores a reference to that node in a variable called el.

The code then uses a property called className (which you meet on p232) to update the value of the class attribute of the element stored in this variable. Its value is cool, and this triggers a new rule in the CSS that sets the background color of the element to aqua.

Note how the className property is used on the variable that stores the reference to the element.

Browser Support: This is one of the oldest and best supported methods for accessing elements.

NODELISTS: DOM QUERIES THAT RETURN MORE THAN ONE ELEMENT

When a DOM method **can return more than one element**, it returns a **NodeList** (even if it only finds one matching element).

A NodeList is a collection of element nodes. Each node is given an index number (a number that starts at zero, just like an array).

The order in which the element nodes are stored in a NodeList is the same order that they appeared in the **HTML page**.

When a DOM query returns a NodeList, you may want to:

- Select one element from the NodeList.
- Loop through each item in the NodeList and perform the same statements on each of the element nodes.

NodeLists look like arrays and are numbered like arrays, but they are not actually arrays; they are a type of object called a **collection**.

Like any other object, a NodeList has properties and methods, notably:

- The **length** property tells you how many items are in the NodeList.
- The **item()** method returns a specific node from the NodeList when you tell it the index number of the item that you want (in the parentheses). However, it is more common to use **array syntax (with square brackets)** to retrieve an item from a NodeList (as you will see on p199).

LIVE & STATIC NODELISTS

There are times when you will want to work with the same selection of elements several times, so the **NodeList** can be stored in a variable and re-used (rather than collecting the same elements again).

In a **live NodeList**, when your script updates the page, the NodeList is updated at the same time. The methods beginning **getElementsBy...** return **live NodeLists**. They are also typically faster to generate than static NodeLists.


In a **static NodeList** when your script updates the page, the NodeList is not updated to reflect the changes made by the script.

The new methods that begin **querySelector...** (which use CSS selector syntax) return **static NodeLists**. They reflect the document when the query was made. If the script changes the content of the page, the NodeList is not updated to reflect those changes.

getElementsBy ... → returns live nodeList
querySelectorAll → returns static nodeList

Here you can see four different DOM queries that all return a NodeList. For each query, you can see the elements and their index numbers in the NodeList that is returned.

getElementsByTagName('h1')

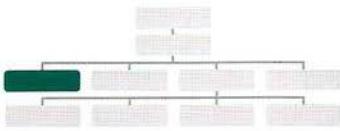


Even though this query only returns one element, the method still returns a NodeList because of the potential for returning more than one element.

INDEX NUMBER & ELEMENT

0 <h1>

getElementsByTagName('li')

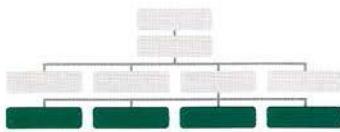

This method returns four elements, one for each of the elements on the page. They appear in the same order as they do in the HTML page.

INDEX NUMBER & ELEMENT


0 <li id="one" class="hot">

1 <li id="two" class="hot">

2 <li id="three" class="hot">

3 <li id="four">

getElementsByClassName('hot')

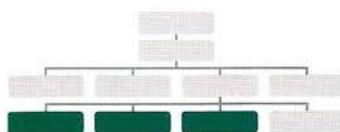

This NodeList contains only three of the elements because we are searching for elements by the value of their class attribute, not tag name.


INDEX NUMBER & ELEMENT

0 <li id="one" class="hot">

1 <li id="two" class="hot">

2 <li id="three" class="hot">

querySelectorAll('li[id]')

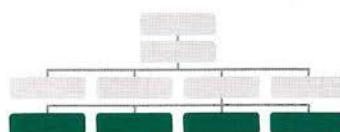

This method returns four elements, one for each of the elements on the page that have an id attribute (regardless of the values of the id attributes).

INDEX NUMBER & ELEMENT

0 <li id="one" class="hot">

1 <li id="two" class="hot">

2 <li id="three" class="hot">

3 <li id="four">

SELECTING AN ELEMENT FROM A NODELIST

There are two ways to select an element from a NodeList:

The `item()` method and array syntax.

Both require the index number of the element you want.

THE `item()` METHOD

NodeLists have a method called `item()` which will return an individual node from the NodeList.

You specify the index number of the element you want as a parameter of the method (inside the parentheses).

Executing code when there are no elements to work with wastes resources. So programmers often check that there is at least one item in the NodeList before running any code. To do this, use the `length` property of the NodeList – it tells you how many items the NodeList contains.

Here you can see that an `if` statement is used. The condition for the `if` statement is whether the `length` property of the NodeList is greater than zero. If it is, then the statements inside the `if` statement are executed. If not, the code continues to run after the second curly brace.

```
var elements = document.getElementsByClassName('hot')
if (elements.length >= 1) {
    var firstItem = elements.item(0);
```

1

Select elements that have a `class` attribute whose value is `hot` and store the NodeList in a variable called `elements`.

2

Use the `length` property to check how many elements were found. If 1 or more are found, run the code in the `if` statement.

3

Store the first element from the NodeList in a variable called `firstItem`. (It says `0` because index numbers start at zero.)

Array syntax is preferred over the `item()` method because it is faster. Before selecting a node from a NodeList, check that it contains nodes. If you repeatedly use the NodeList, store it in a variable.

ARRAY SYNTAX

You can access individual nodes using a square bracket syntax similar to that used to access individual items from an array.

You specify the index number of the element you want inside square brackets that follow the NodeList.

As with all DOM queries, if you need to access the same NodeList several times, store the result of the DOM query in a variable.

In the examples on both of these pages, the NodeList is stored in a variable called `elements`.

If you create a variable to hold a NodeList (as shown below) but there are no matching elements, the variable will be an empty NodeList. When you check the `length` property of the variable, it will return the number 0 because it does not contain any elements.

```
var elements = document.getElementsByClassName('hot');
if (elements.length >= 1) {
    var firstItem = elements[0];
```

1

Create a NodeList containing elements that have a `class` attribute whose value is `hot`, and store it in the variable `elements`.

2

If that number is greater than or equal to one, run the code inside the `if` statement.

|| more common method

3

Get the first element from the NodeList (it says 0 because index numbers start at zero).

SELECTING ELEMENTS USING CLASS ATTRIBUTES

The `getElementsByClassName()` method allows you to select elements whose `class` attribute contains a specific value.

The method has one parameter: the class name which is given in quotes within the parentheses after the method name.

Because several elements can have the same value for their `class` attribute, this method always returns a `NodeList`.

c05/js/get-elements-by-class-name.js

JAVASCRIPT

```
var elements = document.getElementsByClassName('hot'); // Find hot items
if (elements.length > 2) { // If 3 or more are found
    var el = elements[2];
    el.className = 'cool';
}
```

// Select the third one from the NodeList
// Change the value of its class attribute

This example starts by looking for elements whose `class` attribute *contains* `hot`. (The value of a `class` attribute can contain several class names, each separated by a space.) The result of this DOM query is stored in a variable called `elements` because it is used more than once in the example.

An `if` statement checks if the query found more than two elements. If so, the third one is selected and stored in a variable called `e1`. The `class` attribute of that element is then updated to say `class`. (In turn, this triggers a new CSS style, changing the presentation of that element.)

Browser Support: IE9, Firefox 3, Chrome 4, Opera 9.5, Safari 3.1

RESULT



SELECTING ELEMENTS BY TAG NAME

The `getElementsByName()` method allows you to select elements using their tag name.

The element name is specified as a parameter, so it is placed inside the parentheses and is contained by quote marks.

Note that you do not include the angled brackets that surround the tag name in the HTML (just the letters inside the brackets).

JAVASCRIPT

```
var elements = document.getElementsByTagName('li');  
if (elements.length > 0) {  
    var el = elements[0];  
    el.className = 'cool';  
}  
  
// Find <li> elements  
// If 1 or more are found  
// Select the first one using array syntax  
// Change the value of the class attribute
```

RESULT



This example looks for any `` elements in the document. It stores the result in a variable called `elements` because the result is used more than once in this example.

An `if` statement checks if any `` elements were found. As with any element that can return a `NodeList`, you check that there will be a suitable element before you try to work with it.

If matching elements were found, the first one is selected and its `class` attribute is updated. This changes the color of the list item to make it aqua.

Browser Support: Very good – it is safe to use in any scripts.

SELECTING ELEMENTS USING CSS SELECTORS

querySelector() returns the first element node that matches the CSS-style selector. querySelectorAll() returns a NodeList of all of the matches.

Both methods take a CSS selector as their only parameter. The CSS selector syntax offers more flexibility and accuracy when selecting an element than

just specifying a class name or a tag name, and should also be familiar to front-end web developers who are used to targeting elements using CSS.

c05/js/query-selector.js

JAVASCRIPT

```
// querySelector() only returns the first match
var el = document.querySelector('li.hot');
el.className = 'cool';

// querySelectorAll returns a NodeList
// The second matching element (the third list item) is selected and changed
var els = document.querySelectorAll('li.hot');
els[1].className = 'cool';
```

These two methods were introduced by browser manufacturers because a lot of developers were including scripts like jQuery in their pages so that they could select elements using CSS selectors. (You meet jQuery in Chapter 7.)

If you look at the final line of code, array syntax is used to select the second item from the NodeList, even though that NodeList is stored in a variable.

RESULT



Browser Support: The drawback with these two methods is that they are only supported in more recent browsers.

IE8+ (released Mar 2009)
Firefox 3.5+ (released Jun 2009)
Chrome 1+ (released Sep 2008)
Opera 10+ (released Sep 2009)
Safari 3.2+ (released Nov 2008)

JavaScript code runs one line at a time, and statements affect the content of a page as the interpreter processes them.

If a DOM query runs when a page loads, the same query could return different elements if it is used again later in the page.

Below you can see how the example on the left-hand page (`query-selector.js`) changes the DOM tree as it runs.

1: WHEN THE PAGE FIRST LOADS

HTML

```
<ul>
  <li id="one" class="hot">
    <em>fresh</em> figs</li>
  <li id="two" class="hot">pine nuts</li>
  <li id="three" class="hot">honey</li>
  <li id="four">balsamic vinegar</li>
</ul>
```

c05/query-selector.html

2: AFTER THE FIRST SET OF STATEMENTS

HTML

```
<ul>
  <li id="one" class="cool">
    <em>fresh</em> figs</li>
  <li id="two" class="hot">pine nuts</li>
  <li id="three" class="hot">honey</li>
  <li id="four">balsamic vinegar</li>
</ul>
```

c05/query-selector.html

3: AFTER THE SECOND SET OF STATEMENTS

HTML

```
<ul>
  <li id="one" class="cool">
    <em>fresh</em> figs</li>
  <li id="two" class="hot">pine nuts</li>
  <li id="three" class="cool">honey</li>
  <li id="four">balsamic vinegar</li>
</ul>
```

c05/query-selector.html

1. This is how the page starts. There are three `` elements that have a `class` attribute whose value is `hot`. The `querySelector()` method finds the first one, and updates the value of its `class` attribute from `hot` to `cool`. This also updates the DOM tree stored in memory so – after this line has run – only the second and third `` elements have a `class` attribute with a value of `hot`.

2. When the second selector runs, there are now only two `` elements whose `class` attributes have a value of `hot` (see left), so it just selects these two. This time, array syntax is used to work with the second of the matching elements (which is the third list item). Again the value of its `class` attribute is changed from `hot` to `cool`.

3. When the second selector has done its job, the DOM tree now only holds one `` element whose `class` attribute has a value of `hot`. Any further code looking for `` elements whose `class` attribute has a value of `hot` would find only this one. However, if they were looking for `` elements whose `class` attribute has a value of `cool`, they would find two matching element nodes.

REPEATING ACTIONS FOR AN ENTIRE NODELIST

When you have a NodeList, you can loop through each node in the collection and apply the same statements to each.

In this example, once a NodeList has been created, a **for** loop is used to go through each element in the NodeList.

All of the statements inside the **for** loop's curly braces are applied to each element in the NodeList one-by-one.

To indicate which item of the NodeList is currently being worked with, the counter **i** is used in the array-style syntax.

```
var hotItems = document.querySelectorAll('li.hot');
for (var i = 0; i < hotItems.length; i++) {
    hotItems[i].className = 'cool';
}
```

li = tag, hot = class name

1

The variable **hotItems** contains a NodeList. It contains all list items whose **class** attribute has a value of **hot**. They are collected using the **querySelectorAll()** method.

2

The **length** property of the NodeList indicates how many elements are in the NodeList. The number of elements dictates how many times the loop should run.

3

Array syntax is used to indicate which item in the NodeList is currently being worked with: **hotItems[i]**. It uses the counter variable inside the square brackets.

LOOPING THROUGH A NODELIST

If you want to apply the same code to numerous elements, looping through a NodeList is a powerful technique.

It involves finding out how many items are in the NodeList, and then setting a counter to loop through them, one-by-one.

Each time the loop runs, the script checks that the counter is less than the total number of items in the NodeList.

JAVASCRIPT

c05/js/node-list.js

```
var hotItems = document.querySelectorAll('li.hot'); // Store NodeList in array

if (hotItems.length > 0) {                                // If it contains items

    for (var i=0; i<hotItems.length; i++) {      // Loop through each item
        hotItems[i].className = 'cool';           // Change value of class attribute
    }
}
```

RESULT




In this example, the NodeList is generated using `querySelectorAll()`, and it is looking for any `` elements that have a `class` attribute whose value is `hot`.


The NodeList is stored in a variable called `hotItems`, and the number of elements in the list is found using the `length` property.

For each of the elements in the NodeList, the value of the `class` attribute is changed to `cool`.

LOOPING THROUGH A NODELIST: PLAY-BY-PLAY

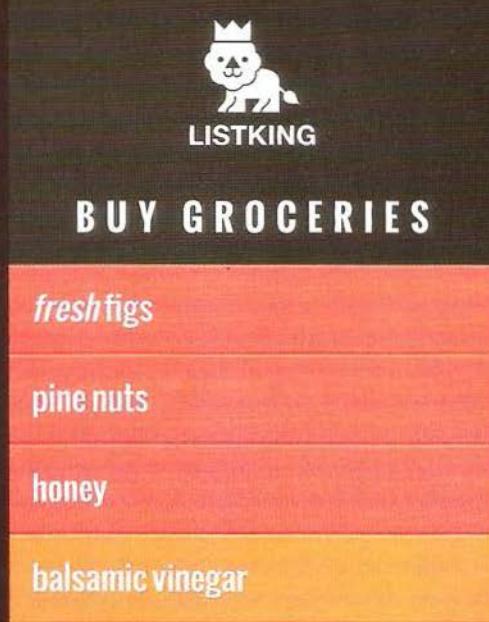


START

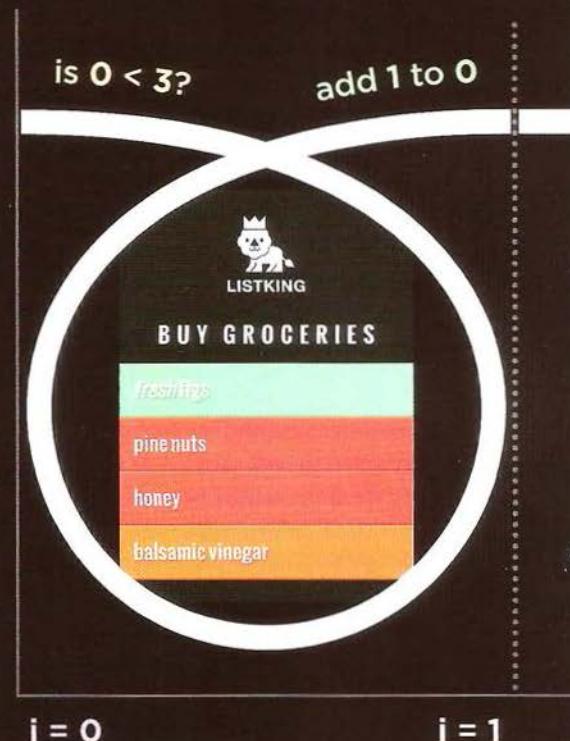

At the start of this example, there are three list items with a `class` attribute whose value is `hot` so the value of `hotItems.length` is 3.

At first, the value of the counter is set to 0, so the first item from the NodeList (which has an index of 0) is targeted and the value of its `class` attribute is set to `cool`.

```
for (var i = 0; i < hotItems.length; i++) {  
    hotItems[i].className = 'cool';  
}
```

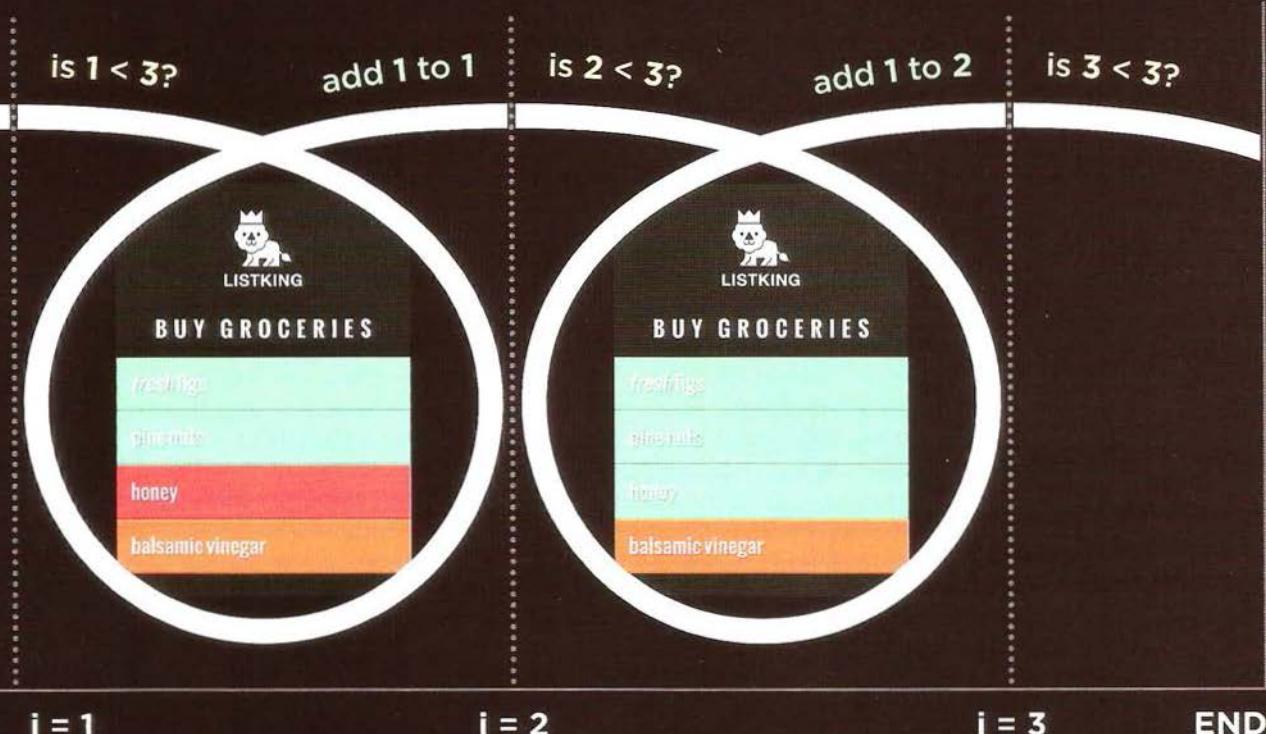

When the value of the counter is 1, the second item from the NodeList (which has an index of 1) is targeted and the value of its `class` attribute is set to `cool`.

When the value of the counter is 2, the third item from the NodeList (which has an index of 2) is targeted and the value of its `class` attribute is set to `cool`.

When the value of the counter is 3, the condition no longer returns `true`, so the loops ends. The script then continues to the first line of code after the loop.

TRAVERSING THE DOM

When you have an element node, you can select another element in relation to it using **these five properties**. This is known as traversing the DOM.

parentNode

This property finds the element node for the containing (or parent) element in the HTML.

(1) If you started with the first `` element, then its parent node would be the one representing the `` element.

previousSibling

nextSibling

These properties find the previous or next sibling of a node if there are siblings.


If you started with the first `` element, it would not have a previous sibling. However, its next sibling (2) would be the node representing the second ``.

firstChild

lastChild

These properties find the first or last child of the current element.

If you started with the `` element, the first child would be the node representing the first `` element, and (3) the last child would be the last ``.

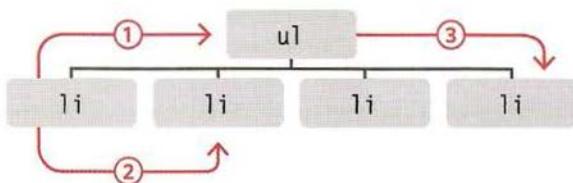

These are properties of the current node (not methods to select an element); therefore, they do not end in parentheses.

If you use these properties and they do not have a previous/next sibling, or a first/last child, the result will be `null`.

These properties are read-only; they can only be used to select a new node, not to update a parent, sibling, or child.

WHITESPACE NODES

Traversing the DOM can be difficult because some browsers add a text node whenever they come across whitespace between elements.


Most browsers, except IE, treat whitespace between elements (such as spaces or carriage returns) as a text node, so the properties below return different elements in different browsers:

`previousSibling`
`nextSibling`
`firstChild`
`lastChild`


Below, you can see all of the whitespace nodes added to the DOM tree for the list example. Each one is represented by a green square. You could strip all the whitespace out of a page before serving it to the browser. This would also make the page smaller and faster to serve/load. However, it would also make the code much harder to read.

Another way around this problem is to avoid using these DOM properties altogether.

One of the most popular ways to address this kind of problem is to use a JavaScript library such as jQuery, which helps deal with such problems. These types of browser inconsistencies were a big factor in jQuery's popularity.

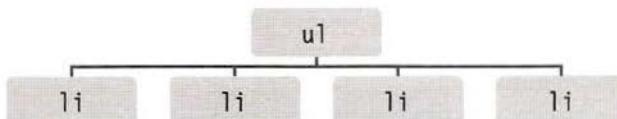

Internet Explorer (shown above) ignores whitespace and does not create extra text nodes.

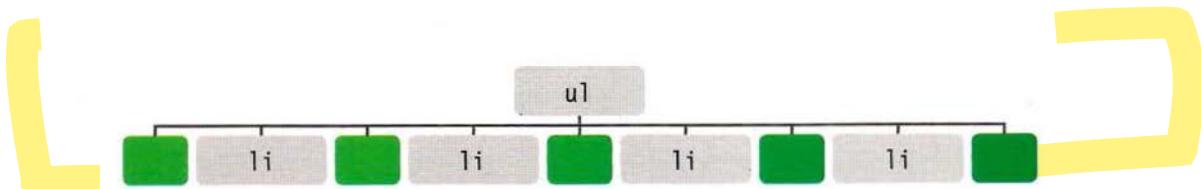

Chrome, Firefox, Safari, and Opera create text nodes from whitespace (spaces and carriage returns).

PREVIOUS & NEXT SIBLING

You have just seen that these properties can return inconsistent results in different browsers. However, it is safe to use them when there is no whitespace between elements.

For this example, all spaces between the HTML elements have been removed. In order to demonstrate these properties, the second list item is selected using `getElementById()`.

From this element node, the `previousSibling` property will return the first `` element, and the `nextSibling` property will return the third `` element.

c05/sibling.html

HTML


```
<ul><li id="one" class="hot"><em>fresh</em> figs</li><li id="two" class="hot">pine nuts</li><li id="three" class="hot">honey</li><li id="four">balsamic vinegar</li></ul>
```

c05/js/sibling.js

JAVASCRIPT

```
// Select the starting point and find its siblings
var startItem = document.getElementById('two');
var prevItem = startItem.previousSibling;
var nextItem = startItem.nextSibling;

// Change the values of the siblings' class attributes
prevItem.className = 'complete';
nextItem.className = 'cool';
```

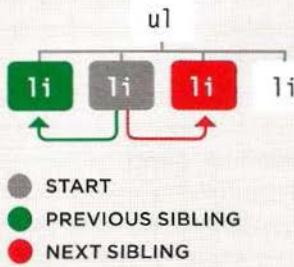

Note how references to sibling nodes are stored in new variables. This means properties such as `className` can be used on that node by adding the dot notation between the variable name and the property.



RESULT

FIRST & LAST CHILD

These properties also return inconsistent results if there is whitespace between elements. In this example, a slightly different solution is used in the HTML - the closing tags are put

next to the opening tags of the next element, making it a little more readable. The example starts by using the `getElementsByTagName()` method to select the ``

element from the page. From this element node, the `firstChild` property will return the first `` element, and the `lastChild` property will return the last `` element.

HTML

```
<ul>
  <li id="one" class="hot"><em>fresh</em> figs</li>
  <li id="two" class="hot">pine nuts</li>
  <li id="three" class="hot">honey</li>
  <li id="four">balsamic vinegar</li>
</ul>
```

c05/child.html


JAVASCRIPT

```
// Select the starting point and find its children
var startItem = document.getElementsByTagName('ul')[0];
var firstItem = startItem.firstChild;
var lastItem = startItem.lastChild;

// Change the values of the children's class attributes
firstItem.setAttribute('class', 'complete');
lastItem.setAttribute('class', 'cool');
```

c05/js/child.js

RESULT

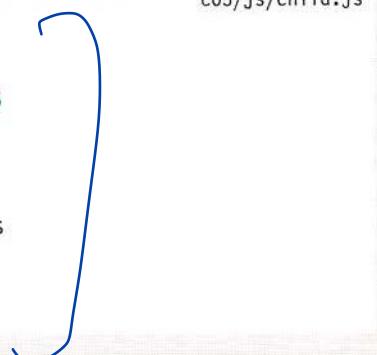

- START
- FIRST CHILD
- LAST CHILD

HOW TO GET/UPDATE ELEMENT CONTENT


So far this chapter has focused on finding elements in the DOM tree. The rest of this chapter shows how to access/update element content. Your choice of techniques depends upon what the element contains.

Take a look at the three examples of `` elements on the right. Each one adds some more markup and, as a result, the fragment of the DOM tree for each list item is very different.

- The first (on this page) just contains text.
- The second and third (on the right-hand page) contain a mix of text and an `` element.

You can see that by adding something as simple as an `` element, the DOM tree's structure changes significantly. In turn, this affects how you might work with that list item. When an element contains a mix of text and other elements, you are more likely to work with the containing element rather than the individual nodes for each descendant.

```
<li id="one">figs</li>
```

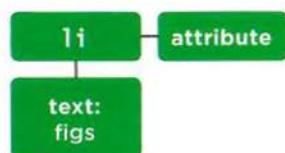

Above, the `` element has:

- One `child` node holding the word that you can see in the list item: `figs`
- An attribute node holding the `id` attribute.

To work with the content of elements you can:


- **Navigate to the text nodes.** This works best when the element contains only text, no other elements.
- **Work with the containing element.** This allows you to access its text nodes and child elements. It works better when an element has text nodes and child elements that are siblings.

TEXT NODES

Once you have navigated from an element to its text node, there is one property that you will commonly find yourself using:

PROPERTY	DESCRIPTION
<code>nodeValue</code>	Accesses text from node (p214)


```
<li id="one"><em>fresh</em> figs</li>
```

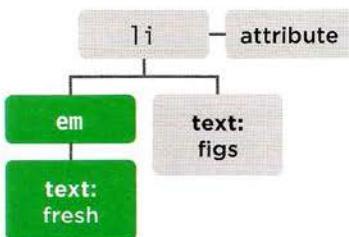

An `` element is added. It becomes the *first child*.

- The `` element node has its own *child text node which contains the word fresh*.
- The original text node is now a *sibling of the node that represents the element*.

```
<li id="one">six <em>fresh</em> figs</li>
```

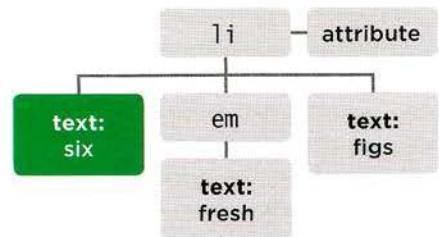

When text is added before the `` element:

- The *first child* of the `` element is a text node, which contains the word `six`.
- It has a *sibling* which is an element node for the `` element. In turn, that `` element node has a *child text node containing the word fresh*.
- Finally, there is a text node holding the word `figs`, which is a *sibling of both the text node for the word "six" and the element node, *.

CONTAINING ELEMENT

When you are working with an element node (rather than its text node), that element can contain markup. You have to choose whether you want to retrieve (get) or update (set) the markup as well as the text.


When you use these properties to update the content of an element, the new content will overwrite the entire contents of the element (both text and markup).

For example, if you used any of these properties to update the content of the `<body>` element, it would update the entire web page.

PROPERTY	DESCRIPTION
<code>innerHTML</code>	Gets/Sets text & markup (p220)
<code>textContent</code>	Gets/Sets text only (p216)
<code>innerText</code>	Gets/Sets text only (p216)

ACCESS & UPDATE A TEXT NODE WITH NODEVALUE

When you select a text node, you can retrieve or amend the content of it using the `nodeValue` property.

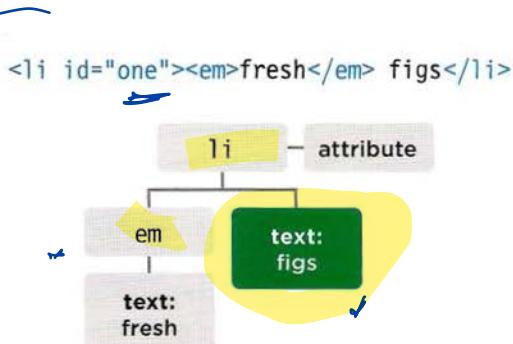

The code below shows how you access the second text node. It will return the result: figs

```
document.getElementById('one').firstChild.nextSibling.nodeValue;  
①-----②-----③-----④-----
```

In order to use `nodeValue`, you must be on a text node, not the element that contains the text.

This example shows that navigating from the element node to a text node can be complicated.

If you do not know whether there will be element nodes alongside text nodes, it is easier to work with the containing element.

1. The `` element node is selected using the `getElementById()` method.
2. The *first child* of `` is the `` element.
3. The text node is the *next sibling* of that `` element.
4. You have the text node and can access its contents using `nodeValue`.

ACCESSING & CHANGING A TEXT NODE

To work with text in an element, first the element node is accessed and then its text node.

The text node has a property called `nodeValue` which returns the text in that text node.

You can also use the `nodeValue` property to update the content of a text node.

JAVASCRIPT

```
var itemTwo = document.getElementById('two');

var elText = itemTwo.firstChild.nodeValue;

elText = elText.replace('pine nuts', 'kale');

itemTwo.firstChild.nodeValue = elText;
```

c05/js/node-value.js

```
// Get second list item

// Get its text content

// Change pine nuts to kale

// Update the list item
```

RESULT



This example takes the text content of the second list item and changes it from pine nuts to kale.

The first line collects the second list item. It is stored in a variable called `itemTwo`.

Next the text content of that element is stored in a variable called `elText`.

The third line of text replaces the words 'pine nuts' with 'kale' using the `String` object's `replace()` method.

The last line uses the `nodeValue` property to update the content of the text node with the updated value.

ACCESS & UPDATE TEXT WITH TEXTCONTENT (& INNERTEXT)


The `textContent` property allows you to collect or update just the text that is in the containing element (and its children).

textContent

To collect the text from the `` elements in our example (and ignore any markup inside the element) you can use the `textContent` property on the containing `` element. In this case it would return the value: `fresh figs`.

You can also use this property to update the content of the element; it replaces the entire content of it (including any markup).

```
<li id="one"><em>fresh</em> figs</li>
```

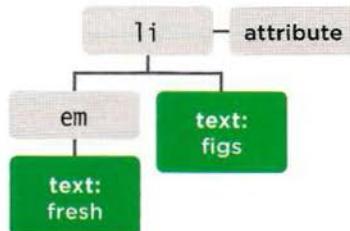

```
document.getElementById('one').textContent;
```

One issue with the `textContent` property is that Internet Explorer did not support it until IE9. (All other major browsers support it.)

innerText

You may also come across a property called `innerText`, but you should generally avoid it for three key reasons:

SUPPORT

Although most browser manufacturers adopted the property, Firefox does not because `innerText` is not part of any standard.

OBEYS CSS

It will not show any content that has been hidden by CSS. For example, if there were a CSS rule that hid the `` elements, the `innerText` property would return only the word `figs`.

PERFORMANCE

Because the `innerText` property takes into account layout rules that specify whether the element is visible or not, it can be slower to retrieve the content than the `textContent` property.

ACCESSING TEXT ONLY

In order to demonstrate the difference between `textContent` and `innerText`, this example features a CSS rule to hide the contents of the `` element.

The script starts off by getting the content of the first list item using both the `textContent` property and `innerText`. It then writes the values after the list.

Finally, the value of the first list item is then updated to say sourdough bread. This is done using the `textContent` property.

JAVASCRIPT

```
var firstItem = document.getElementById('one');           // Find first list item
var showTextContent = firstItem.textContent;          // Get value of textContent
var showInnerText = firstItem.innerText;               // Get value of innerText

// Show the content of these two properties at the end of the list
var msg = '<p>textContent: ' + showTextContent + '</p>';
msg += '<p>innerText: ' + showInnerText + '</p>';
var el = document.getElementById('scriptResults');
el.innerHTML = msg;

firstItem.textContent = 'sourdough bread';           // Update the first list item
```

RESULT



In most browsers:

- `textContent` collects the words fresh figs.
- `innerHTML` just shows figs (because fresh was hidden by the CSS).

But:

- In IE8 or earlier, the `textContent` property does not work.
- In Firefox, the `innerText` property will return undefined because the it was never implemented in Firefox.

ADDING OR REMOVING HTML CONTENT

There are two very different approaches to adding and removing content from a DOM tree: the `innerHTML` property and DOM manipulation.

THE `innerHTML` PROPERTY

Note: there are security risks associated with using `innerHTML` – these issues are described on p228.

APPROACH

`innerHTML` can be used on any element node. It is used both to retrieve and replace content. To update an element, new content is provided as a string. It can contain markup for descendant elements.

ADDING CONTENT

To add new content:
1. Store new content (including markup) as a string in a variable.
2. Select the element whose content you want to replace.
3. Set the element's `innerHTML` property to be the new string.

REMOVING CONTENT

To remove all content from an element, you set `innerHTML` to an empty string. To remove one element from a DOM fragment, e.g., one `` from a ``, you need to provide the entire fragment minus that element.


EXAMPLE: CHANGING A LIST ITEM

1: Create variable holding markup


```
var item;  
item = '<em>Fresh</em> figs';
```

You can have as much or as little markup in the variable as you want. It is a quick way to add a lot of markup to the DOM tree.

2: Select element whose content you want to update

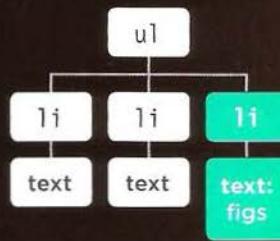

3: Update content of selected element with new markup

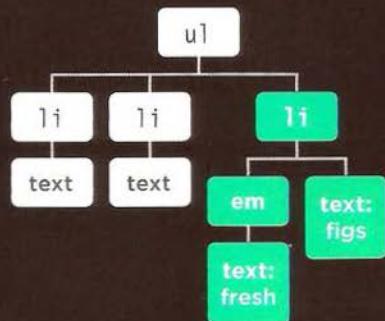

DOM manipulation easily targets individual nodes in the DOM tree,
whereas `innerHTML` is better suited to updating entire fragments.

DOM MANIPULATION METHODS

DOM manipulation can be safer than using `innerHTML`, but it requires more code and can be slower.

APPROACH

DOM manipulation refers to a set of DOM methods that allow you to create element and text nodes, and then attach them to the DOM tree or remove them from the DOM tree.

ADDING CONTENT

To add content, you use a DOM method to create new content one node at a time and store it in a variable. Then another DOM method is used to attach it to the right place in the DOM tree.

REMOVING CONTENT

You can remove an element (along with any contents and child elements it may contain) from the DOM tree using a single method.

EXAMPLE: ADDING A LIST ITEM

1: Create new text node

text

2: Create new element node


li

3: Add text node to element node


li

text

4: Select element you want to add the new fragment to

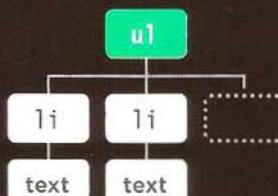

5: Append the new fragment to the selected element

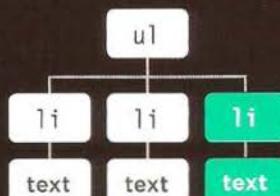

ACCESS & UPDATE TEXT & MARKUP WITH INNERHTML

Using the `innerHTML` property, you can access and amend the contents of an element, including any child elements.

innerHTML


When getting HTML from an element, the `innerHTML` property will get the content of an element and return it as one long string, including any markup that the element contains.

When used to set new content for an element, it will take a string that can contain markup and process that string, adding any elements within it to the DOM tree.

When adding new content using `innerHTML`, be aware that one missing closing tag could throw out the design of the entire page.

Even worse, if `innerHTML` is used to add content that your users created to a page, they could add malicious content. See p228.

```
<li id="one"><em>fresh</em> figs</li>
```

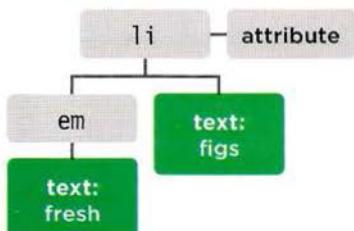

GET CONTENT

The following line of code collects the content of the list item and adds it to a variable called `eContent`:

```
var eContent = document.getElementById('one').innerHTML;
```

The `eContent` variable would now hold the string:

```
'<em>fresh</em> figs'
```

SET CONTENT

The following line of code adds the content of the `eContent` variable (including any markup) to the first list item:

```
document.getElementById('one').innerHTML = eContent;
```

UPDATE TEXT & MARKUP

This example starts by storing the first list item in a variable called `firstItem`.


It then retrieves the content of this list item and stores it in a variable called `itemContent`.

Finally, the content of the list item is placed inside a link. Note how the quotes are escaped.


JAVASCRIPT

```
// Store the first list item in a variable  
var firstItem = document.getElementById('one');  
  
// Get the content of the first list item  
var itemContent = firstItem.innerHTML;  
  
// Update the content of the first list item so it is a link  
firstItem.innerHTML = '<a href=\"http://example.org\">' + itemContent + '</a>';
```

c05/js/inner-html.js

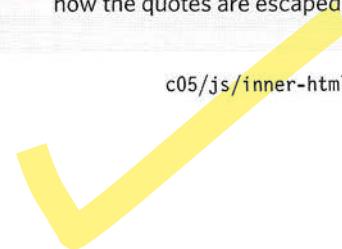

RESULT

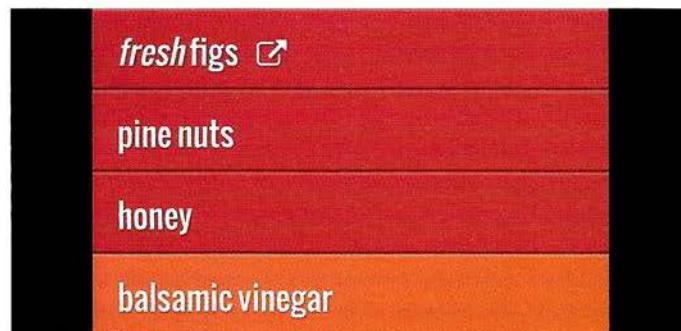

As the content of the string is added to the element using the `innerHTML` property, the browser will add any elements in the string to the DOM. In this example, an `<a>` element has been added to the page. (Any new elements will also be available to other scripts in the page.)

If you use attributes in your HTML code, escaping the quotation using the backslash character \ can make it clearer that those characters are not part of the script.

ADDING ELEMENTS USING DOM MANIPULATION

DOM manipulation offers another technique to add new content to a page (rather than `innerHTML`). It involves three steps:

1

CREATE THE ELEMENT

`createElement()`

You start by creating a new element node using the `createElement()` method. This element node is stored in a variable.

When the element node is created, it is not yet part of the DOM tree. It is not added to the DOM tree until step 3.

2

GIVE IT CONTENT

`createTextNode()`

`createTextNode()` creates a new text node. Again, the node is stored in a variable. It can be added to the element node using the `appendChild()` method.

This provides the content for the element, although you can skip this step if you want to attach an empty element to the DOM tree.

3

ADD IT TO THE DOM

`appendChild()`

Now that you have your element (optionally with some content in a text node), you can add it to the DOM tree using the `appendChild()` method.

The `appendChild()` method allows you to specify which element you want this node added to, as a child of it.

In the example at the end of the chapter, you will see another method that can be used to insert an element into the DOM tree. The `insertBefore()` method is used to add a new element before the selected DOM node.

DOM manipulation and `innerHTML` both have uses. You will see a discussion of when to choose each method on p226.

Note: You may see developers leave an empty element in their HTML pages in order to attach new content to that element, but this practice is best avoided unless absolutely necessary.

ADDING AN ELEMENT TO THE DOM TREE

`createElement()` creates an element that can be added to the DOM tree, in this case an empty `` element for the list.

This new element is stored inside a variable called `newEl` until it is attached to the DOM tree later on.

`createTextNode()` allows you to create a new text node to attach to an element. It is stored in a variable called `newText`.

JAVASCRIPT

c05/js/add-element.js

```
// Create a new element and store it in a variable.  
var newEl = document.createElement('li');  
  
// Create a text node and store it in a variable.  
var newText = document.createTextNode('quinoa');  
  
// Attach the new text node to the new element.  
newEl.appendChild(newText);  
  
// Find the position where the new element should be added.  
var position = document.getElementsByTagName('ul')[0];  
  
// Insert the new element into its position.  
position.appendChild(newEl);
```



RESULT



The text node is added to the new element node using `appendChild()`.

The `getElementsByTagName()` method selects the position in the DOM tree to insert the new element (the first `` element in the page).

Finally, `appendChild()` is used again - this time to insert the new element and its content into the DOM tree.

REMOVING ELEMENTS VIA DOM MANIPULATION

DOM manipulation can be used to remove elements from the DOM tree.

1

STORE THE ELEMENT TO BE REMOVED IN A VARIABLE

2

STORE THE PARENT OF THAT ELEMENT IN A VARIABLE

3

REMOVE THE ELEMENT FROM ITS CONTAINING ELEMENT

You start by selecting the element that is going to be removed and store that element node in a variable.

You can use any of the methods you saw in the section on DOM queries to select the element.

Next, you find the parent element that contains the element you want to remove and store that element node in a variable.

The simplest way to get this element is to use the `parentNode` property of this element.

The `removeChild()` method is used on the containing element that you selected in step 2.

The `removeChild()` method takes one parameter: the reference to the element that you no longer want.

When you remove an element from the DOM, it will also remove any child elements.

The example on the right is quite simple, but this technique can significantly alter the DOM tree.

Removing elements from the DOM will affect the index number of siblings in a NodeList.

REMOVING AN ELEMENT FROM THE DOM TREE

This example uses the `removeChild()` method to **remove the fourth item from the list (along with its contents)**.

The first variable, `removeEl`, stores the actual element you want to remove from the page (the fourth list item).

The second variable, `containerEl`, stores the `` element that **contains the element you want to remove**.

JAVASCRIPT

c05/js/remove-element.js


```
var removeEl = document.getElementsByTagName('li')[3]; // The element to remove  
var containerEl = removeEl.parentNode; // Its containing element  
containerEl.removeChild(removeEl); // Removing the element
```

RESULT



The `removeChild()` method is used on the variable that holds the **container node**.

It requires one parameter: the element you want to remove (which is stored in the second variable).

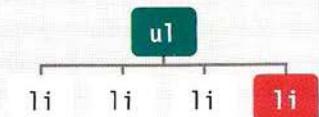

● CONTAINER ELEMENT
● ELEMENT TO BE REMOVED

COMPARING TECHNIQUES: UPDATING HTML CONTENT

So far, you have seen three techniques for adding HTML to a web page.
It's time to compare when you should use each one.

In any programming language, there are often several ways to achieve the same task. In fact, if you asked ten programmers to write the same script, you may well find ten different approaches.

Some programmers can be rather opinionated and believe that their way is always the "right" way to do things – when there are often several right ways. If you understand why people prefer some approaches over others, then you are in a strong position to decide whether it meets the needs of your project.

document.write()

The document object's `write()` method is a simple way to add content that was not in the original source code to the page, but its use is rarely advised.

ADVANTAGES

- It is a quick and easy way to show beginners how content can be added to a page.

DISADVANTAGES

- It only works when the page initially loads.
- If you use it after the page has loaded it can:
 1. Overwrite the whole page
 2. Not add the content to the page
 3. Create a new page
- It can cause problems with XHTML pages that are strictly validated.
- This method is very rarely used by programmers these days and is generally frowned upon.

You can choose different techniques depending on the task (and keep in mind how the site might be developed in the future).

`element.innerHTML`

The `innerHTML` property lets you get/update the entire content of any element (including markup) as a string.

ADVANTAGES

- You can use it to add a lot of new markup using less code than DOM manipulation methods.
- It can be faster than DOM manipulation when adding a lot of new elements to a web page.
- It is a simple way to remove all of the content from one element (by assigning it a blank string).

DISADVANTAGES

- It should not be used to add content that has come from a user (such as a username or blog comment), as it can pose a significant security risk which is discussed over the next four pages.
- It can be difficult to isolate single elements that you want to update within a larger DOM fragment.
- Event handlers may no longer work as intended.

DOM MANIPULATION

DOM manipulation refers to using a set of methods and properties to access, create, and update elements and text nodes.

ADVANTAGES

- It is suited to changing one element from a DOM fragment where there are many siblings.
- It does not affect event handlers.
- It easily allows a script to add elements incrementally (when you do not want to alter a lot of code at once).

DISADVANTAGES

- If you have to make a lot of changes to the content of a page, it is slower than innerHTML.
- You need to write more code to achieve the same thing compared with innerHTML.

CROSS-SITE SCRIPTING (XSS) ATTACKS

X 228 to 233

If you add HTML to a page using `innerHTML` (or several jQuery methods), you need to be aware of **Cross-Site Scripting Attacks** or **XSS**; otherwise, an attacker could gain access to your users' accounts.

This book has several warnings about security issues when you add HTML to a page using `innerHTML`. (There are also notes about it when using jQuery.)

HOW XSS HAPPENS

XSS involves an attacker placing malicious code into a site. Websites often feature content created by many different people. For example:

- Users can create profiles or add comments
- Multiple authors may contribute articles
- Data can come from third-party sites such as Facebook, Twitter, news tickers, and other feeds
- Files such as images and video may be uploaded

Data you do not have complete control over is known as **untrusted data**; it must be handled with care.

The next four pages describe the issues you need to be aware of, and how to make your site secure against these kinds of attacks.

WHAT CAN THESE ATTACKS DO?

XSS can give the attacker access to information in:

- The DOM (including form data)
- That website's cookies
- Session tokens: information that identifies you from other users when you log into a site

This could let the attacker access a user account and:

- Make purchases with that account
- Post defamatory content
- Spread their malicious code further / faster

EVEN SIMPLE CODE CAN CAUSE PROBLEMS:

Malicious code often mixes HTML and JavaScript (although URLs and CSS can be used to trigger XSS attacks). The two examples below demonstrate how fairly simple code could help an attacker access a user's account.

This first example stores cookie data in a variable, which could then be sent to a third-party server:

```
<script>var adr='http://example.com/xss.php?cookie=' + escape(document.cookie);</script>
```

This code shows how a missing image can be used with an HTML attribute to trigger malicious code:

```


```

Any HTML from untrusted sources opens your site to XSS attacks. But the threat is only from certain characters.

DEFENDING AGAINST CROSS-SITE SCRIPTING

VALIDATE INPUT GOING TO THE SERVER

1. Only let visitors input the kind of characters they need to when supplying information. This is known as **validation**. Do not allow untrusted users to submit HTML markup or JavaScript.
2. Double-check validation on the server before displaying user content/storing it in a database. This is important because users could bypass validation in the browser by turning JavaScript off.
3. The database may safely contain markup and script from trusted sources (e.g., your content management system). This is because it does not try to process the code; it just stores it.

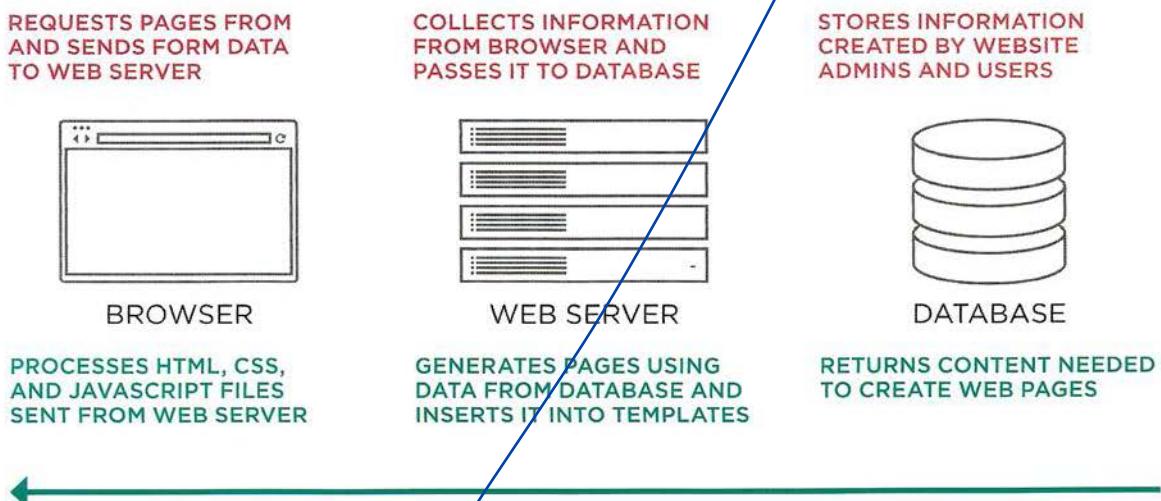

ESCAPE DATA COMING FROM THE SERVER & DATABASE

6. Do not create DOM fragments containing HTML from untrusted sources. It should only be added as text once it has been escaped.
5. Make sure that you are only inserting content generated by users into certain parts of the template files (see p230).
4. As your data leaves the database, all potentially dangerous characters should be escaped (see p231).

So, you can safely use `innerHTML` to add markup to a page if you have written the code – but content from any untrusted sources should be escaped and added as text (not markup), using properties like `textContent`.

XSS: VALIDATION & TEMPLATES

Make sure that your users can only input characters they need to use and limit where this content will be shown on the page.

FILTER OR VALIDATE INPUT

The most basic defense is to prevent users from entering characters into form fields that they do not **need** to use when providing that kind of information.

For example, users' names and email addresses will not contain angled brackets, ampersands, or parentheses, so you can validate data to prevent characters like this being used.

This can be done in the browser, but must also be done on the server (in case the user has JavaScript turned off). You learn about validation in Chapter 13.

You may have seen that the comment sections on websites rarely allow you to enter a lot of markup (they sometimes allow a limited subset of HTML). This is to prevent people from entering malicious code such as `<script>` tags, or any other character with an event handling attribute.

Even the HTML editors used in many content management systems will limit the code that you are allowed to use within them, and will automatically try to correct any markup that looks malicious.

LIMIT WHERE USER CONTENT GOES

Malicious users will not just use `<script>` tags to try and create an XSS attack. As you saw on p228, malicious code can live in an event handler attribute without being wrapped in `<script>` tags. XSS can also be triggered by malicious code in CSS or URLs.

Browsers process HTML, CSS, and JavaScript in different ways (or execution contexts), and in each language different characters can cause problems. Therefore, you should only add content from untrusted sources as text (not markup), and place that text in elements that are visible in the viewport.

Never place any user's content in the following places without detailed experience of the issues involved (which are beyond the scope of this book):

Script tags:	<code><script>not here</script></code>
HTML comments:	<code><!-- not here --></code>
Tag names:	<code><notHere href="/test" /></code>
Attributes:	<code><div notHere="norHere" /></code>
CSS values:	<code>{color: not here}</code>

XSS: ESCAPING & CONTROLLING MARKUP

Any content generated by users that contain characters that are used in code should be escaped on the server. You must control any markup added to the page.

ESCAPING USER CONTENT

All data from untrusted sources should be escaped on the server before it is shown on the page. Most server-side languages offer helper functions that will strip-out or escape malicious code.

HTML

Escape these characters so that they are displayed as characters (not processed as code).

&	&	'	'	(not ')
<	<	"	"	
>	>	/	/	
-	`			

JAVASCRIPT

Never include data from untrusted sources in JavaScript. It involves escaping all ASCII characters with a value less than 256 that are not alphanumeric characters (and can be a security risk).

URLS

If you have links containing user input (e.g., links to a user profile or search queries), use the JavaScript `encodeURIComponent()` method to encode the user input. It encodes the following characters:

, / ? : @ & = + \$ #

ADDING USER CONTENT

When you add untrusted content to an HTML page, once it has been escaped on the server, it should still be added to the page as text. JavaScript and jQuery both offer tools for doing this:

JAVASCRIPT

DO use: `textContent` or `innerText` (see p216)
DO NOT use: `innerHTML` (see p220)

JQUERY

DO use: `.text()` (see p316)
DO NOT use: `.html()` (see p316)

You can still use the `innerHTML` property and jQuery `.html()` method to add HTML to the DOM, but you must make sure that:

- You control **all** of the markup being generated (do not allow user content that could contain markup).
- The user's content is escaped and added as text using the approaches noted above, rather than adding the user's content as HTML.

ATTRIBUTE NODES

Once you have an element node, you can use other properties and methods on that element node to access and change its attributes.

There are two steps to accessing and updating attributes.

First, select the element node that carries the attribute and follow it with a period symbol.

Then, use one of the methods or properties below to work with that element's attributes.

Finds the element node (works with any technique covered in this chapter)

DOM QUERY

Gets the value of the attribute that was given as a parameter of the method

METHOD

```
document.getElementById('one').getAttribute('class');
```

MEMBER OPERATOR

Indicates that the subsequent method will be used on the node specified to the left

METHOD

METHOD	DESCRIPTION
getAttribute()	gets the value of an attribute
hasAttribute()	checks if element node has a specified attribute
setAttribute()	sets the value of an attribute
removeAttribute()	removes an attribute from an element node

You have seen that the DOM treats each HTML element as its own object in the DOM tree.

The properties of the object correspond to the attributes that type of element can carry.

On the left, you can see the `className` and `id` properties. (Others include `accessKey`, `checked`, `href`, `lang`, and `title`.)

PROPERTY

PROPERTY	DESCRIPTION
className	gets or sets the value of the <code>class</code> attribute
id	gets or sets the value of the <code>id</code> attribute

CHECK FOR AN ATTRIBUTE AND GET ITS VALUES

Before you work with an attribute, it is good practice to check whether it exists. This will save resources if the attribute cannot be found.

The `hasAttribute()` method of any element node lets you check if an attribute exists. The attribute name is given as an argument in the parentheses.

Using `hasAttribute()` in an `if` statement like this means that the code inside the curly braces will run only if the attribute exists on the given element.

JAVASCRIPT

```
var firstItem = document.getElementById('one');  
  
if (firstItem.hasAttribute('class')) {  
    var attr = firstItem.getAttribute('class');  
  
    // Add the value of the attribute after the list  
    var el = document.getElementById('scriptResults');  
    el.innerHTML = '<p>The first item has a class name: ' + attr + '</p>';  
  
}
```

c05/js/get-attribute.js

RESULT



In this example, the DOM query `getElementById()` returns the element whose `id` attribute has a value of `one`.

The `hasAttribute()` method is used to check whether this element has a `class` attribute, and returns a Boolean. This is used with an `if` statement so that the code in the curly braces will run only if the `class` attribute does exist.

The `getAttribute()` method returns the value of the `class` attribute, which is then written to the page.

Browser Support: Both of these methods have good support in all major web browsers.

CREATING ATTRIBUTES & CHANGING THEIR VALUES

The `className` property allows you to change the value of the `class` attribute. If the attribute does not exist, it will be created and given the specified value.

You have seen this property used throughout the chapter to update the status of the list items. Below, you can see another way to achieve the task.

The `setAttribute()` method allows you to update the value of *any* attribute. It takes two parameters: the attribute name, and the value for the attribute.

c05/js/set-attribute.js

JAVASCRIPT

```
var firstItem = document.getElementById('one'); // Get the first item  
firstItem.className = 'complete'; // Change its class attribute  
  
var fourthItem = document.getElementsByTagName('li').item(3); // Get fourth item  
el2.setAttribute('class', 'cool'); // Add an attribute to it
```

When there is a property (like the `className` or `id` properties), it is generally considered better to update the properties rather than use a method (because, behind the scenes, the method would just be setting the properties anyway).

When you update the value of an attribute (especially the `class` attribute) it can be used to trigger new CSS rules, and therefore change the appearance of the elements.

RESULT



Note: These techniques override the entire value of the `class` attribute. They do not add a new value to the existing value of the `class` attribute.

If you wanted to add a new value onto the existing value of the `class` attribute, you would need to read the content of the attribute first, then add the new text to that existing value of the attribute (or use the jQuery `.addClass()` method covered on p320).

REMOVING ATTRIBUTES

To remove an attribute from an element, first select the element, then call `removeAttribute()`. It has one parameter: the name of the attribute to remove.

Trying to remove an attribute that does not exist will not cause an error, but it is good practice to check for its existence before attempting to remove it.

In this example, the `getElementById()` method is used to retrieve the first item from this list, which has an `id` attribute with a value of one.

JAVASCRIPT

```
var firstItem = document.getElementById('one'); // Get the first item
if (firstItem.hasAttribute('class')) {           // If it has a class attribute
    firstItem.removeAttribute('class');          // Remove its class attribute
}
```

c05/js/remove-attribute.js

RESULT



The script checks to see if the selected element has a `class` attribute and, if so, it is removed.

EXAMINING THE DOM IN CHROME


Modern browsers come with tools that help you inspect the page loaded in the browser and understand the structure of the DOM tree.

In the screenshot to the right, the `` element is highlighted and the **Properties** panel (1) indicates that this is an:

- `li` element with an `id` attribute whose value is one and `class` whose value is hot
- an `HTMLLIElement`
- an `HTMLElement`
- an element
- a node
- an object

Each of these object names has an arrow next to it which you can use to expand that section. It will tell you what properties are available to that kind of node.

They are separated because some properties are specific to list item elements, others to element nodes, others to all nodes, and others to all objects, and the different properties are listed under the corresponding type of node. But they do remind you of which properties you can access through the DOM node for that element.

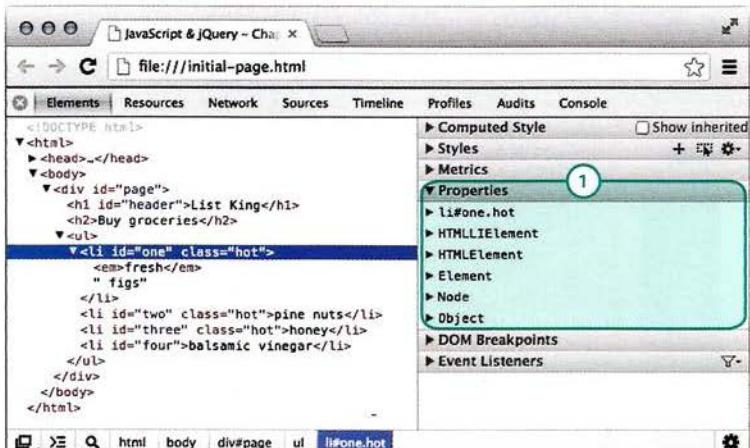

To get the developer tools in Chrome on a Mac, go to the **View** menu, select **Developer** and then **Developer Tools**. On a PC, go to **Tools** (or **More Tools**) and select **Developer Tools**.

Or right-click on any element and select **Inspect Element**.


Select **Elements** from the menu that runs across the top of this tool. The source of the page will be shown on the left and several other options to the right.

Any element that has child elements has an arrow next to it that lets you expand and collapse the item to show and hide its content.

The **Properties** panel (on the right) tells you the type of object the selected element is. (In some versions of Chrome this is shown as a tab.) When you highlight different elements in the main left-hand window, you can see the values in the **Properties** panel on the right reflect that element.

EXAMINING THE DOM IN FIREFOX

Firefox has similar built-in tools, but you can also download a DOM inspector tool that shows the text nodes.

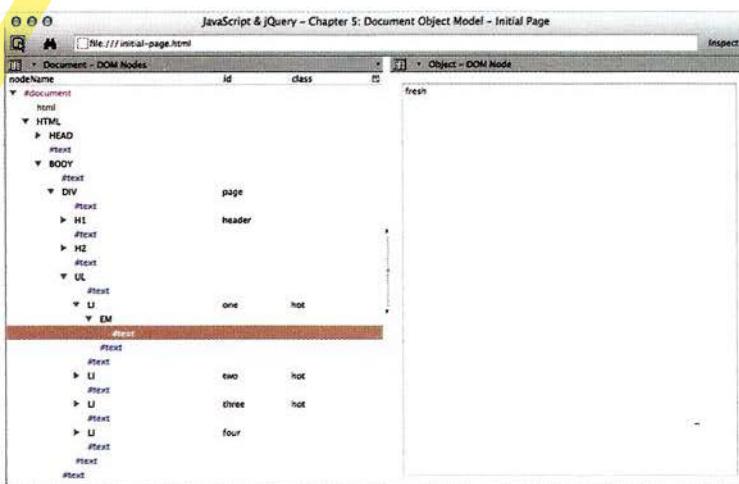

If you search online for "DOM Inspector", you will find the tool designed for Firefox shown on the left. In the screen shot, you can see a similar tree view to the one shown in Chrome, but it also shows you where there are whitespace nodes (they are shown as `#text`). In the panel to the right, you can see the value in the nodes; whitespace nodes have no value in this panel.

Another Firefox extension worth trying is called Firebug.

Firefox also has a 3D view of the DOM, where a box is drawn around each element, and you can change the angle of the page to show which parts of it stick out more than others. The further they protrude the further into child elements they appear.

This can give you an interesting (and quick) glimpse into the complexity of the markup used on a page and the depth to which elements are nested.







EXAMPLE DOCUMENT OBJECT MODEL

This example brings together a selection of the techniques you have seen throughout the chapter to update the contents of the list. It has three main aims:

1: Add a new item to the start and end of the list

Adding an item to the *start* of a list requires the use of a different method than adding an element to the *end* of the list.

2: Set a `class` attribute on all items

This involves looping through each of the `` elements and updating the value of the `class` attribute to `cool`.

3: Add the number of list items to the heading

This involves four steps:

1. Reading the content of the heading
2. Counting the number of `` elements in the page
3. Adding the number of items to the content of the heading
4. Updating the heading with this new content

EXAMPLE

DOCUMENT OBJECT MODEL

c05/js/example.js

JAVASCRIPT

```
// ADDING ITEMS TO START AND END OF LIST
var list = document.getElementsByTagName('ul')[0]; // Get the <ul> element

// ADD NEW ITEM TO END OF LIST
var newItemLast = document.createElement('li'); // Create element
var newTextLast = document.createTextNode('cream'); // Create text node
newItemLast.appendChild(newTextLast); // Add text node to element
list.appendChild(newItemLast); // Add element end of list

// ADD NEW ITEM START OF LIST
var newItemFirst = document.createElement('li'); // Create element
var newTextFirst = document.createTextNode('kale'); // Create text node
newItemFirst.appendChild(newTextFirst); // Add text node to element
list.insertBefore(newItemFirst, list.firstChild); // Add element to list
```

This part of the example adds two new list items to the `` element: one to the end of the list and one to the start of it. The technique used here is DOM manipulation and there are four steps to creating a new element node and adding it to the DOM tree:

1. Create the element node
2. Create the text node
3. Add the text node to the element node
4. Add the element to the DOM tree

To achieve step four, you must first specify the `parent` that will contain the new node. In both cases, this is the `` element. The node for this element is stored in a variable called `list` because it is used many times.

The `appendChild()` method adds new nodes as a child of the parent element. It has one parameter: the new content to be added to the DOM tree. If the parent element already has child elements, it will be added after the last of these (and will therefore be the last child of the parent element).

`parent.appendChild(newItem);`

(You have seen this method used several times both to add new elements to the tree and to add text nodes to element nodes.)

To add the item to the *start* of the list, the `insertBefore()` method is used. This requires one extra piece of information: the element you want to add the new content before (the target element).

`parent.insertBefore(newItem, target);`

EXAMPLE

DOCUMENT OBJECT MODEL

JAVASCRIPT

```
var listItems = document.querySelectorAll('li'); // All <li> elements

// ADD A CLASS OF COOL TO ALL LIST ITEMS
var i;
for (i = 0; i < listItems.length; i++) {
    listItems[i].className = 'cool';
} // Counter variable
// Loop through elements
// Change class to cool

// ADD NUMBER OF ITEMS IN THE LIST TO THE HEADING
var heading = document.querySelector('h2'); // h2 element
var headingText = heading.firstChild.nodeValue; // h2 text
var totalItems = listItems.length; // No. of <li> elements
var newHeading = headingText + '<span>' + totalItems + '</span>'; // Content
heading.textContent = newHeading; // Update h2
```

The next step of this example is to loop through all of the elements in the list and update the value of their class attributes, setting them to cool.

This is achieved by first collecting all of the list item elements and storing them in a variable called `listItems`. A for loop is then used to go through each of them in turn. In order to tell how many times the loop should run, you use the `length` property.

Finally, the code updates the heading to include the number of list items. It updates it using the `innerHTML` property as opposed to the DOM manipulation techniques used earlier in the script.

This demonstrates how you can add to the content of an existing element by reading its current value and adding to it. You could use a similar technique if you needed to add a value to an attribute – without overwriting its existing value.

c05/js/example.js

To update the heading with the number of items in the list, you need two pieces of information:

1. **The original content of the heading** so that you can add the number of list items to it. It is collected using the `nodeValue` property (although `innerHTML` or `textContent` would do the same).
2. **The number of list items**, which can be found using the `length` property on the `listItems` variable.

With this information ready, there are two steps to updating the content of the `<h2>` element:

1. **Creating the new heading** and storing it in a variable – the new heading will be made up of the original heading content, followed by the number of items in the list.
2. **Updating the heading**, which is done by updating the content of the heading element using the `innerText` property of that node.

SUMMARY

DOCUMENT OBJECT MODEL

- ▶ The browser represents the page using a DOM tree.
- ▶ DOM trees have four types of nodes: document nodes, element nodes, attribute nodes, and text nodes.
- ▶ You can select element nodes by their `id` or `class` attributes, by tag name, or using CSS selector syntax.
- ▶ Whenever a DOM query can return more than one node, it will always return a `NodeList`.
- ▶ From an element node, you can access and update its content using properties such as `textContent` and `innerHTML` or using DOM manipulation techniques.
- ▶ An element node can contain multiple text nodes and child elements that are siblings of each other.
- ▶ In older browsers, implementation of the DOM is inconsistent (and is a popular reason for using jQuery).
- ▶ Browsers offer tools for viewing the DOM tree.

6


EVENTS


except 258-259, 264

H4 270]

When you browse the web, your browser registers different types of events. It's the browser's way of saying, "Hey, this just happened." Your script can then respond to these events.

Scripts often respond to these events by updating the content of the web page (via the Document Object Model) which makes the page feel more interactive. In this chapter, you will learn how:

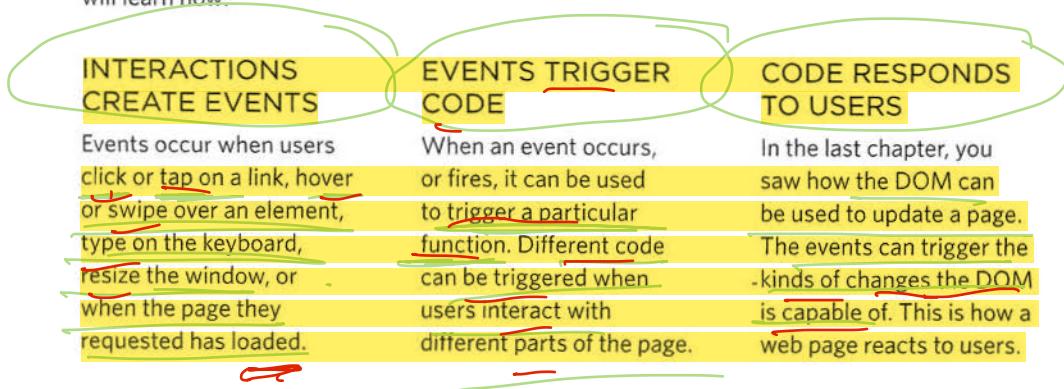

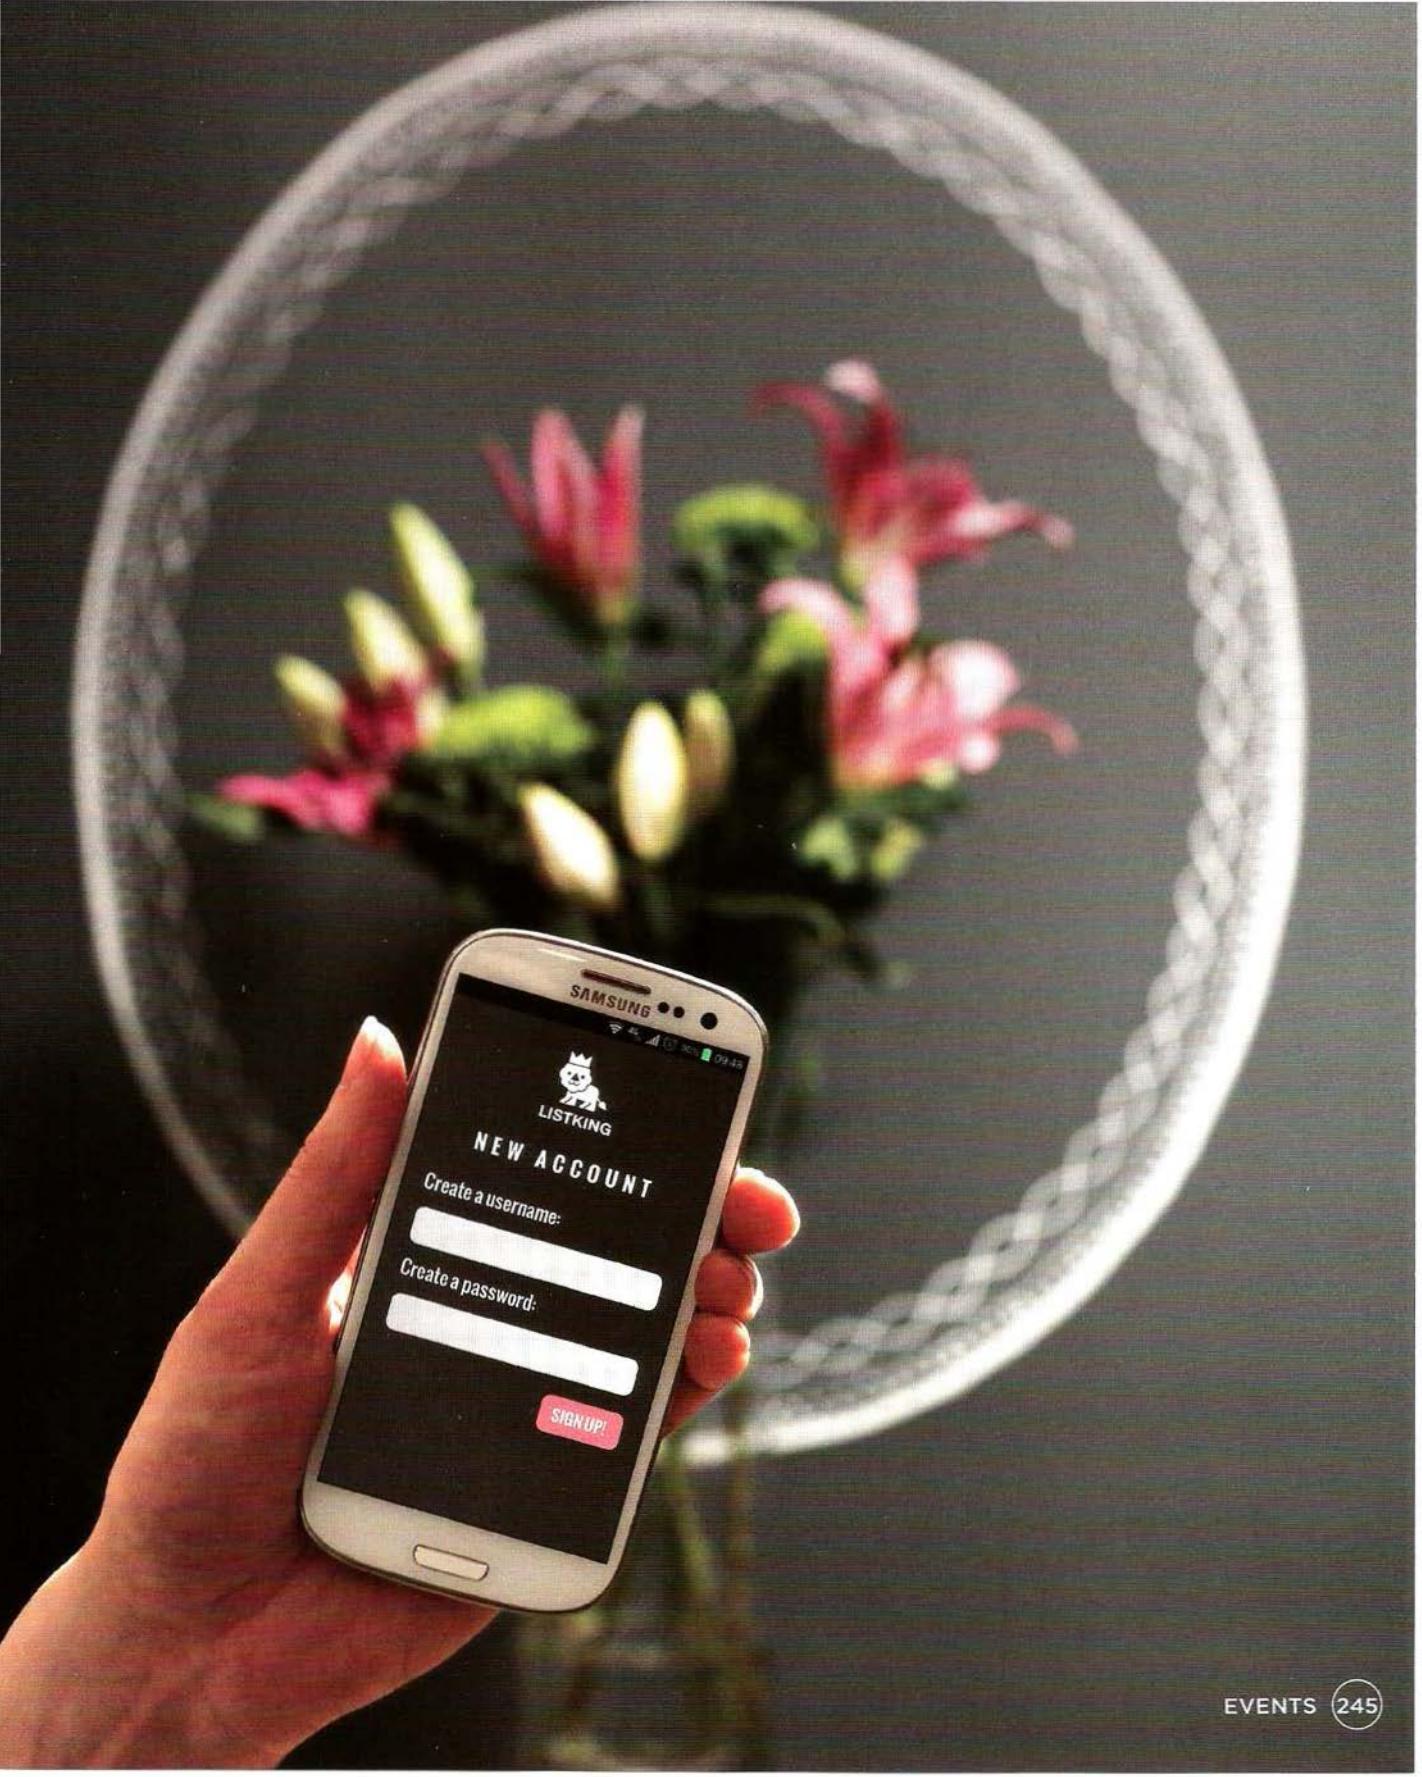

DIFFERENT EVENT TYPES

Here is a selection of the events that occur in the browser while you are browsing the web. Any of these **events can be used to trigger a function in your JavaScript code.**

UI EVENTS

Occur when a user interacts with the browser's user interface (UI) rather than the web page

EVENT	DESCRIPTION
load	Web page has finished loading
unload	Web page is unloading (usually because a new page was requested)
error	Browser encounters a JavaScript error or an asset doesn't exist
resize	Browser window has been resized
scroll	User has scrolled up or down the page

KEYBOARD EVENTS

Occur when a user interacts with the keyboard (see also `input` event)

EVENT	DESCRIPTION
keydown	User first presses a key (repeats while key is depressed)
keyup	User releases a key
keypress	Character is being inserted (repeats while key is depressed)

MOUSE EVENTS


Occur when a user interacts with a mouse, trackpad, or touchscreen

EVENT	DESCRIPTION
click	User presses and releases a button over the same element
dblclick	User presses and releases a button twice over the same element
mousedown	User presses a mouse button while over an element
mouseup	User releases a mouse button while over an element
mousemove	User moves the mouse (not on a touchscreen)
mouseover	User moves the mouse over an element (not on a touchscreen)
mouseout	User moves the mouse off an element (not on a touchscreen)

TERMINOLOGY

✓ EVENTS FIRE OR ARE RAISED

When an event has occurred, it is often described as having **fired** or **been raised**. In the diagram on the right, if the user is tapping on a link, a **click event** would fire in the browser.

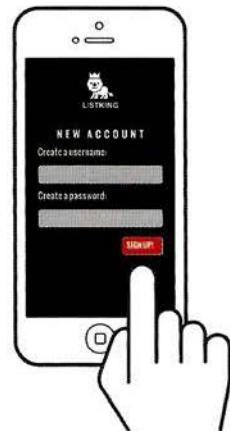

✓ EVENTS TRIGGER SCRIPTS

Events are said to **trigger** a function or script. When the **click event** fires on the element in this diagram, it could trigger a script that enlarges the selected item.

FOCUS EVENTS

Occur when an element (e.g., a link or form field) gains or loses focus

EVENT	DESCRIPTION
focus / focusin	Element gains focus
blur / focusout	Element loses focus

FORM EVENTS

Occur when a user interacts with a form element

EVENT	DESCRIPTION
input	Value in any <input> or <textarea> element has changed (IE9+) or any element with the contenteditable attribute
change	Value in select box, checkbox, or radio button changes (IE9+)
submit	User submits a form (using a button or a key)
reset	User clicks on a form's reset button (rarely used these days)
cut	User cuts content from a form field
copy	User copies content from a form field
paste	User pastes content into a form field
select	User selects some text in a form field

MUTATION EVENTS*

Occur when the DOM structure has been changed by a script

* To be replaced by mutation observers (see p284)

EVENT	DESCRIPTION
DOMSubtreeModified	Change has been made to document
DOMNodeInserted	Node has been inserted as a direct child of another node
DOMNodeRemoved	Node has been removed from another node
DOMNodeInsertedIntoDocument	Node has been inserted as a descendant of another node
DOMNodeRemovedFromDocument	Node has been removed as a descendant of another node

HOW EVENTS TRIGGER JAVASCRIPT CODE

When the user interacts with the HTML on a web page, there are three steps involved in getting it to trigger some JavaScript code. Together these steps are known as **event handling**.

1

Select the **element node(s)** you want the script to respond to.

For example, if you want to trigger a function when a user clicks on a specific link, you need to get the DOM node for that link element. You do this using a DOM query (see Chapter 5).

2

Indicate which **event** on the selected node(s) will trigger the response.

Programmers call this **binding an event to a DOM node**.

The previous two pages showed a selection of the popular events that you can monitor for.

3

State the **code** you want to run when the event occurs.

When the event occurs, on a specified element, it will trigger a function. This may be a named or an anonymous function.

The UI events that relate to the browser window (rather than the HTML page loaded in it) work with the `window` object rather than an element node. Examples include the events that occur when a requested page has finished loading, or when the user scrolls. You will learn about using these on p272.

Some events work with most element nodes, such as the `mouseover` event, which is triggered when the user rolls over any element. Other events only work with specific element nodes, such as the `submit` event, which only works with a form.



Here you can see how event handling can be used to provide feedback to users filling in a registration form. It will show an error message if their username is too short.

1

SELECT ELEMENT

The element that users are interacting with is the text input where they enter the username.

2


SPECIFY EVENT

When users move out of the text input, it loses focus, and the blur event fires on this element.

3

CALL CODE

When the blur event fires on the username input, it will trigger a function called checkUsername(). This function checks if the username is less than 5 characters.

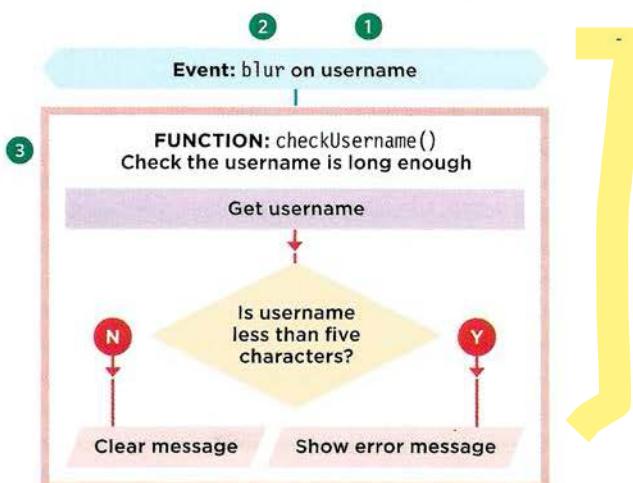

If there are not enough characters, it shows an error message that prompts the user to enter a longer username.

If there are enough characters, the element that holds the error message should be cleared.

This is because an error message may have been shown to the user already and they subsequently corrected their mistake. (If the error message was still visible when they had filled in the form correctly, it would be confusing.)

THREE WAYS TO BIND AN EVENT TO AN ELEMENT

Event handlers let you indicate which event you are waiting for on any particular element.

There are three types of event handlers.

HTML EVENT HANDLERS

See p251

This is bad practice, but you need to be aware of it because you may see it in older code.

Early versions of HTML included a set of attributes that could respond to events on the element they were added to. The attribute names matched the event names. Their values called the function that was to run when that event occurred.

For example, the following:
`` indicated that when a user clicked on this `<a>` element, the `hide()` function would be called.

This method of event handling is no longer used because it is better to separate the JavaScript from the HTML. You should use one of the other approaches shown on this page instead.

TRADITIONAL DOM EVENT HANDLERS

See p252

DOM event handlers were introduced in the original specification for the DOM. They are considered better than HTML event handlers because they let you separate the JavaScript from the HTML.

Support in all major browsers is very strong for this approach. The main drawback is that you can only attach a single function to any event. For example, the submit event of a form cannot trigger one function that checks the contents of a form, and a second to submit the form data if it passes the checks.

As a result of this limitation, if more than one script is used on the same page, and both scripts respond to the same event, then one or both of the scripts may not work as intended.

DOM LEVEL 2 EVENT LISTENERS

See p254

Event listeners were introduced in an update to the DOM specification (DOM level 2, released in the year 2000). They are now the favored way of handling events.

The syntax is quite different and, unlike traditional event handlers, these newer event listeners allow one event to trigger multiple functions. As a result, there are less likely to be conflicts between different scripts that run on the same page.

This approach does not work with IE8 (or earlier versions of IE) but you meet a workaround on p258. Differences in browser support for the DOM and events helped speed adoption of jQuery (but you need to know how events work to understand how jQuery uses them).

~~HTML EVENT HANDLER ATTRIBUTES (DO NOT USE)~~

Please note: This approach is now considered bad practice; however, you need to be aware of it because you may see it if you are looking at older code. (See previous page.)

In the HTML, the first `<input>` element has an attribute called `onBlur` (triggered when the user leaves the element). The value of the attribute is the name of the function that it should trigger.

The value of the event handler attributes would be JavaScript. Often it would call a function that was written either in the `<head>` element or a separate JavaScript file (as shown below).

HTML

c06/event-attributes.html

```
<form method="post" action="http://www.example.org/register">
  <label for="username">Create a username: </label>
  <input type="text" id="username" onblur="checkUsername()" />
  <div id="feedback"></div>

  <label for="password">Create a password: </label>
  <input type="password" id="password" />

  <input type="submit" value="Sign up!" />
</form>
...
<script type="text/javascript" src="js/event-attributes.js"></script>
```

JAVASCRIPT

c06/js/event-attributes.js

```
function checkUsername() {                                // Declare function
  var elMsg = document.getElementById('feedback');      // Get feedback element
  var elUsername = document.getElementById('username'); // Get username input
  if (elUsername.value.length < 5) {                      // If username too short
    elMsg.textContent = 'Username must be 5 characters or more'; // Set msg
  } else {                                                 // Otherwise
    elMsg.textContent = '';                             // Clear message
  }
}
```

The names of the HTML event handler attributes are identical to the event names shown on p246 - p247, preceded by the word "on."

For example:

- `<a>` elements can have `onclick`, `onmouseover`, `onmouseout`
- `<form>` elements can have `onsubmit`
- `<input>` elements for text can have `onkeypress`, `onfocus`, `onblur`

TRADITIONAL DOM EVENT HANDLERS

All modern browsers understand this way of creating an event handler, but you can only attach one function to each event handler.

Here is the syntax to bind an event to an element using an event handler, and to indicate which function should execute when that event fires:

element.onevent = functionName;

ELEMENT

EVENT

CODE

DOM element node to target

Event bound to node(s) preceded by word "on"

Name of function to call (with no parentheses following it)

Below, the event handler is on the last line (after the function has been defined and the DOM element node(s) selected).

When a function is called, the parentheses that follow its name tell the JavaScript interpreter to "run this code now."

We don't want the code to run until the event fires, so the parentheses are omitted from the event handler on the last line.

```
function checkUsername() {  
    // code to check the length of username  
}  
var el = document.getElementById('username');  
el.onblur = checkUsername;
```

A reference to the DOM element node is often stored in a variable.

The event name is preceded by the word "on."

The code starts by defining the named function.

The function is called by the event handler on the last line, but the parentheses are omitted.

An example of an anonymous function and a function with parameters is shown on p256.

USING DOM EVENT HANDLERS

In this example, the event handler appears on the last line of the JavaScript. Before the DOM event handler, two things are put in place:

JAVASCRIPT

```
function checkUsername() {  
    var elMsg = document.getElementById('feedback');  
    if (this.value.length < 5) {  
        elMsg.textContent = 'Username must be 5 characters or more'; // Set msg  
    } else {  
        elMsg.textContent = '';  
    }  
  
② var elUsername = document.getElementById('username'); // Get username input  
③ elUsername.onblur = checkUsername; // When it loses focus call checkUsername()
```

When using event handlers, the event name is preceded by the word "on" (`onsubmit`, `onchange`, `onfocus`, `onblur`, `onmouseover`, `onmouseout`, etc).

3. On the last line of the code sample above, the event handler `elUsername.onblur` indicates that the code is waiting for the `blur` event to fire on the element stored in the variable called `elUsername`.

1. If you use a named function when the event fires on your chosen DOM node, write that function first. (You could also use an anonymous function.)

2. The DOM element node is stored in a variable. Here the text input (whose id attribute has a value of `username`) is placed into a variable called `elUsername`.

c06/js/event-handler.js

```
// Declare function  
// Get feedback element  
// If username too short  
// or more'; // Set msg  
// Otherwise  
// Clear message
```

This is followed by an equal sign, then the name of the function that will run when the event fires on that element. Note that there are no parentheses on the function name. This means you cannot pass arguments to this function. (If you want to pass arguments to a function in an event handler, see p256.)

The HTML is the same as that shown on p251 but without the `onblur` event attribute. This means that the event handler is in the JavaScript, not the HTML.

Browser support: On line 3, the `checkUsername()` function uses the `this` keyword in the conditional statement to check the number of characters the user entered. It works in most browsers because they know `this` refers to the element the event happened on.

However, in Internet Explorer 8 or earlier, IE would treat `this` as the `window` object. As a result, it would not know which element the event occurred on and there would be no value that it checked the length of, so it would raise an error. You will learn a solution for this issue on p264.

EVENT LISTENERS

Event listeners are a more recent approach to handling events.

They can deal with more than one function at a time

but they are not supported in older browsers.

Here is the syntax to bind an event to an element using an event listener, and to indicate which function should execute when that event fires:

Adds an event listener to the DOM element node(s)

METHOD

```
element.addEventListener('event', functionName [, Boolean] );
```

ELEMENT

**DOM element
node to target**

EVEN

CODE

Event to bind node(s) to in quote marks	Name of function to call
---	--------------------------

EVENT FLOW

Indicates something called capture, and is usually set to false (see p260)

A reference to the DOM element node - is often stored in a variable.

```
function checkUsername() {  
    // code to check the length of username  
}  
  
var el = document.getElementById('username');  
el.addEventListener('blur', checkUsername, false);
```

The event name is enclosed in quotation marks.

The code starts by defining the named function. The function is called by the event listener on the last line, but the parentheses are omitted.

An example of an anonymous function and a function with parameters is shown on p256.

USING EVENT LISTENERS

In this example, the event listener appears on the last line of the JavaScript. Before you write an event listener, two things are put in place:

1. If you use a named function when the event fires on your chosen DOM node, write that function first. (You could also use an anonymous function.)

2. The DOM element node(s) is stored in a variable. Here the text input (whose id attribute has a value of username) is placed into a variable called elUsername.

JAVASCRIPT

```
function checkUsername() {  
    var elMsg = document.getElementById('feedback');  
    if (this.value.length < 5) {  
        elMsg.textContent = 'Username must be 5 characters or more'; // Set msg  
    } else {  
        elMsg.textContent = '';  
    }  
  
② var elUsername = document.getElementById('username'); // Get username input  
// When it loses focus call checkUsername()  
elUsername.addEventListener('blur', checkUsername, false);
```

The addEventListener() method takes three properties:

- i) The event you want it to listen for. In this case, the blur event.
- ii) The code that you want it to run when the event fires. In this example, it is the checkUsername() function. Note that the parentheses are omitted where the function is called because they would indicate that the function should run as the page loads (rather than when the event fires).
- iii) A Boolean indicating how events flow, see p260. (This is usually set to false.)

① i ii iii

BROWSER SUPPORT

Internet Explorer 8 and earlier versions of IE do not support the addEventListener() method, but they do support a method called attachEvent() and you will see how to use this on p258.

Also, as with the previous example, IE8 and older versions of IE would not know what this referred to in the conditional statement. An alternative approach for dealing with it is shown on p270.

EVENT NAMES

Unlike the HTML and traditional DOM event handlers, when you specify the name of the event that you want to react to, the event name is **not preceded by the word "on"**.

If you need to remove an event listener, there is a function called **removeEventListener()** which removes the event listener from the specified element (it has the same parameters).

USING PARAMETERS WITH EVENT HANDLERS & LISTENERS


Because you cannot have parentheses after the function names in event handlers or listeners, passing arguments requires a workaround.

Usually, when a function needs some information to do its job, you pass arguments within the parentheses that follow the function name.

When the interpreter sees the parentheses after a function call, it runs the code straight away. In an event handler, you want it to wait until the event triggers it.

Therefore, if you need to pass arguments to a function that is called by an event handler or listener, you wrap the function call in an anonymous function.

The named function includes parentheses containing the parameter after the function name.

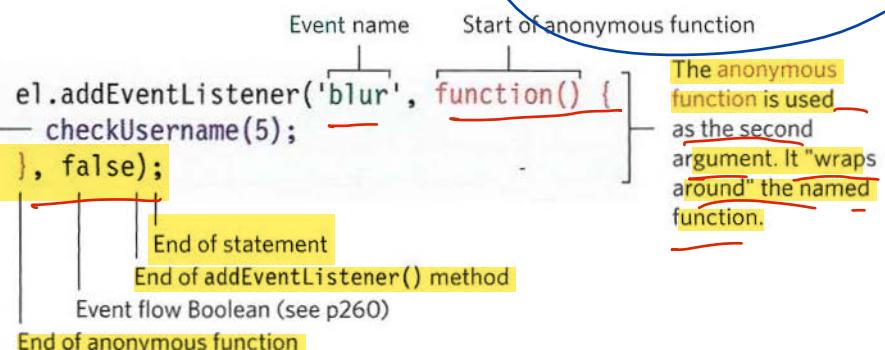

The named function that requires the arguments lives inside the anonymous function.

Although the anonymous function has parentheses, it only runs when the event is triggered.

The named function can use arguments as it only runs if the anonymous function is called.

USING PARAMETERS WITH EVENT LISTENERS

The first line of this example shows the updated `checkUsername()` function. The `minLength` parameter specifies the minimum number of characters that the username should be.

JAVASCRIPT

```
var elUsername = document.getElementById('username'); // Get username input
var elMsg = document.getElementById('feedback'); // Get feedback element

function checkUsername(minLength) { // Declare function
    if (elUsername.value.length < minLength) { // If username too short
        // Set the error message
        elMsg.textContent = 'Username must be ' + minLength + ' characters or more';
    } else {
        elMsg.innerHTML = '';
    }
}

elUsername.addEventListener('blur', function() { // When it loses focus
    checkUsername(5); // Pass arguments here
}, false);
```

The event listener on the last three lines is longer than the previous example because the call to the `checkUsername()` function needs to include the value for the `minLength` parameter.

The value that is passed into the `checkUsername()` function is used in the conditional statement to check if the name is long enough, and provide feedback if the username name is too short.

To receive this information, the event listener uses an anonymous function, which acts like a wrapper. Inside that wrapper the `checkUsername()` function is called, and passed an argument.

Browser support: On the next page you also see how to deal with the lack of support for event listeners in IE8 and earlier.

SUPPORTING OLDER VERSIONS OF IE

IE5-8 had a different event model and did not support `addEventListener()` but you can provide fallback code to make event listeners work with older versions of IE.

IE5-IE8 did not support the `addEventListener()` method. Instead, it used its own method called `attachEvent()` which did the same job, but was only available in Internet Explorer. If you want to use event listeners and need to support Internet Explorer 8 or earlier, you can use a conditional statement as illustrated below.

Using an `if...else` statement, you can check if the browser supports the `addEventListener()` method. The condition in the `if` statement will return `true` if the browser supports the `addEventListener()` method, and you can use it. If the browser does not support that method, it returns `false`, and the code will try to use the `attachEvent()` method.

If the browser supports `addEventListener()`:

Run the code inside these curly braces

If it doesn't, do something else:

Run the code inside these curly braces

```
if (el.addEventListener) {  
    el.addEventListener('blur', function() {  
        checkUsername(5);  
    }, false );  
} else {  
    el.attachEvent('onblur', function() {  
        checkUsername(5);  
    });  
}
```

When `attachEvent()` is used, the event name should be preceded by the word "on" (e.g., `blur` becomes `onblur`). You will see another approach to supporting the older IE event model in Chapter 13 (using a utility file).

FALLBACK FOR USING EVENT LISTENERS IN IE8

The event handling code builds on the last example, but it is a lot longer this time because it contains the fallback for Internet Explorer 5-8.

After the `checkUsername()` function, an if statement checks whether `addEventListener()` is supported or not; it returns true if the element node supports this method, and false if it does not.

JAVASCRIPT

```
var elUsername = document.getElementById('username'); // Get username input
var elMsg = document.getElementById('feedback'); // Get feedback element

function checkUsername(minLength) {
    if (elUsername.value.length < minLength) { // Declare function
        // Set message // If username too short
        elMsg.innerHTML = 'Username must be ' + minLength + ' characters or more';
    } else { // Otherwise
        elMsg.innerHTML = '';
    }
}

if (elUsername.addEventListener) { // If event listener supported
    elUsername.addEventListener('blur', function(){ // When username loses focus
        checkUsername(5); // Call checkUsername()
    }, false ); // Capture during bubble phase
} else {
    elUsername.attachEvent('onblur', function(){ // IE fallback: onblur
        checkUsername(5); // Call checkUsername()
    });
}
```

If the browser supports the `addEventListener()` method, the code inside the first set of curly braces is run using `addEventListener()`.

If it is not supported, then the browser will use the `attachEvent()` method that older versions of IE will understand. In the IE version, note that the event name must be preceded by the word "on."

c06/js/event-listener-with-ie-fallback.js

If you need to support IE8 (or older), instead of writing this fallback code for every event you are responding to, it is better to write your own function (known as a helper function) that creates the appropriate event handler for you. You will see a demonstration of this in Chapter 13, which covers form enhancement and validation.

It is, however, important to understand this syntax, used by IE8 (and older) so that you know why the helper function is used and what it is doing.


As you will see in the next chapter, this is another type of cross-browser inconsistency that jQuery can take care of for you.

EVENT FLOW

HTML elements nest inside other elements. If you hover or click on a link, you will also be hovering or clicking on its parent elements.


Imagine a list item contains a link. When you hover over the link or click on it, JavaScript can trigger events on the `<a>` element, and also any elements the `<a>` element sits inside.

Event handlers/listeners can be bound to the containing ``, ``, `<body>`, and `<html>` elements, plus the `document` object, and the `window` object. The order in which the events fire is known as **event flow**, and events flow in two directions.

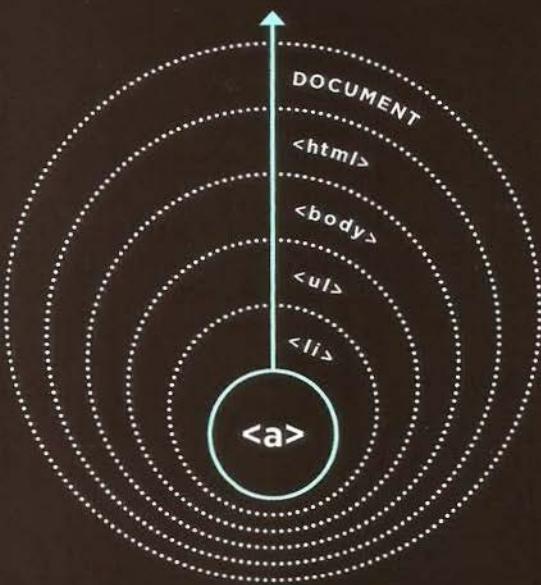

EVENT BUBBLING

The event starts at the most specific node and flows outwards to the least specific one. This is the default type of event flow with very wide browser support.

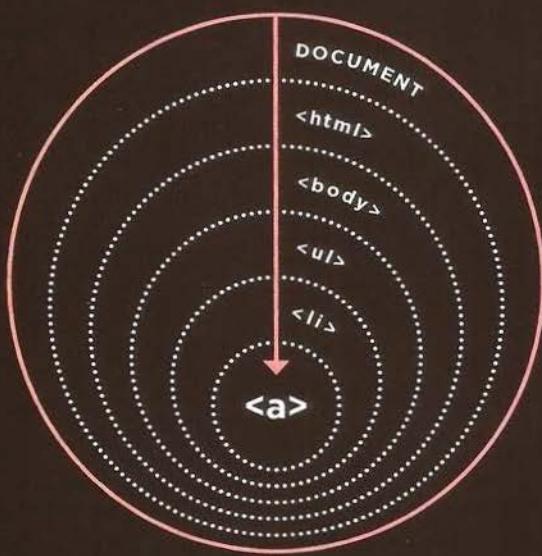

EVENT CAPTURING

The event starts at the least specific node and flows inwards to the most specific one. This is not supported in Internet Explorer 8 and earlier.

WHY FLOW MATTERS

traditional → event
bubbling

The flow of events only really matters when your code has event handlers on an element and one of its ancestor or descendant elements.

The example below has event listeners that respond to the click event on each of the following elements:

- One on the element ✓
- One on the element ✓
- One on the <a> element in the list item ✓

The event will show the HTML content of that element in an alert box, and event flow will tell you which element the click is registered upon first.

For traditional DOM event handlers (and HTML event attributes), all modern browsers default to using event bubbling rather than capturing. With event listeners, the final parameter in the addEventListener() method lets you choose the direction to trigger events:

- **true = capturing phase** ✓
- **false = bubbling phase** ✓ (false is often a default choice because capturing was not supported in IE8 or earlier.)

The event-flow.js file (shown on the left, and available in the download code) demonstrates the difference between bubbling and capturing. In this example, the event handlers have a value of false for their last parameter indicating events should be followed in bubbling phase. So the first alert box shows the content of the innermost <a> element, and works its way out. You can also see the capturing version in the download code.




BUBBLE

fresh figs ↗



THE EVENT OBJECT

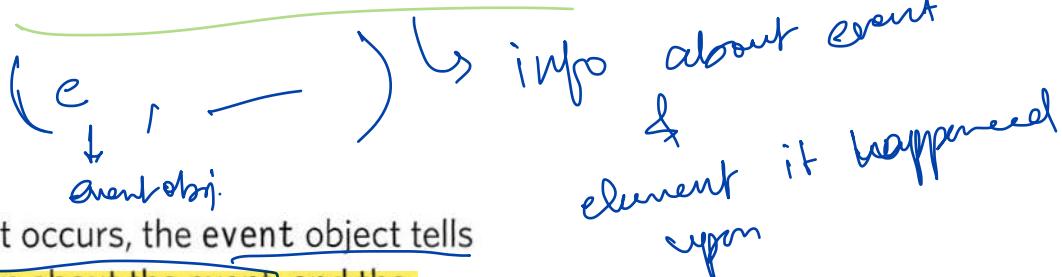

Every time an event fires, the event object contains helpful data about the event, such as:

- Which element the event happened on
- Which key was pressed for a keypress event
- What part of the viewport the user clicked for a click event (the viewport is the part of the browser window that shows the web page)

The event object is passed to any function that is the event handler or listener.

If you need to pass arguments to a named function, the event object will first be passed to the anonymous wrapper function (this happens automatically); then you must specify it as a parameter of the named function (as shown on the next page).

When the event object is passed into a function, it is often given the parameter name e (for event). It is a widely used shorthand (and you see it adopted throughout this book).

Note, however, that some programmers also use the parameter name e to refer to the error object; so e may mean event or error in some scripts.

Not only did IE8 have a different syntax for event listeners (as shown on p258), the event object in IE5-8 also had different names for the properties and methods shown in the tables below, and the example on p265.

PROPERTY	IE5-8 EQUIVALENT	PURPOSE
target	srcElement	The target of the event (most specific element interacted with)
type	type	Type of event that was fired
cancelable	not supported	Whether you can cancel the default behavior of an element

METHOD	IE5-8 EQUIVALENT	PURPOSE
preventDefault()	returnValue	Cancel default behavior of the event (if it can be canceled)
stopPropagation()	cancelBubble	Stops the event from bubbling or capturing any further

EVENT LISTENER WITH NO PARAMETERS

```
function checkUsername(e) {  
    ③ var target = e.target; // get target of event  
}
```

```
var el = document.getElementById('username');  
el.addEventListener('blur', checkUsername, false);
```

1. Without you doing anything, a reference to the event object is automatically passed from the number 1, where the event listener calls the function...

2. To here, where the function is defined. At this point, the parameter must be named. It is often given the name e for event.

3. This name can then be used inside the function as a reference to the event object. You can now use the properties and methods of the event object.

EVENT LISTENER WITH PARAMETERS

```
function checkUsername(e, minLength) {  
    ④ var target = e.target; // get target of event  
}
```

```
var el = document.getElementById('username');  
el.addEventListener('blur', function(e){  
    ① checkUsername(e, 5);  
}, false);
```

1. The reference to the event object is automatically passed to the anonymous function, but it must be named in the parentheses.

2. The reference to the event object can then be passed onto the named function. It is given as the first parameter of the named function.

3. The named function receives the reference to the event object as the first parameter of the method. 4. It can now be used by this name in the named function.

THE EVENT OBJECT IN IE5-8

Below you can see how you get the event object in IE5-8. It is *not* passed automatically to event handler/listener functions; but it *is* available as a child of the window object.

On the right, an if statement checks if the event object has been passed into the function. As you saw on p168, the existence of an object is treated as a **truthy** value, so the condition here is saying "if the event object does not exist..."

In IE8 and less, e will not hold an object, so the following code block runs and e is set to be the event object that is a child of the window object.

GETTING PROPERTIES

Once you have a reference to the event object, you can get its properties using the technique on the right. This works on short circuit evaluation (see p169).

A FUNCTION TO GET THE TARGET OF AN EVENT

If you need to assign event listeners to several elements, here is a function that will return a reference to the element the event happened on.

```
function checkUsername(e) {  
    if (!e) {  
        e = window.event;  
    }  
}
```

```
var target;  
target = e.target || e.srcElement;
```

```
function getEventTarget(e) {  
    if (!e) {  
        e = window.event;  
    }  
    return e.target || e.srcElement;  
}
```

✓ USING EVENT LISTENERS WITH THE EVENT OBJECT

Here is the example that has been used throughout the chapter so far with some modifications:

1. The function is called `checkLength()` rather than `checkUsername()`. It can be used on any text input.
2. The event object is passed to the event listener. The code includes fallbacks for IE5-8 (Chapter 13 demonstrates using helper functions to do this).
3. In order to determine which element the user was interacting with, the function uses the event object's `target` property (and for IE5-8 it uses the equivalent `srcElement` property).

This function is now far more flexible than the previous code you have seen in this chapter because:

1. It can be used to check the length of any text input so long as that input is directly followed by an empty element that can hold a feedback message for the user. (There should not be space or carriage returns between the two elements; otherwise, some browsers might return a whitespace node.)
2. The code will work with IE5-8 because it tests whether the browser supports the latest features (or whether it needs to fallback to use older techniques).

JAVASCRIPT

```
function checkLength(e, minLength) {
  var el, elMsg;
  if (!e) {
    e = window.event;
  }
  el = e.target || e.srcElement;
  elMsg = el.nextSibling;

  if (el.value.length < minLength) {
    elMsg.innerHTML = 'Username must be ' + minLength + ' characters or more';
  } else {
    elMsg.innerHTML = '';
  }
}

var elUsername = document.getElementById('username');// Get username input
if (elUsername.addEventListener) { // If event listener supported
  elUsername.addEventListener('blur', function(e) { // On blur event
    checkLength(e, 5);
  }, false);
} else {
  elUsername.attachEvent('onblur', function(e){
    checkLength(e, 5);
  });
}
```

c06/js/event-listener-with-event-object.js

```
// Declare function
// Declare variables
// If event object doesn't exist
// Use IE fallback

// Get target of event
// Get its next sibling

// If length is too short set msg
// Otherwise
// Clear message

// Get username input
// If event listener supported
// Call checkLength()
// Capture in bubble phase
// Otherwise
// IE fallback onblur
// Call checkLength()
```

EVENT DELEGATION

Creating event listeners for a lot of elements can slow down a page, but event flow allows you to listen for an event on a parent element.

If users can interact with a lot of elements on the page, such as:

- a lot of buttons in the UI
- a long list
- every cell of a table

Adding event listeners to each element can use a lot of memory and slow down performance.

Because events affect containing (or ancestor) elements (due to event flow - p260), you can place event handlers on a containing element and use the event object's target property to find which of its children the event happened on.

By attaching an event listener to a containing element, you are only responding to one element (rather than having an event handler for each child element).

You are delegating the job of the event listener to a parent of the elements. In the list shown here, if you place the event listener on the `` element rather than on links in each `` element, you only need one event listener. This gives better performance, and if you add or remove items from the list it would still work the same. (The code for this example is shown on p269.)



ADDITIONAL BENEFITS OF EVENT DELEGATION

WORKS WITH NEW ELEMENTS

If you add new elements to the DOM tree, you do not have to add event handlers to the new elements because the job has been delegated to an ancestor.

SOLVES LIMITATIONS WITH this KEYWORD

Earlier in the chapter, the `this` keyword was used to identify an event's target, but that technique did not work in IE8, or when a function needed parameters.

SIMPLIFIES YOUR CODE

It requires fewer functions to be written, and there are fewer ties between the DOM and your code, which helps maintainability.

CHANGING DEFAULT BEHAVIOR

The event object has methods that change:
the default behavior of an element and how
the element's ancestors respond to the event.

preventDefault()

Some events, such as clicking on links and submitting forms, take the user to another page.

To prevent the default behavior of such elements (e.g., to keep the user on the same page rather than following a link or being taken to a new page after submitting a form), you can use the event object's preventDefault() method.

IE5-8 have an equivalent property called returnValue which can be set to false. A conditional statement can check if the preventDefault() method is supported, and use IE8's approach if it isn't:

```
if (event.preventDefault) {  
    event.preventDefault();  
} else {  
    event.returnValue = false;  
}
```

stopPropagation()

Once you have handled an event using one element, you may want to stop that event from bubbling up to its ancestor elements (especially if there are separate event handlers responding to the same events on the containing elements).

To stop the event bubbling up, you can use the event object's stopPropagation() method.

The equivalent in IE8 and earlier is the cancelBubble property which can be set to true. Again, a conditional statement can check if the stopPropagation() method is supported and use IE8's approach if not:

```
if (event.stopPropagation) {  
    event.stopPropagation();  
} else {  
    event.cancelBubble = true;  
}
```

USING BOTH METHODS

You will sometimes see the following used in similar situations that are in a function:
`return false;`

It prevents the default behavior of the element, and prevents the event from bubbling up or capturing further. It also works in all browsers, so it is popular.

Note, however, when the interpreter comes across the return false statement, it stops processing any subsequent code within that function and moves to the next statement after the function was called.

Since this blocks any further code within the function, it is often better to use the preventDefault() method of the event object rather than return false.


USING EVENT DELEGATION

This example will put together a lot of what you have learned in the chapter so far. Each list item contains a link. When the user clicks on that link (to indicate they have completed that task), the item will be removed from the list.

- There is a screen grab of the example on p266.
- On the right there is a flowchart that helps explain the order in which the code is processed.
- The right-hand page has the code for the example

1. The event listener will be added to the `` element, so this needs to be selected.
2. Check whether or not the browser supports `addEventListener()`.
3. If so, use it to call the `itemDone()` function when the user clicks anywhere on that list.
4. If not, use the `attachEvent()` method.
5. The `itemDone()` function will remove the item from the list. It requires three pieces of information.
6. Three variables are declared to hold the info.
7. `target` holds the element the user clicked on. To obtain this, the `getTarget()` function is called. This is created at the start of the script, and shown at the bottom of the flowchart.
8. `elParent` holds that element's parent (the ``)
9. `elGrandparent` holds that element's grandparent
10. The `` element is removed from the `` element.
11. Check if the browser supports `preventDefault()` to prevent the link taking the user to a new page.
12. If so, use it.
13. If not, use the older IE `returnValue` property.

In the HTML, the links would take you to `itemDone.php` if the browser did not support JavaScript. (The PHP file is not supplied with the code download because server-side languages are beyond the scope of this book.)

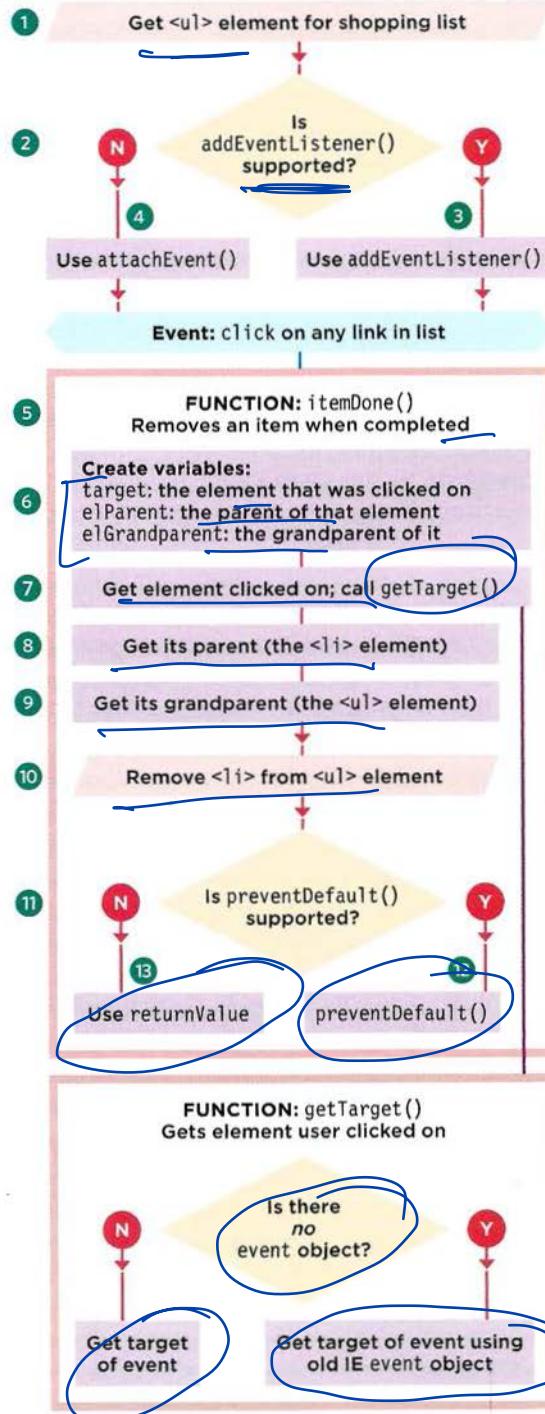

```
<ul id="shoppingList">
  <li class="complete"><a href="itemDone.php?id=1"><em>fresh</em> figs</a></li>
  <li class="complete"><a href="itemDone.php?id=2">pine nuts</a></li>
  <li class="complete"><a href="itemDone.php?id=3">honey</a></li>
  <li class="complete"><a href="itemDone.php?id=4">balsamic vinegar</a></li>
</ul>
```

JAVASCRIPT

```
function getTarget(e) {
  if (!e) {
    e = window.event;
  }
  return e.target || e.srcElement;
}

⑤ function itemDone(e) {
  // Remove item from the list
  ⑥ var target, elParent, elGrandparent;
  ⑦ target = getTarget(e);
  ⑧ elParent = target.parentNode;
  ⑨ elGrandparent = target.parentNode.parentNode;
  ⑩ elGrandparent.removeChild(elParent);

  // Prevent the link from taking you elsewhere
  ⑪ if (e.preventDefault) {
    e.preventDefault();
  } else {
    e.returnValue = false;
  }
}

// Set up event listeners to call itemDone() on click
⑫ var el = document.getElementById('shoppingList');// Get shopping list
⑬ if (el.addEventListener) { // If event listeners work
  el.addEventListener('click', function(e) { // Add listener on click
    itemDone(e); // It calls itemDone()
    }, false); // Use bubbling phase for flow
} else {
  ⑭ el.attachEvent('onclick', function(e){ // Otherwise
    itemDone(e); // Use old IE model: onclick
  });
}
```

```
// Declare function
// If there is no event object
// Use old IE event object
// Get the target of event

// Declare function
// Declare variables
// Get the item clicked link
// Get its list item
// Get its list
// Remove list item from list

// If preventDefault() works
// Use preventDefault()
// Otherwise
// Use old IE version
```

WHICH ELEMENT DID AN EVENT OCCUR ON?

When calling a function, the event object's target property is the best way to determine which element the event occurred on. But you may see the approach below used; it relies on the this keyword.

THE this KEYWORD

The this keyword refers to the owner of a function. On the right, this refers to the element that the event is on.

This works when no parameters are being passed to the function (and therefore it is not called from an anonymous function).

```
function checkUsername() {  
  var elMsg = document.getElementById('feedback');  
  if (this.value.length < 5) {  
    elMsg.innerHTML = 'Not long enough';  
  } else {  
    elMsg.innerHTML = '';  
  }  
}  
  
var el = document.getElementById('username');  
el.addEventListener('blur', checkUsername, false);
```

It's like the function had been written here rather than higher up

USING PARAMETERS

If you pass parameters to the function, the this keyword no longer works because the owner of the function is no longer the element that the event listener was bound to, it is an anonymous function.

You could pass the element the event was called on as another parameter of the function.

In both cases, the event object is the preferred approach.

```
function checkUsername(el, minLength) {  
  var elMsg = document.getElementById('feedback');  
  if (el.value.length < minLength) {  
    elMsg.innerHTML = 'Not long enough';  
  } else {  
    elMsg.innerHTML = '';  
  }  
}  
  
var el = document.getElementById('username');  
el.addEventListener('blur', function() {  
  checkUsername(el, 5);  
}, false);
```

DIFFERENT TYPES OF EVENTS

In the rest of the chapter, you learn about the different types of events you can respond to.

Events are defined in:

- The W3C DOM specification
- The HTML5 specification
- In Browser Object Models

W3C DOM EVENTS

The DOM events specification is managed by the W3C (who also look after other specifications including HTML, CSS, and XML). Most of the events you will meet in this chapter are part of this DOM events specification.

Browsers implement all the events using the same event object that you already met. It also provides feedback such as which element the event occurred on, which key a user pressed, or where the cursor is positioned).

There are, however, some events that are not covered in the DOM event model - in particular those that deal with form elements. (They used to be part of the DOM, but got moved to the HTML5 specification.)

Most are a result of the user interacting with the HTML, but there are a few that react to the browser or other DOM events.

HTML5 EVENTS

The HTML5 specification (that is still being developed) details events that browsers are expected to support that are specifically used with HTML. For example, events that are fired when a form is submitted or form elements are changed (which you will meet on p282):

submit
input
change

There are also new events introduced with the HTML5 specification that are only supported by more recent browsers. Here are a few (which you will meet on p286):

readystatechange
DOMContentLoaded
hashchange

We do not show every event, but the examples you see should teach you enough so that you can work with all types of events.

BOM EVENTS

Browser manufacturers also implement some events as part of their Browser Object Model (or BOM). Typically these are events not (yet) covered by W3C specifications (although some will be added to W3C specifications in the future). Several of these events dealt with touchscreen devices:

touchstart
touchend
touchmove
orientationchange

Other events are being added to capture gestures and take advantage of accelerometers. Care is needed using such features, as different browsers often create different implementations of similar functionality.

USER INTERFACE EVENTS

User interface (UI) events occur as a result of interaction with the browser window rather than the HTML page contained within it, e.g., a page having loaded or the browser window being resized.

The event handler / listener for UI events should be attached to the browser window.

In old HTML code, you may see these events used as attributes on the opening `<body>` tag. (For example, older code used the `onload` attribute to trigger code that would run when the page had loaded.)

EVENT TRIGGER	BROWSER SUPPORT
<code>load</code> Fires when the web page has finished loading. It can also fire on nodes of other elements that load, such as images, scripts, or objects.	The DOM Level 2 (Nov 2000) states that it fires on the <code>document</code> object, but prior to this it fired on the <code>window</code> object. Browsers support both for backwards compatibility, and developers often still attach <code>load</code> event handlers to the <code>window</code> (not <code>document</code>) object.
<code>unload</code> Fires when the web page is unloading (usually because a new page has been requested). See also the <code>beforeunload</code> event (on p286) which fires before the user leaves a page.	The DOM Level 2 states that it fires on the node for the <code><body></code> element, but in older browsers it fired on the <code>window</code> object (this is often used for backwards compatibility).
<code>error</code> Fires when the browser encounters a JavaScript error or an asset doesn't exist.	Support for this event is inconsistent across browsers and so it is not reliable for error handling, a topic you learn more about in Chapter 10.
<code>resize</code> Fires when the browser window has been resized.	Browsers repeatedly fire the <code>resize</code> event as the window is being resized, so avoid using this event to trigger complicated code because this might make the page appear less responsive.
<code>scroll</code> Fires when the user has scrolled up or down the page. It can relate to the entire page or a specific element on the page (such as a <code><textarea></code> that has scrollbars).	Browsers repeatedly fire the event as the window is scrolled, so avoid running complicated code as the user scrolls.

LOAD

The load event is commonly used to trigger scripts that access the contents of the page. In this example, a function called `setup()` gives focus to the text input when the page has loaded.

The event is automatically raised by the `window` object when a page has finished loading the HTML and all of its resources: images, CSS, scripts (even third party content e.g., banner ads).

The `setup()` function would not work before the page has loaded because it relies on finding the element whose `id` attribute has a value of `username`, in order to give it focus.

JAVASCRIPT

```
function setup() {  
    var textInput;  
    textInput = document.getElementById('username');  
    textInput.focus();  
}  
  
window.addEventListener('load', setup, false); // When page loaded call setup()
```

c06/js/load.js

RESULT



Because the `load` event only fires when everything else on the page has loaded (images, scripts, even ads), the user already have started to use the page before the script has started to run.

Users particularly notice when a script changes the appearance of the page, changes focus, or selects form elements after they have started to use it. (It can make a site look slower to load.)

Note that the event listener is attached to the `window` object (not the `document` object – as this can cause cross-browser compatibility issues).

If the `<script>` element is at the end of the HTML page, then the DOM would have loaded the form elements before the script runs, and there would be no need to wait for the `load` event. (See also: the `DOMContentLoaded` event on p286 and jQuery's `document.ready()` method on p312.)

Imagine this form had more inputs; the user may be filling in the second or third box when the script fires - moving focus back to the first box too late and interrupting the user.

FOCUS & BLUR EVENTS

The HTML elements you can interact with, such as links and form elements, can gain focus. These events fire when they gain or lose focus.

If you can interact with an HTML element, then it can gain (and lose) focus. You can also tab between the elements that can gain focus (a technique often used by those with visual impairments).

In older scripts, the focus and blur events were often used to change the appearance of an element as it gained focus, but now the CSS :focus pseudo-class is a better solution (unless you need to affect an element *other* than the one that gained focus).

The focus and blur events are most commonly used on forms. They can be particularly helpful when:

- You want to show tips or feedback to users as they interact with an individual element within a form (the tips are usually shown in *other* elements and *not* the one they are interacting with)
- You need to trigger form validation as a user moves from one control to the next (rather than waiting for them to submit the entire form first)

EVENT	TRIGGER	FLOW
focus	When an element gains focus, the focus event fires for that DOM node.	Capture
blur	When an element loses focus, the blur event fires for that DOM node.	Capture
focusin	Same as focus (see above but not supported in Firefox at time of writing)	Bubble & capture
focusout	Same as blur (see above but not supported in Firefox at time of writing)	Bubble & capture

FOCUS & BLUR

In this example, as the text input gains and loses focus, feedback is shown to the user in the `<div>` element under the text input. The feedback is given using two functions.

`tipUsername()` is triggered when the text input gains focus. It changes the `class` attribute of the element containing the message, and updates the contents of the element.

`checkUsername()` is triggered when the text input loses focus. It adds a message and changes the `class` if the username is less than 5 characters; otherwise, it clears the message.

JAVASCRIPT

c06/js/focus-blur.js

```
function checkUsername() { // Declare function
    var username = el.value; // Store username in variable
    if (username.length < 5) { // If username < 5 characters
        elMsg.className = 'warning'; // Change class on message
        elMsg.textContent = 'Not long enough, yet...'; // Update message
    } else { // Otherwise
        elMsg.textContent = ''; // Clear the message
    }
}
function tipUsername() { // Declare function
    elMsg.className = 'tip'; // Change class for message
    elMsg.innerHTML = 'Username must be at least 5 characters'; // Add message
}

var el = document.getElementById('username'); // Username input
var elMsg = document.getElementById('feedback'); // Element to hold message

// When the username input gains / loses focus call functions above:
el.addEventListener('focus', tipUsername, false); // focus call tipUsername()
el.addEventListener('blur', checkUsername, false); // blur call checkUsername()
```

RESULT



MOUSE EVENTS

The mouse events are fired when the mouse is moved and also when its buttons are clicked.

All of the elements on a page support the mouse events, and all of these bubble. Note that actions are different on touchscreen devices.

Preventing a default behavior can have unexpected results. E.g., a `click` event only fires when both the `mousedown` and `mouseup` event have fired.

EVENT	TRIGGER	TOUCH
<code>click</code>	Fires when the user clicks on the primary mouse button (usually the left button if there is more than one). The <code>click</code> event will fire for the element that the mouse is currently over. It will also fire if the user presses the Enter key on the keyboard when an element has focus.	A tap on the touchscreen will be treated like a single left-click.
<code>dblclick</code>	Fires when the user clicks the primary mouse button twice in quick succession.	A double-tap will be treated as a double left click.
<code>mousedown</code>	Fires when the user clicks down on any mouse button. (Cannot be triggered by keyboard.)	You can use the <code>touchstart</code> event.
<code>mouseup</code>	Fires when the user releases a mouse button. (Cannot be triggered by keyboard.)	You can use the <code>touchend</code> event.
<code>mouseover</code>	Fires when the cursor was outside an element and is then moved inside it. (Cannot be triggered by keyboard.)	Fires when the cursor is moved over an element.
<code>mouseout</code>	Fires when the cursor is over an element, and then moves onto another element - outside of the current element or a child of it (Cannot be triggered by keyboard.)	Fires when the cursor is moved off an element.
<code>mousemove</code>	Fires when the cursor is moved around an element. This event is repeatedly fired. (Cannot be triggered by keyboard.)	Fires when the cursor is moved.

WHEN TO USE CSS

The `mouseover` and `mouseout` events were often used to change the appearance of boxes or to switch images as the user rolls over them. To change the appearance of the element, a preferable technique would be to use the CSS `:hover` pseudo-class.

WHY SEPARATE MOUSEDOWN & UP?

The `mousedown` and `mouseup` events separate out the press and release of a mouse button. They are commonly used for adding drag and drop functionality, or to add controls in game development.

The aim of this example is to use the `click` event to remove the big note that has been added to the middle of the page. But first, the script has to create that note.

Because the note is over the top of the page, we only want to show it to users who have JavaScript enabled (otherwise they could not hide it).

When the `click` event fires on the close link the `dismissNote()` function is called. This function will remove the note that was added by the same script.

JAVASCRIPT

c06/js/click.js


```
// Create the HTML for the message
var msg = '<div class=\"header\"><a id=\"close\" href="#">close X</a></div>';
msg += '<div><h2>System Maintenance</h2>';
msg += 'Our servers are being updated between 3 and 4 a.m. ';
msg += 'During this time, there may be minor disruptions to service.</div>';

var elNote = document.createElement('div');           // Create a new element
elNote.setAttribute('id', 'note');                   // Add an id of note
elNote.innerHTML = msg;                            // Add the message
document.body.appendChild(elNote);                  // Add it to the page

function dismissNote() {                           // Declare function
    document.body.removeChild(elNote);             // Remove the note
}

var elClose = document.getElementById('close');      // Get the close button
elClose.addEventListener('click', dismissNote, false); // Click close-clear note
```

RESULT

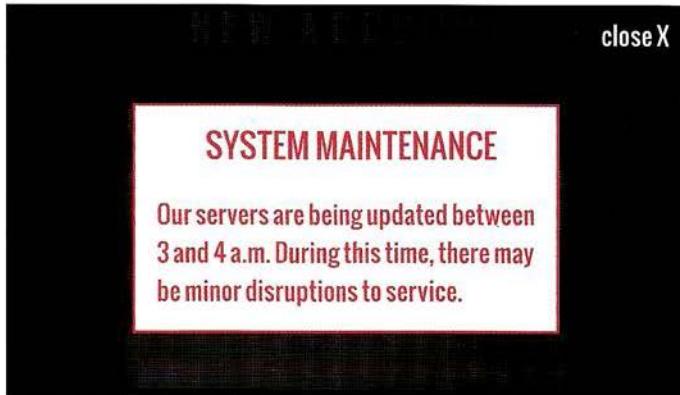


ACCESSIBILITY

The `click` event can be applied to any element, but it is better to only use it on items that are usually clicked or it will not be accessible to people who rely upon keyboard navigation.

You may also be tempted to use the `click` event to run a script when a user clicks on a form element, but it is better to use the `focus` event because that fires when the user accesses that control using the tab key.

WHERE EVENTS OCCUR

The **event** object can tell you where the cursor was positioned when an event was triggered.

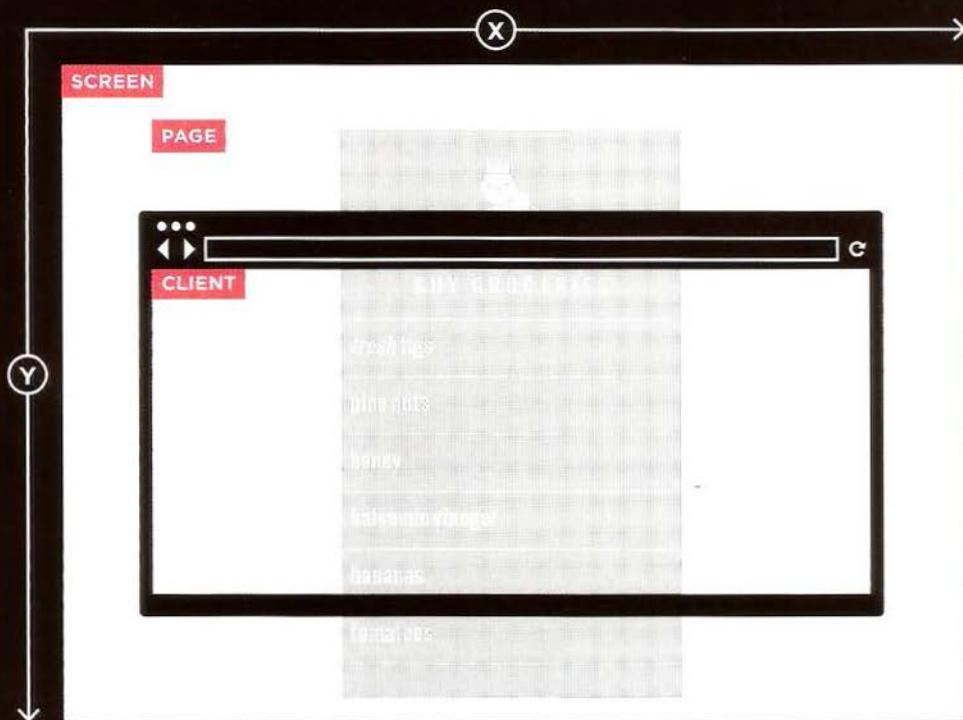

SCREEN

The `screenX` and `screenY` properties indicate the position of the cursor within the entire screen on your monitor, measuring from the top left corner of the screen (rather than the browser).

PAGE

The `pageX` and `pageY` properties indicate the position of the cursor within the entire page. The top of the page may be outside of the viewport so even if the cursor is in the same position, page and client coordinates can be different.

CLIENT

The `clientX` and `clientY` properties indicate the position of the cursor within the browser's viewport. If the user has scrolled down and the top of the page is no longer in view, it will not affect the client coordinates.

DETERMINING POSITION

In this example, as you move your mouse around the screen, the text inputs across the top of the page are updated with the current mouse position.

This demonstrates the three different positions you can retrieve when the mouse is moved or when one of the buttons is clicked.

Note how `showPosition()` is passed `event` as a parameter, which refers to the event object. The positions are all properties of this event object.

JAVASCRIPT

c06/js/position.js

```
var sx = document.getElementById('sx');           // Element to hold screenX
var sy = document.getElementById('sy');           // Element to hold screenY
var px = document.getElementById('px');           // Element to hold pageX
var py = document.getElementById('py');           // Element to hold pageY
var cx = document.getElementById('cx');           // Element to hold clientX
var cy = document.getElementById('cy');           // Element to hold clientY

function showPosition(event) {                   // Declare function
    sx.value = event.screenX;                  // Update element with screenX
    sy.value = event.screenY;                  // Update element with screenY
    px.value = event.pageX;                   // Update element with pageX
    py.value = event.pageY;                   // Update element with pageY
    cx.value = event.clientX;                 // Update element with clientX
    cy.value = event.clientY;                 // Update element with clientY
}

var el = document.getElementById('body');          // Get body element
el.addEventListener('mousemove', showPosition, false); // Move updates position
```

RESULT



KEYBOARD EVENTS

The keyboard events are fired when a user interacts with the keyboard (they fire on any kind of device with a keyboard).

EVENT	TRIGGER
input	Fires when the value of an <input> or <textarea> element changes. First supported in IE9 (although it does not fire when deleting text in IE9). For older browsers, you can use keydown as a fallback.
keydown	Fires when the user presses any key on the keyboard. If the user holds down a key, the event continues to fire repeatedly. This is important because it mimics what would happen in a text input if the user holds down a key (the same character would be added repeatedly while the key is held down).
keypress	Fires when the user presses a key that would result in a character being shown on the screen. For example, this event would not fire when the user presses the arrow keys, whereas the keydown event would. If the user holds down a key, the event continues to fire repeatedly.
keyup	Fires when the user releases a key on the keyboard. The keydown and keypress events fire before a character shows on screen, whereas keyup fires after it appears.

The three events that begin key... fire in this order:

1. keydown – user presses key down
2. keypress – user has pressed or is holding a key that adds a character into the page
3. keyup – user releases key

WHICH KEY WAS PRESSED?

When you use the keydown or keypress events, the event object has a property called keyCode, which can be used to tell which key was pressed. However, it does not return the *letter* for that key (as you might expect); it returns an **ASCII code** that represents the lowercase character for that key. You can see a table of the characters and their ASCII codes in an online extra on the website accompanying this book.

If you want to get the letter or number as it would be displayed on the keyboard (rather than an ASCII equivalent), the String object has a built-in method called `fromCharCode()` which will do the conversion for you: `String.fromCharCode(event.keyCode);`

WHICH KEY WAS PRESSED

In this example, the <textarea> element should only have 180 characters. When the user enters text, the script will show them how many characters they have left available to use.

The event listener checks for the keypress event on the <textarea> element. Each time it fires, the charCount() function updates the character count and shows the last character used.

The input event would work well to update the count when the user pastes in text or uses keys like backspace, but it does not tell you which key was the last to be pressed.

JAVASCRIPT

```
var el; // Declare variables

function charCount(e) { // Declare function
    var textEntered, charDisplay, counter, lastKey; // Declare variables
    textEntered = document.getElementById('message').value; // User's text
    charDisplay = document.getElementById('charactersLeft'); // Counter element
    counter = (180 - (textEntered.length)); // Num of chars left
    charDisplay.textContent = counter; // Show chars left

    lastkey = document.getElementById('lastkey'); // Get last key used
    lastkey.textContent = 'Last key in ASCII code: ' + e.keyCode; // Create msg
}

el = document.getElementById('message'); // Get msg element
el.addEventListener('keypress', charCount, false); // keypress event
```

c06/js/keypress.js

RESULT



FORM EVENTS

There are two events that are commonly used with forms. In particular you are likely to see `submit` used in form validation.

EVENT TRIGGER

`submit` When a form is submitted, the `submit` event fires on the node representing the `<form>` element. It is most commonly used when checking the values a user has entered into a form before sending it to the server.

`change` Fires when the status of several form elements change. For example, when:


- a selection is made from a drop-down select box
- a radio button is selected
- a checkbox is selected or deselected

It is often better to use the `change` event rather than the `click` event because clicking is not the only way users interact with form elements (for example, they might use the tab, arrow, or Enter keys).

`input` The `input` event, which you saw on the previous page is commonly used with `<input>` and `<textarea>` elements.

FOCUS AND BLUR

The `focus` and `blur` events (which you met on p274) are often used with forms, but they can also be used in conjunction with other elements, such as links (so they are not specifically related to forms).

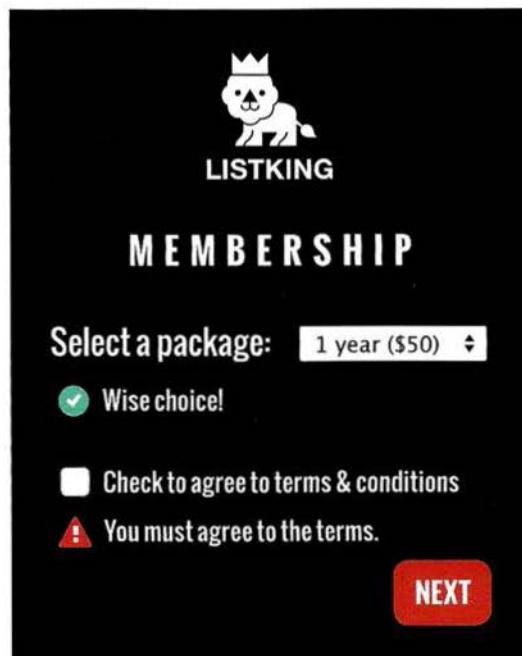

VALIDATION

Checking form values is known as validation. If users miss required information or enter incorrect information, checking it using JavaScript is faster than sending the data to the server for it to be checked. Validation is covered in Chapter 13.

USING FORM EVENTS

When a user interacts with the drop-down select box, the `change` event will trigger the `packageHint()` function. This shows messages below the select box that reflect the choice.

When the form is submitted, the `checkTerms()` function is called. This tests to see if the user has checked the box that indicates they agree to the terms and conditions.

If not, the script will prevent the default behavior of the `form` element (and stop it from submitting the form data to the server) and it will show an error message to the user.

JAVASCRIPT

c06/js/form.js

```
var e1Form, e1SelectPackage, e1PackageHint, e1Terms;           // Declare variables
e1Form      = document.getElementById('formSignup'); // Store elements
e1SelectPackage = document.getElementById('package');
e1PackageHint = document.getElementById('packageHint');
e1Terms      = document.getElementById('terms');
e1TermsHint  = document.getElementById('termsHint');

function packageHint() {                                         // Declare function
    var package = this.options[this.selectedIndex].value; // Get selected option
    if (package == 'monthly') {                           // If monthly package
        e1PackageHint.innerHTML = 'Save $10 if you pay for 1 year!';//Show this msg
    } else {                                              // Otherwise
        e1PackageHint.innerHTML = 'Wise choice!';          // Show this message
    }
}

function checkTerms(event) {                                     // Declare function
    if (!e1Terms.checked) {                                    // If checkbox ticked
        e1TermsHint.innerHTML = 'You must agree to the terms.'; // Show message
        event.preventDefault();                                // Don't submit form
    }
}

//Create event listeners: submit calls checkTerms(), change calls packageHint()
e1Form.addEventListener('submit', checkTerms, false);
e1SelectPackage.addEventListener('change', packageHint, false);
```

MUTATION EVENTS & OBSERVERS

Whenever elements are added to or removed from the DOM, its structure changes. This change triggers a mutation event.

When your script adds or removes content from a page it is updating the DOM tree. There are many reasons why you might want to respond to the DOM tree being updated, for example, you might want to tell the user that the page had changed.

Below are some events that are triggered when the DOM changes. These mutation events were introduced in Firefox 3, IE9, Safari 3, and all versions of Chrome. But they are already scheduled to be replaced by an alternative called mutation observers.

EVENT	TRIGGER
<code>DOMNodeInserted</code>	Fires when a node is inserted into the DOM tree. e.g. using <code>appendChild()</code> , <code>replaceChild()</code> , or <code>insertBefore()</code> .
<code>DOMNodeRemoved</code>	Fires when a node is removed from the DOM tree. e.g. using <code>removeChild()</code> or <code>replaceChild()</code> .
<code>DOMSubtreeModified</code>	Fires when the DOM structure changes. It fires after the two events listed above occur.
<code>DOMNodeInsertedIntoDocument</code>	Fires when a node is inserted into the DOM tree as a descendant of another node that is already in the document.
<code>DOMNodeRemovedFromDocument</code>	Fires when a node is removed from the DOM tree as a descendant of another node that is already in the document.

PROBLEMS WITH MUTATION EVENTS

If your script makes a lot of changes to a page, you end up with a lot of mutation events firing. This can make a page feel slow or unresponsive. They can also trigger other event listeners as they propagate through the DOM, which modify other parts of the DOM, triggering more mutation events. Therefore they are being replaced by mutation observers.

Browser support: Chrome, Firefox 3, IE 9, Opera 9, Safari 3

NEW MUTATION OBSERVERS

Mutation observers are designed to wait until a script has finished its task before reacting, then report the changes as a batch (rather than one at a time). You can also specify the type of changes to the DOM that you want them to react to. But at the time of writing, the browser support was not widespread enough to use them on public websites.

Browser support: IE 11, Firefox 14, Chrome 27 (or 18 with webkit prefix), Safari 6.1, Opera 15
On mobile: Android 4.4, Safari on iOS 7.

USING MUTATION EVENTS

In this example, two event listeners each trigger their own function. The first is on the last but one line, and it listens for when the user clicks the link to add a new list item. It then uses DOM manipulation events to add a new element (changing the DOM structure and triggering mutation events).

The second event listener waits for the DOM tree within the `` element to change. When the `DOMNodeInserted` event fires, it calls a function called `updateCount()`. This function counts how many items there are in the list, and then updates the list count at the top of the page accordingly.

JAVASCRIPT

c06/js/mutation.js

```
var elList, addLink, newEl, newText, counter, listItems; // Declare variables

elList = document.getElementById('list'); // Get list
addLink = document.querySelector('a'); // Get add item button
counter = document.getElementById('counter'); // Get item counter

function addItem(e) { // Declare function
  e.preventDefault(); // Prevent link action
  newEl = document.createElement('li'); // New <li> element
  newText = document.createTextNode('New list item'); // New text node
  newEl.appendChild(newText); // Add text to <li>
  elList.appendChild(newEl); // Add <li> to list
}

function updateCount() { // Declare function
  listItems = list.getElementsByTagName('li').length; // Get total of <li>s
  counter.innerHTML = listItems; // Update counter
}

addLink.addEventListener('click', addItem, false); // Click on button
elList.addEventListener('DOMNodeInserted', updateCount, false); // DOM updated
```

RESULT



HTML5 EVENTS

Here are three page-level events that have been included in versions of the HTML5 spec that have become popular very quickly.

EVENT	TRIGGER	BROWSER SUPPORT
DOMContentLoaded	Event fires when the DOM tree is formed (images, CSS, and JavaScript might still be loading). Scripts start to run earlier than using the <code>load</code> event which waits for other resources such as images and advertisements to load. This makes the page seem faster to load. However, because it does not wait for scripts to load, the DOM tree will not contain any HTML that would have been generated by those scripts. It can be attached to the <code>window</code> or <code>document</code> objects.	Chrome 0.2, Firefox 1, IE9, Safari 3.1, Opera 9
hashchange	Event fires when the URL hash changes (without the entire window refreshing). Hashes are used on links to specific parts (sometimes known as anchors) within a page and also on pages that use AJAX to load content. The <code>hashchange</code> event handler works on the <code>window</code> object, and after firing, the <code>event</code> object will have <code>oldURL</code> and <code>newURL</code> properties that hold the url before and after the <code>hashchange</code> .	IE8, Firefox 20, Safari 5.1, Chrome 26, and Opera 12.1
beforeunload	Event fires on the <code>window</code> object before the page is unloaded. It should only be used to help the user (not to encourage them to stay on a website if they are trying to leave). For example, it can be helpful to let a user know that changes on a form they completed have not been saved. You can add a message to the dialog box that is shown by the browser, but you do not have control over the text shown before it or on the buttons the user can press (which can vary slightly between browsers and operating systems).	Chrome 1, Firefox 1, IE4, Safari 3, Opera 12

There are also several other events that are being introduced to support more recent devices (such as phones and tablets). They respond to events such as gestures and movements that are based upon an accelerometer (which detects the angle at which a device is being held).

USING HTML5 EVENTS

In this example, as soon as the DOM tree has been formed, focus is given to the text input with an id of `username`.

The `DOMContentLoaded` event fires before the `load` event (because the latter waits for all of the page's resources to load).

If users try to leave the page before they press the submit button, the `beforeunload` event checks that they want to leave.

JAVASCRIPT

06/js/html5-events.js

```
function setup() {  
    vartextInput;  
    textInput = document.getElementById('message');  
    textInput.focus();  
}  
  
window.addEventListener('DOMContentLoaded', setup, false);  
  
window.addEventListener('beforeunload', function(event){  
    return 'You have changes that have not been saved...';  
}, false);
```

RESULT



On the left, you can see the dialog box that is shown when you try to navigate away from the page.

The text before your message and on the buttons may change from browser to browser (you have no control over this).



EXAMPLE

EVENTS



This example shows an interface for a user to record voice notes. The user can enter a name which is displayed in the heading, and they can press record (which changes the image that is shown).

When the user starts typing a name into the text box, the keyup event will trigger a function called `writeLabel()` which copies the text from the form input and writes it into the main heading under the logo for List King, replacing the words 'AUDIO NOTE'.

The record / pause button is a bit more interesting. The button has an attribute called `data-state`. When the page loads, its value is `record`. When the user presses the button, the value of this attribute changes to `pause` (this triggers a new CSS rule to indicate that it is now recording).

If you have not used HTML5's `data-` attributes, they allow you to store custom data on any HTML element. (The name of the attribute can be anything starting with `data-` as long as the name is lowercase.)

This demonstrates a new technique based upon event delegation. The event listener is placed upon the containing element whose `id` is `buttons`. The event object is used to determine the value of the `id` attribute on the element that was used. The value from that `id` attribute is then used in a `switch` statement to decide which function to call (depending on whether the button is in `record` state or `pause` state).

This is a good way to handle many buttons because it reduces the number of event listeners in your code.

The event listeners are written at the bottom of the page, and they have fallbacks for users who are running IE8 or less (which has a different event model).

EXAMPLE

EVENTS

The script starts by defining the variables that it will need to use, and then collecting the element nodes that are needed.

The player functions (shown on the right-hand page) would appear next, and at the bottom of this page you can see the event listeners.

The event listeners live inside a conditional statement so that the attachEvent() method can be used for visitors who have IE8 or less.

c06/js/example.js

JAVASCRIPT

```
var username, noteName, textEntered, target; // Declare variables

noteName = document.getElementById('noteName'); // Element that holds note

function writeLabel(e) { // Declare function
  if (!e) { // If event object not present
    e = window.event; // Use IE5-8 fallback
  }
  target = event.target || event.srcElement; // Get target of event
  textEntered = e.target.value; // Value of that element
  noteName.textContent = textEntered; // Update note text
}

// This is where the record / pause controls and functions go...
// See right hand page

if (document.addEventListener) { // If event listener supported
  document.addEventListener('click', function(e){ // For any click document
    recorderControls(e); // Call recorderControls()
  }, false); // Capture during bubble phase
  // If input event fires on username input call writeLabel()
  username.addEventListener('input', writeLabel, false);
} else {
  document.attachEvent('onclick', function(e){ // IE fallback: any click
    recorderControls(e); // Calls recorderControls()
  });
  // If keyup event fires on username input call writeLabel()
  username.attachEvent('onkeyup', writeLabel, false);
}
```

EXAMPLE

EVENTS

The recorderControls() function is automatically passed the event object. Not only does this offer code to support older versions of IE, but also stops the link from performing its default behavior (of taking the user to a new page).

JAVASCRIPT

```
function recorderControls(e) {  
    if (!e) {  
        e = window.event;  
    }  
    target = event.target || event.srcElement; // Get the target element  
    if (event.preventDefault) {  
        e.preventDefault();  
    } else {  
        event.returnValue = false;  
    }  
  
    switch(target.getAttribute('data-state')) { // Get the data-state attribute  
        case 'record':  
            record(target);  
            break;  
        case 'stop':  
            stop(target);  
            break;  
            // More buttons could go here...  
    }  
};  
  
function record(target) { // Declare function  
    target.setAttribute('data-state', 'stop'); // Set data-state attr to stop  
    target.textContent = 'stop'; // Set text to 'stop'  
}  
  
function stop(target) {  
    target.setAttribute('data-state', 'record');//Set data-state attr to record  
    target.textContent = 'record'; // Set text to 'record'  
}
```

The switch statement is used to indicate which function to run depending on whether the user is trying to record or stop the audio note. This technique of delegation is a good way to cope with multiple buttons in the UI.

c06/js/example.js

SUMMARY

EVENTS

- ▶ Events are the browser's way of indicating when something has happened (such as when a page has finished loading or a button has been clicked).
- ▶ Binding is the process of stating which event you are waiting to happen, and which element you are waiting for that event to happen upon.
- ▶ When an event occurs on an element, it can trigger a JavaScript function. When this function then changes the web page in some way, it feels interactive because it has responded to the user.
- ▶ You can use event delegation to monitor for events that happen on all of the children of an element.
- ▶ The most commonly used events are W3C DOM events, although there are others in the HTML5 specification as well as browser-specific events.

7

JQUERY

till 357

except (330 - 341) & (346 to 353)

jQuery offers a simple way to achieve a variety of common JavaScript tasks quickly and consistently, across all major browsers and without any fallback code needed.

SELECT ELEMENTS

It is simpler to access elements using jQuery's CSS-style selectors than it is using DOM queries. The selectors are also more powerful and flexible.


PERFORM TASKS

jQuery's methods let you update the DOM tree, animate elements into and out of view, and loop through a set of elements, all in one line of code.

HANDLE EVENTS

jQuery includes methods that allow you to attach event listeners to selected elements without having to write any fallback code to support older browsers.

This chapter assumes that you have read the book up to this point or are familiar with the basics of JavaScript. As you will see, jQuery is powerful when combined with traditional JavaScript techniques, but you need to understand JavaScript to make full use of jQuery.

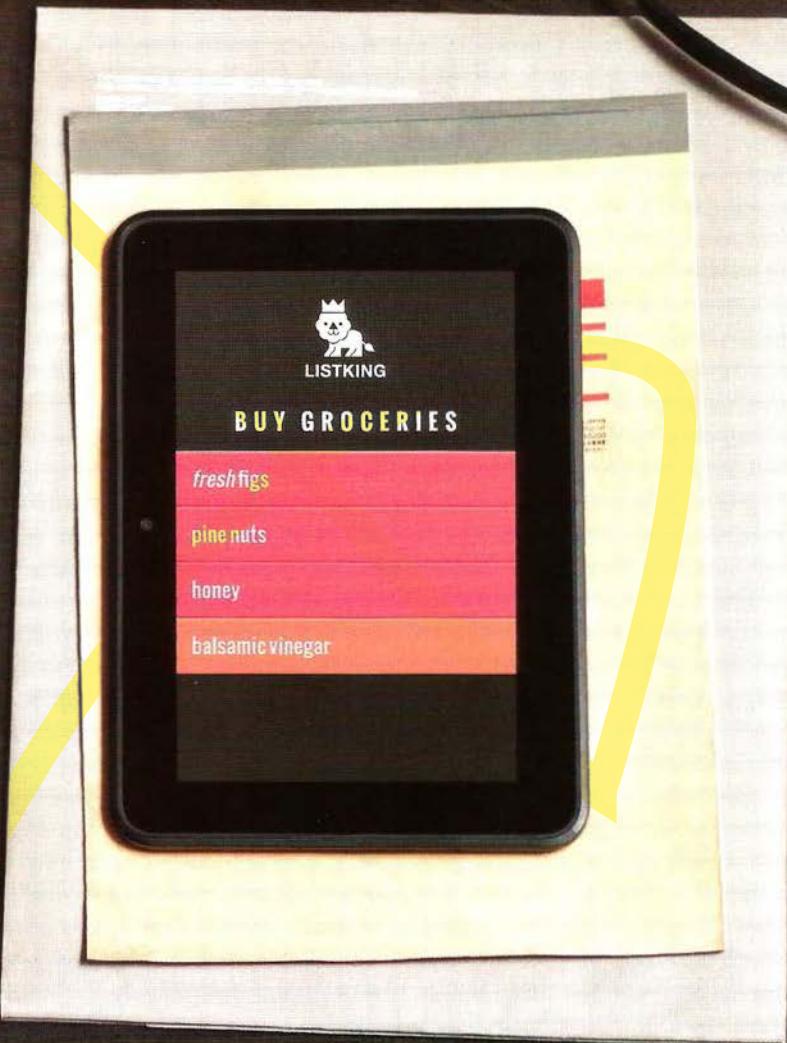


WHAT IS JQUERY?

a JS file

jQuery is a JavaScript file that you include in your web pages.
It lets you find elements using CSS-style selectors and then do something with the elements using jQuery methods.

1: FIND ELEMENTS USING CSS-STYLE SELECTORS

A function called jQuery() lets you find one or more elements in the page. It creates an object called jQuery which holds references to those elements. \$() is often used as a shorthand to save typing jQuery(), as shown here.

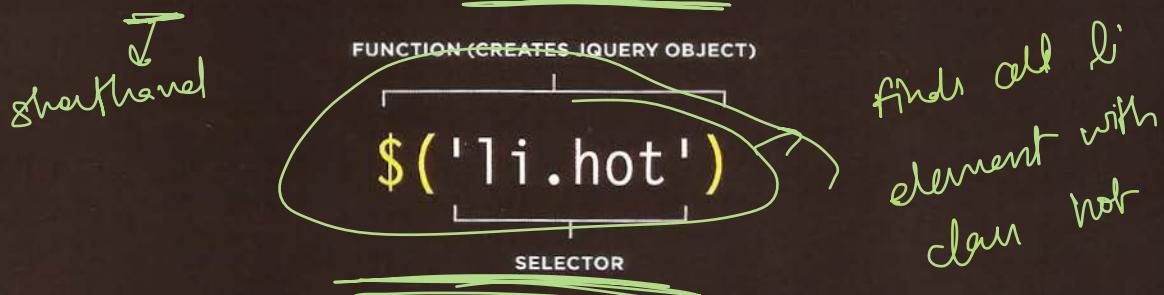

The jQuery() function has one parameter: a CSS-style selector. This selector finds all of the elements with a class of hot.


SIMILARITIES TO DOM

- jQuery selectors perform a similar task to traditional DOM queries, but the syntax is much simpler.
- You can store the jQuery object in a variable, just as you can with DOM nodes.
- You can use jQuery methods and properties (like DOM methods and properties) to manipulate the DOM nodes that you select.

The jQuery object has many methods that you can use to work with the elements you select. The methods represent tasks that you commonly need to perform with elements.

2: DO SOMETHING WITH THE ELEMENTS USING JQUERY METHODS

Here a jQuery object is created by the jQuery() function. The object and the elements it contains is referred to as a matched set or a jQuery selection.

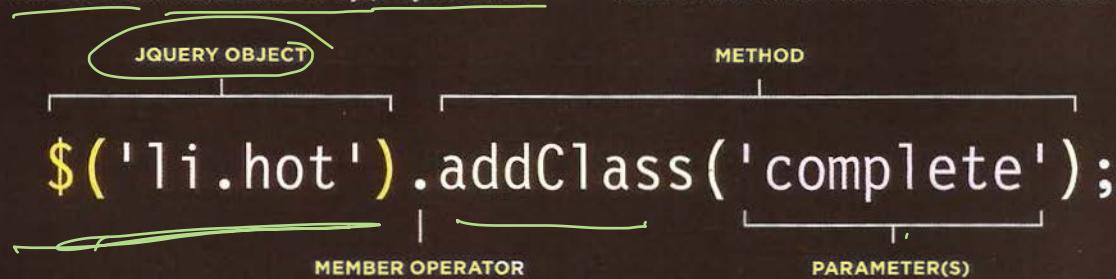

The member operator indicates that the method on the right should be used to update the elements in the jQuery object on the left.

You can then use the methods of the jQuery object to update the elements that it contains. Here, the method adds a new value to the class attribute.

Each method has parameter(s) that provide details about how to update the elements. This parameter specifies a value to add to the class attribute.

KEY DIFFERENCES FROM DOM

- It's cross-browser, and there's no need to write fallback code.
- Selecting elements is simpler (because it uses CSS-style syntax) and is more accurate.
- Event handling is simpler as it uses one method that works in all major browsers.
- Methods affect all the selected elements without the need to loop through each one (see p310).
- Additional methods are provided for popular required tasks such as animation (see p332).
- Once you have made a selection, you can apply multiple methods to it.

A BASIC JQUERY EXAMPLE

The examples in this chapter revisit the list application used in the previous two chapters, and they will use jQuery to update the content of the page.

my

1. In order to use jQuery, the first thing you need to do is include the iQuery script in your page. You can see that it is included before the closing </body> tag.

2. Once jQuery has been added to the page, a second JavaScript file is included that uses jQuery selectors and methods to update the content of the HTML page.

c07/basic-example.html

HTML

```
<body>
  <div id="page"
    <h1 id="header">List</h1>
    <h2>Buy groceries</h2>
    <ul>
      <li id="one" class="hot"><em>fresh</em> figs</li>
      <li id="two" class="hot">pine nuts</li>
      <li id="three" class="hot">honey</li>
      <li id="four">balsamic vinegar</li>
    </ul>
  </div>
  ① <script src="js/jquery-1.11.0.js"></script>
  ② <script src="js/basic-example.js"></script>
</body>
```

jQuery Script
file uses jQuery
selectors & methods
to update HTML
page

WHERE TO GET JQUERY AND WHICH VERSION TO USE

Above, jQuery is included before the closing </body> tag just like other scripts. (Another way to include the script is shown on p355.) A copy of jQuery is included with the code for this book, or you can download it from <http://jquery.org>.

The version number of jQuery should be kept in the file name. Here, it is jquery-1.11.0.js, but by the time you read this book, there may be a newer version. The examples should still work with newer versions.

You often see websites use a version of the jQuery file with the file extension .min.js.

It means unnecessary spaces and carriage returns have been stripped from the file. e.g., jquery-1.11.0.js becomes jquery-1.11.0.min.js.

It is done using a process called minification (hence min is used in the file name). The result is a much smaller file which makes it faster to download. But minified files are much harder to read.

If you want to look at the jQuery file, you can open it with a text editor - it is just text like JavaScript, albeit very complicated JavaScript.

Most people who use jQuery do not try to understand how the jQuery JavaScript file achieves what it does. As long as you know how to select elements and how to use its methods and properties, you can reap the benefits of using jQuery without looking under the hood.

Here, the JavaScript file uses the `$()` shortcut for the `jQuery()` function. It selects elements and creates three jQuery objects that hold references to the elements.

The methods of the jQuery object fade the list items in, and remove them when they are clicked on. Don't worry if you don't understand the code yet.

First, you will learn how to *select* elements using jQuery selectors, and then how to *update* those elements using the methods and properties of the jQuery object.

JAVASCRIPT

```
① $(':header').addClass('headline');
② $('li:lt(3)').hide().fadeIn(1500);
③ $('li').on('click', function() {
    $(this).remove();
});
```


1. The first line selects all of the `<h1>` - `<h6>` headings, and adds a value of `headline` to their class attributes.

2. The second line selects the first three list items and does two things:
- The elements are hidden (in order to allow the next step).
 - The elements fade into view.

3. The last three lines of the script set an event listener on each of the `` elements. When a user clicks on one, it triggers an anonymous function to remove that element from the page.

c07/js/basic-example.js

RESULT

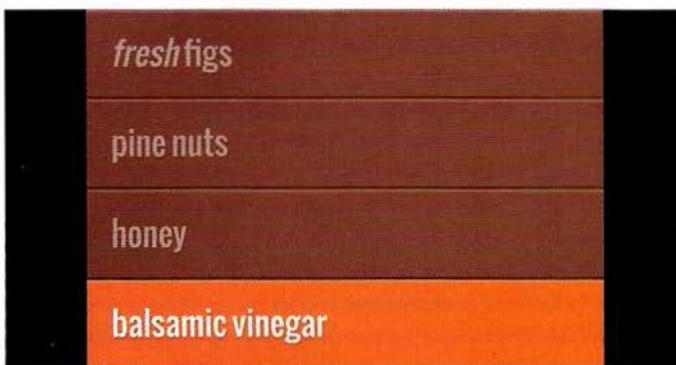

Here is a reminder of the colors used to convey the priority and status of each list item:

HOT	COOL
NORMAL	COMPLETE

WHY USE JQUERY?

In of all websites
uses JQuery.

jQuery doesn't do anything you cannot achieve with pure JavaScript.
It is just a JavaScript file but estimates show it has been used on over a quarter of the sites on the web, because it makes coding simpler.

1: SIMPLE SELECTORS

As you saw in Chapter 5, which introduced the DOM, it is not always easy to select the elements that you want to. For example:

- Older browsers do not support the latest methods for selecting elements.
- IE does not treat whitespace between elements as text nodes, while other browsers do.

Such issues make it hard to select the right elements on a page across all major browsers.

Rather than learn a new way to select elements, jQuery uses a language that is already familiar to front-end web developers: CSS selectors. They:

- Are much faster at selecting elements
- Can be a lot more accurate about which elements to select
- Often require a lot less code than older DOM methods
- Are already used by most front-end developers

jQuery even adds some extra CSS-style selectors which offer additional functionality.

Since jQuery was created, modern browsers have implemented the `querySelector()` and `querySelectorAll()` methods to let developers select elements using CSS syntax. However, these methods are not supported in older browsers.

2: COMMON TASKS IN LESS CODE

There are some tasks that front-end developers need to do regularly, such as loop through the elements that have been selected.

jQuery has methods that offer web developers simpler ways to perform common tasks, such as:

- Loop through elements
- Add / remove elements from the DOM tree
- Handle events
- Fade elements into / out of view
- Handle Ajax requests

jQuery simplifies each of these tasks, and allows you to write less code to achieve them.

jQuery also offers chaining of methods (a technique which you will meet on p311). Once you have selected some elements, this allows you to apply multiple methods to the same selection.

jQuery's motto is "Write less, do more," because it allows you to achieve the same goals but in fewer lines of code than you would need to write with plain JavaScript.


7.

3: CROSS-BROWSER COMPATIBILITY

jQuery automatically handles the inconsistent ways in which browsers select elements and handle events, so you do not need to write cross-browser fallback code (such as that shown in the previous two chapters).

To do this, jQuery uses **feature detection** to find the best way to achieve a task. It involves the use of many conditional statements: if the browser supports the ideal way to achieve a task, it uses that approach; otherwise, it tests to see if it supports the next best option to achieve the same task.

This was the technique used in the last chapter to determine whether or not the browser supported event listeners. If event listeners were not supported, an alternative approach was offered (aimed at users of Internet Explorer 8 and older versions of IE).

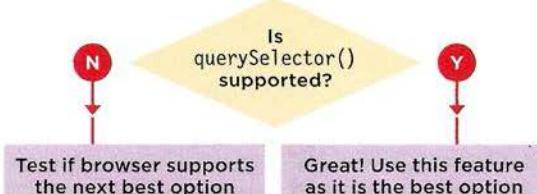

Here, a conditional statement checks if the browser supports `querySelector()`. If it does, that method is used. If it doesn't, it checks to see if the next best option is supported and uses that instead.

JQUERY 1.9.X+ OR 2.0.X+

As jQuery developed, it built up a lot of code to support IE6, 7, and 8; which made the script bigger and more complicated. As version 2.0 of jQuery was approaching, the development team decided to create a version that would drop support for older browsers in order to create a smaller, faster script.

The jQuery team was, however, aware that many people on the web still used these older browsers, and that developers therefore needed to support them. For this reason, they now maintain two parallel versions of jQuery:

jQuery 1.9+: Encompasses the same features as 2.0.x but still offers support for IE6, 7, and 8

jQuery 2.0+: Drops support for older browsers to make the script smaller and faster to use

The functionality of both versions is not expected to diverge significantly in the short term.

The jQuery file name should contain the version number in it (e.g., `jquery-1.11.0.js` or `jquery-1.11.0.min.js`). If you don't do this, a user's browser might try to use a cached version of the file that is either older or newer - which could prevent other scripts from working correctly.

FINDING ELEMENTS

Using jQuery, you usually select elements using **CSS-style selectors**. It also offers some extra selectors, noted below with a 'jQ'.

Examples of using these selectors are demonstrated throughout the chapter. The syntax will be familiar to those who have used selectors in CSS.

BASIC SELECTORS

*
element
#id
.class
selector1, selector2

All elements
All elements with that element name
Elements whose **id** attribute has the value specified
Elements whose **class** attribute has the value specified
Elements that match more than one selector (see also the **.add()** method, which is more efficient when combining selections)

HIERARCHY

ancestor descendant
parent > child
previous + next
previous ~ siblings

An element that is a descendant of another element (e.g., **li i a**)
An element that is a direct child of another element (you can use * in the place of the child to select all **child** elements of the specified parent)
Adjacent sibling selector only selects elements that are immediately followed by the previous element
Sibling selector will select any elements that are a sibling of the previous element

BASIC FILTERS

:not(selector)
:first
:last
:even
:odd
:eq(index)
:gt(index)
:lt(index)
:header
:animated
:focus

All elements except the one in the selector (e.g., **div:not('#summary')**)
The first element from the selection
The last element from the selection
Elements with an even index number in the selection
Elements with an odd index number in the selection
Elements with an index number equal to the one in the parameter
Elements with an index number greater than the parameter
Elements with an index number less than the parameter
All **<h1> - <h6>** elements
Elements that are currently being animated
The element that currently has focus

CONTENT FILTERS

:contains('text')		Elements that contain the specified text as a parameter
:empty		All elements that have no children
:parent		All elements that have a child node (can be text or element)
:has(selector)	jQ	Elements that contain at least one element that matches the selector (e.g., <code>div:has(p)</code> matches all <code>div</code> elements that contain a <code><p></code> element)

VISIBILITY FILTERS

:hidden		All elements that are hidden
:visible	jQ	All elements that consume space in the layout of the page
		Not selected if: <code>display: none; height / width: 0;</code> ancestor is hidden
		Selected if: <code>visibility: hidden; opacity: 0</code> because they would take up space in layout

CHILD FILTERS

:nth-child(expr)		The value here is not zero-based e.g. <code>ul li:nth-child(2)</code>
:first-child		First child from the current selection
:last-child		Last child from the current selection
:only-child		When there is only one child of the element (<code>div p:only-child</code>)

ATTRIBUTE FILTERS

[attribute]		Elements that carry the specified attribute (with any value)
[attribute='value']		Elements that carry the specified attribute with the specified value
[attribute!='value']	jQ	Elements that carry the specified attribute but not the specified value
[attribute^='value']		The value of the attribute begins with this value
[attribute='value']		The value of the attribute ends with this value
[attribute*='value']		The value should appear somewhere in the attribute value
[attribute ='value']		Equal to given string, or starting with string and followed by a hyphen
[attribute~='value']		The value should be one of the values in a space separated list
[attribute] [attribute2]		Elements that match all of the selectors

FORM

:input	jQ	All input elements
:text	jQ	All text inputs
:password	jQ	All password inputs
:radio	jQ	All radio buttons
:checkbox	jQ	All checkboxes
:submit	jQ	All submit buttons
:image	jQ	All <code></code> elements
:reset	jQ	All reset buttons
:button	jQ	All <code><button></code> elements
:file	jQ	All file inputs
:selected	jQ	All selected items from drop-down lists
:enabled		All enabled form elements (the default for all form elements)
:disabled		All disabled form elements (using the CSS <code>disabled</code> property)
:checked		All checked radio buttons or checkboxes

DOING THINGS WITH YOUR SELECTION

Updating
Elements

Once you have seen the basics of how jQuery works, most of this chapter is dedicated to demonstrating these methods.

These two pages both offer an overview to the jQuery methods and will also help you find the methods you are looking for once you have read the chapter.

You often see jQuery method names written starting with a period (.) before the name. This convention is used in this book to help you easily identify those methods as being jQuery methods rather than built-in JavaScript methods, or methods of custom objects.

When you make a selection, the jQuery object that is created has a property called **length**, which will return the number of elements in the object.

If the jQuery selection did not find any matching elements, you will not get an error by calling any of these methods - they just won't do or return anything.

There are also methods that are specifically designed to work with Ajax (which lets you refresh part of the page rather than an entire page) shown in Chapter 8.

CONTENT FILTERS

Get or change content of elements, attributes, text nodes

GET/CHANGE CONTENT

.html()	p316
.text()	p316
.replaceWith()	p316
.remove()	p316

ELEMENTS

.before()	p318
.after()	p318
.prepend()	p318
.append()	p318
.remove()	p346
.clone()	p346
.unwrap()	p346
.detach()	p346
.empty()	p346
.add()	p338

ATTRIBUTES

.attr()	p320
.removeAttr()	p320
.addClass()	p320
.removeClass()	p320
.css()	p322

FORM VALUES

.val()	p343
.isNumeric()	p343

FINDING ELEMENTS

Find and select elements to work with & traverse the DOM

GENERAL

.find()	p336
.closest()	p336
.parent()	p336
.parents()	p336
.children()	p336
.siblings()	p336
.next()	p336
.nextAll()	p336
.prev()	p336
.prevAll()	p336

FILTER/TEST

.filter()	p338
.not()	p338
.has()	p338
.is()	p338
:contains()	p338

ORDER IN SELECTION

.eq()	p340
.lt()	p340
.gt()	p340

Once you have selected the elements you want to work with (and they are in a jQuery object), the jQuery methods listed on these two pages perform tasks on those elements.

DIMENSION/POSITION

Get or update the dimensions or position of a box

DIMENSION

<code>.height()</code>	p348
<code>.width()</code>	p348
<code>.innerHeight()</code>	p348
<code>.innerWidth()</code>	p348
<code>.outerHeight()</code>	p348
<code>.outerWidth()</code>	p348
<code>\$(document).height()</code>	p350
<code>\$(document).width()</code>	p350
<code>\$(window).height()</code>	p350
<code>\$(window).width()</code>	p350

POSITION

<code>.offset()</code>	p351
<code>.position()</code>	p351
<code>.scrollLeft()</code>	p350
<code>.scrollTop()</code>	p350

EFFECTS & ANIMATION

Add effects and animation to parts of the page

BASIC

<code>.show()</code>	p332
<code>.hide()</code>	p332
<code>.toggle()</code>	p332

FADING

<code>.fadeIn()</code>	p332
<code>.fadeOut()</code>	p332
<code>.fadeTo()</code>	p332
<code>.fadeToggle()</code>	p332

SLIDING

<code>.slideDown()</code>	p332
<code>.slideUp()</code>	p332
<code>.slideToggle()</code>	p332

CUSTOM

<code>.delay()</code>	p332
<code>.stop()</code>	p332
<code>.animate()</code>	p332

EVENTS

Create event listeners for each element in the selection

DOCUMENT/FILE

<code>.ready()</code>	p312
<code>.load()</code>	p313

USER INTERACTION

<code>.on()</code>	p326
--------------------	------

There used to be methods for individual types of event, so you may see methods such as `.click()`, `.hover()`, `.submit()`. However, these have been dropped in favour of the `.on()` method to handle events.

A MATCHED SET / JQUERY SELECTION

When you select one or more elements, a **jQuery object** is returned.
It is also known as a **matched set** or a **jquery selection**.

SINGLE ELEMENT

If a selector returns one element, the **jQuery object** contains a reference to **just one element node**.

`$('ul')`

This selector picks the `` element from the page.
So the **jQuery object** contains a reference to **just one node** (the only `` element in the page):



Each element is given an index number.
Here there is just one element in the object.

INDEX	ELEMENT NODE
0	ul

MULTIPLE ELEMENTS

If a selector returns several elements, the **jQuery object** contains references to **each element**.

`$('li')`

This selector picks all the `` elements. Here, the **jQuery object** has references for each of the nodes that was selected (each `` element):



The resulting **jQuery object** contains four list items.
Remember that **index numbers start at zero**.

INDEX	ELEMENT NODE
0	li#one.hot
1	li#two.hot
2	li#three.hot
3	li#four

JQUERY METHODS THAT GET AND SET DATA

Some jQuery methods both retrieve information from, and update the contents of, elements. But they do not always apply to all elements.

GET INFORMATION

If a jQuery selection holds more than one element, and a method is used to get information from the selected elements, it will retrieve information from only the first element in the matched set.

In the list example we have been using, the following selector chooses the four `` elements from a list.

`$('li')`

When you use the `.html()` method (which will be introduced on p316) to get information from an element, it will return the content of the first element in the matched set.

```
var content = $('li').html();
```

This will retrieve the content of the first list item, and store it in the variable called `content`.

To get a different element, you can use methods to traverse (p336) or filter (p338) the selection, or write a more specific selector (p302).

To get the content of all of the elements, see the `.each()` method (p324).

SET INFORMATION

If a jQuery selection holds more than one element, and a method is used to update information on the page, it will update all of the elements in the matched set, not just the first one.



When you use the `.html()` method (which you meet on p316) to update the element, it will replace the contents of each element in the matched set. Here, it updates the content of each item in the list.

```
$( 'li' ).html( 'Updated' );
```

This will update the content of all of the list items in the matched set with the word `Updated`.

To update just one element, you can use methods to traverse (p336) or filter (p338) the selection, or write a more specific selector (p302).

JQUERY OBJECTS STORE REFERENCES TO ELEMENTS

When you create a selection with jQuery, it stores a reference to the corresponding nodes in the DOM tree. It does not create copies of them.

As you have seen, when HTML pages load, the browser creates a model of the page in memory.


Imagine your browser's memory is a set of tiles:

- <> Nodes in the DOM take up a tile
- var Variables take up a tile
- \$ Complex JavaScript objects may take several tiles because they hold more data

In reality, the items in the browser's memory are not spread out as they are in this diagram, but the diagram helps explain the concept.

When you create a jQuery selection, the jQuery object holds references to the elements in the DOM - it does not create a copy of them.

When programmers say that a variable or object is storing a reference to something, what it is doing is storing the location a piece of information in the browser's memory. Here, the jQuery object would know that the list items are stored in A4, B4, and C4. Again, this is purely for illustration purposes; the browser's memory is not quite as simple as a checkerboard with these locations.

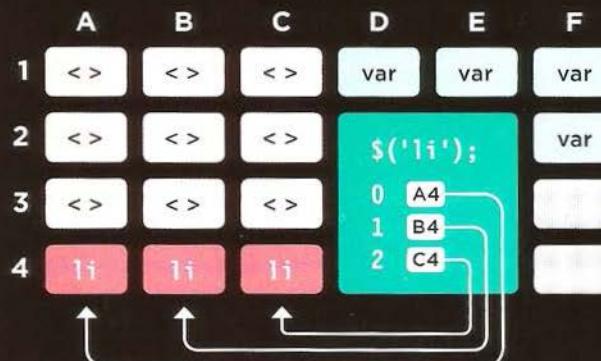

The jQuery object is an array-like object because it stores a list of the elements in the same order that they appear in the HTML document (unlike other objects where the order of the properties is not usually preserved).

CACHING JQUERY SELECTIONS IN VARIABLES

A jQuery object stores references to elements.

Caching a jQuery object stores a reference to it in a variable.

To create a jQuery object takes time, processing resources, and memory. The interpreter must:

1. Find the matching nodes in the DOM tree
2. Create the jQuery object
3. Store references to the nodes in the jQuery object

So, if the code needs to use the same selection more than once, it is better to use that same jQuery object again rather than repeat the above process.


To do this, you store a reference to the jQuery object in a variable.

Below, a jQuery object is created. It stores the locations of the `` elements in the DOM tree.

`$('li');`

A reference to this object is in turn stored in a variable called `$listItems`. Note that when a variable contains a jQuery object, it is often given a name beginning with the `$` symbol (to help differentiate it from other variables in your script).

`$listItems = $('li');`

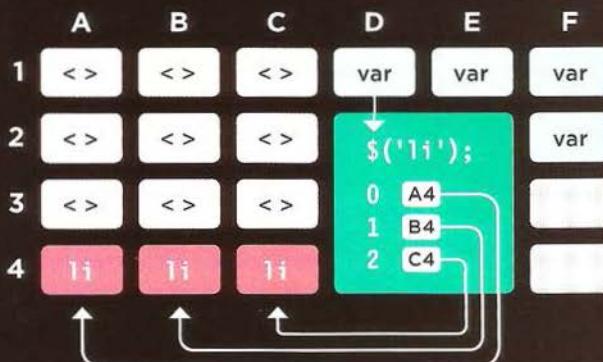

Caching jQuery selections is similar to the idea of storing a reference to a DOM node once you have made a DOM query (as you saw in Chapter 5).

LOOPING

In plain JavaScript, if you wanted to do the same thing to several elements, you would need to write code to loop through all of the elements you selected.

c07/js/looping.js

```
$('li em').addClass('seasonal');  
$('li.hot').addClass('favorite');
```

In this example, the first selector applies only to one element and the class attribute's new value triggers a CSS rule that adds a calendar icon to the left of it.

The second selector applies to three elements. The new value added to the class attribute for each of these elements triggers a CSS rule that adds a heart icon on the right-hand side.

The ability to update all of the elements in the jQuery selection is known as implicit iteration.

When you want to get information from a series of elements, you can use the .each() method (which you meet on p324) rather than writing a loop.

With jQuery, when a selector returns multiple elements, you can update all of them using the one method. There is no need to use a loop.

In this code, the same value is added to the class attribute for all of the elements that are found using the selector. It doesn't matter if there are one or many.

JAVASCRIPT

RESULT



CHAINING

If you want to use more than one jQuery method on the same selection of elements, you can list several methods at a time using dot notation to separate each one, as shown below.

In this one statement, three methods act on the same selection of elements:
hide() hides the elements
delay() creates a pause
fadeIn() fades in the elements

The process of placing several methods in the same selector is referred to as **chaining**. As you can see, it results in code that is far more compact.

JAVASCRIPT

c07/js/chaining.js

```
$('li[id!="one"]').hide().delay(500).fadeIn(1400);
```

RESULT



To make your code easier to read, you can place each new method on a new line:

```
$('li[id!="one"]')  
  .hide()  
  .delay(500)  
  .fadeIn(1400);
```

Each line starts with the dot notation, and the semicolon at the end of the statement indicates that you have finished working with this selection.

Most methods used to update the jQuery selection can be chained. However the methods that retrieve information from the DOM (or about the browser) cannot be chained.

It is worth noting that if one method in the chain does not work, the rest will not run either.

CHECKING A PAGE IS READY TO WORK WITH

jQuery's `.ready()` method checks that the page is ready for your code to work with.

`$(document)` creates a jQuery object representing the page.

When the page is ready, the function inside the parentheses of the `.ready()` method is run.

```
JQUERY OBJECT           READY EVENT METHOD  
[ $(document).ready(function() {  
    // Your script goes here  
}); ]
```

As with plain JavaScript, if the browser has not yet constructed the DOM tree, jQuery will not be able to select elements from it.

If you place a script at the end of the page (just before the closing `</body>` tag), the elements will be loaded into the DOM tree.

If you wrap your jQuery code in the method above, it will still work when used elsewhere on the page or even in another file.

A shorthand for this is shown on the right-hand page. It is more commonly used than this longer version.

THE `load` EVENT

jQuery had a `load()` method. It fired on the `load` event, but has been replaced by the `on()`. As you saw on p272, the `load` event fires after the page and all of its resources (images, CSS, and scripts) have loaded.

You should use this when your script relies on assets to have loaded, e.g., if it needs to know the dimensions of an image.

It works in all browsers, and also provides function-level scope for the variables it contains.

THE `.ready()` METHOD

jQuery's `.ready()` method checks if the browser supports the `DOMContentLoaded` event, because it fires as soon as the DOM has loaded (it does not wait for other assets to finish loading) and can make the page appear as if it is loading faster.

If `DOMContentLoaded` is supported, jQuery creates an event listener that responds to that event. But the event is only supported in modern browsers. In older browsers, jQuery will wait for the `load` event to fire.

VS

PLACING SCRIPTS BEFORE THE CLOSING `</body>` TAG

When you place your script at the end of the page (before the closing `</body>` tag), the HTML will have loaded into the DOM before the script runs.

VS

You will, however, still see people using the `.ready()` method because scripts that use it will still work if someone moves the script tag elsewhere in the HTML page. (This is particularly common when that script is being made available for other people to use.)

SHORTHAND FOR READY EVENT METHOD ON DOCUMENT OBJECT

```
$()function() {  
    // Your script goes here  
};
```

Above, you can see the shorthand that is commonly used instead of `$(document).ready()`

A positive side-effect of writing jQuery code inside this method is that it creates function-level scope for its variables.

This function-level scope prevents naming collisions with other scripts that might use the same variable names.

Any statements inside the method automatically run when the page has loaded. This is the version that will be used in the examples in the rest of the chapter.

GETTING ELEMENT CONTENT

The `.html()` and `.text()` methods both retrieve and update the content of elements. This page will focus on how to retrieve element content. To learn how to update element content, see p316.

`.html()`

When this method is used to retrieve information from a jQuery selection, it retrieves only the HTML inside the first element in the matched set, along with any of its descendants.

For example, `$('.ul').html();` will return this:

```
<li id="one"><em>fresh</em> figs</li>
<li id="two">pine nuts</li>
<li id="three">honey</li>
<li id="four">balsamic vinegar</li>
```

Whereas `$('.li').html();` will return this:

```
<em>fresh</em> figs
```

Note how this returns only the content of the first `` element.

If you want to retrieve the value of every element, you can use the `.each()` method (see p324).

`.text()`

When this method is used to retrieve the text from a jQuery selection, it returns the content from every element in the jQuery selection, along with the text from any descendants.

For example, `$('.ul').text();` will return this:

```
fresh figs
pine nuts
honey
balsamic vinegar
```

Whereas `$('.li').text();` will return this:

```
fresh figspine nutshoneybalsamic vinegar
```

Note how this returns the text content of all `` elements (including spaces between words), but there are no spaces between the individual list items.

To get the content from `<input>` or `<textarea>` elements, use the `.val()` method shown on p343.

GETTING AT CONTENT

On this page you can see variations on how the `.html()` and `.text()` methods are used on the same list (depending on whether `` or `` elements are used in the selector).

JAVASCRIPT

c07/js/get-html-fragment.js

```
var $listHTML = $('ul').html();
$('ul').append($listHTML);
```

The selector returns the `` element. The `.html()` method gets all the HTML inside it (the four `` elements). This is then appended to the end of the selection, in this case after the existing `` elements.

JAVASCRIPT

c07/js/get-text-fragment.js

```
var $listText = $('ul').text();
$('ul').append('<p>' + $listText + '</p>');
```

The selector returns the `` element. The `.text()` method gets the text from all of the `` element's children. This is then appended to the end of the selection, in this case after the existing `` element.

JAVASCRIPT

c07/js/get-html-node.js

```
var $listItemHTML = $('li').html();
$('li').append('<i>' + $listItemHTML + '</i>');
```

The selector returns the four `` elements, but the `.html()` method returns only the contents of the first one. This is then appended to the end of the selection, in this case after each existing `` element.

JAVASCRIPT

c07/js/get-text-node.js

```
var $listItemText = $('li').text();
$('li').append('<i>' + $listItemText + '</i>');
```

The selector returns the four `` elements. The `.text()` method gets the text from these. This is then appended to each of the `` elements in the selection.

Please note: The `.append()` method (covered on p318) lets you add content to the page.



UPDATING ELEMENTS

Here are four methods that update the content of all elements in a jQuery selection.

When the `.html()` and `.text()` methods are used as setters (to update content) they will replace the content of each element in the matched set (along with any content and child elements).

The `.replaceWith()` and `.remove()` methods replace and remove the elements they match (as well as their content and any child elements).

The `.html()`, `.text()`, and `.replaceWith()` methods can take a string as a parameter.

The string can:

- Be stored in a variable
- Contain markup

When you add markup to the DOM, be sure to escape all untrusted content properly on the server. Both the `.html()` and `.replaceWith()` methods carry the same security risks as using the DOM's `innerHTML` property.

See p228 - p231 on XSS.

`.html()`

This method gives every element in the matched set the same new content. The new content may include HTML.

`.text()`

This method gives every element in the matched set the same new text content. Any markup would be shown as text.

`.replaceWith()`

This method replaces every element in a matched set with new content. It also returns the replaced elements.

`.remove()`

This method removes all of the elements in the matched set.


USING A FUNCTION TO UPDATE CONTENT

If you want to use and amend the content of the current selection, these methods can take a function as a parameter. The function can be used to create new content. Here the text from each element is placed inside `` tags.

```
$('li.hot').html(function() {  
    return '<em>' + $(this).text() + '</em>';  
});
```

1. `return` indicates that content should be returned by the function.
2. `` tags are placed around the text content of the list item.
3. `this` refers to the current list item. `$(this)` places that element in a new jQuery object so that you can use jQuery methods on it.

CHANGING CONTENT

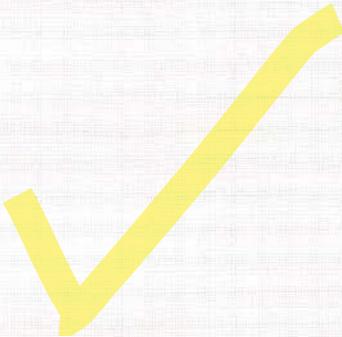

In this example, you can see three methods that allow you to update the content of the page.

When updating the content of an element, you can use a string, a variable, or a function.

JAVASCRIPT

```
(function() {
    $('li:contains("pine")').text('almonds');
    $('li.hot').html(function() {
        return '<em>' + $(this).text() + '</em>';
    });
    $('#one').remove();
});
```


c07/js/changing-content.js

1. This line selects any list items that contain the word pine. It then changes the text of the matching element to almonds using the `.text()` method.

2. These lines select all list items whose class attribute contains the word hot, and uses the `.html()` method to update the content of each of them.

The `.html()` method uses a function to place the content of each element inside an `` element. (See the bottom of the left-hand page for a closer look at the syntax.)

RESULT

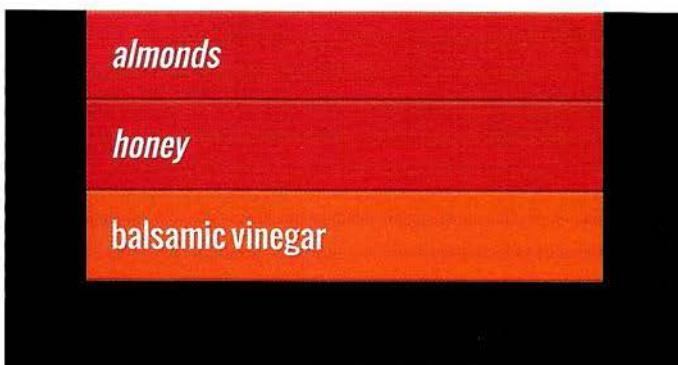

3. This line selects the `` element that has an `id` attribute whose value is one, then uses the `remove()` method to remove it. (This does not require a parameter.)

When specifying new content, carefully choose when to use single quotes and when to use double quotes. If you append a new element that has attributes, use single quotes to surround the content. Then use double quotes for the attribute values themselves.

INSERTING ELEMENTS

13 Oct

Inserting new elements involves two steps:

- 1: Create the new elements in a jQuery object
- 2: Use a method to insert the content into the page

You can create new jQuery objects to hold text and markup that you then add to the DOM tree using one of the methods listed in step 2 on the right.

If you create a selection that returns multiple elements, these methods will **add the same content to each of the elements in the matched set.**

When adding content to the DOM, make sure you have escaped all untrusted content properly on the server. (See p228 - p231 on XSS.)

.before() .after()
 ▼ ▼
 item
 ^ ^
.prepend() .append()

1: CREATING NEW ELEMENTS IN A JQUERY OBJECT

The following statement creates a variable called \$newFragment and stores a jQuery object in it. The jQuery object is set to contain an empty element:

```
var $newFragment = $('- ');

```

The following statement creates a variable called \$ newItem and stores a jQuery object in it. This jQuery object in turn contains an element with a class attribute and some text:

```
var $ newItem = $('- item</li>');

```

2: ADDING THE NEW ELEMENTS TO THE PAGE

Once you have a variable holding the new content, you can use the following methods to **add the content to the DOM tree**:

.before()

This method inserts content before the selected element(s).

.after()

This method inserts content after the selected element(s).

.prepend()

This method inserts content inside the selected element(s), after the opening tag.

.append()

This method inserts content inside the selected element(s), before the closing tag.

There are also .prependTo() and .appendTo() methods. They work the other way around from .prepend() and .append(). So:

a.prepend(b) adds b to a
a.prependTo(b) adds a to b

a.append(b) adds b to a
a.appendTo(b) adds a to b

ADDING NEW CONTENT

In this example, you can see three jQuery selections are made. Each selection uses a different method to amend the content of the list.

The first adds a new notice before the list, the second adds a + symbol before the hot items, and the third adds a new element to the end of the list.

JAVASCRIPT

```
$(function() {  
  ①  $('ul').before('<p class="notice">Just updated</p>');  
  ②  $('li.hot').prepend('+ ');  
  ③  [ var newListItem = $('<li><em>gluten-free</em> soy sauce</li>');  
    $('li:last').after(newListItem);  
  ]);
```

c07/js/adding-new-content.js

1. The `` element is selected, and the `.before()` method is used to insert a new paragraph before the list.

2. Selects all `` elements whose `class` attribute contains a value of `hot` and uses the `.prepend()` method to add a plus symbol (+) before the text.

3. A new `` element is created and stored in a variable. Then the last `` element is selected, and the new element is added using the `.after()` method.

RESULT



GETTING AND SETTING ATTRIBUTE VALUES

no written notes

You can create attributes, or access and update their contents, using the following four methods.

You can work with any attribute on any element using the attr() and removeAttr() methods.

If you use the attr() method to update an attribute that does not exist, it will create the attribute and give it the specified value.

The value of the class attribute can hold more than one class name (each separated by a space). The addClass() and removeClass() methods are very powerful because they let you add or remove an individual class name within the value of the class attribute (and they do not affect any other class names).

.attr()

This method can get or set a specified attribute and its value. To get the value of an attribute, you specify the name of the attribute in the parentheses.

```
$('li#one').attr('id');
```

To update the value of an attribute, you specify both the attribute name and its new value.

```
$('li#one').attr('id', 'hot');
```

.removeAttr()

This method removes a specified attribute (and its value). You just specify the name of the attribute that you want to remove from the element in the parentheses.

```
$('li#one').removeAttr('id');
```

.addClass()

This method adds a new value to the existing value of the class attribute. It does not overwrite existing values.

.removeClass()

This method removes a value from the class attribute, leaving any other class names within that attribute intact.

These two methods are another good example of how jQuery adds helpful functionality commonly needed by web developers.

WORKING WITH ATTRIBUTES

The statements in this example use jQuery methods to change the class and id attributes of the specified HTML elements.

When the values of these attributes change, new CSS rules are applied to the elements, changing how they look.

Using events to trigger changes to attribute values that apply new CSS rules is a popular way to make a web page interactive.

JAVASCRIPT

```
$(function() {  
 ①  $('li#three').removeClass('hot'); —  
 ②  $('li.hot').addClass('favorite'); —  
 ③  $('ul').attr('id', 'group');  
});
```

c07/js/attributes.js

1. The first statement finds the third list item (it has an id attribute with a value of three) and removes hot from the class attribute on that element. This is important to note because it affects the next statement.

2. The second statement selects all `<i>` elements whose class attribute has a value of hot. It adds a new class name called favorite. Because step 1 updated the third list item, this statement affects only the first two.

3. The third statement selects the `` element and adds an id attribute, giving it a value of group (which triggers a CSS rule that will add a margin and border to the `` element).

RESULT



GETTING & SETTING CSS PROPERTIES

The `.css()` method lets you retrieve and set the values of CSS properties.

To **get** the value of a CSS property, you indicate which property you want to retrieve in parentheses. If the matched set contains more than one element, it will return the value from the first element.

To **set** the values of a CSS property, you specify the property name as the first argument in the parentheses, then a comma, followed by its value as the second argument. This will update every element in the matched set. You can also specify multiple properties in the same method using object literal notation.

Note: In the method used to set an individual property, the property name and its value are separated by a comma (because all parameters in a method are separated by a comma).

In the object literal notation, properties and their values are separated by a colon.

HOW TO GET A CSS PROPERTY

This will store the background color of the first list item in a variable called `backgroundColor`. The color will be returned as an RGB value.

`var backgroundColor = $('li').css('background-color');` *value*

HOW TO SET A CSS PROPERTY

This will set the background color of all list items. Note how the CSS property and its value are separated using a comma instead of a colon.

`$('li').css('background-color', '#272727');`

When dealing with dimensions that are specified in pixels, you can increase and decrease the values using the `+=` and `-=` operators.

`$('li').css('padding-left', '+=20');`

SETTING MULTIPLE PROPERTIES

You can set multiple properties using **object literal notation**:

- Properties and values are placed in curly braces
 - A colon is used to separate property names from their values
 - A comma separates each pair (but there is not one after the last pair)
- This sets the background color and typeface for all list items.

`$('li').css({
 'background-color': '#272727',
 'font-family': 'Courier'
});`

properties

like dictionary

value

CHANGING CSS RULES

This example demonstrates how the `.css()` method can be used to select and update the CSS properties of elements.

The script checks what the background color of the first list item is when the page loads and then writes it after the list.

Next, it updates several CSS properties in all list items using the same `.css()` method with object literal notation.

JAVASCRIPT

```
$(function() {  
    ① var backgroundColor = $('li').css('background-color');  
    ② $('ul').append('<p>Color was: ' + backgroundColor + '</p>');  
    ③ $('li').css({  
        'background-color': '#c5a996',  
        'border': '1px solid #fff',  
        'color': '#000',  
        'font-family': 'Georgia',  
        'padding-left': '+=75'  
    });  
});
```

c07/js/css.js


1. The `backgroundColor` variable is created. The jQuery selection contains all `` elements, and the `.css()` method returns the value of the `background-color` property of the first list item.

2. The background color of the first list item is written into the page using the `.append()` method (which you met on p318). Here, it is used to add content after the `` element.

3. The selector picks all `` elements, and then the `.css()` method updates several properties at the same time:

- The background color is changed to brown
- A white border is added
- The color of the text is changed to black
- The typeface is changed to Georgia
- Extra padding is added on the left

RESULT

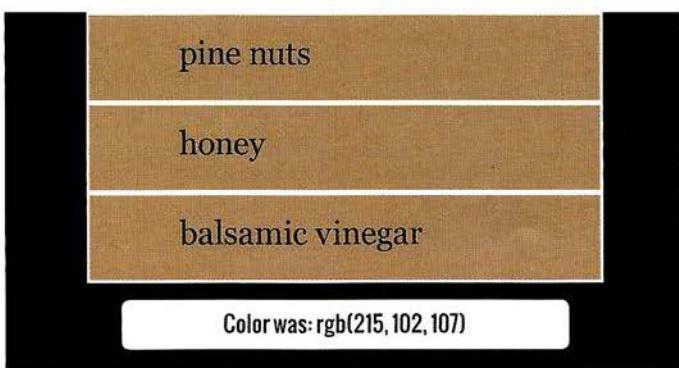

Note: It is better to change the value of a `class` attribute (to trigger new CSS rules in the style sheet) rather than to change CSS properties from within the JavaScript file itself.

WORKING WITH EACH ELEMENT IN A SELECTION

jQuery allows you to recreate the functionality of a loop on a selection of elements, using the .each() method.

You have already seen several jQuery methods that update all of the elements in a matched set without the need for a loop.

There are, however, times when you will want to loop through each of the elements in the selection. Often this will be to:

- Get information from each element in the matched set.
- Perform a series of actions on each of the elements.

The .each() method is provided for this purpose. The parameter of the .each() method is a function. This could be an anonymous function (as shown here) or a named function.

.each()

Allows you to perform one or more statements on each of the items in the selection of elements that is returned by a selector – rather like a loop in JavaScript.

It takes one parameter:
a function containing the statements you want to run on each element.

```
① ②
$(‘li’).each(function() {
  var ids = this.id;
  $(this).append(‘ <em class=“order”>’ + ids + ‘</em>’);
});
```

1. The jQuery selection contains all of the elements.
2. .each() applies the same code to each element in the selection.
3. An anonymous function is run for each of the items in the list.

Since this refers to the current node, if you want to access a property of that node, e.g., that element's id or class attributes, it is better to use plain JavaScript to access those attributes:
ids = this.id;


this or \$(this)

As the .each() method goes through the elements in a selection, you can access the current element using the this keyword.

You also often see \$(this), which uses the this keyword to create a new jQuery selection containing the current element. It allows you to use jQuery methods on the current element.

It is more efficient than writing
ids = \$(this).attr('id');
because this would involve
the interpreter creating a new
jQuery object, and then using
a method to access info that is
available as a property.

USING .EACH()



This example creates a jQuery object containing all of the list items from the page.

The `.each()` method is then used to loop through the list items and run an anonymous function for each of them.

The anonymous function takes the value from the id attribute on the `` element and adds it to the text in the list item.

JAVASCRIPT

```
$(function() {
  $('li').each(function() {
    var ids = this.id;
    $(this).append(' <span class="order">' + ids + '</span>');
  });
});
```

c07/js/each.js

1. The selector creates a jQuery object containing all `` elements. The `.each()` method calls an anonymous function for each of the list items in the matched set.

2. The `this` keyword refers to the current element node in the loop. It is used to access the value of the current element's `id` attribute, which is stored in a variable called `ids`.

3. `$(this)` is used to create a jQuery object that contains the current element in the loop.

Having the element in a jQuery object enables you to use jQuery methods on that element. In this case the `.append()` method is used to add a new `` element to the current list item.

RESULT



The content of that element is the value of its `id` attribute, which was obtained in step 2.

EVENT METHODS

The .on() method is used to handle all events.

Behind the scenes, jQuery handles all of the cross-browser issues you saw in the last chapter.

Using the .on() method is no different than using any other jQuery method; you:

- Use a selector to create a jQuery selection.
- Use .on() to indicate which event you want to respond to. It adds an event listener to each element in the selection.

.on() was introduced in v 1.7 of jQuery. Prior to that, jQuery used separate methods for each event, e.g., .click() and .focus(). You may come across them in older code, but you should only use the .on() method now.

```
① ② ③
$('li').on('click', function() {
  $(this).addClass('complete');
});
```

1. The jQuery selection contains all of the elements.
2. The .on() method is used to handle events. It needs two parameters:
3. The first parameter is the event you want to respond to. Here it is the click event.
4. The second parameter is the code you want to run when that event occurs on any element in the matched set. This could be a named function or an anonymous function. Above, it is an anonymous function that adds a value of complete to the class attribute.

You will see more advanced options for this method on p330.

JQUERY EVENTS

Some of the most popular events that .on() deals with are listed below. jQuery also added some extras to make life easier, such as ready, which fires when the page is ready to be worked with. These are noted with a pink asterisk: *

UI	focus, blur, change
KEYBOARD	input, keydown, keyup, keypress
MOUSE	click, dblclick, mouseup, mousedown, mouseover, mousemove, mouseout, hover*
FORM	submit, select, change
DOCUMENT	ready*, load, unload*
BROWSER	error, resize, scroll

EVENTS

In this example, when the mouse moves over a list item, the content of its id attribute is written into the list item.

The same happens if the user clicks on a list item (because mouseover does not work on touchscreen devices).

The mouseout event also removes this extra information from the page to prevent the added content building up.

JAVASCRIPT

c07/js/events.js

```
$(function() {
  var ids = '';
  ① var $listItems = $('li');

  ② $listItems.on('mouseover click', function() {
    ids = this.id;
    $listItems.children('span').remove();
    $(this).append(' <span class="priority">' + ids + '</span>');
  });

  ③ $listItems.on('mouseout', function() {
    $(this).children('span').remove();
  });
});
```

1. The selector finds all list items on the page. The resulting jQuery object is used more than once, so it is stored in a variable called \$listItems.

2. The .on() method creates an event listener, which waits for when the user moves a mouse over a list item or clicks on it. It triggers an anonymous function.


Note how the two events are specified in the same set of quote marks, with a space between them.

The anonymous function:

- Gets the value of the id attribute on that element.
- Removes elements from all of the list items.
- Adds the value of the id attribute to the list item in a new element.

3. The .mouseout() method triggers the removal of any child elements to prevent build-up of added values.

RESULT

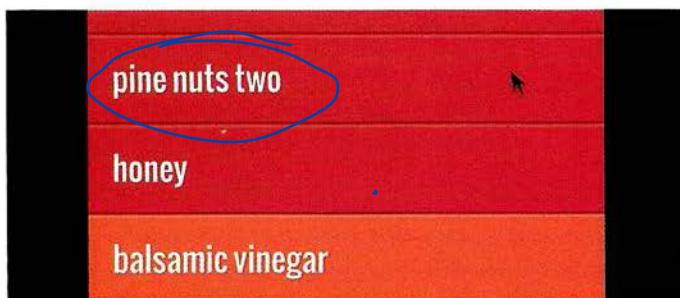

THE EVENT OBJECT

Every event handling function receives an event object.

It has methods and properties related to the event that occurred.

Just like the JavaScript event object, the jQuery event object has properties and methods that tell you more about the event that took place.

If you look at the function that is called when the event occurs, the **event object is named in the parentheses**. Like any other parameter, this name is then used within the function to refer to the event object.

The example on the right uses the letter **e as shorthand for the event object**. However, as noted in the previous chapter, you should be aware that this shorthand is also often used for the error object.

```
$('li').on('click' function(e) {  
    eventType = e.type;  
});
```

② ③

1. Give the event object a parameter name.
2. Use that name in the function to reference the event object.
3. Access the properties and methods of the object using the familiar dot notation (the member operator).

PROPERTY	DESCRIPTION
type	Type of event, (e.g., click, mouseover)
which	Button or key that was pressed
data	An object literal containing extra information passed to the function when the event fires (See right-hand page for an example)

target	DOM element that initiated the event
pageX	Mouse position from left edge of viewport
pageY	Mouse position from top of viewport
timeStamp	Number of milliseconds from Jan 1st, 1970, to when the event was triggered (this is known as Unix Time). Does not work in Firefox.

METHOD	DESCRIPTION
.preventDefault()	Prevents the default (e.g., submitting a form)
.stopPropagation()	Stops the event bubbling up to ancestors

EVENT OBJECT

In this example, when users click on a list item, the date that the event happened on is written next to that item, along with the type of event that triggered it.

To achieve this, two properties of the event object will be used:
timeStamp states when the event occurred; **type** states the kind of event that triggered it.

To prevent the list from becoming cluttered with multiple date entries, whenever a list item is clicked, any **** elements will be removed from the list.

JAVASCRIPT

```
$(function() {  
  $('li').on('click' function(e) {  
    ①    $('li span').remove();  
    ②    var date = new Date();  
    ③    date.setTime(e.timeStamp);  
    ④    var clicked = date.toDateString();  
    $(this).append('<span class="date">' + clicked + ' ' + e.type + '</span>');  
  });  
});
```

c07/js/event-object.js

1. Any **** elements that already exist inside the **** elements are removed.

2. A new Date object is created, and its time is set to the time at which the event was clicked.

3. The time the event was clicked is then converted into a date that can be read.

4. The date that the list item was clicked is written into the list item (along with the type of event that was used).

RESULT



Note that the **timeStamp** property does not display in Firefox.

ADDITIONAL PARAMETERS FOR EVENT HANDLERS

The `.on()` method has two optional properties that let you:
Filter the initial jQuery selection to respond to a subset of the elements;
Pass extra information into the event handler using object literal notation.

Here you can see two additional properties that can be used with the `.on()` method.

When square brackets are used inside a method, they signify that the parameter is optional.

Leaving out a parameter written in square brackets will not stop the method working.

1. This is the event(s) that you want to respond to. If you want to respond to more than one event, you can provide a space-separated list of event names, e.g., 'focus click' will work on both focus *and* click.

2. If you just want to respond to the event happening on a *subset* of the elements in the initial jQuery selection, you can provide a second selector that will filter its descendants.

3. You can pass extra information to the function that is called when the event is triggered. This information is passed along with the event object (`e`).

`.on(events[, selector][, data], function(e));`



4. This is the function that should be run when the specified events occur on one of the elements in the matched set.

5. The function is automatically passed the event object as a parameter, as you saw on the previous two pages. (Remember, if you use it you must give it a name in the parentheses.)

Older jQuery scripts may use the `.delegate()` method for delegation. However, since jQuery 1.7 `.on()` is the preferred approach to delegation.

DELEGATING EVENTS

In this example, the event handler will run when users click or mouseover items in the list, except for the last list item.

It writes out the content of the element the user interacted with, a status message (using the data property), and the event type.

The information passed in the data property here uses object literal notation (so it could handle multiple properties).

JAVASCRIPT

```
$(function() {
    var listItem, itemStatus, eventType;

    $('ul').on(
        ① 'click mouseover',
        ② ':not(#four)',
        ③ {status: 'important'},
        ④ function(e) {
            listItem = 'Item: ' + e.target.textContent + '<br />';
            itemStatus = 'Status: ' + e.data.status + '<br />';
            eventType = 'Event: ' + e.type;
            $('#notes').html(listItem + itemStatus + eventType);
        }
    );
});
```

c07/js/event-delegation.js

RESULT



There is an extra element in the HTML for this example to hold the data that appears under the list.

1. The event handler is triggered by click and mouseover events.

2. The selector parameter filters *out* the element whose id attribute has a value of four.

3. Additional data that will be used by the event handler is passed in as an object literal.

4. The event handler uses the event object to display the content of the element the user interacts with, the information from the data that was passed into the function, and the event type, under the list in a white box.

EFFECTS

When you start using jQuery, the effects methods can enhance your web page with transitions and movement.

Here you can see some of the jQuery effects that show or hide elements and their content. You can animate them fading in and out, or slide them up and down.

When an element that was previously hidden is shown, faded in, or slides into view, the other elements on the page may move to make space for it.

When an element is hidden, has been faded out, or has slid out of view, the other elements on the page can move into the space these elements took up.

Methods with `toggle` in their name will look at the current state of the element (whether it is visible or hidden) and will switch to the opposite state.

Increasingly it is possible to create animations using CSS3. They are often faster than their jQuery counterparts, but they only work in recent browsers.

BASIC EFFECTS

METHOD	DESCRIPTION
<code>.show()</code>	Displays selected elements
<code>.hide()</code>	Hides selected elements
<code>.toggle()</code>	Toggles between showing and hiding selected elements

FADING EFFECTS

METHOD	DESCRIPTION
<code>.fadeIn()</code>	Fades in selected elements making them opaque
<code>.fadeOut()</code>	Fades out selected elements making them transparent
<code>.fadeTo()</code>	Changes opacity of selected elements
<code>.fadeToggle()</code>	Hides or shows selected elements by changing their opacity (the opposite of their current state)

SLIDING EFFECTS

METHOD	DESCRIPTION
<code>.slideUp()</code>	Shows selected elements with a sliding motion
<code>.slideDown()</code>	Hides selected elements with a sliding motion
<code>.slideToggle()</code>	Hides or shows selected elements with a sliding motion (in the opposite direction to its current state)

CUSTOM EFFECTS

METHOD	DESCRIPTION
<code>.delay()</code>	Delays execution of subsequent items in queue
<code>.stop()</code>	Stops an animation if it is currently running
<code>.animate()</code>	Creates custom animations (see p334)

BASIC EFFECTS

In this example, it appears as if list items are faded into view when the page loads. Each item is faded out when it is clicked on.

In fact, the items are loaded normally along with the rest of the page, but then immediately hidden using JavaScript.

Once hidden, only then are they faded into view. This is so they will still be visible in browsers that do not have JavaScript enabled.

JAVASCRIPT

```
$(function() {
    $('h2').hide().slideDown();
    var $li = $('li');
    $li.hide().each(function(index) {
        $(this).delay(700 * index).fadeIn(700);
    });
    $li.on('click', function() {
        $(this).fadeOut(700);
    });
});
```

c07/js/effects.js

1. In the first statement, the selector picks the `<h2>` element and hides it so that it can be animated in. The chosen effect to show the heading is the `.slideDown()` method. Note how the methods are chained; there is no need to make a new selection for each of the tasks.


2. The second part causes the list of items to appear one by one. Again, before they can be faded in, they must be hidden. Then the `.each()` method is used to loop through each of the `` elements in turn. You can see that this triggers an anonymous function.

Inside the anonymous function, the `index` property acts as a counter indicating which `` element is the current one.

The `.delay()` method creates a pause before the list item is shown. The delay is set, multiplying the index number by 700 ms (otherwise all of the list items would appear at the same time). Then it is faded in using the `fadeIn()` method.

3. The final part creates an event listener that waits for the user to click on a list item. When they do, it will fade that item out to remove it from the list (the fade will take 700 milliseconds).

RESULT

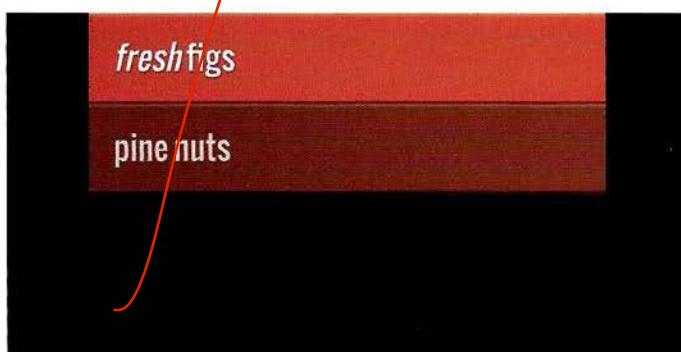

ANIMATING CSS PROPERTIES

The `.animate()` method allows you to create some of your own effects and animations by changing CSS properties.

You can animate any CSS property whose value can be represented as a number, e.g., `height`, `width`, and `font-size`. But not those whose value would be a string, such as `font-family` or `text-transform`.

The CSS properties are written using camelCase notation, so the first word is all lowercase and each subsequent word starts with an uppercase character, e.g.: `border-top-left-radius` would become `borderTopLeftRadius`.

The CSS properties are specified using object literal notation (as you can see on the right-hand page). The method can also take three optional parameters, shown below.

```
.animate({
    // Styles you want to change
}, [speed][, easing][, complete]);
```



1. `speed` indicates the duration of the animation in milliseconds. (It can also take the keywords `slow` and `fast`.)

2. `easing` can have two values: `linear` (the speed of animation is uniform); or `swing` (speeds up in the middle of the transition, and is slower at start and end).

3. `complete` is used to call a function that should run when the animation has finished. This is known as a **callback function**.

EXAMPLES OF JQUERY EQUIVALENTS OF CSS PROPERTY NAMES

```
bottom left right top backgroundPositionX backgroundPositionY height width
maxHeight minHeight maxWidth minWidth margin marginBottom marginLeft marginRight
marginTop outlineWidth padding paddingBottom paddingLeft paddingRight paddingTop
fontSize letterSpacing wordSpacing lineHeight textIndent borderRadius borderWidth
borderBottomWidth borderLeftWidth borderRightWidth borderTopWidth borderSpacing
```

USING ANIMATION

In this example, the `.animate()` method is used to gradually change the values of two CSS properties. Both of them have numerical values: `opacity` and `padding-left`.

When the user clicks on a list item, it fades out and the text content slides to the right. (This takes 500ms.) Once that is complete, a callback function removes the element.

You can increase or decrease numeric values by a specific amount. Here, `+=80` is used to increase the `padding` property by 80 pixels. (To decrease it by 80 pixels, you would use `-=80`.)

JAVASCRIPT

```
$(function() {  
  $('li').on('click', function() {  
    $(this).animate({  
      opacity: 0.0,  
      paddingLeft: '+=80'  
    }, 500, function() {  
      $(this).remove();  
    });  
  });  
});
```

c07/js/animate.js

1. All list items are selected and, when a user clicks on one of them, an anonymous function runs. Inside it, `$(this)` creates a new jQuery object holding the element the user clicked on. The `.animate()` method is then called on that jQuery object.

2. Inside the `.animate()` method, the `opacity` and `paddingLeft` are changed. The value of the `paddingLeft` property is increased by 80 pixels, which makes it look like the text is sliding to the right as it fades out.

3. The `.animate()` method has two more parameters. The first is the speed of the animation in milliseconds (in this case, 500ms). The second is another anonymous function indicating what should happen when the animation finishes.

4. When the animation has finished, the callback function removes that list item from the page using the `.remove()` method.

If you want to animate between two colors, rather than using the `.animate()` method, there is a helpful jQuery color plugin here:

<https://github.com/jquery/jquery-color>

RESULT



TRAVERSING THE DOM

When you have made a jQuery selection, you can use these methods to access other element nodes relative to the initial selection.

Each method finds elements that have a different relationship to those that are in the current selection (e.g., parents or children of the current selection).

The `.find()` and `.closest()` methods both *require* a CSS-style selector as an argument.

For the other methods, the CSS-style selector is optional. But if a selector is provided, both the method and selector must match in order for the element to be added to the new selection.

For example, if you start with a selection that contains one list item, you could create a new selection containing the other items from the list using the `.siblings()` method.

If you added a selector into the method such as this:

`.siblings('.important')`
then it would find only siblings with a class attribute whose value included `important`.

SELECTOR REQUIRED

METHOD	DESCRIPTION
<code>.find()</code>	All elements within current selection that match selector
<code>.closest()</code>	Nearest ancestor (not just parent) that matches selector

SELECTOR OPTIONAL

METHOD	DESCRIPTION
<code>.parent()</code>	Direct parent of current selection
<code>.parents()</code>	All parents of current selection
<code>.children()</code>	All children of current selection
<code>.siblings()</code>	All siblings of current selection
<code>.next()</code>	Next sibling of current element
<code>.nextAll()</code>	All subsequent siblings of current element
<code>.prev()</code>	Previous sibling of current element
<code>.prevAll()</code>	All previous siblings of current element

If the original selection contains multiple elements, these methods will work on all of the elements in the selection (which can result in quite an odd selection of elements). You may need to narrow down your initial selection before traversing the DOM.

Behind the scenes, jQuery will handle the cross-browser inconsistencies involved in traversing the DOM (such as whitespace nodes being added by some browsers).

TRAVERSING

When the page loads, the list is hidden, and a link is added to the heading that indicates the users can display the list if they wish.

The link is added inside the heading and, if the user clicks anywhere on the `<h2>` element, the `` element is faded in.

Any child `` elements that have a `class` attribute whose value is `hot` are also given an extra value of `complete`.

JAVASCRIPT

```
$(function() {
  var $h2 = $('h2');
  $('ul').hide();
  $h2.append('<a>show</a>');

①  $h2.on('click', function() {
②    $h2.next()
③      .fadeIn(500)
④      .children('.hot')
⑤      .addClass('complete');
⑥    $h2.find('a').fadeOut();
});

});
```

c07/js/traversing.js

1. A click event anywhere in the `<h2>` element will trigger an anonymous function.
2. The `.next()` method is used to select the next sibling after the `<h2>` element, which is the `` element.

3. The `` is faded into view.
4. The `.children()` method then selects any child elements of the `` element, and the selector indicates that it should pick only those whose `class` attribute has a value of `hot`.

5. The `.addClass()` method is then used on those `` elements to add a class name of `complete`. This shows how you can chain methods and traverse from one node to another.
6. In the last step, the `.find()` method can be used to select the `<a>` element that is a child of the `<h2>` element and fade it out because the list is now being shown to the users.

RESULT



ADD & FILTER ELEMENTS IN A SELECTION

Once you have a jQuery selection, you can add more elements to it, or you can filter the selection to work with a subset of the elements.

The `.add()` method allows you to add a new selection to an existing one.

The second table on the right shows you how to find a subset of your original selection.

The methods take another selector as a parameter and return a filtered matched set.

The items in this table that begin with a colon can be used wherever you would use a CSS-style selector.

The `:not()` and `:has()` selectors take another CSS-style selector as a parameter. There is also a selector called `:contains()` that lets you find elements that contain specific text.

The `.is()` method lets you use another selector to check whether the current selection matches a condition. If it does, it will return true. This is helpful in conditional statements.

ADDING ELEMENTS TO A SELECTION

METHOD	DESCRIPTION
<code>.add()</code>	Selects all elements that contain the text specified (parameter is case sensitive)

FILTERING WITH A SECOND SELECTOR

METHOD / SELECTOR	DESCRIPTION
<code>.filter()</code>	Finds elements in matched that in turn match a second selector
<code>.find()</code>	Finds descendants of elements in matched set that match the selector
<code>.not() / :not()</code>	Finds elements that do not match the selector
<code>.has() / :has()</code>	Finds elements from the matched set that have a descendant that matches the selector
<code>:contains()</code>	Selects all elements that contain the text specified (parameter is case sensitive)

The following two selectors are equivalent:

```
$('.li').not('.hot').addClass('cool');  
$('.li:not(.hot)').addClass('cool');
```

In browsers that support `querySelector()` / `querySelectorAll()`, `:not()` is faster than `.not()` and `:has()` is faster than `.has()`

TESTING CONTENT

METHOD	DESCRIPTION
<code>.is()</code>	Checks whether current selection matches a condition (returns Boolean)

FILTERS IN USE

This example selects all list items and then uses different filters to select a subset of the items from the list to work with.

The example uses both the filtering methods as well as the CSS-style pseudo-selector :not().

Once the filters have selected a subset of the list items, other jQuery methods are used to update them.

JAVASCRIPT

```
var $listItems = $('li');
① $listItems.filter('.hot:last').removeClass('hot');
② $('li:not(.hot)').addClass('cool');
③ $listItems.has('em').addClass('complete');

④ $listItems.each(function() {
  var $this = $(this);
  if ($this.is('.hot')) {
    $this.prepend('Priority item: ');
  }
});

⑤ $('li:contains("honey")').append(' (local)');
```

c07/js/filters.js

1. The .filter() method finds the last list item with a class attribute whose value is hot. It then removes that value from the class attribute.

2. The :not() selector is used within the jQuery selector to find elements without a value of hot in their class attribute and adds a value of cool.

3. The .has() method finds the element that has an element within it and adds the value complete to the class attribute.

RESULT



4. The .each() method loops through the list items. The current element is cached in a jQuery object. The .is() method looks to see if the element has a class attribute whose value is hot. If it does, 'Priority item: ' is added to the start of the item.

5. The :contains selector checks for elements that contain the text "honey" and appends the text " (local)" to the end of those items.

FINDING ITEMS BY ORDER

Each item returned by a jQuery selector is given an index number, which can be used to filter the selection.

The jQuery object is sometimes referred to as being an **array-like** object because it assigns a number to each of the elements that is returned by a selector. That number is an index number, which means it starts at 0.

You can filter the selected elements based on this number using methods or these additional CSS-style selectors that jQuery has added.

Methods are applied to the jQuery selection, whereas selectors are used as part of the CSS-style selector.

On the right, you can see a selector which picks all of the `` elements from the list example used throughout this chapter. The table shows each list item and its corresponding index number. The example on the next page will use these numbers to select list items and update their `class` attributes.

FINDING ELEMENTS BY INDEX NUMBER

METHOD / SELECTOR DESCRIPTION

<code>.eq()</code>	The element that matches the index number
<code>:lt()</code>	Elements with an index less than the number specified
<code>:gt()</code>	Elements with an index greater than the number specified

`$('li')`

INDEX HTML

0	<code><li id="one" class="hot">fresh figs</code>
1	<code><li id="two" class="hot">pine nuts</code>
2	<code><li id="three" class="hot">honey</code>
3	<code><li id="four">balsamic vinegar</code>

USING INDEX NUMBERS

This example demonstrates how jQuery gives an index number to each of the elements in the jQuery selection.

The :lt() and :gt() selectors and the .eq() method are used to find elements based on their index numbers.

For each of the matching elements, the value of the class attributes are changed.

JAVASCRIPT

```
$(function() {  
①  $('li:lt(2)').removeClass('hot');  
②  $('li').eq(0).addClass('complete');  
③  $('li:gt(2)').addClass('cool');  
});
```

c07/js/index-numbers.js

1. The :lt() selector is used in the selector to pick list items with an index number less than 2. It removes the value hot from their class attribute.

2. The .eq() method selects the first item (using the number 0 because the index numbers start at zero). It adds the value of complete to the class attribute.

3. The :gt() selector is used in the jQuery selector to pick the list items with an index number higher than 2. It adds a value of cool to their class attribute.

RESULT



SELECTING FORM ELEMENTS

jQuery has selectors that are designed specifically to work with forms, however, they are not always the quickest way to select elements.

If you use one of these selectors on its own, jQuery will examine each element in the document to find a match (using code in the jQuery file, which is not as quick as CSS selectors).

Therefore, you should narrow down the part of the document the script needs to look through by placing an element name or other jQuery selector before using the selectors shown on this page.

You can also access elements in a form using the same selectors used to pick any element in jQuery. This will often be the faster option.

It is also worth noting that, because jQuery handles inconsistencies in the way browsers treat whitespace, it is easier to traverse between form elements using jQuery than it is when you are using plain JavaScript.

SELECTORS FOR FORM ELEMENTS

SELECTOR DESCRIPTION

<code>:button</code>	<code><button></code> and <code><input></code> elements whose type attribute has a value of button
<code>:checkbox</code>	<code><input></code> elements whose type attribute has a value of checkbox. Note that you get better performance with <code>\$('input[type="checkbox"]')</code>
<code>:checked</code>	Checked elements from checkboxes and radio buttons (see <code>:selected</code> for select boxes)
<code>:disabled</code>	All elements that have been disabled
<code>:enabled</code>	All elements that are enabled
<code>:focus</code>	Element that currently has focus. Note that you get better performance with <code>\$(document.activeElement)</code>
<code>:file</code>	All elements that are file inputs
<code>:image</code>	All image inputs. Note that you get better performance using <code>[type="image"]</code>
<code>:input</code>	All <code><button></code> , <code><input></code> , <code><select></code> , and <code><textarea></code> elements. Note that you get better performance from selecting elements, then using <code>.filter(":input")</code>
<code>:password</code>	All password inputs. Note that you get better performance using <code>\$('input:password')</code>
<code>:radio</code>	All radio inputs. To select a group of radio buttons, you can use <code>\$('input[name="gender"]:radio')</code>
<code>:reset</code>	All inputs that are reset buttons
<code>:selected</code>	All elements that are selected. Note that you get better performance using a CSS selector inside the <code>.filter()</code> method, e.g., <code>.filter(":selected")</code>
<code>:submit</code>	<code><button></code> and <code><input></code> elements whose type attribute has a value of submit. Note that you will get better performance using <code>[type="submit"]</code>
<code>:text</code>	Selects <code><input></code> elements with a type attribute whose value is text, or whose type attribute is not present. You will likely get better performance from <code>('input:text')</code>

FORM METHODS & EVENTS

RETRIEVE THE VALUE OF ELEMENTS

METHOD DESCRIPTION

.val()	Primarily used with <input>, <select>, and <textarea> elements. It can be used to get the value of the first element in a matched set, or update the value of all of them.
---------------	--

The .val() method gets the value of the first <input>, <select>, or <textarea> element in a jQuery selection.

It can also be used to set the value for all matching elements.

OTHER METHODS

METHOD DESCRIPTION

.filter()	Used to filter a jQuery selection using a second selector (especially form-specific filters)
.is()	Often used with filters to check whether a form input is selected/checked
\$.isNumeric()	Checks whether the value represents a numeric value and returns a Boolean. It returns true for the following: \$.isNumeric(1) \$.isNumeric(-3) \$.isNumeric("2") \$.isNumeric(4.4) \$.isNumeric(+2) \$.isNumeric(0xFF)

The .filter() and .is() methods are commonly used with form elements. You met them on p338.

\$.isNumeric() is a global method. It is not used on a jQuery selection; rather, the value you want to test is passed as an argument.

EVENTS

METHOD DESCRIPTION

.on()	Used to handle all events
--------------	---------------------------

EVENT	DESCRIPTION
blur	When an element loses focus
change	When the value of an input changes
focus	When an element gains focus
select	When the option for a <select> element is changed
submit	When a form is submitted

All of the event methods on the left correspond to JavaScript events that you might use to trigger functions. As with other jQuery code, they handle the inconsistencies between browsers behind the scenes.

jQuery also makes it easier to work with a group of elements (such as radio buttons, checkboxes, and the options in a select box), because, once you have selected the elements, you can simply apply individual methods to each of them without having to write a loop.

When submitting a form, there is also a helpful method called **.serialize()** which you will learn about on p394-p395.

There is an example using forms on the next page, and there are more examples in Chapter 13.

WORKING WITH FORMS

In this example, a button and form have been added under the list. When the user clicks on the button to add a new item, the form will come into view.

The form lets users add a new item to the list with a single text input and a submit button.
(The new item button is hidden when the form is in view.)

When the user presses the submit button, the new item is added to the bottom of the list.
(The form is also hidden and the new item button is shown again.)

c07/form.html

HTML

```
<!-- list goes here -->...</ul>
<div id="newItemButton"><button href="#" id="showForm">new item</button></div>
<form id=" newItemForm">
  <input type="text" id="itemDescription" placeholder="Add description..." />
  <input type="submit" id="addButton" value="add" />
</form>
```

RESULT

The figure consists of three vertically aligned screenshots of a mobile application interface. All three screenshots share a common header featuring a crown icon and the text 'LISTKING' above a dark red bar labeled 'BUY GROCERIES'.
1. **Initial State:** The list contains four items: 'freshfigs', 'pine nuts', 'honey', and 'balsamic vinegar'. A red button at the bottom is labeled 'NEWITEM'.
2. **Form View:** The list items remain the same. A modal-like form is overlaid on the screen. It has a white input field containing 'Add description...' and a red button labeled 'ADD' to its right.
3. **Result State:** The list now includes five items: 'freshfigs', 'pine nuts', 'honey', 'balsamic vinegar', and 'kale'. The 'NEWITEM' button is back at the bottom.

1. New jQuery objects are created to hold the new item button, the form to add new items, and the add button. These are cached in variables.

2. When the page loads, the CSS hides the new item button (and shows the form), so jQuery methods show the new item button and hide the form.

3. If a user clicks on the new item button (the <button> element whose id attribute has a value of showForm), the new item button is hidden and the form is shown.

JAVASCRIPT

c07/js/form.js

```
$(function() {  
  
    ① var $newButtonItem = $('# newItemButton');  
    var $newItemForm = $('# newItemForm');  
    var $textInput = $('input:text');  
  
    ② $newButtonItem.show();  
    $newItemForm.hide();  
  
    ③ $('#showForm').on('click', function(){  
        $newButtonItem.hide();  
        $newItemForm.show();  
    });  
  
    ④ $newItemForm.on('submit', function(e){  
        ⑤ e.preventDefault();  
        ⑥ var newText = $('input:text').val();  
        ⑦ $('li:last').after('<li>' + newText + '</li>');  
        $newItemForm.hide();  
        $newButtonItem.show();  
        $textInput.val('');  
    });  
  
});
```

4. When the form is submitted, an anonymous function is called. It is passed the event object.
5. The .preventDefault() method can stop the form being submitted.

6. The :text selector picks the <input> element whose type attribute has a value of text, and the .val() method gets the value the user entered into it. This value is stored in a variable called newText.

7. A new item is added to the end of the list using the .after() method.
8. The form is hidden, the new item button is shown again, and the content of the text input is emptied (so the user can add a new entry if they want to).

CUTTING & COPYING ELEMENTS

Once you have a jQuery selection, you can use these methods to remove those elements or make a copy of them.

The `.remove()` method deletes the matched elements and all of their descendants from the DOM tree.

The `.detach()` method also removes the matched elements and all of their descendants from the DOM tree; however, it retains any event handlers (and any other associated jQuery data) so they can be inserted back into the page.

The `.empty()` and `.unwrap()` methods remove elements in relation to the current selection.

The `.clone()` method creates a copy of the matched set of elements (and any descendants). If you use this method on HTML that contains `id` attributes, the value of the `id` attributes would need updating otherwise they would no longer be unique. If you want to pass any event handlers, you should add `true` between the parentheses.

CUT

METHOD DESCRIPTION

<code>.remove()</code>	Removes matched elements from DOM tree (including any descendants and text nodes)
------------------------	---

<code>.detach()</code>	Same as <code>.remove()</code> but keeps a copy of them in memory
------------------------	---

<code>.empty()</code>	Removes child nodes and descendants from any elements in matched set
-----------------------	--

<code>.unwrap()</code>	Removes parents of matched set, leaving matched elements
------------------------	--

COPY

METHOD DESCRIPTION

<code>.clone()</code>	Creates a copy of the matched set (including any descendants and text nodes)
-----------------------	--

PASTE

You saw how to add elements into the DOM tree on p318.

CUT, COPY, PASTE

In this example, you can see parts of the DOM tree being removed, duplicated, and placed elsewhere on the page.

The HTML has an extra `<p>` element after the list, which contains a quote. It is moved to a new position under the heading.

In addition, the first list item is detached from the list and moved to the end of it.


JAVASCRIPT

```
$(function() {
①  var $p = $('p');
②  var $clonedQuote = $p.clone();
③  $p.remove();
④  $clonedQuote.insertAfter('h2');

⑤  var $moveItem = $('#one').detach(),
⑥  $moveItem.appendTo('ul');
});
```

c07/js/cut-copy-paste.js

RESULT

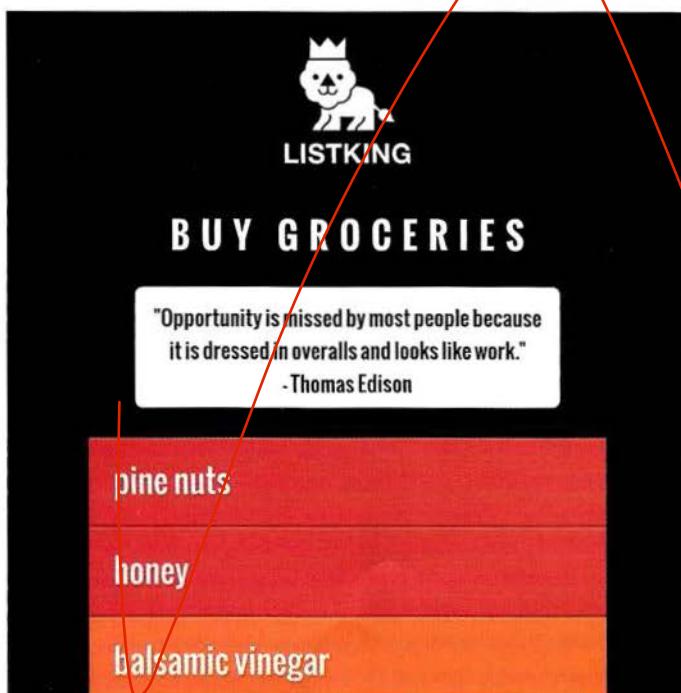

1. A jQuery selection is made containing the `<p>` element at the end of the page, and this is cached in a variable called `$p`.

2. That element is copied using the `.clone()` method (along with its content and child elements). It is stored in a variable called `$clonedQuote`.

3. The paragraph is removed.

4. The cloned version of the quote is inserted after the `<h2>` element at the top of the page.

5. The first list item is detached from the DOM tree and stored in a variable called `$moveItem` (effectively removing it from the DOM tree).

6. That list item is then appended to the end of the list.

BOX DIMENSIONS

These methods allow you to discover or update the width and height of all boxes on the page.

CSS treats each element on a web page as if it were in its own box. A box can have padding, a border, and a margin. If you set the width or height of the box in CSS, it does not include any padding, border, or margin – they are added to the dimensions.

The methods shown here allow you to retrieve the width and height of the first element in the matched set. The first two also allow you to update the dimensions of all boxes in the matched set.

The remaining methods give different measurements depending on whether you want to include padding, border, and a margin. Note how the `.outerHeight()` and `.outerWidth()` methods take a parameter of `true` if you want the margin included.


When retrieving dimensions, these methods return a number in pixels.

RETRIEVE OR SET BOX DIMENSIONS

METHOD	DESCRIPTION
<code>.height()</code>	Height of box (no margin, border, padding)
<code>.width()</code>	Width of box (no margin, border, padding) (1)

RETRIEVE BOX DIMENSIONS ONLY

METHOD	DESCRIPTION
<code>.innerHeight()</code>	Height of box plus padding
<code>.innerWidth()</code>	Width of box plus padding (2)
<code>.outerHeight()</code>	Height of box plus padding and border
<code>.outerWidth()</code>	Width of box plus padding and border (3)
<code>.outerHeight(true)</code>	Height of box plus padding, border, and margin
<code>.outerWidth(true)</code>	Width of box plus padding, border, and margin (4)

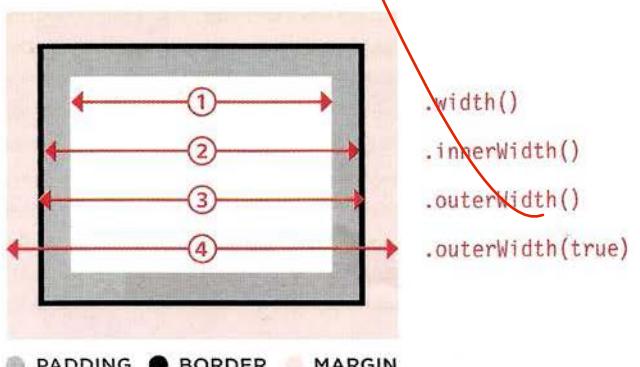

CHANGING DIMENSIONS

This example demonstrates how the `.height()` and `.width()` methods can be used to retrieve and update box dimensions.

The page displays the height of the container. It then changes the width of the list items using percentages and pixels.

JAVASCRIPT

```
$(function() {  
  ①  var listHeight = $('#page').height();  
  ②  $('ul').append('<p>Height: ' + listHeight + 'px</p>');  
  ③  $('li').width('50%');  
  ④  ['$li#one'].width(125);  
  ['$li#two'].width('75%');  
});
```

c07/js/dimensions.js


1. A variable called `listHeight` is created to store the height of the page container. It is obtained using the `.height()` method.

2. The height of the page is written at the end of the list using the `.append()` method and may vary between browsers.

3. The selector picks all the `` elements and sets their width to 50% of their current width using the `.width()` method.

4. These two statements set the width of the first list item to 125 pixels and the width of the second list item to be 75% of the width it was when the page loaded.

RESULT

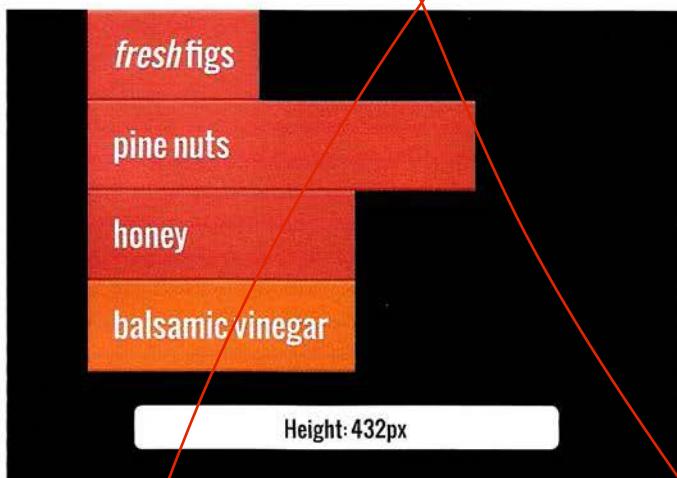

Measurements in percentages or ems should be given as a string, with the suffix % or em. Pixels do not require a suffix and are not enclosed in quotes.

WINDOW & PAGE DIMENSIONS

The `.height()` and `.width()` methods can be used to determine the dimensions of both the browser window and the HTML document. There are also methods to get and set the position of the scroll bars.

On p348, you saw that you can get and set the height or width of a box using the `.height()` and `.width()` methods.

These can also be used on a jQuery selection containing the window or document objects.


The browser can display scroll bars if the height or width of:

- A box's content is larger than its allocated space.
- The current page represented by the document object is larger than the dimensions of the browser window's viewable area (viewport).

The `.scrollLeft()` and `.scrollTop()` methods allow you to get and set the position of the scroll bars.

When retrieving dimensions, these methods return a number in pixels.

METHOD	DESCRIPTION
<code>.height()</code>	Height of the jQuery selection
<code>.width()</code>	Width of the jQuery selection
<code>.scrollLeft()</code>	Gets the horizontal position of the scroll bar for the first element in the jQuery selection, or sets the horizontal scroll bar position for matched nodes
<code>.scrollTop()</code>	Gets the vertical position of the scroll bar for the first element in the jQuery selection, or sets the vertical scroll bar position for matched nodes

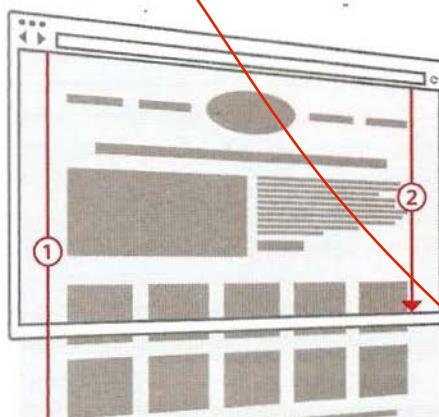


`$(window).height();`
This method will often return the incorrect value unless a DOCTYPE declaration is specified for the HTML page.

POSITION OF ELEMENTS ON THE PAGE

The `.offset()` and `.position()` methods can be used to determine the position of elements on the page.

METHOD	DESCRIPTION
<code>.offset()</code>	Gets or sets coordinates of the element relative to the top left-hand corner of the document object (1)
<code>.position()</code>	Gets or sets coordinates of the element relative to any ancestor that has been taken out of normal flow (using CSS box offsets). If no ancestor is out of normal flow, it will return the same as <code>.offset()</code> (2)

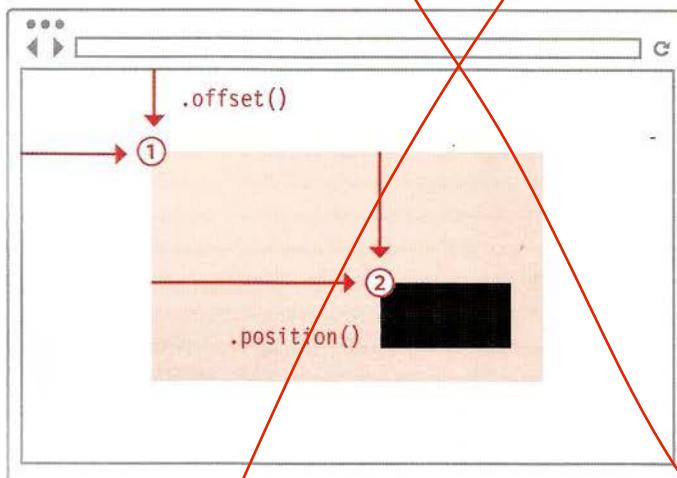

To get the offset or position, store the object that is returned by these methods in a variable. Then use the `left` or `right` properties of the object to retrieve their position.

```
var offset = $('div').offset();
var text = 'Left: ' + offset.left + ' Right: ' + offset.right;
```

The two methods on the left help you to determine the position of an element:

- Within the page.
- In relation to an ancestor that is offset from normal flow.

Each of them returns an object that has two properties:

`top` - the position from the top of the document or containing element.

`left` - the position from the left of the document or containing element.

As with other jQuery methods, when used to retrieve information, they return the co-ordinates of the first element in the matched set.

If they are used to set the position of elements, they will update the position of all elements in the matched set (putting them in the same spot).

DETERMINING POSITION OF ITEMS ON THE PAGE

In this example, as the user scrolls down the page, a box slides into view if they get within 500 pixels of the footer.

We will call this part of the page the end zone, and you need to work out the height at which the endZone starts.

Every time the user scrolls, you then check the position of the scroll bar from the top of the page.

If the scroll bar is further down the page than the start of the end zone, the box is animated into the page. If not, then the box is hidden.

The HTML for this example contains an extra `<div>` element at the end of the page containing the advert. A lot of items have been added to the list to create a long page that scrolls.

c07/position.html

```
...<li>quinoa</li>
</ul>
<p id="footer">&copy; ListKing</p>
<div id="slideAd">
    Buy ListKing Pro for only $1.99
</div>
</div>
<script src="js/jquery-1.9.1.min.js"></script>
<script src="js/position.js"></script>
```

HTML

RESULT



1. Cache the window and advert.

2. The height of the end zone is calculated, and stored in a variable called `endZone`.

3. The `scroll` event triggers an anonymous function every time the user scrolls up or down.

4. A conditional statement checks if the user's position is further from the top of the page than the start of the end zone.

5. If the condition returns true, the box slides in from the right-hand edge of the page. This takes 250 milliseconds.

6. If the condition is false or the box is in the middle of animating, it is stopped using the `.stop()` method. The advert then slides off the right-hand edge of the page. Again, this animation will take 250 milliseconds.

JAVASCRIPT

```
$(function() {  
    ① var $window = $(window);  
    ② var $slideAd = $('#slideAd');  
    ③ var endZone = $('#footer').offset().top - $window.height() - 500;  
  
    ③ $window.on('scroll', function() {  
  
        ④ if ( (endZone) < $window.scrollTop() ) {  
            ⑤ $slideAd.animate({ 'right': '0px' }, 250);  
        } else {  
            ⑥ $slideAd.stop(true).animate({ 'right': '-360px' }, 250);  
        }  
  
    });  
});
```

c07/js/position.js

CALCULATING THE END ZONE

Calculate the height at which the box should come into view by:

a) Getting the height from the top of the page to the top of the footer (the gray bar) in pixels.

b) Subtracting the height of the viewport from this result.


c) Subtracting a further 500px for the area where the box will come into view (shown in pink).

You can tell how far the user has scrolled down the page using:

```
$(window).scrollTop();
```

If the distance extends down further than the height at which the end zone should show, the box should be made visible.

If not, then the box should move off the page.

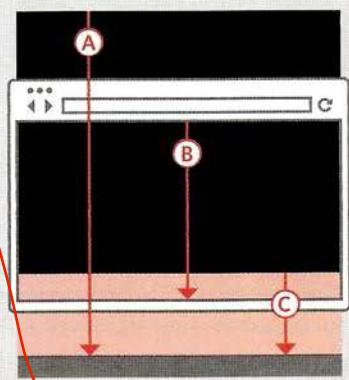


WAYS TO INCLUDE JQUERY IN YOUR PAGE

In addition to hosting the jQuery file with the rest of your website, you can also use a version that is hosted by other companies. However, you should still include a fallback version.

At the time of writing, the main CDNs to offer jQuery are jQuery CDN (powered by MaxCDN), Google, and Microsoft.

● ORIGIN ● CDN ● USER

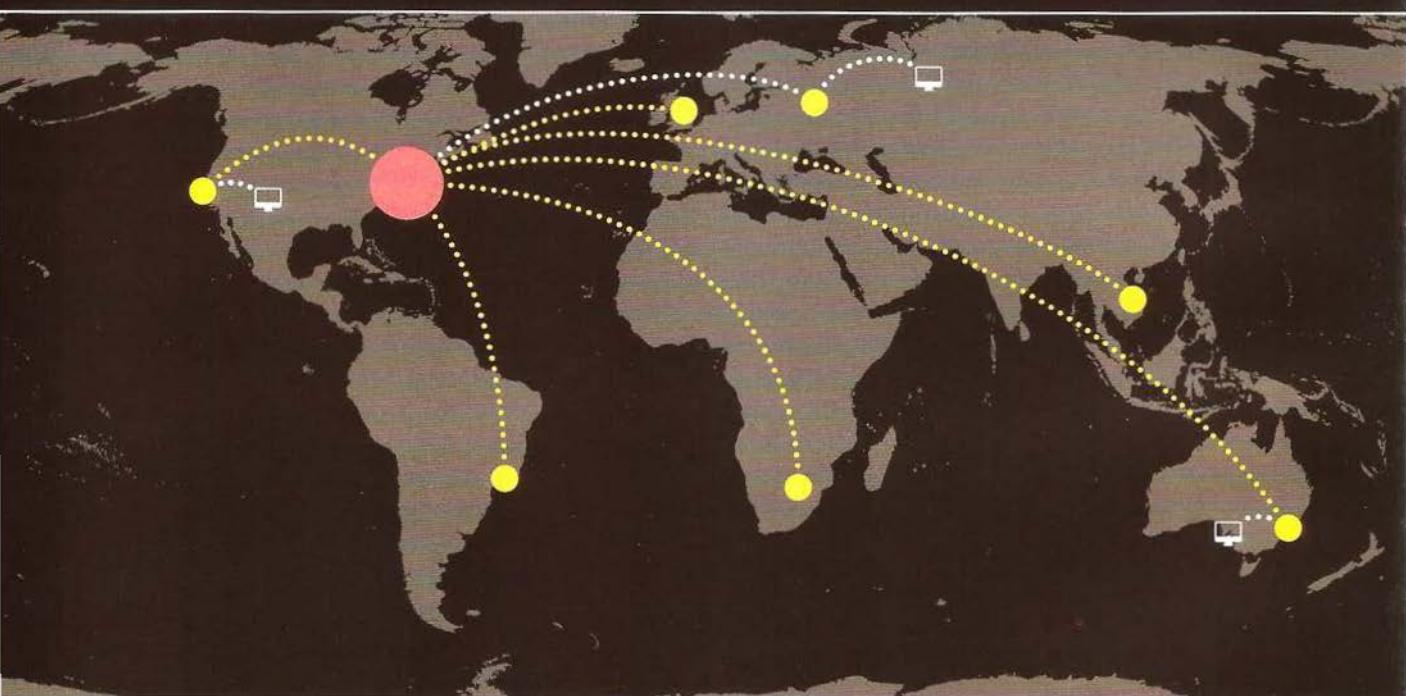

A Content Delivery Network (or CDN) is a series of servers spread out around the world. They are designed to serve static files (such as HTML, CSS, JavaScript, images, audio, and video files) very quickly.

The CDN tries to find a server near you, then sends files from that server so the data does not travel as far. With jQuery, users might have already downloaded and cached the file from a CDN when visiting another site.

When including jQuery in your pages, you can try to load it from one of these CDNs. Then you check if it loaded, and if not, you can include a version that is stored on your own servers (this is known as a fallback).



LOADING JQUERY FROM A CDN

When a page loads jQuery from a CDN, you will often see a syntax like the one shown below. It starts with a `<script>` tag that tries to load the jQuery file from the CDN. But note that the URL for the script starts with two forward slashes (not `http://`).

This is known as a **protocol relative URL**. If the user is looking at the current page through `https`, then they will not see an error that tells them there are unsecure items on the page.

Note: This does not work locally with the `file://` protocol.

This is often followed by a second `<script>` tag that contains a logical operator, which checks to see if jQuery has loaded. If it has not loaded, the browser tries to load the jQuery script from the same server as the rest of the website.

HTML

```
<script src="//ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js">  
</script>  
  
<script>  
window.jQuery || document.write('<script src="js/jquery-1.10.2.js"></script>')  
</script>
```

The logical operator looks for the `jQuery` object that the `jQuery` script makes available. If it exists, then a truthy value is returned and the logical operator short circuits (see p157).

If `jQuery` has not loaded, then the `document.write()` method is used to add a new `<script>` tag into the page. This will load a version of `jQuery` from the same server as the rest of the website.

The fallback option is important because the CDN may be unavailable, the file may have moved, and some countries ban some domain names (such as Google).

WHERE TO PLACE YOUR SCRIPTS



The position of `<script>` elements can affect how quickly a web page seems to load.

SPEED

In the early days of the web, developers were told to place the `<script>` tags in the `<head>` of the page as you do with style sheets. However, this can make pages seem slower to load.

Your web page may use files from several different locations (e.g., images or CSS files might be loaded from one CDN, jQuery could be loaded from the jQuery or Google CDNs, and fonts might be loaded from another third party).

Usually a browser will collect up to two files at a time from each different server. However, when a browser starts to download a JavaScript file, it stops all other downloads and pauses laying out the page until the script has finished loading and been processed.

Therefore, if you place the script at the end of the page before the closing `</body>` tag, it will not affect the rendering of the rest of the page.


Where possible, do consider using alternatives to scripts. For example, use CSS for animations or HTML5's `autofocus` attribute rather than using the `load` event to bring focus to an element.

If your page is slow to load and you only want to include a small amount of code before the rest of the page has loaded, you can place a `<script>` tag within the body of the page.

HTML LOADED INTO THE DOM TREE

Whenever a script is accessing the HTML within a web page, it also needs to have loaded that HTML into the DOM tree before the script can work. (This is often referred to as the DOM having loaded.)

You can use the `load` event to trigger a function so that you know the HTML has loaded. However, it fires only when the page and all of its resources load. You can also use the HTML5 `DOMContentLoaded` event, but it does not work in older browsers.

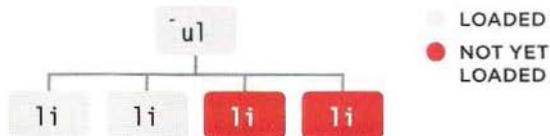

If the script tries to access an element before it has loaded, it causes an error. In the diagram above, the script could access the first two `` elements, but not the third or fourth.

At the time of writing, this technique was commonly used by Google for speed advantages, but it is acknowledged that it makes code much harder to maintain.

```

<!DOCTYPE html>
<html>
  <head>
    <title>Sample Page</title>
    <link rel="stylesheet" href="sample.css" />
    <script src="js/sample.js"></script>
  </head>
  <body>
    <h1>Sample Page</h1>
    <div id="page">Main content here...</div>
  </body>
</html>

```



```

<!DOCTYPE html>
<html>
  <head>
    <title>Sample Page</title>
    <link rel="stylesheet" href="sample.css" />
  <head>
  <body>
    <h1>Sample Page</h1>
    <script src="js/sample.js"></script>
    <div id="page">Main content here...</div>
  </body>
</html>

```



```

<!DOCTYPE html>
<html>
  <head>
    <title>Sample Page</title>
    <link rel="stylesheet" href="sample.css" />
  <head>
  <body>
    <h1>Sample Page</h1>
    <div id="page">Main content here...</div>
    <script src="js/sample.js"></script>
  </body>
</html>

```



IN THE HEAD

This location is best avoided as:

1. Pages seem slower to load.
2. DOM content is not loaded, when the script is executed so you have to wait for an event like `load` or `DOMContentLoaded` to trigger your functions.

If you must use a `<script>` element within the head of the page, it should be just before the closing `</head>` tag.

IN THE PAGE

As with scripts in the `<head>`, those in the middle of the page will slow the rest of the page down when it is loading.

If you use `document.write()`, the `<script>` element has to be placed where you want that content to appear. This is one of several good reasons to avoid using `document.write()`.

BEFORE THE CLOSING `</body>` TAG

This is an ideal location as:

1. The script is not blocking other things from downloading.
2. The DOM has already loaded by the time the script is executed.

JQUERY DOCUMENTATION

For an exhaustive list of the functionality provided in jQuery, visit <http://api.jquery.com>

It is not possible to teach you everything about jQuery in one (albeit long) chapter. But you have seen many of the most popular features, and you should now know enough about jQuery to understand how it works and how to make use of it in your scripts.

Throughout the remaining chapters of this book, you will see many more examples that use jQuery.

What you have learned should also give you enough experience to work with the comprehensive jQuery documentation available online at:
<http://api.jquery.com>

This site lists each method and property available to you, along with new functionality added in the latest versions, and notes that indicate which features are scheduled to be dropped.

HOW THE DOCUMENTATION WORKS

On the left-hand side of the page, you will see the different types of functionality that you can explore.

When you click on any of the methods in the main column, you will see a list of the parameters that it can take. When parameters are optional, they are shown in square brackets.

You will also find deprecated methods. This means that you are no longer advised to use this markup because it is likely to be removed from future versions of jQuery (if it has not already been removed).



EXTENDING JQUERY WITH PLUGINS

Plugins are scripts that extend the functionality of the jQuery library. Hundreds have been written and are available for you to use.

Plugins offer functionality that is not included in the jQuery library. They usually deal with a particular task such as creating slideshows or video players, performing animations, transforming data, enhancing forms, and displaying new data from a remote server.

To get an idea of the number and range of plugins available, see <http://plugins.jquery.com>. All of these are free for you to download and use on your own sites. You may also find other sites listing jQuery plugins for sale (such as codecanyon.net)

Plugins are written so that new methods extend the jQuery object and can, therefore, be used on a jQuery selection. As long as you know how to do the following with jQuery:

- Make a selection of elements
- Call a method and use parameters

You can use a lot of the functionality of these plugins without having to write the code yourself. In Chapter 11, you will see an example of how to create a basic jQuery plugin.



HOW TO CHOOSE A PLUGIN

When you are choosing a plugin to work with, it can be worth checking that it is still being maintained or whether other people have experienced problems using it. Finding out the following can help:

- When was the plugin last updated?
- How many people are watching the plugin?
- What do the bug reports say?

If you ask a question or find a bug in a script, bear in mind that their authors may have a day job and only maintain these plugins in their spare time to help others and to give back to the community.

JAVASCRIPT LIBRARIES

jQuery is an example of what programmers call a JavaScript library. It is a JavaScript file that you include in your page, which then lets you use the functions, objects, methods, and properties it contains.

The concept of a library is that it allows you to borrow code from one file and use its functions, objects, methods, and properties in another script.

Once you have included the script in your page, its functionality is available to use. The documentation for the library will tell you how to use it.

jQuery is the most widely used library on the web, but when you have learned it, you might like to explore some of the other libraries listed below.

Popular libraries have the advantage that they will be well-tested, and some have a whole team of developers who work on them in their spare time.

One of the main drawbacks with a library is that they will usually contain functionality that you will not need to use. This means users have to download code that will not be needed (which can slow your site down). You may find that you can strip out the subset of the library you need or indeed write your own script to do that job.

DOM & EVENTS

Zepto.js
YUI
Dojo.js
MooTools.js

TEMPLATING

Mustache.js
Handlebars.js
jQuery Mobile

USER INTERFACE

jQuery UI
jQuery Mobile
Twitter Bootstrap
YUI

WEB APPLICATIONS

Angular.js
Backbone.js
Ember.js

GRAPHICS & CHARTS

Chart.js
D3.js
Processing.js
Raphael.js

COMPATIBILITY

Modernizr.js
YepNope.js
Require.js

PREVENTING CONFLICTS WITH OTHER LIBRARIES

Earlier in the chapter, you saw that `$()` was shorthand for `jQuery()`. The `$` symbol is used by other libraries such as `prototype.js`, `MooTools`, and `YUI`. To avoid conflicts with those scripts, use these techniques.

INCLUDING JQUERY AFTER OTHER LIBRARIES

Here, `jQuery`'s meaning of `$` takes precedence:

```
<script src="other.js"></script>
<script src="jquery.js"></script>
```

You can use the `.noConflict()` method at the start of your script, to tell `jQuery` to release the `$` shortcut so that other scripts can use it. Then you can use the full name rather than the shortcut:

```
jQuery.noConflict();
jQuery(function() {
    jQuery('div').hide();
});
```

You can wrap your script in an IIFE and still use `$`:

```
jQuery.noConflict();
(function($) {
    $('div').hide(),
})(jQuery);
```

Or you can specify your own alias instead, e.g., `$j`:

```
var $j = jQuery.noConflict();
$j(document).ready(function() {
    $j('div').hide();
});
```

INCLUDING JQUERY BEFORE OTHER LIBRARIES

Here, the other scripts' use of `$` takes precedence:

```
<script src="jquery.js"></script>
<script src="other.js"></script>
```

`$` will have the meaning defined in the other library. There is no need to use the `.noConflict()` method because it will have no effect. But you can continue to use the full name `jQuery`:

```
jQuery(document).ready(function() {
    jQuery('div').hide();
});
```

You can pass `$` as an argument to the anonymous function called by the `.ready()` method like so:

```
jQuery(document).ready(function($) {
    $('div').hide();
});
```

This is equivalent to the code shown above:

```
jQuery(function($){
    $('div').hide();
});
```



LISTKING

BUY GROCERIES 4

freshfigs

pine nuts

honey

balsamic vinegar

NEW ITEM

EXAMPLE

JQUERY

This example brings together a number of the techniques you have seen in this chapter to create a list that users can add items to and remove items from.

- Users can add new list items.
- They can also click to indicate that an item is complete (at which point it is moved to the bottom of the list and marked as complete).
- Once an item is marked as complete, a second click on the item will remove it from the list.

An updated count of the number of items there are in the list will be shown in the heading

As you will see, the code using jQuery is more compact than it would be if you were writing this example in plain JavaScript, and it will work across browsers even though there is no explicit fallback code.

Because new items can be added to the list, the events are handled using event delegation. When the user clicks anywhere on the `` element, the `.on()` event method handles the event. Inside the event handler, there is a conditional statement to check whether the list item is:

- Not complete – in which case, the click is used to change the item to complete, move it to the bottom of the list, and update the counter.
- Complete – in which case, the second click on the item fades it out and removes it from the list altogether.

The use of conditional statements and custom functions (used for the counter) illustrate how jQuery techniques are used in combination with traditional JavaScript that you have been learning throughout the book.

The appearance and removal of the elements is also animated, and these animations demonstrate how methods can be chained together to create complex interactions based on the same selection of elements.

EXAMPLE

JQUERY

c07/js/example.js

JAVASCRIPT

```
$(function() {  
  
    // SETUP  
    var $list, $newItemForm, $newItemButton;  
    var item = '';  
    $list = $('ul');  
    $newItemForm = $('# newItemForm');  
    $newItemButton = $('# newItemButton');  
  
    $('li').hide().each(function(index) {  
        $(this).delay(450 * index).fadeIn(1600);  
    });  
  
    // ITEM COUNTER  
    function updateCount() {  
        var items = $('li[class!=complete]').length; // Number of items in list  
        $('#counter').text(items); // Added into counter circle  
    }  
    updateCount(); // Call the function  
  
    // SETUP FORM FOR NEW ITEMS  
    $newItemButton.show(); // Show the button  
    $newItemForm.hide(); // Hide the form  
    $('#showForm').on('click', function() {  
        $newItemButton.hide(); // When new item clicked  
        $newItemForm.show(); // Hide the button  
    });  
    // Show the form
```

The entire script will wait until the DOM is ready before running, because it is inside the shorthand for the `document.ready()` method. Variables are created that will be used in the script, including jQuery selections that need to be cached.

The `updateCounter()` function checks how many items are in the list and writes it into the heading. It is called straight away to calculate how many list items are on the page when it loads, and then write that number next to the heading.

The form to add new items is hidden when the page loads, and is shown when the user clicks on the add button. When the user clicks on the add button a new item is added to the form and the `updateCounter()` is called.

EXAMPLE

JQUERY

JAVASCRIPT

c07/js/example.js

```
// ADDING A NEW LIST ITEM
$newItemForm.on('submit', function(e) {
  e.preventDefault();
  var text = $('input:text').val();
  $list.append('<li>' + text + '</li>');
  $('input:text').val('');
  updateCount();
});

// CLICK HANDLING - USES DELEGATION ON <ul> ELEMENT
$list.on('click', 'li', function() {
  var $this = $(this); // Cache the element in a jQuery object
  var complete = $this.hasClass('complete'); // Is item complete

  if (complete === true) { // Check if item is complete
    $this.animate({ // If so, animate opacity + padding
      opacity: 0.0,
      paddingLeft: '+=180'
    }, 500, 'swing', function() { // Use callback when animation completes
      $this.remove(); // Then completely remove this item
    });
  } else { // Otherwise indicate it is complete
    item = $this.text(); // Get the text from the list item
    $this.remove(); // Remove the list item
    $list // Add back to end of list as complete
      .append('<li class="complete">' + item + '</li>');
    .hide().fadeIn(300); // Hide it so it can be faded in
    updateCount(); // Update the counter
  }
}

});
```

The `.on()` event method listens for the user clicking anywhere on the list because this script uses event delegation. When they do, the element that was clicked on is stored in a jQuery object and cached in a variable called `$this`.

Next, the code checks if that element has a class name of `complete`. If it does, then the list item is animated out of view and removed. If it was not already complete, then it is moved to the end of the list.

When it is added to the end of the list, its `class` attribute is given a value of `complete`.

Finally, `updateCount()` is called to update the number of items left to do on the list.

SUMMARY

JQUERY

- ▶ jQuery is a JavaScript file you include in your pages.
- ▶ Once included, it makes it faster and easier to write cross-browser JavaScript, based on two steps:
 1. Using CSS-style selectors to collect one or more nodes from the DOM tree.
 2. Using jQuery's built-in methods to work with the elements in that selection.
- ▶ jQuery's CSS-style selector syntax makes it easier to select elements to work with. It also has methods that make it easier to traverse the DOM.
- ▶ jQuery makes it easier to handle events because the event methods work across all browsers.
- ▶ jQuery offers methods that make it quick and simple to achieve a range of tasks that JavaScript programmers commonly need to perform.

8

AJAX & JSON

~~upto 396~~
except 375, 380 → 381,
382 - 387

Ajax is a technique for loading data into part of a page without having to refresh the entire page. The data is often sent in a format called JavaScript Object Notation (or JSON).

The ability to load new content into part of a page improves the user experience because the user does not have to wait for an entire page to load if only part of it is being updated. This has led to a rise in so-called single page web applications (web-based tools that feel more like software applications, even though they run in the browser). This chapter covers:

WHAT AJAX IS


Ajax allows you to request data from a server and load it without having to refresh the entire page.

DATA FORMATS

Servers typically send back HTML, XML, or JSON, so you will learn about these formats.

JQUERY & AJAX

jQuery makes it easier to create Ajax requests and process the data the server returns.

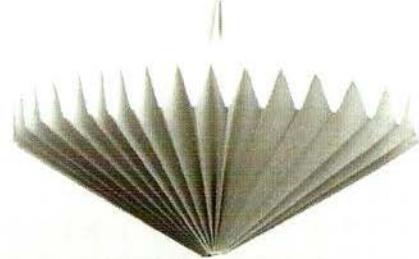

WHAT IS AJAX?

You may have seen Ajax used on many websites, even if you were not aware that it was being used.



Live search (or autocomplete) commonly uses Ajax. You may have seen it used on the Google website. When you type into the search bar on the home page, sometimes you will see results coming up before you have finished typing.

Moog Music Inc. @moogmusicinc

Born today in 1896: Leon Theremin, physicist, spy & inventor of one of the earliest electronic musical instruments. pic.twitter.com/theremin

Websites with user-generated content (such as Twitter and Flickr) may allow you to display your information (such as your latest tweets or photographs) on your own website. This involves collecting data from their servers.



Sometimes when you are shopping online and add items to your shopping cart, it is updated without you leaving the page. At the same time, the site may display a message confirming the item was added.

Choose your username

minimoog

This username is taken. Try another?
Available: minimoog70

If you are registering for a website, a script may check whether your username is available before you have completed the rest of the form.

Sites may also use Ajax to load data behind the scenes so that they can use or show that data later on.

WHY USE AJAX?

Ajax uses an asynchronous processing model. This means the user can do other things while the web browser is waiting for the data to load, speeding up the user experience.

USING AJAX WHILE PAGES ARE LOADING

When a browser comes across a <script> tag, it will typically stop processing the rest of the page until it has loaded and processed that script. This is known as a synchronous processing model.

When a page is loading, if a script needs to collect data from a server (e.g., if it collects financial exchange rates or status updates), then the browser would not just wait for the script to be loaded and processed; it would also have to wait for a server to send the data that the script is going to display.

With Ajax, the browser can request some data from a server and - once that data has been requested - continue to load the rest of the page and process the user's interactions with the page. It is known as an asynchronous (or non-blocking) processing model.

The browser does not wait for the third party data in order to show the page. When the server responds with the data, an event is fired (like the Load event that fires when a page has loaded). This event can then call a function that processes the data.

USING AJAX WHEN PAGES HAVE LOADED

Once a page has loaded, if you want to update what the user sees in the browser window, typically you would refresh the entire page. This means that the user has to wait for a whole new page to download and be rendered by the browser.

With Ajax, if you only want to update a part of the page, you can just update the content of one element. This is done by intercepting an event (such as the user clicking on a link or submitting a form) and requesting the new content from the server using an asynchronous request.

While that data is loading, the user can continue to interact with the rest of the page. Then, once the server has responded, a special Ajax event will trigger another part of the script that reads the new data from the server and updates just that one part of the page.

Because you do not have to refresh the whole page, the data will load faster and the user can still use the rest of the page while they are waiting.

Historically, AJAX was an acronym for the technologies used in asynchronous requests like this. It stood for Asynchronous JavaScript And XML. Since then, technologies have moved on and the term Ajax is now used to refer to a group of technologies that offer asynchronous functionality in the browser.


HOW AJAX WORKS

When using Ajax, the browser requests information from a web server. It then processes the server's response and shows it within the page.

1

THE REQUEST

The browser requests information from the server.

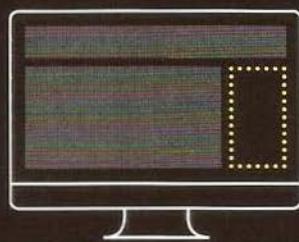


The browser requests data from the server. The request may include information that the server needs – just like a form might send data to a server.

Browsers implement an object called XMLHttpRequest to handle Ajax requests. Once a request has been made, the browser does not wait for a response from the server.

ON THE SERVER

The server responds with data (usually HTML, XML, or JSON).

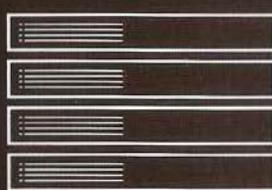


What happens on the server is not part of what is called Ajax.

Server-side technologies such as ASP.net, PHP, NodeJS, or Ruby can generate web pages for each user. When there is an Ajax request, the server might send back HTML, or it might send data in a different format such as JSON or XML (which the browser turns into HTML).

2

THE RESPONSE

The browser processes the content and adds it to the page.

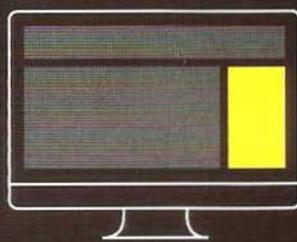


When the server has finished responding to the request, the browser will fire an event (just like it can fire an event when a page has finished loading).

This event can be used to trigger a JavaScript function that will process the data and incorporate it into one part of the page (without affecting the rest of the page).

HANDLING AJAX REQUESTS & RESPONSES

To create an Ajax request, browsers use the XMLHttpRequest object. When the server responds to the browser's request, the same XMLHttpRequest object will process the result.

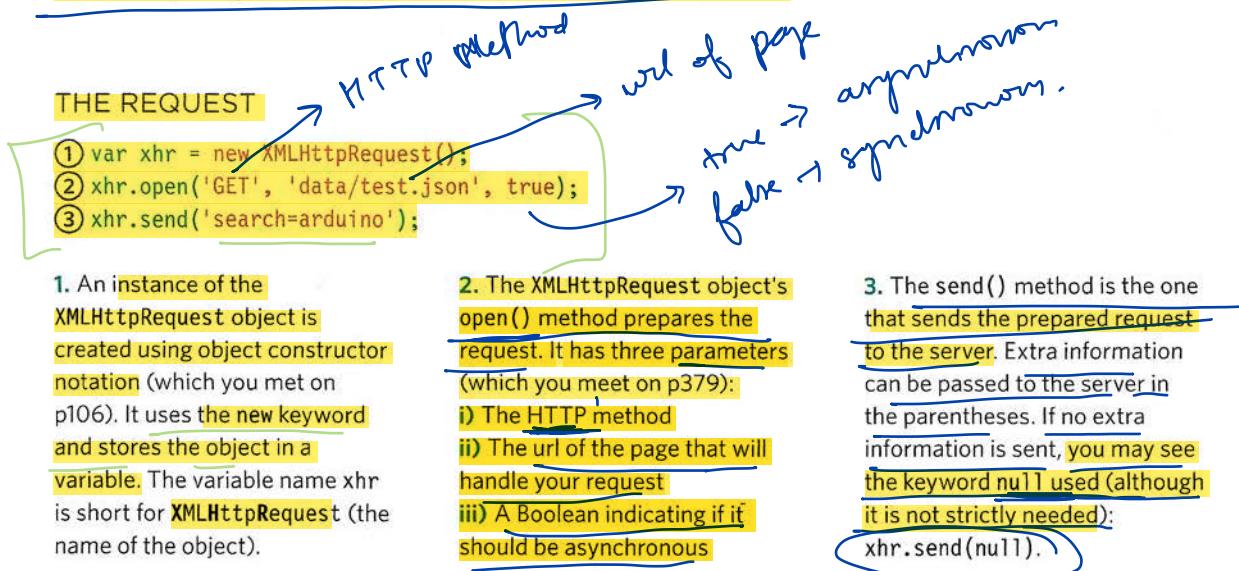

THE RESPONSE

```
① xhr.onload = function() {  
②   if (xhr.status === 200) {  
    // Code to process the results from the server  
  }  
}
```

the server has responded & all is OK

1. When the browser has received and loaded a response from the server, the onload event will fire. This will trigger a function (here, it is an anonymous function).

2. The function checks the status property of the object. This is used to make sure the server's response was okay. (If this property is blank, check the setup of the server.)

Note that IE9 was the first version of IE to support this way of dealing with Ajax responses. To support older browsers, you can use jQuery (see p388).

DATA FORMATS

The response to an Ajax request usually comes in one of three formats: HTML, XML, or JSON. Below is a comparison of these formats. XML and JSON are introduced over the next three pages.

HTML

You are probably most familiar with HTML, and, when you want to update a section of a web page, it is the simplest way to get data into a page.

BENEFITS

- It is easy to write, request, and display.
- The data sent from the server goes straight into the page. There's no need for the browser to process it (as with the other two methods).

DRAWBACKS

- The server must produce the HTML in a format that is ready for use on your page.
- It is not well-suited for use in applications other than web browsers. It does not have good data portability.
- The request must come from the same domain* (see below).

XML

XML looks similar to HTML, but the tag names are different because they describe the data that they contain. The syntax is also more strict than HTML.

BENEFITS

- It is a flexible data format and can represent complex structures.
- It works well with different platforms and applications.
- It is processed using the same DOM methods as HTML.

DRAWBACKS

- It is considered a verbose language because the tags add a lot of extra characters to the data being sent.
- The request must come from the same domain as the rest of the page* (see below).
- It can require a lot of code to process the result.

JSON

JavaScript Object Notation (JSON) uses a similar syntax to object literal notation (which you met on p102) in order to represent data.

BENEFITS

- It can be called from any domain (see JSON-P/CORS).
- It is more concise (less verbose) than HTML/XML.
- It is commonly used with JavaScript (and is gaining wider use across web applications).

DRAWBACKS

- The syntax is not forgiving. A missed quote, comma, or colon can break the file.
- Because it is JavaScript, it can contain malicious content (see XSS on p228). Therefore, you should only use JSON that has been produced by trusted sources.

* Browsers only let Ajax load HTML and XML from the same domain name as the rest of the page (e.g., if the page is on www.example.com, the Ajax request must return data from www.example.com).

XML: EXTENSIBLE MARKUP LANGUAGE

XML looks a lot like HTML, but the tags contain different words. The purpose of the tags is to describe the kind of data that they hold.

```
<?xml version="1.0" encoding="utf-8" ?>
<events>
  <event>
    <location>San Francisco, CA</location>
    <date>May 1</date>
    <map>img/map-ca.png</map>
  </event>
  <event>
    <location>Austin, TX</location>
    <date>May 15</date>
    <map>img/map-tx.png</map>
  </event>
  <event>
    <location>New York, NY</location>
    <date>May 30</date>
    <map>img/map-ny.png</map>
  </event>
</events>
```

In the same way that HTML is a markup language that can be used to describe the structure and semantics of a web page, XML can be used to create markup languages for other types of data - anything from stock reports to medical records.

The tags in an XML file should describe the data they contain. As a result, even if you have never seen the code to the left, you can see that the data describes information about several events. The `<events>` element contains several individual events. Each individual event is represented in its own `<event>` element.

XML works on any platform and gained wide popularity in the early 2000s because it made it easy to transfer data between different types of applications. It is also a very flexible data format because it is capable of representing complex data structures.

You can process an XML file using the same DOM methods as HTML. Because different browsers deal with whitespace in HTML/XML documents in different ways, it is easier to process XML using jQuery rather than plain JavaScript (just as it can be with HTML).

JSON: JAVASCRIPT OBJECT NOTATION

Data can be formatted using JSON (pronounced "Jason").
It looks very similar to object literal syntax, but it is not an object.

JSON data looks like the object literal notation which you met on p102; however, it is just plain text data (not an object).

The distinction may sound small but remember that HTML is just plain text, and the browser converts it into DOM objects.

You cannot transfer the actual objects over a network. Rather, you send text which is converted into objects by the browser.

```
{  
  "location": "San Francisco, CA",  
  "capacity": 270,  
  "booking": true  
}
```

(in double quotes)

KEYS

In JSON, the key should be placed in double quotes (not single quotes).

The key (or name) is separated from its value by a colon.

Each key/value pair is separated by a comma. However, note that there is no comma after the last key/value pair.

VALUES

The value can be any of the following data types (some of these are demonstrated above; others are shown on the right-hand page):

DATA TYPE DESCRIPTION

string	Text (must be written in quotes)
number	Number
Boolean	Either true or false
array	Array of values - this can also be an array of objects
object	JavaScript object - this can contain child objects or arrays
null	This is when the value is empty or missing

WORKING WITH JSON DATA

JavaScript's JSON object can turn **JSON data** into a **JavaScript object**. It can also convert **a JavaScript object** into a **string**.

```
{  
  "events": [  
    {  
      "location": "San Francisco, CA",  
      "date": "May 1",  
      "map": "img/map-ca.png"  
    },  
    {  
      "location": "Austin, TX",  
      "date": "May 15",  
      "map": "img/map-tx.png"  
    },  
    {  
      "location": "New York, NY",  
      "date": "May 30",  
      "map": "img/map-ny.png"  
    }  
  ]  
}
```

● OBJECT ● ARRAY

An object can also be written on one line, as you can see here:

```
{  
  "events": [  
    { "location": "San Francisco, CA", "date": "May 1", "map": "img/map-ca.png" },  
    { "location": "Austin, TX", "date": "May 15", "map": "img/map-tx.png" },  
    { "location": "New York, NY", "date": "May 30", "map": "img/map-ny.png" }  
  ]  
}
```

The object on the left represents a series of three events, stored in an array called **events**. The array uses square bracket notation, and it holds three objects (one for each event).

JSON.stringify() converts JavaScript objects into a string, formatted using JSON. This allows you to send JavaScript objects from the browser to another application.

JSON.parse() processes a string containing JSON data. It converts the JSON data into a JavaScript objects ready for the browser to use.

Browser support: Chrome 3, Firefox 3.1, IE8, and Safari 4

LOADING HTML WITH AJAX

HTML is the easiest type of data to add into a page using Ajax.

The browser renders it just like any other HTML.

The CSS rules for the rest of the page are applied to the new content.

Below, the example loads data about three events using Ajax. (The result will look the same for the next four examples.)

The page users open does not hold the event data (highlighted in pink). Ajax is used to load it into the page from another file.

Browsers will only let you use this technique to load HTML that comes from the same domain name as the rest of the page.

Whether HTML, XML, or JSON is being returned from the server, the process of setting up the Ajax request and checking whether the file is ready to be worked with is the same. What changes is how you deal with the data that is returned.

In the example on the right-hand page, the code to display the new HTML is placed inside a conditional statement.

Please note: These examples do not work locally in Chrome. They should work locally in Firefox and Safari. IE support is mixed until IE9.

Later in the chapter, you will see that jQuery offers better cross-browser support for Ajax.




HIGHLIGHTED AREA LOADED USING AJAX

When a server responds to any request, it should send back a status message, to indicate if it completed the request. The values can be:

- 200** The server has responded and all is ok
- 304** Not modified
- 404** Page not found
- 500** Internal error on the server

If you run the code locally, you will not get a server status property, so this check must be commented out, and return true for the condition. If a server fails to return a status property, check the server setup.

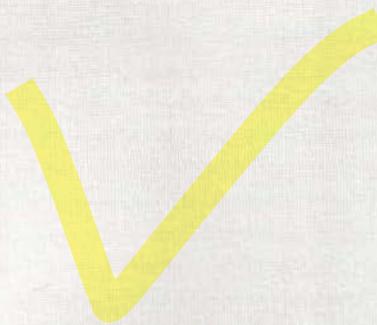

1. An XMLHttpRequest object is stored in a variable called xhr.
2. The XMLHttpRequest object's open() method prepares the request. It has three parameters:
 - i) Either HTTP GET or POST to specify how to send the request
 - ii) The path to the page that will handle the request
 - iii) Whether or not the request is asynchronous (this is a Boolean)
3. Up to this point, the browser has not yet contacted the server to request the new HTML.
4. The object's onload event will fire when the server responds. It triggers an anonymous function.
5. Inside the function, a conditional statement checks if the status property of the object is 200, indicating the server responded successfully. If the example is run locally, there will be no response so you cannot perform this check.

JAVASCRIPT

c08/js/data-html.js

```
① var xhr = new XMLHttpRequest(); // Create XMLHttpRequest object  
④ xhr.onload = function() { // When response has loaded  
    // The following conditional check will not work locally - only on a server  
    ⑤ if(xhr.status == 200) { // If server status was ok  
        ⑥ document.getElementById('content').innerHTML = xhr.responseText; // Update  
    }  
};  
  
② xhr.open('GET', 'data/data.html', true); // Prepare the request  
③ xhr.send(null); // Send the request
```

6. Finally, the page is updated: `document.getElementById('content').innerHTML = xhr.responseText;`



A) The element that will contain the new HTML is selected.
(Here it is an element whose id attribute has a value of content.)

B) The innerHTML property replaces the content of that element with the new HTML that has been sent from the server.

C) The new HTML is retrieved from the XMLHttpRequest object's responseText property.

Remember that innerHTML should only be used when you know that the server will not return malicious content. All content that has been created by users or third parties should be escaped on the server (see p228).

LOADING XML WITH AJAX

Requesting XML data is very similar to requesting HTML. However, processing the data that is returned is more complicated because the XML must be converted into HTML to be shown on the page.

On the right-hand page, you can see that the code to request an XML file is almost identical to the code to request an HTML file shown on the previous page. What changes is the part *inside* the conditional statement that processes the response (points 1–4 on the right-hand page). The XML must be turned into HTML. The structure of the HTML for each event is shown below.

1. When a server responds with XML, it can be obtained using the `responseXML` property of the `XMLHttpRequest` object. Here, the XML returned is stored in a variable called `response`.

2. This is followed by the declaration of a new variable called `events`, which holds all of the `<event>` elements from the XML document. (You saw the XML file on p375.)

3. The XML file is then processed using the DOM methods you learned about in Chapter 5. First, the `for` loop goes through each of the `<event>` elements, collecting the data stored in their child elements, and placing it into new HTML elements.

Each of those HTML elements is then added into the page.

4. Inside the `for` loop, you will see the `getnodeValue()` function is called several times. Its purpose is to get the contents from each of the XML elements. It takes two parameters:

- i) `obj` is an XML fragment.
- ii) `tag` is the name of the tag you want to collect the information from.

The function looks for the matching tag within the XML fragment (using the DOM's `getElementsByTagName()` method). It then gets the text from the first matching element within that fragment.

The XML for each event is being transformed into the following HTML structure:

HTML

```
<div class="event">
  
  <p><b>Location</b><br />Event date</p>
</div>
```

```
var xhr = new XMLHttpRequest();           // Create XMLHttpRequest object

xhr.onload = function() {                // When response has loaded
    // The following conditional check will not work locally - only on a server
    if (xhr.status === 200) {            // If server status was ok

        // THIS PART IS DIFFERENT BECAUSE IT IS PROCESSING XML NOT HTML
        ① var response = xhr.responseXML;          // Get XML from the server
        ② var events = response.getElementsByName('event'); // Find <event> elements

        for (var i = 0; i < events.length; i++) {
            var container, image, location, city, newline;
            container = document.createElement('div');
            container.className = 'event';

            image = document.createElement('img');           // Add map image
            image.setAttribute('src', getNodeValue(events[i], 'map'));
            image.appendChild(document.createTextNode(getNodeValue(events[i], 'map')));
            container.appendChild(image);

            ③ location = document.createElement('p');          // Add location data
            city = document.createElement('b');
            newline = document.createElement('br');
            city.appendChild(document.createTextNode(getNodeValue(events[i], 'location')));
            location.appendChild(newline);
            location.insertBefore(city, newline);
            location.appendChild(document.createTextNode(getNodeValue(events[i], 'date'))));
            container.appendChild(location);

            document.getElementById('content').appendChild(container);
        }
        function getNodeValue(obj, tag) {             // Gets content from XML
            ④ return obj.getElementsByTagName(tag)[0].firstChild.nodeValue;
        }

        // THE FINAL PART IS THE SAME AS THE HTML EXAMPLE BUT IT REQUESTS AN XML FILE
    }
};

xhr.open('GET', 'data/data.xml', true);      // Prepare the request
xhr.send(null);                           // Send the request
```

LOADING JSON WITH AJAX

Server
↓ json string
web browser
↓ deserialize
(string to JSON)

The request for JSON data uses the same syntax you saw in the requests for HTML and XML data. When the server responds, the JSON will be converted into HTML.

When JSON data is sent from a server to a web browser, it is transmitted as a string.

When it reaches the browser, your script must then convert the string into a JavaScript object. This is known as deserializing an object.

This is done using the parse() method of a built-in object called JSON. This is a global object, so you can use it without creating an instance of it first.

Once the string has been parsed, your script can access the data in the object and create HTML that can be shown in the page.

The HTML is added to the page using the innerHTML property. Therefore, it should only be used when you are confident that it will not contain malicious code (see XSS on p228).

This example will look the same as the last two examples when you view it in a web browser.

The JSON object also has a method called stringify(), which converts objects into a string using JSON notation so it can be sent from the browser back to a server. This is also known as serializing an object.

This method can be used when the user has interacted with the page in a way that has updated the data held in the JavaScript object (e.g., filling in a form), so that it can then update the information stored on the server.

Here you can see the JSON data that is being processed again (it was introduced on p377). Note how it is saved with the .json file extension.

c08/data/data.json

JAVASCRIPT

```
{  
  "events": [  
    { "location": "San Francisco, CA", "date": "May 1", "map": "img/map-ca.png" },  
    { "location": "Austin, TX", "date": "May 15", "map": "img/map-tx.png" },  
    { "location": "New York, NY", "date": "May 30", "map": "img/map-ny.png" }  
  ]  
}
```

1. The JSON data from the server is stored in a variable called `responseObject`. It is made available by the XMLHttpRequest object's `responseText` property

When it comes from the server, the JSON data is a string, so it is converted into a JavaScript object using the JSON object's `parse()` method.

2. The `newContent` variable is created to hold the new HTML data. It is set to an empty string outside the loop so that the code in the loop can add to the string.

3. Loop through the objects that represent each event using a `for` loop. The data in the objects are accessed using dot notation, just like you access other objects.

Inside the loop, the contents of the object are added to the `newContent` variable, along with their corresponding HTML markup.

4. When the loop has finished running through the event objects in `responseObject`, the new HTML is added to the page using the `innerHTML` property.

JAVASCRIPT

c08/js/data-json.js

```
var xhr = new XMLHttpRequest();  
  
xhr.onload = function() {  
    if(xhr.status === 200) {  
        ①   responseObject = JSON.parse(xhr.responseText);  
  
        // BUILD UP STRING WITH NEW CONTENT (could also use DOM manipulation)  
        ②   var newContent = '';  
        for (var i = 0; i < responseObject.events.length; i++) { //Loop through object  
            newContent += '<div class="event">';  
            newContent += '';  
            newContent += '<p><b>' + responseObject.events[i].date + '</b><br>';  
            newContent += '</div>';  
        }  
  
        // Update the page with the new content  
        ④   document.getElementById('content').innerHTML = newContent;  
  
    }  
};  
  
xhr.open('GET', 'data/data.json', true);  
xhr.send(null);  
  
// Prepare the request  
// Send the request
```

WORKING WITH DATA FROM OTHER SERVERS

Ajax works smoothly with data from your own server but – for security reasons – browsers do not load Ajax responses from other domains (known as cross-domain requests). There are three common workarounds.

A PROXY FILE ON THE WEB SERVER

The first way to load data from a remote server is to create a file on *your* server that collects the data from the remote server (using a server-side language such as ASP.net, PHP, NodeJS, or Ruby). The other pages on your site then request the data from the file on your server (which in turn gets it from the remote server). This is called a **proxy**, because it acts on behalf of the other page.

Because this relies upon creating pages in server-side languages, it is beyond the scope of this book.

JSONP (JSON WITH PADDING)

JSONP (sometimes written JSON-P) involves adding a `<script>` element into the page, which loads the JSON data from another server. This works because there are no restrictions on the source of script in a `<script>` element.

The script contains a call to a function, and the JSON-formatted data is provided as an argument to that function. The function that is called is defined in the page that requests the data, and is used to process and display the data. See next page.

ALTERNATIVES

Many people use jQuery when making requests for remote data, as it simplifies the process and handles backward compatibility for older browsers. As you can see in the next column, support for new approaches is an issue.

CROSS-ORIGIN RESOURCE SHARING

Every time a browser and server communicate, they send information to each other using HTTP headers. **Cross-Origin Resource Sharing** or **CORS** involves adding extra information to the HTTP headers to let the browser and server know that they should be communicating with each other.

CORS is a W3C specification, but is only supported by the most recent browsers and – because it requires setting up of HTTP headers on the server – is beyond the scope of this book.

CORS SUPPORT

Standard support is as follows:
Chrome 4, FF 3.5, IE10, Safari 4
Android 2.1, iOS 3.2

IE8+9 used a non-standard `XDomainRequest` object to handle cross-origin requests.

HOW JSONP WORKS

First, the page must include a function to process the JSON data. It then requests the data from the server using a `<script>` element.

BROWSER

The HTML page will use two pieces of JavaScript:

1. A function that will process the JSON data that the server sends. In the example on the next page, the function is called `showEvents()`.
2. A `<script>` element whose `src` attribute will request the JSON data from the remote server.

```
<script>
function showEvents(data) {
    // Code to process data and
    // display it in the page here
}
</script>

<script src="http://example.org/jsonp">
</script>
```

It is important to note that there is no need to use the `JSON` object's `parse()` or `stringify()` methods when working with JSONP. Because the data is being sent as a script file (not as a string), it will be treated as an object.

The file on the server is often written so that you can specify the name of the function that will process the data that is returned. The name of the function is usually given in the query string of a URL:
`http://example.org/upcomingEvents.php?callback=showEvents`

The server returns a file that calls the function that processes the data. The JSON data is provided as an argument to that function.

SERVER

When the server responds, the script contains a call to the named function that will process the data (that function was defined in step 1). This function call is the "padding" in JSONP. The JSON-formatted data is sent as an argument to this function.

So, in this case, the JSON data sits inside the call to the `showEvents()` function.

```
showEvents({
    "events": [
        {
            "location": "San Francisco, CA",
            "date": "May 1",
            "map": "img/map-ca.png"
        }...
    ]
});
```

USING JSONP

This example looks the same as the JSON example, but the event details come from a remote server. Therefore, the HTML uses two `<script>` elements.

The first `<script>` element loads a JavaScript file that contains the `showEvents()` function. This will be used to display the deals information.

The second `<script>` element loads the information from a remote server. The name of the function that processes the data is given in the query string.

c08/data-jsonp.html

HTML

```
<script src="js/data-jsonp.js"></script>
<script src="http://deciphered.com/js/jsonp.js?callback=showEvents"></script>
</body>
</html>
```

c08/js/data-jsonp.js

JAVASCRIPT

```
function showEvents(data) {
    var newContent = '';

    // BUILD UP STRING WITH NEW CONTENT (could also use DOM manipulation)
    for (var i = 0; i < data.events.length; i++) { // Loop through data
        newContent += '<div class="event">';
        newContent += '';
        newContent += '<p><b>' + data.events[i].location + '</b><br>';
        newContent += data.events[i].date + '</p>';
        newContent += '</div>';
    }

    // Update the page with the new content
    document.getElementById('content').innerHTML = newContent; }
```

1. The code in the for loop (which is used to process the JSON data and create the HTML) and the line that writes it into the page are the same as the code that processed the JSON data from the same server.

There are three key differences:

- i) It is wrapped in a function called `showEvents()`.
- ii) The JSON data comes in as an argument of the function call.
- iii) The data does not need to be parsed with `JSON.parse()`. In the for loop, it is just referred to by the parameter name `data`.

Instead of using a second `<script>` element in the HTML pages, you can use JavaScript to write that `<script>` element into the page (just like you would add any other element into the page). That would place all the functionality for the external data in the one JavaScript file.

JSONP loads JavaScript, and any JavaScript data may contain malicious code. For this reason, you should load data only from trusted sources.

Since JSONP is loading data from a different server, you might add a timer to check if the server has replied within a fixed time (and, if not, show an error message).

You will see more about handling errors in Chapter 10, and there is an example of a timer in Chapter 11 (where you create a content slider).


JAVASCRIPT

```
showEvents({
  "events": [
    {
      "location": "San Francisco, CA",
      "date": "May 1",
      "map": "img/map-ca.png"
    },
    {
      "location": "Austin, TX",
      "date": "May 15",
      "map": "img/map-tx.png"
    },
    {
      "location": "New York, NY",
      "date": "May 30",
      "map": "img/map-ny.png"
    }
  ]
});
```

<http://htmlandcssbook.com/js/jsonp.js>

RESULT

The bus stops here.

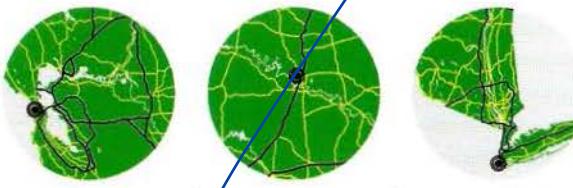

The file that is returned from the server wraps the JSON-formatted data inside the call to the `showEvents()` function. So the `showEvents()` function is only called when the browser has loaded this remote data.

JQUERY & AJAX: REQUESTS

jQuery provides several methods that handle Ajax requests.

Just like other examples in this chapter, the process involves two steps:
making a request and handling the response.

Here you can see the six ways jQuery lets you make Ajax requests. The first five are all shortcuts for the `$.ajax()` method, which you meet last.


The `.load()` method operates on a jQuery selection (like most jQuery methods). It loads new HTML content into the selected element(s).

You can see that the other five methods are written differently. They are methods of the global jQuery object, which is why they start with `$`. They only request data from a server; they do not automatically use that data to update the elements of a matched set, which is why the `$` symbol is not followed by a selector.

When the server returns data, the script needs to indicate what to do with it.

METHOD / SYNTAX	DESCRIPTION
<code>.load()</code>	Loads HTML fragments into an element It is the simplest method for retrieving data
<code>\$.get()</code>	Loads data using the HTTP GET method Used to request data from the server
<code>\$.post()</code>	Loads data using the HTTP POST method Used to send data that updates data on server
<code>\$.getJSON()</code>	Loads JSON data using a GET request Used for JSON data
<code>\$.getScript()</code>	Loads and executes JavaScript data using GET Used for JavaScript (e.g., JSONP) data
<code>\$.ajax()</code>	This method is used to perform all requests The above methods all use this under the hood

JQUERY & AJAX: RESPONSES

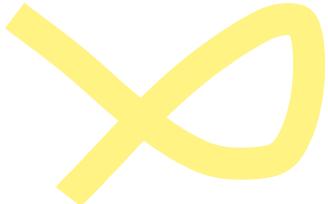

When using the `.load()` method, the HTML returned from the server is inserted into a jQuery selection. For the other methods, you specify what should be done when the data that is returned using the jqXHR object.

JQXHR PROPERTIES DESCRIPTION

<u>responseText</u>	Text-based data returned
<u>responseXML</u>	XML data returned
<u>status</u>	Status code
<u>statusText</u>	Status description (typically used to display information about an error if one occurs)

JQXHR METHODS DESCRIPTION

<u>.done()</u>	Code to run if request was successful
<u>.fail()</u>	Code to run if request was unsuccessful
<u>.always()</u>	Code to run if request succeeded or failed
<u>.abort()</u>	Halt the communication

jQuery has an object called jqXHR, which makes it easier to handle the data that is returned from the server. You will see its properties and methods (shown in the tables on the left) used over the next few pages.


Because jQuery lets you chain methods, you can use the `.done()`, `.fail()`, and `.always()` methods to run different code depending on the outcome of loading the data.

RELATIVE URLs

If the content you load via Ajax contains relative URLs (e.g., images and links) those URLs get treated as if they are relative to the *original* page that was loaded.

If the new HTML is in a different folder from the original page, the relative paths could be broken.

1. This HTML file uses Ajax to load content from a page in the folder shown in step 2.
2. The page in the this folder has an image whose path is a relative link to the second folder:
``
3. The HTML file cannot find the image as the path is no longer correct - it is not in a child folder.

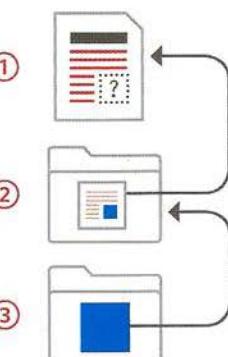

LOADING HTML INTO A PAGE WITH JQUERY

The `.load()` method is the simplest of the jQuery Ajax methods.

It can only be used to load HTML from the server, but when the server responds, the HTML is then loaded into the jQuery Selection for you.

JQUERY SELECTOR

You start by selecting the element that you want the HTML code to appear inside.

URL OF THE PAGE

Then you use the `.load()` method to specify the URL of the HTML page to load.

SELECTOR

You can specify that you want to load only part of the page (rather than the whole page).

```
$(' #content').load(' jq-ajax3.html #content');
```



1. This creates a jQuery object with the element whose id attribute has a value of content.

2. This is the URL of the page you want to load the HTML from. There must be a space between the URL and the selector in step 3.

3. This is the fragment of the HTML page to show. Again, it is the section whose id attribute has a value of content.

Here, links in the top right corner take the user to other pages. If the user has JavaScript enabled, when they click on a link, code inside the `.on()` event method stops it from loading a whole new page. Instead, the `.load()` method will replace the area highlighted in pink (whose id attribute has a value of content) with the equivalent area from the page that the user just requested. Only the pink area is refreshed – not the whole page.



LOADING CONTENT

When users click on any of the links in the `<nav>` element, one of two things will occur:

If they have JavaScript enabled, a `click` event will trigger an anonymous function that loads new content into the page.

If they do not have JavaScript enabled, they will move from page to page as normal.

Inside the anonymous function, five things happen:

1. `e.preventDefault()` stops the link taking users to a new page.
2. A variable called `url` holds the URL of the page to load. This is collected from the `href` attribute of the link the user clicked on. It indicates which page to load.

3. The class attributes on the links are updated to indicate which page is the current page.

4. The element holding the content is removed.

5. The container element is selected and `.load()` fetches new the new content. It is hidden straight away using `.hide()` so that `fadeIn()` can fade it in.

JAVASCRIPT

```
$('nav a').on('click', function(e) {  
    ①  e.preventDefault(); →  
    ②  var url = this.href;  
  
    ③  [  $('nav a.current').removeClass('current');  
        $(this).addClass('current'); →  
    ④  $('#container').remove(); →  
    ⑤  $('#content').load(url + '#content').hide().fadeIn('slow'); // New content  
});
```

// User clicks nav link
// Stop loading new link
// Get value of href

// Clear current indicator
// New current indicator

// Remove old content
// New content

c08/js/jq-load.js

HTML

```
<nav>  
  <a href="jq-load.html" class="current">Home</a>  
  <a href="jq-load2.html">Route</a> ↴  
  <a href="jq-load3.html">Toys</a>  
</nav>  
<section id="content">  
  <div id="container">  
    <!-- Page content lives here -->  
  </div>  
</section>
```

c08/jq-load.html

The links still work if JavaScript is not enabled. If JavaScript is enabled, jQuery will load content into the `<div>` whose `id` has a value of `content` from the target URL. The rest of the page does not need to be reloaded.

JQUERY'S AJAX SHORTHAND METHODS



jQuery provides four shorthand methods to handle specific types of Ajax requests.

The methods below are all shorthand methods. If you looked at the source code for jQuery, you would see that they all use the `$.ajax()` method.

You will meet each one over the next few pages because they introduce key aspects of the `$.ajax()` method.

These methods do not work on a selection like other jQuery methods, which is why you prefix them with only the `$` symbol rather than a jQuery selection. They are usually triggered by an event, such as the page having loaded or the user interacting with the page (e.g., clicking on a link, or submitting a form).

With an Ajax request, you will often want to send data to the server, which will in turn affect what the server sends back to the browser.

As with HTML forms (and the Ajax requests you met earlier in the chapter), you can send the data using HTTP GET or POST.

METHOD / SYNTAX	DESCRIPTION
<code>\$.get(url[, data][, callback][, type])</code>	HTTP GET request for data
<code>\$.post(url[, data][, callback][, type])</code>	HTTP POST to update data on the server
<code>\$.getJSON(url[, data][, callback])</code>	Loads JSON data using a GET request
<code>\$.getScript(url[, callback])</code>	Loads and executes JavaScript (e.g., JSONP) using a GET request

The parameters in square brackets are optional.

`$` shows that this is a method of the `jQuery` object.

`url` specifies where the data is fetched from.

`data` provides any extra information to send to the server.

`callback` indicates that the function should be called when data is returned (can be named or anonymous).

`type` shows the type of data to expect from the server.

Note: The examples in this section only work on a web server (and not on local file systems). Server-side languages and server setup are beyond the scope of this book, but you can try out the examples on our website. PHP files have been included with the download code, but they are for demonstration purposes only.

REQUESTING DATA

Here, users vote for their favorite t-shirt without leaving the page.

1. If users click on a t-shirt an anonymous function is triggered.
2. e.preventDefault() stops the link opening a new page.
3. The user's choice is the value of the id attribute on the image. It is stored in a variable called queryString in the format of a query string, e.g., vote=gray

4. The \$.get() method is called using three parameters:

- i) The page that will handle the request (on the same server).
- ii) The data being sent to the server (here it is a query string, but it could be JSON).
- iii) The function that handles the result the server sends back; in this case it is an anonymous function.

When the server responds, the anonymous callback function handles the data. In this case, the code in that function selects the element that held the t-shirts and replaces it with the HTML sent back from the server. This is done using jQuery's .html() method.

JAVASCRIPT

```
① $('#selector a').on('click', function(e) {  
②   e.preventDefault();  
③   var queryString = 'vote=' + event.target.id;  
④   $.get('votes.php', queryString, function(data) {  
⑤     $('#selector').html(data);  
    });  
});
```

c08/js/jq-get.js

data sent to
server

HTML

(This HTML is created by code inside the JS file.)

```
<div class="third"><a href="vote.php?vote=gray">  
  </a></div>  
<div class="third"><a href="vote.php?vote=yellow">  
  </a></div>  
<div class="third"><a href="vote.php?vote=green">  
  </a></div>
```

RESULT



The t-shirt links are created in the JavaScript file to ensure they only show if the browser supports JavaScript (the resulting HTML structure is shown above). When the server responds, it does not have to send back HTML; it can return any kind of data that the browser can process and use.

SENDING FORMS USING AJAX



To send data to the server, you are likely to use the `.post()` method. jQuery also provides the `.serialize()` method to collect form data.

SENDING FORM DATA

The HTTP POST method is often used when sending form data to a server and it has a corresponding function, the `.post()` method. It takes the same three parameters as the `.get()` method:

- i) The name of the file on the (same) server that will process the data from the form
- ii) The form data that you are sending
- iii) The callback function that will handle the response from the server

On the right-hand page you can see the `$.post()` method used with a method called `.serialize()`, which is very helpful when working with forms. Together they send the form data to the server.

COLLECTING FORM DATA

jQuery's `.serialize()` method:

- Selects all of the information from the form
- Puts it into a string ready to send to the server
- Encodes characters that cannot be used in a query string

Typically it will be used on a selection containing a `<form>` element (although it can be used on individual elements or a subsection of a form).

It will only send successful form controls, which means it will not send:

- Controls that have been disabled
- Controls where no option has been selected
- The submit button

SERVER-SIDE

When a server-side page handles a form, you might want the same page to work whether:

- It was a normal request for a web page (in which case you would send the whole page); or
- It was an Ajax request (where you might respond with just a fragment of the page)

On the server, you can check whether a page is being requested by an Ajax call using the `X-Requested-With` header.

If it is set and has a value of `XMLHttpRequest`, you know that the request was an Ajax request.

SUBMITTING FORMS

1. When users submit the form, an anonymous function runs.

2. `e.preventDefault()` stops the form from submitting.

3. The form data is collected by the `.serialize()` method and stored in the `details` variable.

4. The `$.post()` method is called using all three parameters:

- i) The url of the page that the data is being sent to
- ii) The data that was just collected from the form
- iii) A callback function that will display the results to the user

5. When the server responds, the content of the element whose `id` attribute has a value of `register` is overwritten with new HTML sent from the server.

JAVASCRIPT

```
① $('#register').on('submit', function(e) {           // When form is submitted
②   e.preventDefault();                            // Prevent it being sent
③   var details = $('#register').serialize();      // Serialize form data
④   $.post('register.php', details, function(data) { // Use $.post() to send it
⑤     $('#register').html(data);                   // Where to display result
    });
});
```

c08/js/jq-post.js

HTML

```
<form id="register" action="register.php" method="post">
<h2>Register</h2>
<label for="name">Username</label><input type="text" id="name" name="name" />
<label for="pwd">Password</label><input type="password" id="pwd" name="pwd" />
<label for="email">Email</label><input type="email" id="email" name="email" />
<input type="submit" value="Join" />
</form>
```

c08/jq-post.html

RESULT



Register

USERNAME

PASSWORD

EMAIL

This example needs to be run on a web server. The server-side page will return a confirmation message (but it does not validate the data submitted nor send a confirmation email).

LOADING JSON & HANDLING AJAX ERRORS



You can load JSON data using the `$.getJSON()` method.

There are also methods that help you deal with the response if it fails.

LOADING JSON

If you want to load JSON data, there is a method called `$.getJSON()` which will retrieve JSON from the same server that the page is from. To use JSONP you should use the method called `$.getScript()`.

AJAX AND ERRORS

Occasionally a request for a web page will fail and Ajax requests are no exception. Therefore, jQuery provides two methods that can trigger code depending on whether the request was successful or unsuccessful, along with a third method that will be triggered in both cases (successful or not).

Below is an example that will demonstrate these concepts. It loads fictional exchange rates.

SUCCESS / FAILURE

There are three methods you can chain after `$.get()`, `$.post()`, `$.getJSON()`, and `$.ajax()` to handle success / failure. These methods are:

- `.done()` – an event method that fires when the request has successfully completed
- `.fail()` – an event method that fires when the request did not complete successfully
- `.always()` – an event method that fires when the request has completed (whether it was successful or not)

Older scripts may use the `.success()`, `.error()`, and `.complete()` methods instead of these methods. They do the same thing, but these newer methods have been the preferred option since jQuery 1.8.

Exchange Rates

🇬🇧 UK: 20.00
🇺🇸 US: 35.99
🇦🇺 AU: 39.99

Last update: 15:34



Exchange Rates

Sorry, we cannot load rates.



JSON & ERRORS

1. In this example, JSON data representing currency exchange rates is loaded into the page by a function called `loadRates()`.

2. On the first line of the script an element is added to the page to hold the exchange rate data.

3. The function is called on the last line of the script.

4. Inside `loadRates()`, the `$.getJSON` method tries to load some JSON data. There are three methods chained after this method. They do not all run.

5. `.done()` only runs if the data is retrieved successfully. It contains an anonymous function that shows exchange rates and the time they were displayed.

6. `.fail()` only runs if the server cannot return the data. Its job is to display an error message to the user.

7. `.always()` will run whether or not the answer was returned. It adds a refresh button to the page, along with an event handler that triggers the `loadRates()` function again.

JAVASCRIPT

c08/js/jq-getJSON.js

```
② $('#exchangerates').append('<div id="rates"></div><div id="reload"></div>');

① function loadRates() {
④   $.getJSON('data/rates.json')
⑤   .done( function(data){
        var d = new Date();
        var hrs = d.getHours();
        var mins = d.getMinutes();
        var msg = '<h2>Exchange Rates</h2>';
        $.each(data, function(key, val) {
          msg += '<div class="' + key + '">' + key + ': ' + val + '</div>';
        });
        msg += '<br>Last update: ' + hrs + ':' + mins + '<br>'; // Show update time
        $('#rates').html(msg); // Add rates to page
      })
      .fail( function() {
        $('#aside').append('Sorry, we cannot load rates.');
      })
      .always( function() {
        var reload = '<a id="refresh" href="#">';
        reload += '</a>';
        $('#reload').html(reload);
        $('#refresh').on('click', function(e) {
          e.preventDefault();
          loadRates();
        });
      });
    }
}

③ loadRates(); // Call loadRates()
```

AJAX REQUESTS WITH FINE-GRAINED CONTROL

The `$.ajax()` method gives you greater control over Ajax requests. Behind the scenes, this method is used by all of jQuery's Ajax shorthand methods.

Inside the jQuery file, the `$.ajax()` method is used by the other Ajax helper methods that you have seen so far (which are offered as a simpler way of making Ajax requests).

This method offers greater control over the entire process, with over 30 different settings that you can use to control the Ajax request. You can see a selection of these settings in the table below. These settings are provided using object literal notation (the object is referred to as the settings object).

The example on the right-hand page looks and works like the one that demonstrated the `.load()` method on p390. But it uses the `$.ajax()` method instead.

- The settings can appear in any order, as long as they use valid JavaScript literal notation.
- The settings that take a function can use a named function or an anonymous function written inline.
- `$.ajax()` does not let you load just one part of the page so the jQuery `.find()` method is used to select the required part of the page.

SETTING	DESCRIPTION
<code>type</code>	Can take values GET or POST depending on whether the request is made using HTTP GET or POST
<code>url</code>	The page the request is being sent to
<code>data</code>	The data that is being sent to the server with the request
<code>success</code>	A function that runs if the Ajax request completes successfully (similar to the <code>.done()</code> method)
<code>error</code>	A function that runs if there is an error with the Ajax request (similar to the <code>.fail()</code> method)
<code>beforeSend</code>	A function (anonymous or named) that is run before the Ajax request starts In the example on the right, this is used to trigger a loading icon
<code>complete</code>	Runs after success/error events In the example on the right, this removes a loading icon
<code>timeout</code>	The number of milliseconds to wait before the event should fail

CONTROLLING AJAX

When the user clicks on a link in the <nav> element, new content is loaded into the page. This is very similar to the example on p390 for the .load() method, but that shorthand method only required one line.

1. Here the click event handler triggers the \$.ajax() method.

This example sets seven settings for the \$.ajax() method. The first three are properties, the final four are anonymous functions triggered at different points in the Ajax request.

2. This example sets the timeout property to wait two seconds for the Ajax response.

3. The code also adds elements into the page to show that data is loading. You may not see them appear if the request is handled quickly, but you will see them if the page is slower to load.

4. If the Ajax request fails, then an error message will be shown to the user.

JAVASCRIPT

c08/js/jq-ajax.js

```
① $('nav a').on('click', function(e) {
    e.preventDefault();
    var url = this.href;
    var $content = $('#content');

    // URL to load
    // Cache selection

    // Update links
    // Remove content

    $.ajax({
        type: "POST",
        url: url,
        timeout: 2000,
        beforeSend: function() {
            $content.append('<div id="load">Loading</div>');
            // Path to file
            // Waiting time
            // Before Ajax
            // Load message
        },
        complete: function() {
            $('#loading').remove();
            // Once finished
            // Clear message
        },
        success: function(data) {
            // Show content
            $content.html( $(data).find('#container') ).hide().fadeIn(400);
        },
        fail: function() {
            // Show error msg
            $('#panel').html('<div class="loading">Please try again soon.</div>');
        }
    });
});
```



HOME ROUTE TOYS TIMETABLE

Roll up! Roll up! It's the maker bus...

SAN FRANCISCO, CA

AUSTIN, TX

NEW YORK, NY

9:02 Arduino Antics

10:00 Brain Hacking

11:30 Intro to 3D Modeling

1:02 The Printed Lunch

2:00 Driving On

3:00 Circuit Hacking


Austin, TX

Learn how to program and use an Arduino! This easy-to-learn open source microcontroller board takes all sorts of weird inputs, does some really cool programmed stuff, and outputs some art and power. Arduinos are commonly used in robotics, mechatronics, and all manner of electronic projects around the world. Taught by Matt Dieter, a professional software developer with a long previous career as a technical artist in the video game industry, electronics enthusiast, and instructor.



EXAMPLE

AJAX & JSON

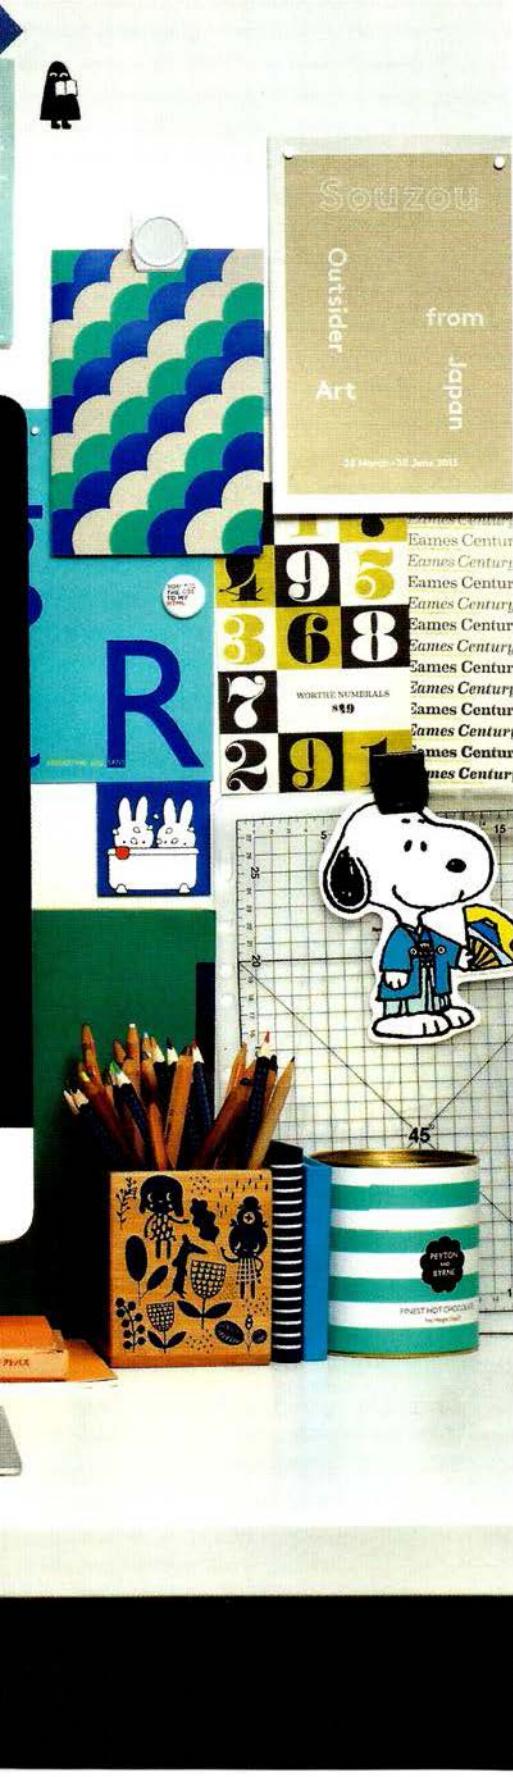

This example shows information about three events. The data used comes from three different sources.

- 1) When the page loads, event locations are coded into the HTML. Users click on an event in the left-hand column; it updates the timetable in the middle column.

In the left column, the links have an `id` attribute whose value is a two-letter identifier for the state the event is in:

```
<a id="tx" href="tx.html">... Austin, TX</a>
```

- 2) The timetables are stored in a JSON object, in an external file collected when the DOM has loaded. When users click on a session in the middle column, its description is shown in the right-hand column.

In the middle column showing timetables, the title of each session is used inside a link that will show the description for the session.

```
<a href="descriptions.html#Circuit-Hacking">  
Circuit Hacking</a>
```

- 3) Descriptions of all sessions are stored in one HTML file. Individual descriptions are selected using jQuery's `.load()` method (and the `#` selector shown on p390).

In the right column, the session description is taken from an HTML file. Each session is stored in an element whose `id` attribute contains the title of the session (with spaces replaced by dashes).

```
<div id="Intro-to-3D-Modeling">  
  <h3>Intro to 3D Modeling</h3>  
  <p>Come learn how to create 3D models of ...</p>  
</div>
```

Because links are added and removed, event delegation is used.

EXAMPLE

AJAX & JSON

This example uses data from three separate sources to demonstrate Ajax techniques.

In the left-hand column you can see three locations for an event. These are written into the HTML for the timetable page. Each one is a link.

1. Clicking on an event loads the session times for that event. They are stored in a file called `example.json`, which is collected when the DOM has loaded.

2. Clicking on a session will load its description. They are stored in `descriptions.html`, which is loaded when a user clicks on a session title.

The screenshot shows a website for "THE MAKER BUS". The header includes a logo of a bus, the text "THE MAKER BUS", and a navigation bar with links for "HOME", "ROUTE", "TOYS", and "TIMETABLE" (which is highlighted in red).

Roll up! Roll up! It's the maker bus...

SAN FRANCISCO, CA

AUSTIN, TX

NEW YORK, NY

①	②
9:00 Arduino Antics	Arduino Antics
10:00 Brain Hacking	Learn how to program and use an Arduino! This easy-to-learn open source microcontroller board takes all sorts of sensor inputs, follows user-generated programs, and outputs data and power. Arduinos are commonly used in robotics, mechatronics, and all manners of electronics projects around the world. Taught by Elsie Denney, professional software developer with a long previous career as a technical artist in the video game industry, electronics enthusiast and instructor.
11:30 Intro to 3D Modeling	
1:00 The Printed Lunch	
2:00 Droning On	
3:00 Circuit Hacking	
4:30 Make The Future	

EXAMPLE

AJAX & JSON

HTML

c08/example.html

```
<body>
  <header>
    <h1>THE MAKER BUS</h1>
    <nav>
      <a href="jq-load.html">HOME</a>
      <a href="jq-load2.html">ROUTE</a>
      <a href="jq-load3.html">TOYS</a>
      <a href="example.html" class="current">TIMETABLE</a>
    </nav>
  </header>

  <section id="content">
    <div id="container">
      <div class="third">
        <div id="event">
          <a id="ca" href="ca.html">
            San Francisco, CA</a>
          <a id="tx" href="tx.html">
            Austin, TX</a>
          <a id="ny" href="ny.html">
            New York, NY</a>
          </div>
        </div>
        <div class="third">
          <div id="sessions">Select an event from the left</div>
        </div>
        <div class="third">
          <div id="details">Details</div>
        </div>
      </div><!-- #container -->
    </section><!-- #content -->

    <script src="js/jquery-1.11.0.min.js"></script>
    <script src="js/example.js"></script>
  </body>
```

Here you can see the HTML page. It has a header, followed by three columns. Two scripts appear before the closing `</body>` tag.

Left column: list of the events

Middle column: timetable of the sessions

Right column: description of the sessions

EXAMPLE

AJAX & JSON

cNN/data/example.json

JAVASCRIPT

```
{  
  "CA": [  
    {  
      "time": "09.00",  
      "title": "Intro to 3D Modeling"  
    },  
    {  
      "time": "10.00",  
      "title": "Circuit Hacking"  
    },  
    {  
      "time": "11.30",  
      "title": "Arduino Antics"  
    }...  
}
```

c08/descriptions.html

HTML

```
<div id="Intro-to-3D-Modeling">  
  <h3>Intro to 3D Modeling</h3>  
  <p>Come learn how to create 3D models of parts you can then make...</p>  
</div>  
<div id="Circuit-Hacking">  
  <h3>Circuit Hacking</h3>  
  <p>Head to the Electro-Tent for a free introductory soldering...</p>  
</div>  
<div id="Arduino-Antics">  
  <h3>Arduino Antics</h3>  
  <p>Learn how to program and use an Arduino! This easy-to-learn...</p>  
</div>
```

When the script is run, the `loadTimetable()` function loads the timetables for all three events from a file formatted using JSON, stored in `example.json`. The data is cached in a variable called `times`.

Events are identified by a two-letter code for the state. You can see a sample of the JSON-formatted data above and a sample of the HTML that will be created using that data.

EXAMPLE

AJAX & JSON

JAVASCRIPT

c08/js/example.js

```
① $(function() { // When the DOM is ready
  ②   var times; // Declare global variable
    $.ajax({
      beforeSend: function(xhr){
        ③       if (xhr.overrideMimeType) { // Before requesting data
          xhr.overrideMimeType("application/json"); // If supported
        }
      }
    });
  ④   // FUNCTION THAT COLLECTS DATA FROM THE JSON FILE
  ⑤   function loadTimetable() { // Declare function
    ⑥     $.getJSON('data/example.json') // Try to collect JSON data
      .done( function(data){ // If successful
        times = data; // Store it in a variable
      }).fail( function() { // If a problem: show message
        $('#event').html('Sorry! We could not load the timetable at the moment');
      });
  ⑦   loadTimetable(); // Call the function
}
```

1. The script that does all the work is in example.js. It runs when the DOM has loaded.
2. The `times` variable will be used to store the session timetables for all of the events.
3. Before the browser requests the JSON data, the script checks if the browser supports the `overrideMimeType()` method. This is used to indicate that the response from the server should be treated as JSON data. This method can be used in case the server is accidentally set up to indicate that the data being returned is in any other format.

4. Next you can see a function called `loadTimetable()`, which is used to load the timetable data from a file called `example.json`.
5. If the data loads successfully, the data for the timetables will be stored in a variable called `times`.
6. If it fails to load, an error message will be shown to the users.
7. The `loadTimetable()` function is then called to load the data.

EXAMPLE

AJAX & JSON

c08/js/example.js

JAVASCRIPT

```
// CLICK ON THE EVENT TO LOAD A TIMETABLE
①  $('#content').on('click', '#event a', function(e) { // User clicks on place
    ②  e.preventDefault();                                // Prevent loading page
    ③  var loc = this.id.toUpperCase();                  // Get value of id attr
    ④  var newContent = '';                            // To build up timetable
    for (var i = 0; i < times[loc].length; i++) {      // loop through sessions
        ⑤  newContent += '<li><span class="time">' + times[loc][i].time + '</span>';
        ⑥  newContent += '<a href="descriptions.html#' + times[loc][i].id + '"';
        ⑦  newContent += times[loc][i].title.replace(/\ /g, '-') + '"';
        ⑧  newContent += times[loc][i].title + '</a></li>';
    }
    ⑨  $('#sessions').html('<ul>' + newContent + '</ul>'); // Display time
    ⑩ [  $('#event a.current').removeClass('current');           // Update selected link
         $(this).addClass('current');
    ⑪   $('#details').text('');                                // Clear third column
});
```

1. A jQuery event helper method waits for users to click on the name of an event. It will load the timetable for that event into the middle column.

2. The `preventDefault()` method prevents the link from opening a page (because it will show the AJAX data instead).

3. A variable called `loc` is created to hold the name of the event location. It is collected from the `id` attribute of the link that was clicked.

4. The HTML for the timetables will be stored in a variable called `newContent`. It is set to a blank string.

5. Each session is stored inside an `` element, which starts by displaying the time of the session.

6. A link is added to the timetable, which will be used to load the description. The link points to the `descriptions.html` file. It is followed by a `#` symbol so it links to the correct part of the page.

7. The session title is added after the `#` symbol. The `.replace()` method replaces spaces in the title with a dash to match the value of the `id` attribute in the `descriptions.html` file for each session.

8. Inside the link you can see the title of the session.

9. The new content is added into the middle column.

10. The class attributes on the event links are updated to show which event is the current event.

11. The third column is emptied if it had content.

EXAMPLE

AJAX & JSON

JAVASCRIPT

c08/js/example.js

```
// CLICK ON A SESSION TO LOAD THE DESCRIPTION
① $('#content').on('click', '#sessions li a', function(e) { // Click on session
②   e.preventDefault(); // Prevent loading
③   var fragment = this.href; // Title is in href
④
⑤   fragment = fragment.replace('#', ' #'); // Add space after#
⑥   $('#details').load(fragment); // To load info
⑦
⑧   $('#sessions a.current').removeClass('current'); // Update selected
⑨   $(this).addClass('current');
});

// CLICK ON PRIMARY NAVIGATION
$('#nav a').on('click', function(e) {
  e.preventDefault(); // Click on nav
  var url = this.href; // Prevent loading
  // Get URL to load
  $('#nav a.current').removeClass('current'); // Update nav
  $(this).addClass('current');

  $('#container').remove(); // Remove old
  $('#content').load(url + ' #container').hide().fadeIn('slow'); // Add new
});

});
```

1. Another jQuery event helper method is set up to respond when a user clicks on a session in the middle column. It loads a description of the session.

2. `preventDefault()` stops the link opening.

3. A variable called `fragment` is created to hold the link to the session. This is collected from the `href` attribute of the link that was clicked.

4. A space is added before the `#` symbol so that it is the correct format for the jQuery `load()` method to collect part (not all) of the HTML page, e.g., `description.html #Arduino-Antics`

5. A jQuery selector is used to find the element whose id attribute has a value of `details` in the third column. The `.load()` method is then used to load the session description into that element.

6. The links are updated so that they highlight the appropriate session in the middle column.

7. The main navigation is set up as shown on p391.

SUMMARY

AJAX & JSON

- ▶ Ajax refers to a group of technologies that allow you to update just one part of the page (rather than reload a whole page).
- ▶ You can incorporate HTML, XML, or JSON data into your pages. (JSON is becoming increasingly popular.)
- ▶ To load JSON from a different domain, you can use JSONP but only if the code is from a trusted source.
- ▶ jQuery has methods that make it easier to use Ajax.
- ▶ `.load()` is the simplest way to load HTML into your pages and allows you to update just a part of the page.
- ▶ `.ajax()` is more powerful and more complex. (Several shorthand methods are also offered.)
- ▶ It is important to consider how the site will work if the user does not have JavaScript enabled, or if the page is not able to access the data from a server.