Task 1 — Zomato Restaurant Analysis

Alfido Tech Data Science Internship | Project report

Task 1: Zomato Restaurant Analysis

Dataset and methodology

• Source: locally available CSV in `data/raw/`.

• Findings describe this dataset only; they are not automatically generalizable.

Findings

• Rows: 9,551; columns: 21.

• Duplicate rows: 0.

• Cells missing values: 9.

• Average restaurant rating: 2.67; median: 3.20; valid ratings: 9,551.

• City with most listings in this dataset: New Delhi (5,473 listings).

• Most frequently listed cuisine: North Indian (3,960 mentions).

• Average Cost for two: median 400.00; mean 1,199.21 (currency/units follow the source dataset).

• Correlation between rating and votes: 0.314 (descriptive, not causal).

Outputs

Charts and supporting CSV files are saved in outputs/.

Recommendations and next steps


• Compare ratings across cities and cuisines before selecting areas for further investigation.

• Review price range and average cost alongside ratings; correlation does not prove causation.


• Validate missing values, duplicate records, currency units and dataset provenance.

• Use city, cuisine and review-volume patterns as descriptive indicators, not guaranteed demand.


Task1 Zomato Rating Distribution

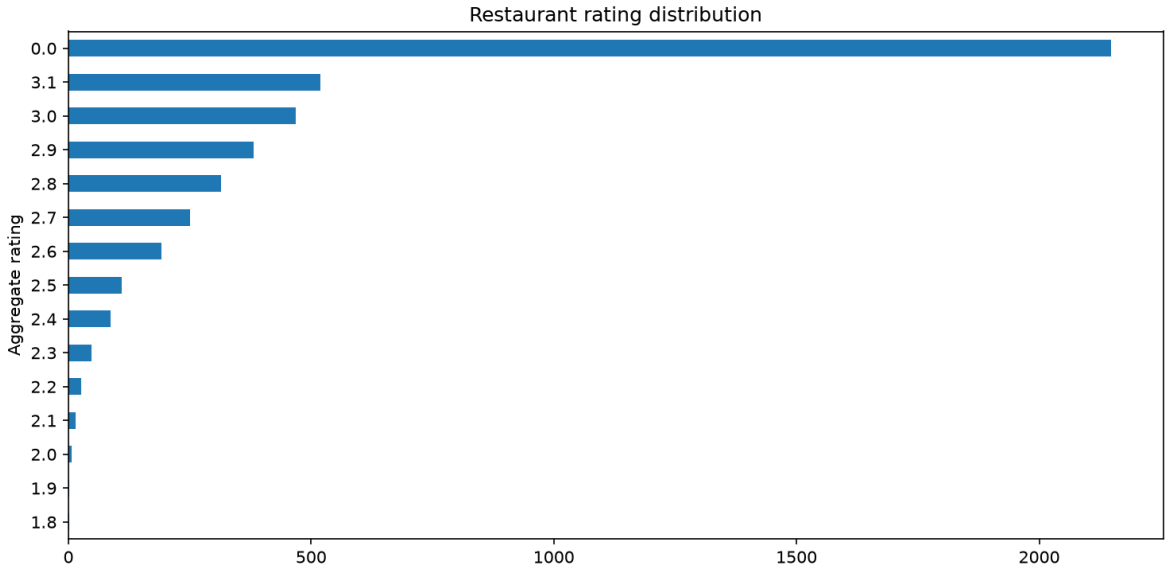

Task1 Zomato Top Cities

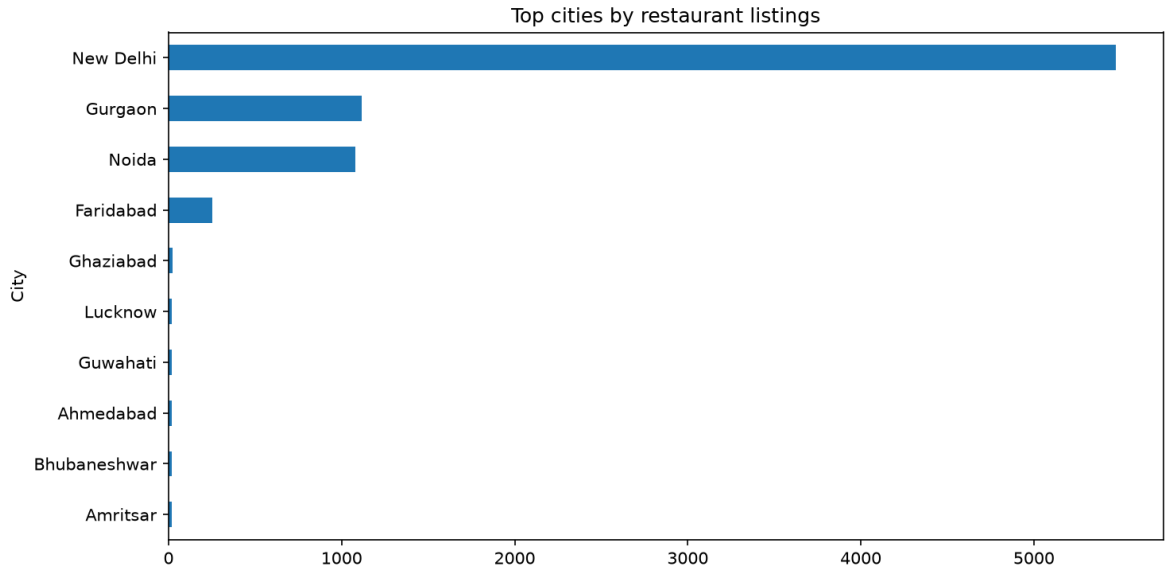

Task1 Zomato Top Cuisines

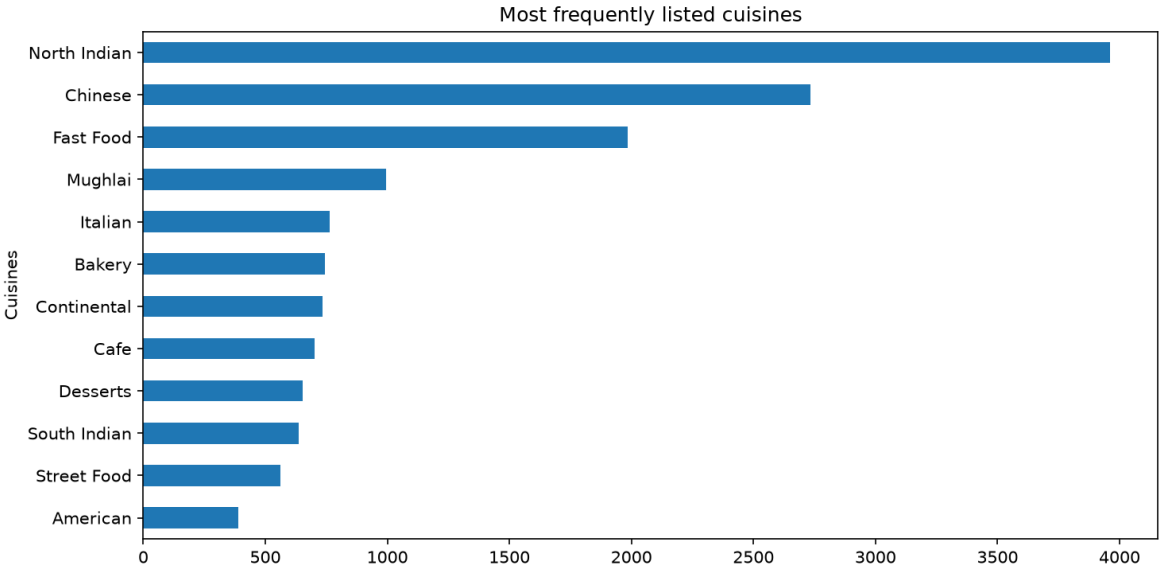
Most frequently listed cuisines
Cuisines
North Indian
Chinese
Fast Food
Mughlai
Italian
Bakery
Continental
Cafe
Desserts
South Indian
Street Food
American
0
500
1000
1500
2000
2500
3000
3500
4000