Task 1 — Zomato Restaurant Analysis

Alfido Tech Data Science Internship | Project deliverable

Task 1: Zomato Restaurant Analysis

Dataset and methodology

• Source: locally available CSV in `data/raw/`.

• Findings describe this dataset only; they are not automatically generalizable.

Findings

• Rows: 9,551; columns: 21.

• Duplicate rows: 0.

• Cells missing values: 9.

• Average restaurant rating: 2.67; median: 3.20; valid ratings: 9,551.

• City with most listings in this dataset: New Delhi (5,473 listings).

• Most frequently listed cuisine: North Indian (3,960 mentions).

• Average Cost for two: median 400.00; mean 1,199.21 (currency/units follow the source dataset).

• Correlation between rating and votes: 0.314 (descriptive, not causal).

Outputs

Charts and supporting CSV files are saved in outputs/.

Recommendations and next steps

• Compare restaurant ratings across cities and cuisines before choosing partnership targets.


• Review price range and average cost alongside ratings; do not assume price alone causes better ratings.

• Prioritize locations with a strong restaurant supply and useful customer demand indicators.


• Use cuisine popularity and review volume to guide restaurant discovery content.

• Validate missing values, duplicate records, currency units and dataset source before business decisions.


Task1 City Average Rating

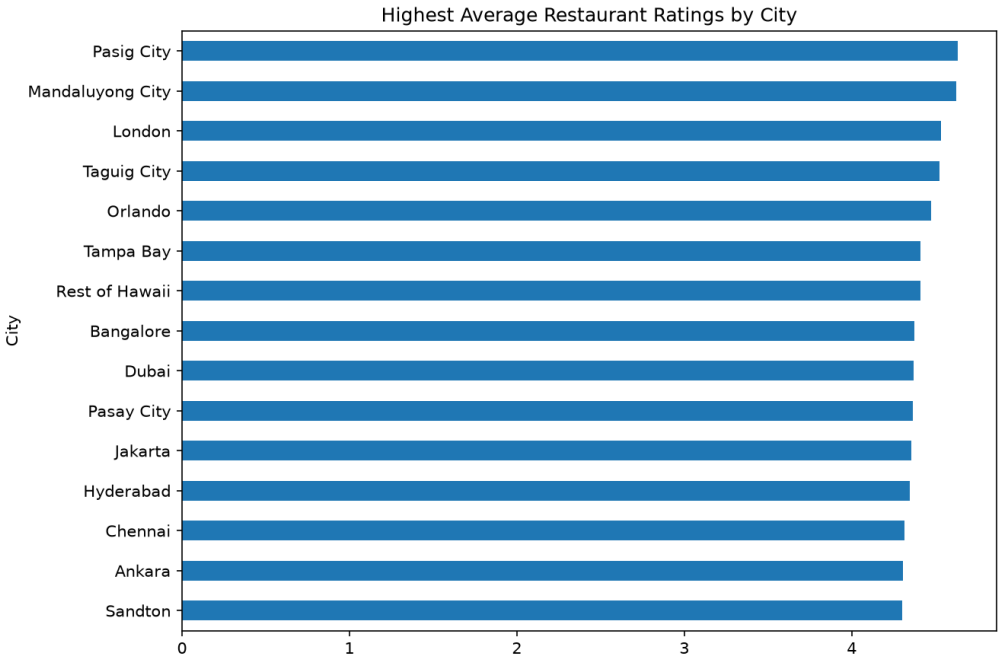

Task1 Cuisine Average Rating

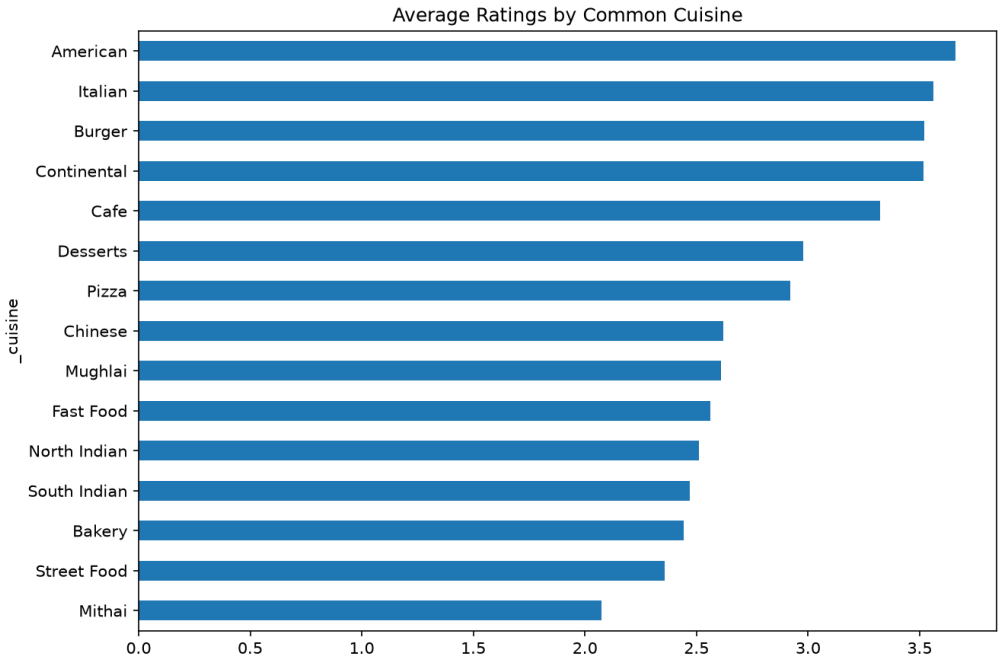

Task1 Cost Vs Rating

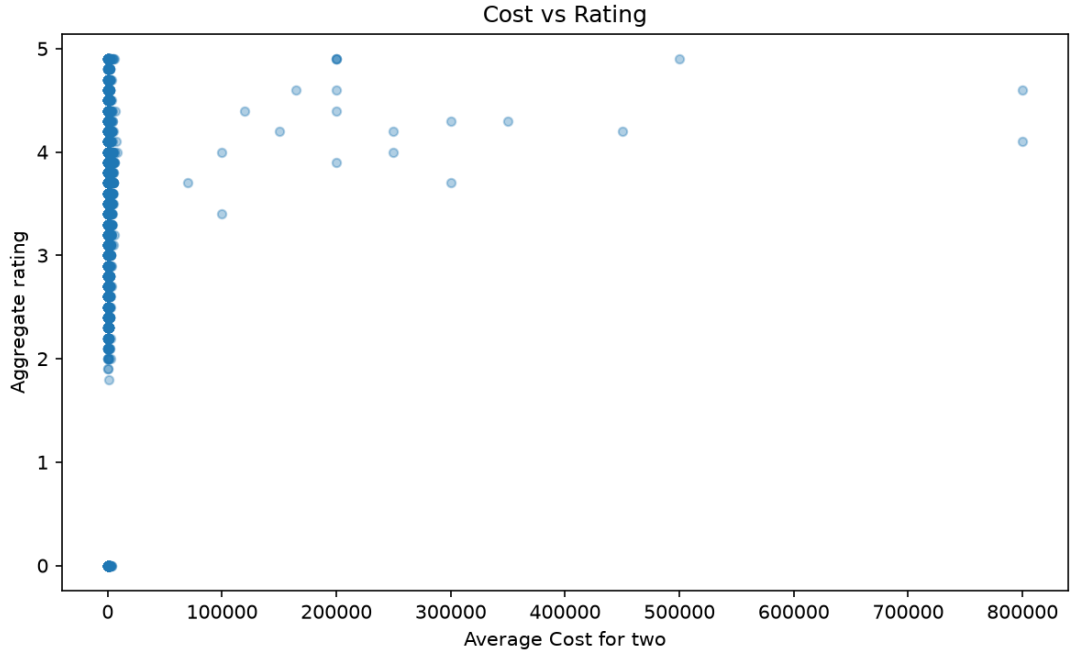
Cost vs Rating
Aggregate rating
Average Cost for two
0
1
2
3
4
5
0
100000
200000
300000
400000
500000
600000
700000
800000