# Task 1 — Zomato Restaurant Analysis

Alfido Tech Data Science Internship | Project deliverable

## Task 1: Zomato Restaurant Analysis

## Dataset and methodology

• Source: locally available CSV in `data/raw/`.

• Findings describe this dataset only; they are not automatically generalizable.

## Findings

• Rows: 9,551; columns: 21.

• Duplicate rows: 0.

• Cells missing values: 9.

• Average restaurant rating: 2.67; median: 3.20; valid ratings: 9,551.

• City with most listings in this dataset: New Delhi (5,473 listings).

• Most frequently listed cuisine: North Indian (3,960 mentions).

• Average Cost for two: median 400.00; mean 1,199.21 (currency/units follow the source dataset).

• Correlation between rating and votes: 0.314 (descriptive, not causal).

## Outputs

Charts and supporting CSV files are saved in outputs/.

# Recommendations and next steps

• Compare restaurant ratings across cities and cuisines before choosing partnership targets.


• Review price range and average cost alongside ratings; do not assume price alone causes better ratings.

• Prioritize locations with a strong restaurant supply and useful customer demand indicators.


• Use cuisine popularity and review volume to guide restaurant discovery content.

• Validate missing values, duplicate records, currency units and dataset source before business decisions.


## Task1 Zomato Rating Distribution

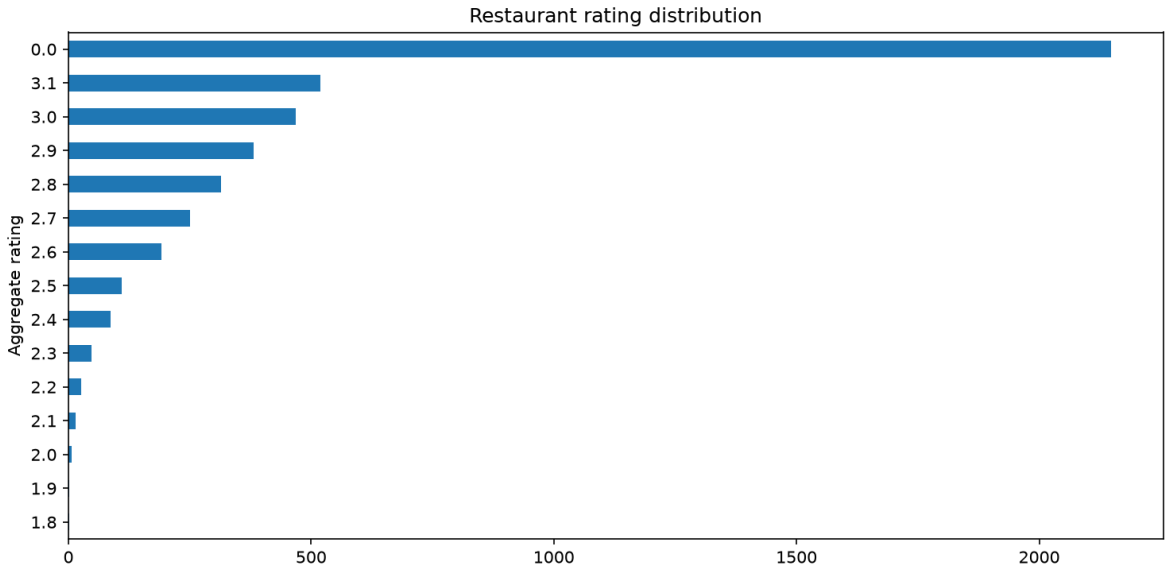


## Task1 Zomato Top Cities

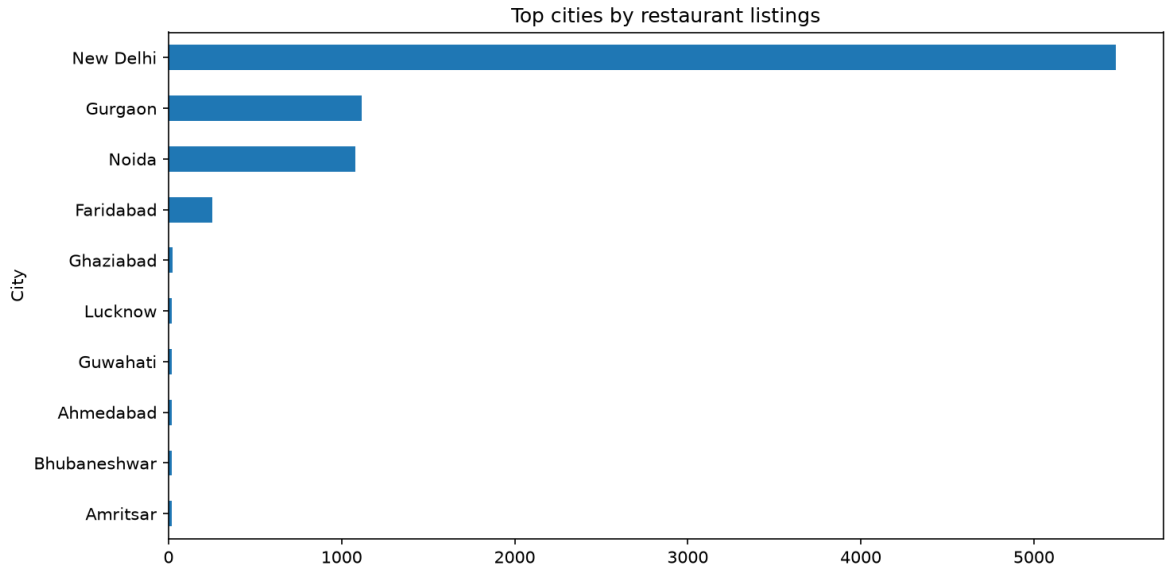


## Task1 Zomato Top Cuisines

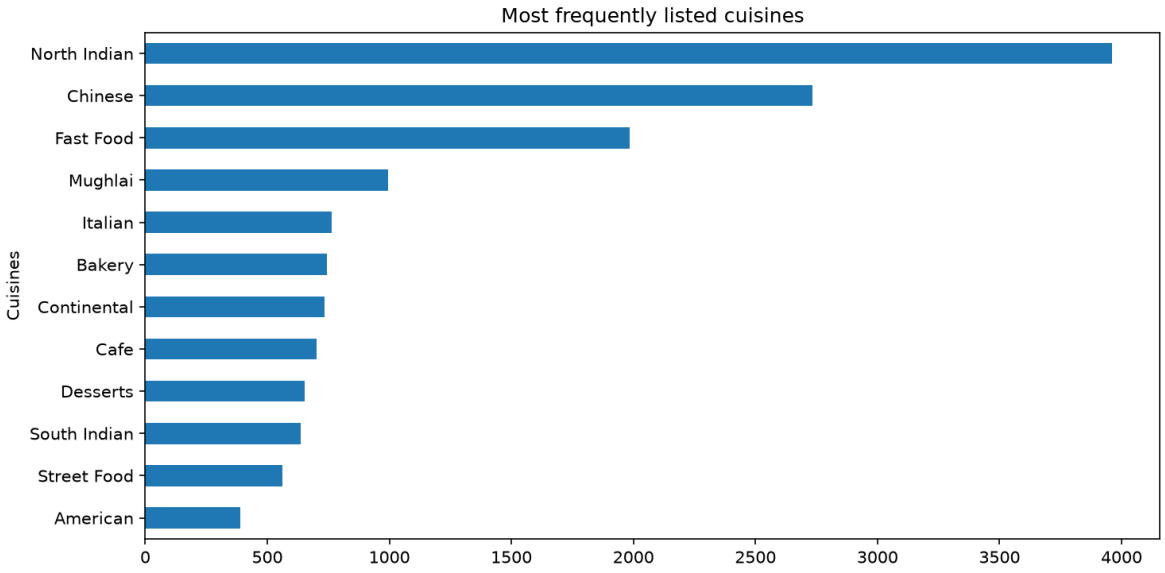
Most frequently listed cuisines
Cuisines
North Indian
Chinese
Fast Food
Mughlai
Italian
Bakery
Continental
Cafe
Desserts
South Indian
Street Food
American
0
500
1000
1500
2000
2500
3000
3500
4000