


# Data Flow Diagram


|                      |                                                                              |
|----------------------|------------------------------------------------------------------------------|
| <b>Date</b>          | 04 October 2026                                                              |
| <b>Team ID</b>       | POCKETSMART-TEAM                                                             |
| <b>Project Name</b>  | PocketSmart AI – Smart Budget & Recommendation Assistant using Gemini Models |
| <b>Maximum Marks</b> | 2 Marks                                                                      |

## Level 0 and Level 1 Diagrams

### Level 0 – Context Diagram

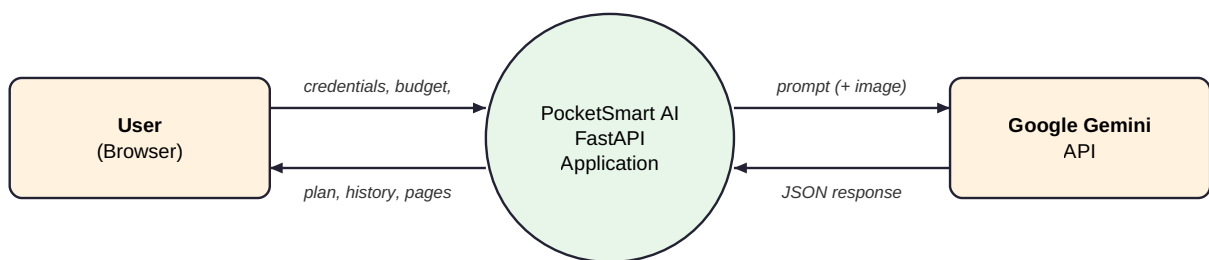

### Level 1 – Main Processes

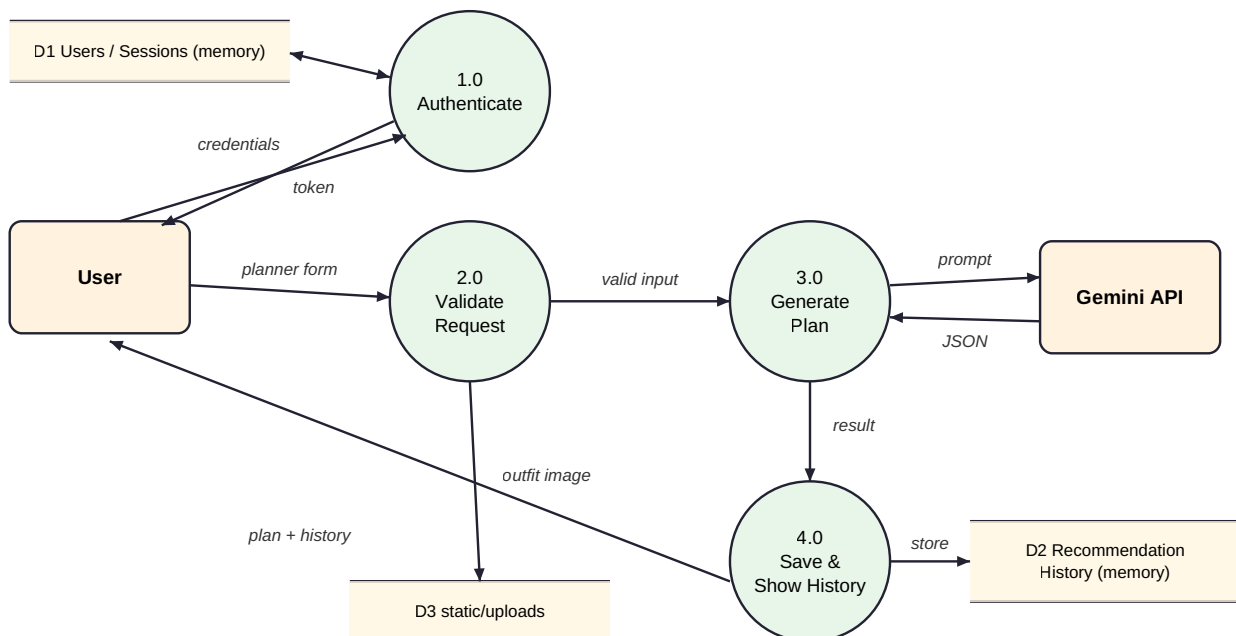

| Symbol          | Name                     | Meaning in this project                                                                 |
|-----------------|--------------------------|-----------------------------------------------------------------------------------------|
| External entity | User / Google Gemini API | The user supplies credentials, budgets and requirements; Gemini returns generated JSON. |

|            |                                                  |                                                                                |
|------------|--------------------------------------------------|--------------------------------------------------------------------------------|
| Process    | Authenticate / Validate / Generate / Save & Show | Application logic handled by FastAPI (main.py, auth.py, gemini_utils.py).      |
| Data store | D1, D2 (in-memory), D3 (uploads folder)          | Users and sessions, recommendation history, and uploaded outfit images.        |
| Arrow      | Data flow                                        | Credentials, token, planner input, prompt, AI response, plan and history data. |

Note: D1 and D2 are Python dictionaries held in application memory, so they are cleared when the server restarts.