


CS4830 - BIG DATA LABORATORY

LAB 7 ASSIGNMENT

REPORT

Sahil Ahmad Ansari
ME17B065

1. Question 1

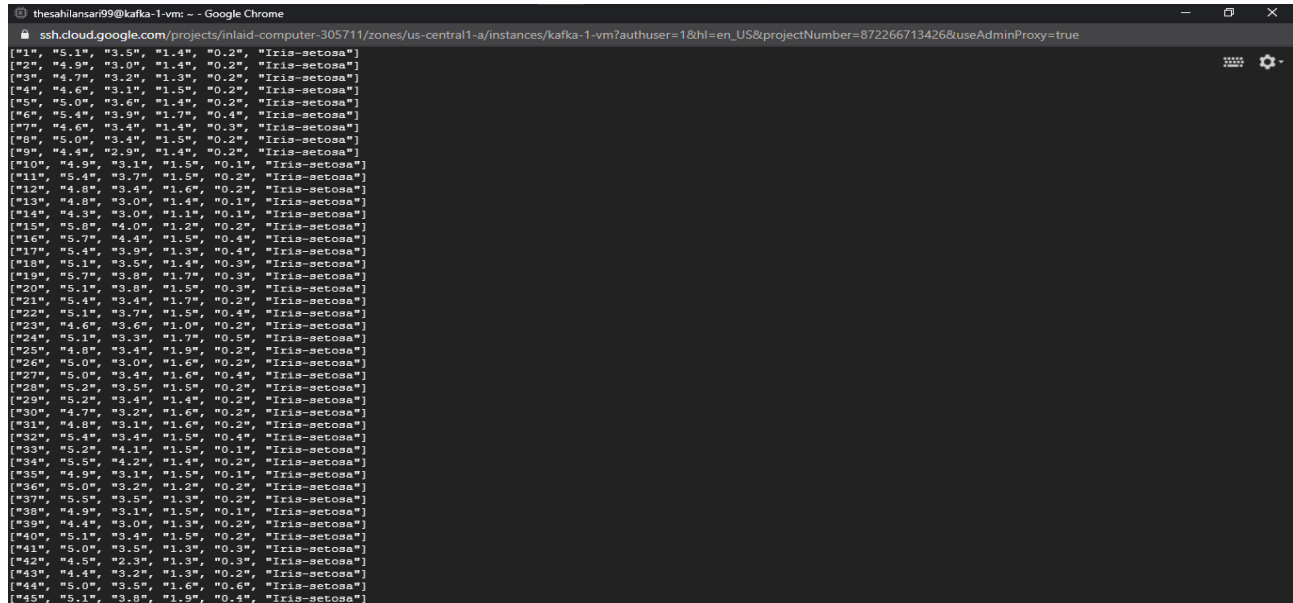


```
ssh.cloud.google.com/projects/inlaid-computer-305711/zones/us-central1-a/instances/kafka-1-vm?authuser=1&hl=en_US&projectNumber=872266713426&useAdminProxy=true

["1", "5.1", "3.5", "1.4", "0.2", "Iris-setosa"]
["2", "4.9", "3.0", "1.4", "0.2", "Iris-setosa"]
["3", "4.7", "3.2", "1.3", "0.2", "Iris-setosa"]
["4", "4.5", "3.1", "1.5", "0.2", "Iris-setosa"]
["5", "5.0", "3.6", "1.4", "0.2", "Iris-setosa"]
["6", "5.4", "3.9", "1.7", "0.4", "Iris-setosa"]
["7", "4.6", "3.4", "1.4", "0.3", "Iris-setosa"]
["8", "5.0", "3.4", "1.5", "0.2", "Iris-setosa"]
["9", "4.4", "2.9", "1.4", "0.2", "Iris-setosa"]
["10", "4.9", "3.1", "1.5", "0.1", "Iris-setosa"]
["11", "5.4", "3.7", "1.5", "0.2", "Iris-setosa"]
["12", "4.8", "3.4", "1.6", "0.2", "Iris-setosa"]
["13", "4.8", "3.0", "1.4", "0.1", "Iris-setosa"]
["14", "4.3", "3.0", "1.1", "0.1", "Iris-setosa"]
["15", "5.8", "4.0", "1.2", "0.2", "Iris-setosa"]
["16", "5.7", "4.4", "1.5", "0.4", "Iris-setosa"]
["17", "5.4", "3.9", "1.3", "0.4", "Iris-setosa"]
["18", "5.1", "3.5", "1.4", "0.3", "Iris-setosa"]
["19", "5.7", "3.8", "1.7", "0.3", "Iris-setosa"]
["20", "5.1", "3.8", "1.5", "0.3", "Iris-setosa"]
["21", "5.4", "3.4", "1.7", "0.2", "Iris-setosa"]
["22", "5.1", "3.7", "1.3", "0.4", "Iris-setosa"]
["23", "4.6", "3.6", "1.0", "0.2", "Iris-setosa"]
["24", "5.1", "3.3", "1.7", "0.5", "Iris-setosa"]
["25", "4.8", "3.4", "1.9", "0.2", "Iris-setosa"]
["26", "5.0", "3.0", "1.6", "0.2", "Iris-setosa"]
["27", "5.0", "3.4", "1.4", "0.4", "Iris-setosa"]
["28", "5.2", "3.5", "1.5", "0.2", "Iris-setosa"]
["29", "5.2", "3.4", "1.4", "0.2", "Iris-setosa"]
["30", "4.7", "3.2", "1.6", "0.2", "Iris-setosa"]
["31", "4.8", "3.1", "1.6", "0.2", "Iris-setosa"]
["32", "5.4", "3.4", "1.5", "0.4", "Iris-setosa"]
["33", "5.2", "4.1", "1.5", "0.1", "Iris-setosa"]
["34", "5.5", "4.2", "1.4", "0.2", "Iris-setosa"]
["35", "4.9", "3.1", "1.5", "0.1", "Iris-setosa"]
["36", "5.0", "3.2", "1.2", "0.2", "Iris-setosa"]
["37", "5.5", "3.5", "1.3", "0.2", "Iris-setosa"]
["38", "4.9", "3.1", "1.5", "0.1", "Iris-setosa"]
["39", "4.4", "3.0", "1.3", "0.2", "Iris-setosa"]
["40", "5.1", "3.4", "1.5", "0.2", "Iris-setosa"]
["41", "5.0", "3.5", "1.3", "0.3", "Iris-setosa"]
["42", "4.5", "2.3", "1.3", "0.3", "Iris-setosa"]
["43", "4.4", "3.2", "1.3", "0.2", "Iris-setosa"]
["44", "5.0", "3.5", "1.6", "0.5", "Iris-setosa"]
["45", "5.1", "3.8", "1.5", "0.4", "Iris-setosa"]
```

(a) Cloud Functions

The above screenshot shows log of the consumer when a file is uploaded from the consumer. Each row is converted into a string and then pushed to the consumer.

2. Question 2 For this part we first load the model from the bucket. Then for data which we receive, we make the prediction. Below screenshot shows the data that is received from the producer.

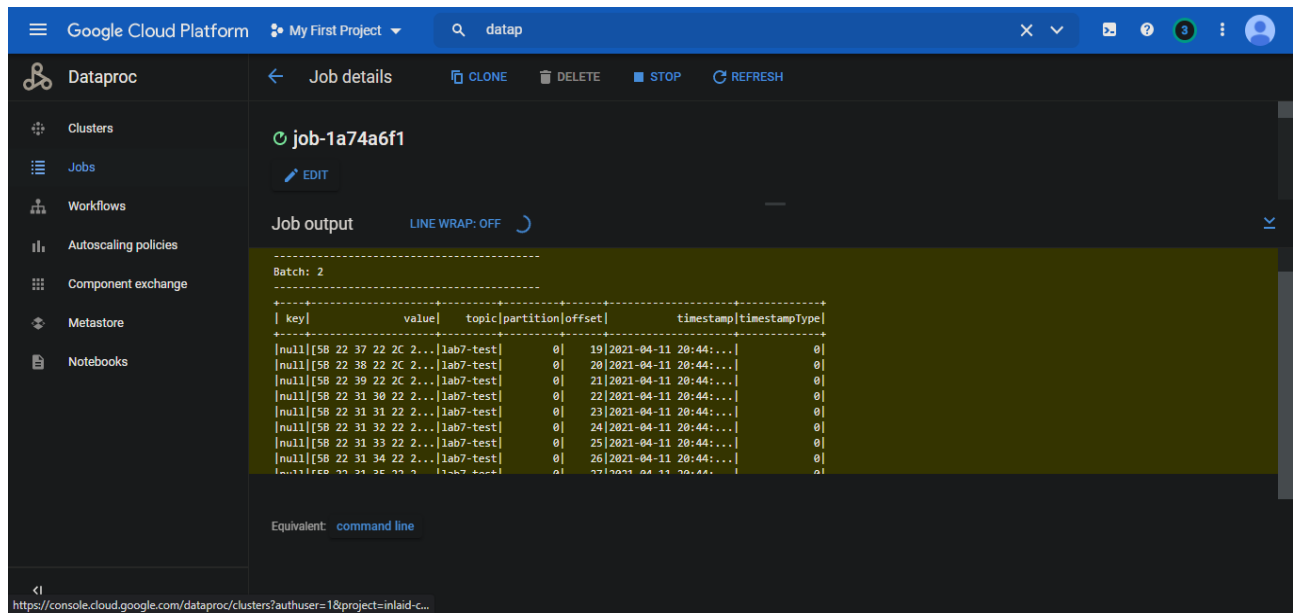

(a) Cloud Functions

Unfortunately, I could not figure out how to do the predictions on the incoming data, hence I cannot produce a screenshot for the same.