

Class 5: Data Viz with ggplot2

Madina(PID: 185)

Table of contents

Background	1
Add some custom features	4
Gene Expression Data	7

Background

There are many graphics system in R for making plots and figures. These include so-called “*base R*” *graphics* like the `plot()` function and add on packages like **ggplot2**.


Let’s compare how we make a simple figure with these two systems:

We can use the in-built `cars` dataset:

```
head(cars)
```

```
  speed dist
1     4    2
2     4   10
3     7    4
4     7   22
5     8   16
6     9   10
```

```
plot(cars)
```

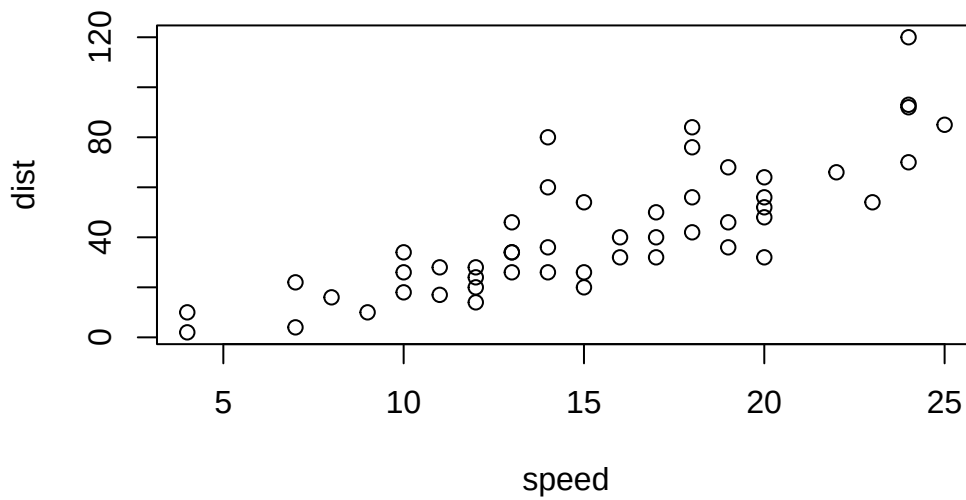

Before I can use the **ggplot2** I need to install it on my computer. To do this we can use the function `install.packages("ggplot2")`.


N.B. We never run `install.packages()` in our quarto doc (we run it once only in R console) as it would re-install the package everytime we render the code.

Once installed we need to load up the package into our R brain

```
library(ggplot2)
```

The main function in **ggplot2** package is called `ggplot()`


```
ggplot(cars)
```



Every ggplot has at least 3 layers

- The **data** (a data.frame of the stuff we want to plot)
- The **aesthetics** (how the data maps to the plot)
- The **geom** layer(how you want the plot drawn, e.g points, line, etc.)


```
ggplot(cars) +  
  aes(x=speed ,y=dist ) +  
  geom_point()
```

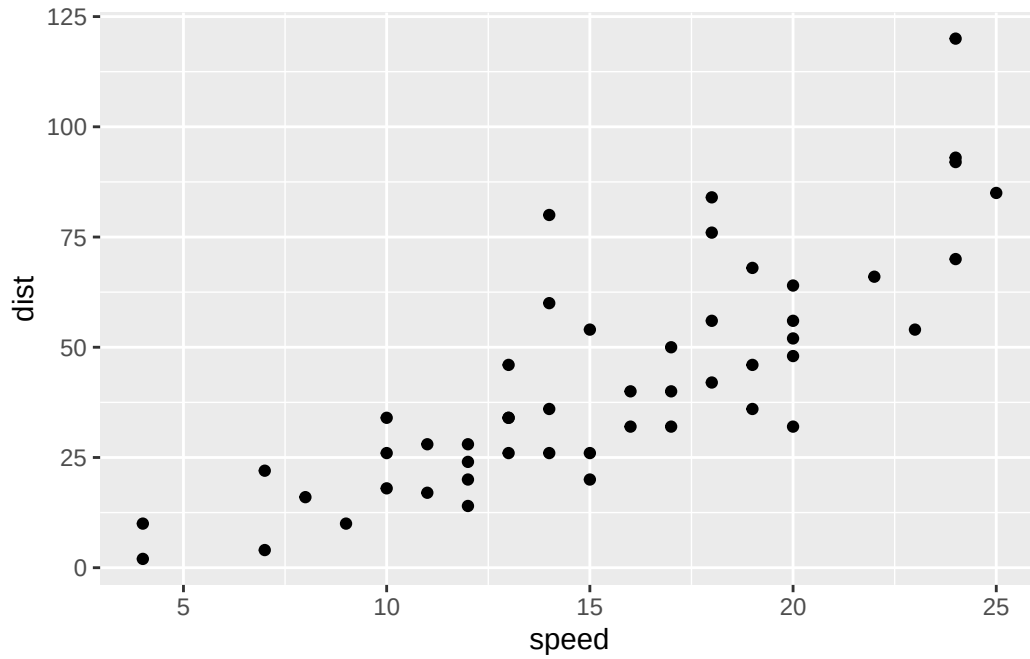

Add some custom features


Let's add a trend line that shows the relationship between the speed and distance.

```
ggplot(cars) +  
  aes(x=speed ,y=dist ) +  
  geom_point() +  
  geom_line()
```

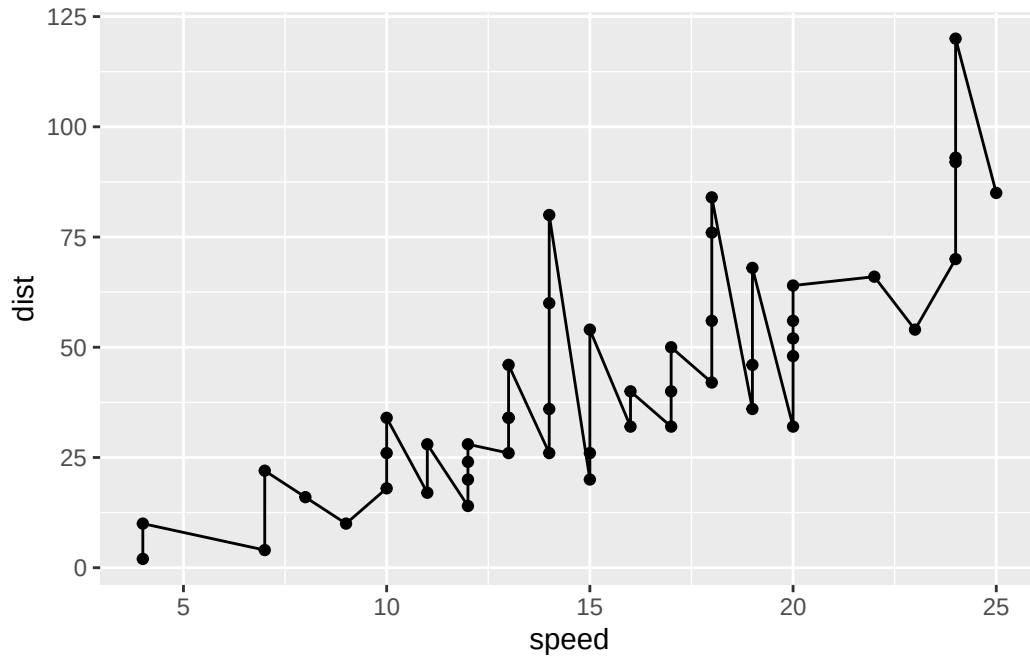

```
ggplot(cars) +  
  aes(x=speed ,y=dist ) +  
  geom_point() +  
  geom_smooth() +  
  theme_bw() +  
  labs(title = "Stopping Distribution of Old Cars",  
        x="Speed(MPH)",  
        y="Distance(ft)")
```


`geom\_smooth()` using method = 'loess' and formula = 'y ~ x'

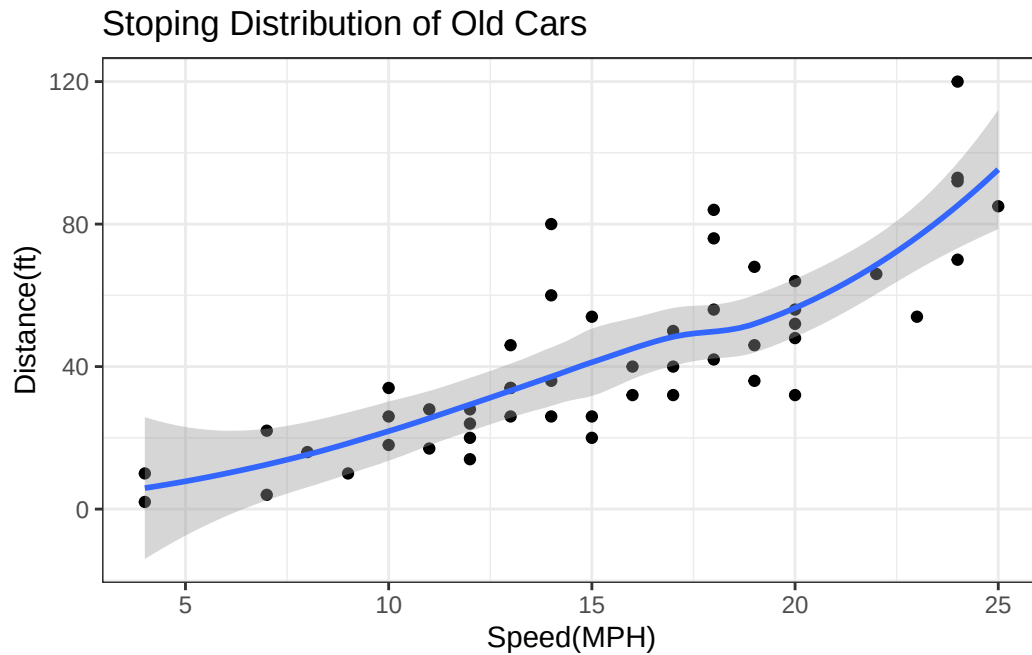

Q. Can you make the `geom_smooth()` function produce a linear straight line fit to the data trend line and turn-off the grey error region.

```
ggplot(cars) +
  aes(x=speed ,y=dist ) +
  geom_point() +
  geom_smooth(method = lm, se=FALSE) +
  theme_bw() +
  labs(title = "Stopping Distribution of Old Cars",
        x="Speed(MPH)",
        y="Distance(ft)")
```

`geom_smooth()` using formula = `'y ~ x'`

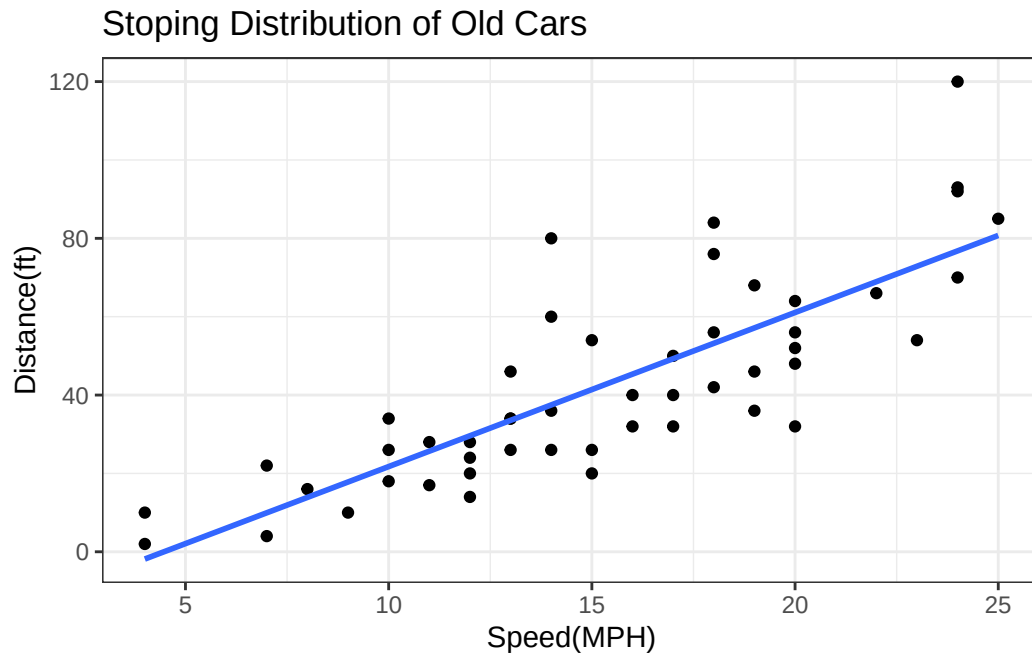

Gene Expression Data

```
url <- "https://bioboot.github.io/bimm143_S20/class-material/up_down_expression.txt"
genes <- read.delim(url)
head(genes)
```

	Gene	Condition1	Condition2	State
1	A4GNT	-3.6808610	-3.4401355	unchanging
2	AAAS	4.5479580	4.3864126	unchanging
3	AASDH	3.7190695	3.4787276	unchanging
4	AATF	5.0784720	5.0151916	unchanging
5	AATK	0.4711421	0.5598642	unchanging
6	AB015752.4	-3.6808610	-3.5921390	unchanging

```
up <- sum(genes$State == "up")
up
```

```
[1] 127
```

```
total <- nrow(genes)
total
```

```
[1] 5196
```

```
ncol(genes)
```

```
[1] 4
```

```
fraction <- up/total
fraction
```

```
[1] 0.02444188
```

```
round(fraction, 2)
```

```
[1] 0.02
```

A useful new function in this context is the `table()` function.


```
table(genes$State)
```

down	unchanging	up
72	4997	127

My first plot attempt

```
ggplot(genes) +
  aes(Condition1, Condition2, col=State) +
  geom_point() +
  labs(title="Gene Expression Changes upon GLP-1 Inhibitor Drug Treatment", x="Control(no drug)", y="Drug") +
  scale_color_manual(values = c("purple", "grey", "orange"))
```


Gene Expression Changes upon GLP-1 Inhibitor Drug Treatment

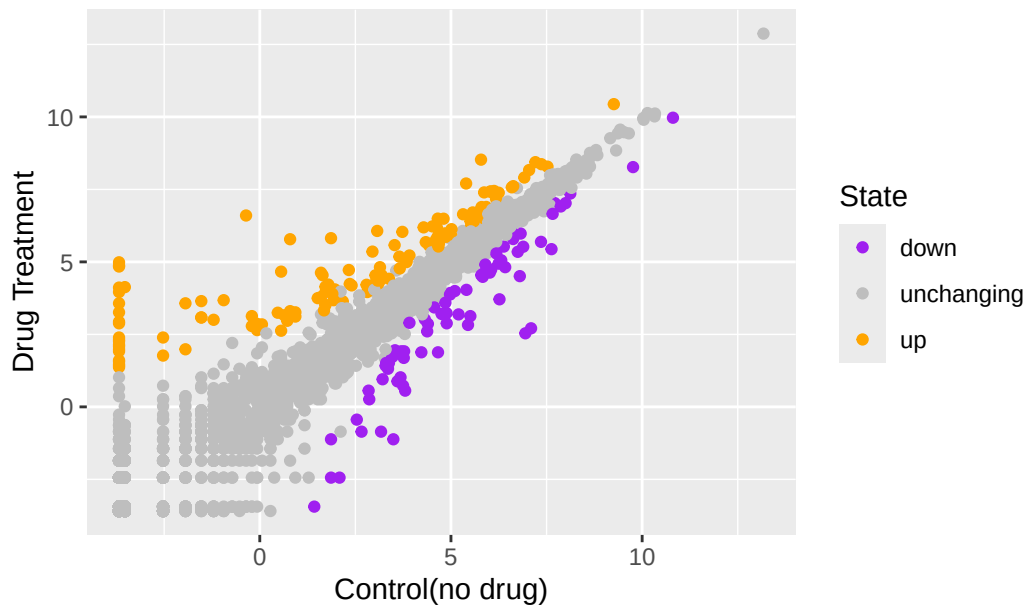

Here we read the famous gapminder

```
url <- "https://raw.githubusercontent.com/jennybc/gapminder/master/inst/extdata/gapminder.tsv"
gapminder <- read.delim(url)
head(gapminder)
```

	country	continent	year	lifeExp	pop	gdpPercap
1	Afghanistan	Asia	1952	28.801	8425333	779.4453
2	Afghanistan	Asia	1957	30.332	9240934	820.8530
3	Afghanistan	Asia	1962	31.997	10267083	853.1007
4	Afghanistan	Asia	1967	34.020	11537966	836.1971
5	Afghanistan	Asia	1972	36.088	13079460	739.9811
6	Afghanistan	Asia	1977	38.438	14880372	786.1134

Q. How many entries (i.e. rows) are in this dataset?

```
nrow(gapminder)
```

```
[1] 1704
```

Q. How many “countries” are in this dataset?

```
length(table(gapminder$country))
```

```
[1] 142
```

```
length(unique(gapminder$country))
```


```
[1] 142
```

Let's make our first plot of the entire dataset.

Plot of the “gdpPercap” vs “lifeExp” colored by “continent”.


```
p <- ggplot(gapminder) +  
  aes(gdpPercap, lifeExp, col=continent) +  
  geom_point(alpha=0.3)
```

p

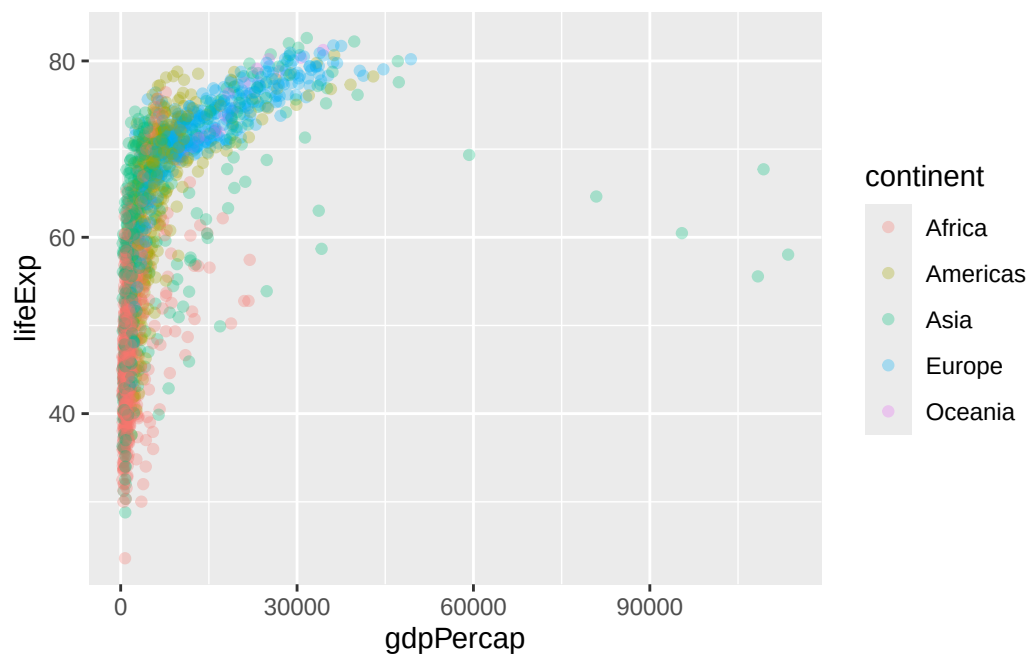

I can add more layers to “p”

```
p + facet_wrap(~continent)
```

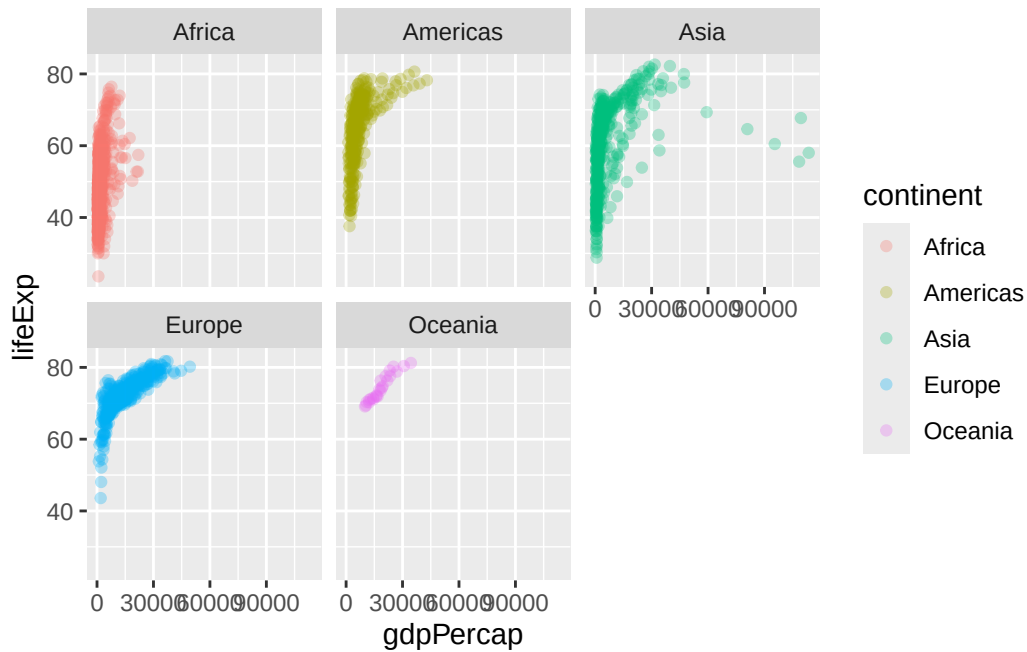


Make a plot for 1977 and 2007 not all year in the dataset.

First use the **dplyr** package and the `filter()` function from the package to extract the rows from the year 2007.


```
library(dplyr)
```

```
gapminder_year_2007 <- filter(gapminder, year == 2007)
gapminder_year_1977 <- filter(gapminder, year == 1977)
g <- filter(gapminder, year == 2007 | year == 1977)
```

```
ggplot(gapminder_year_2007) +
  aes(gdpPercap, lifeExp, col=continent, size=pop) +
  geom_point()
```

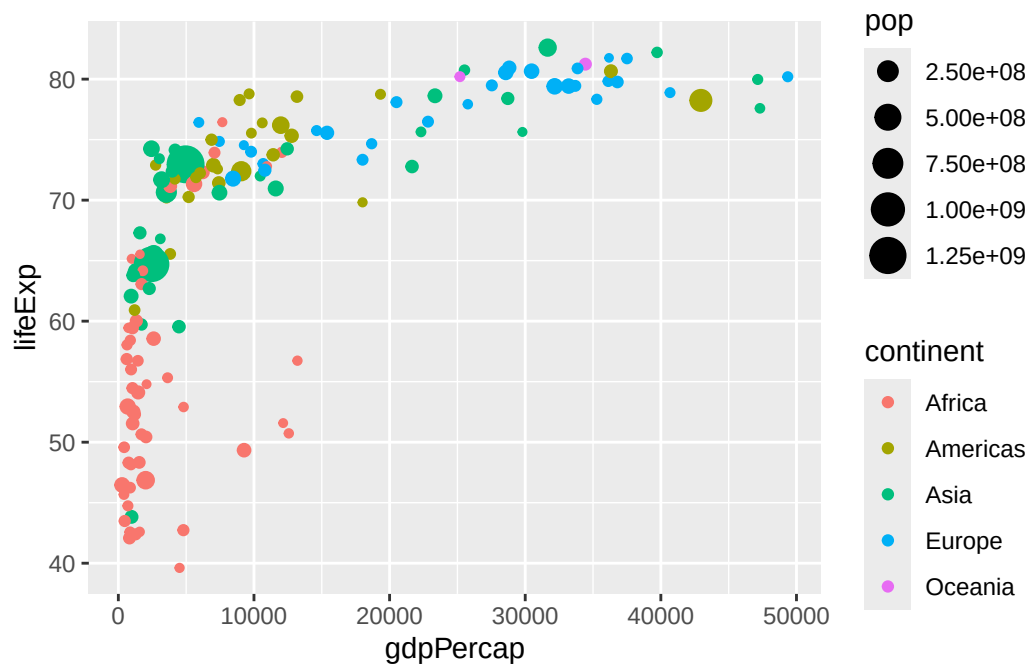


```
ggplot(g) +
  aes(gdpPercap, lifeExp, col=continent, size = pop) +
  geom_point() +
  facet_wrap(~year)
```

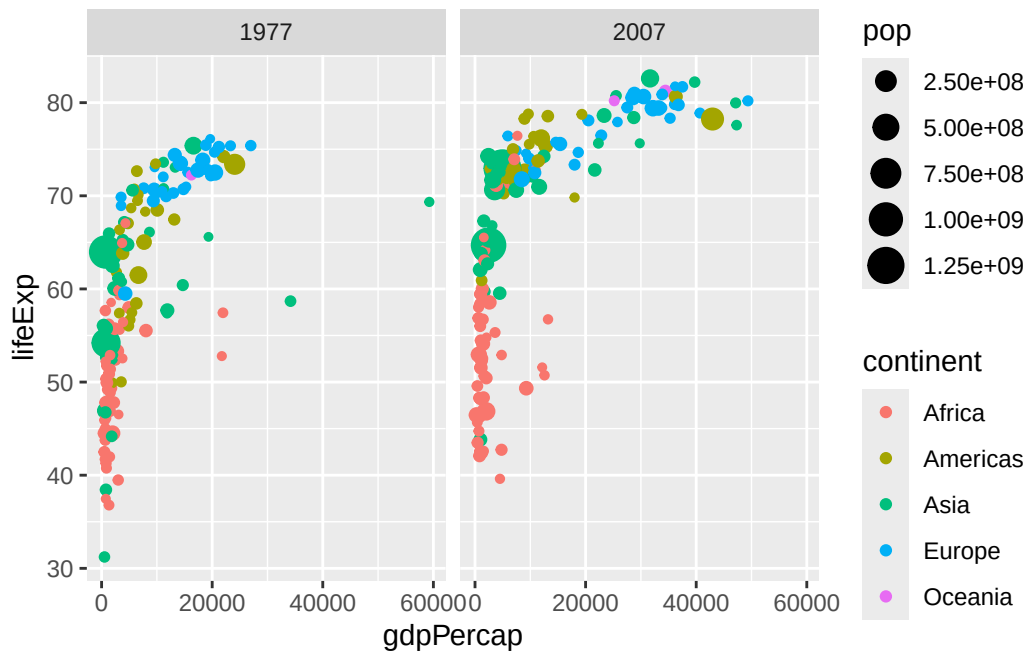

Q. Make a histogram of lifeExp colored by continent.(use `fill=continent` or `col=continent`)

```
ggplot(gapminder) +
  aes(lifeExp, fill = continent) +
  geom_histogram()
```

``stat_bin()`` using ``bins = 30``. Pick better value ``binwidth``.

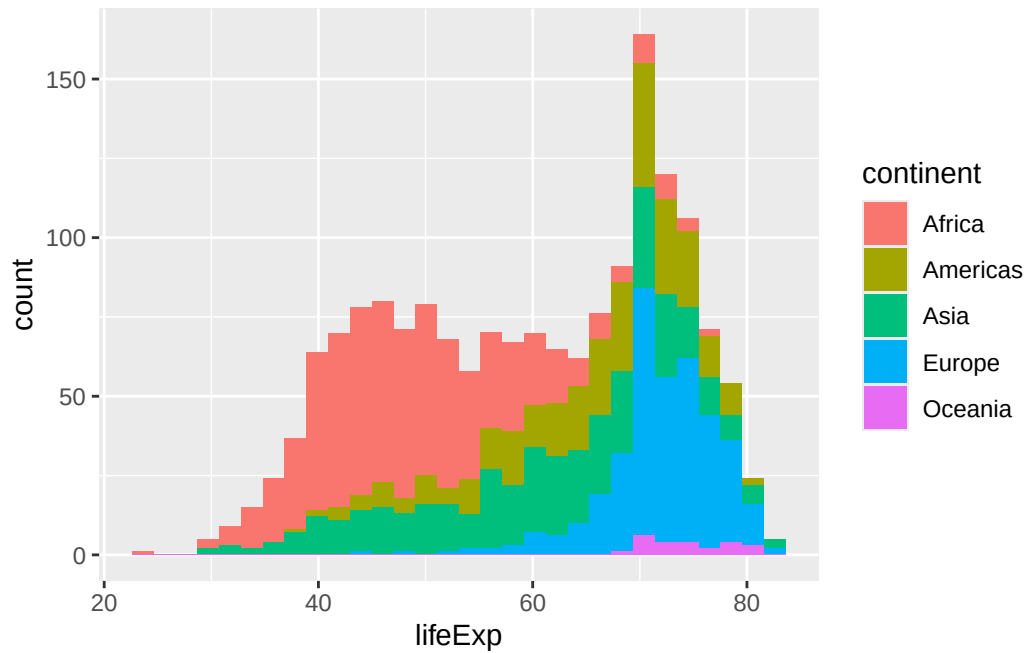

Q. Make a histogram of lifeExp faceted by continent

```
ggplot(gapminder) +  
  aes(lifeExp, fill = continent) +  
  geom_histogram() +  
  facet_wrap(~continent)
```

``stat_bin()`` using ``bins = 30``. Pick better value ``binwidth``.

