

Agente respondiendo preguntas con fuentes citadas

Cloud Shell


Menu ▾

```
raise self._make_status_error_from_response(err.response) from None
groq.NotFoundError: Error code: 404 - {'error': {'message': 'The model `gemini-2.0-flash` does not exist or you do not have access to it.', 'type': 'invalid_request_error', 'code': 'model_not_found'}}
vpmadridc@cloudshell:src (us-ashburn-1)$ sed -i 's/LLM_MODEL=gemini-2.0-flash/LLM_MODEL=llama-3.3-70b-versatile/'
../.env
vpmadridc@cloudshell:src (us-ashburn-1)$ cat ../.env | grep LLM_MODEL
LLM_MODEL=llama-3.3-70b-versatile
vpmadridc@cloudshell:src (us-ashburn-1)$ python3 -c "
> from generate import responder
> resultado = responder('¿Cuál es la política de reembolsos?')
> print('RESPUESTA:', resultado['respuesta'])
> print()
> print('FUENTES:', resultado['fuentes'])
> "
RESPUESTA: La política de reembolsos de BimBam Buy se gestiona según la Política de Reembolsos y Devoluciones de la empresa. Los reembolsos por devoluciones, garantías o cancelaciones aprobadas se procesan de acuerdo con esta política. Antes de procesar un reembolso, el área de pagos puede requerir confirmación de varios datos, como el caso aprobado, el monto final, el medio original de pago, el estado de captura o conciliación y cualquier restricción bancaria o regulatoria.

(Fuente: faq.pdf, página 5)

FUENTES: [{'archivo': 'faq.pdf', 'pagina': 4}, {'archivo': 'faq.pdf', 'pagina': 7}, {'archivo': 'faq.pdf', 'pagina': 5}, {'archivo': 'faq.pdf', 'pagina': 5}, {'archivo': 'politica_reembolsos.pdf', 'pagina': 4}]
vpmadridc@cloudshell:src (us-ashburn-1)$
```

Servidor Streamlit activo en OCI Cloud Shell

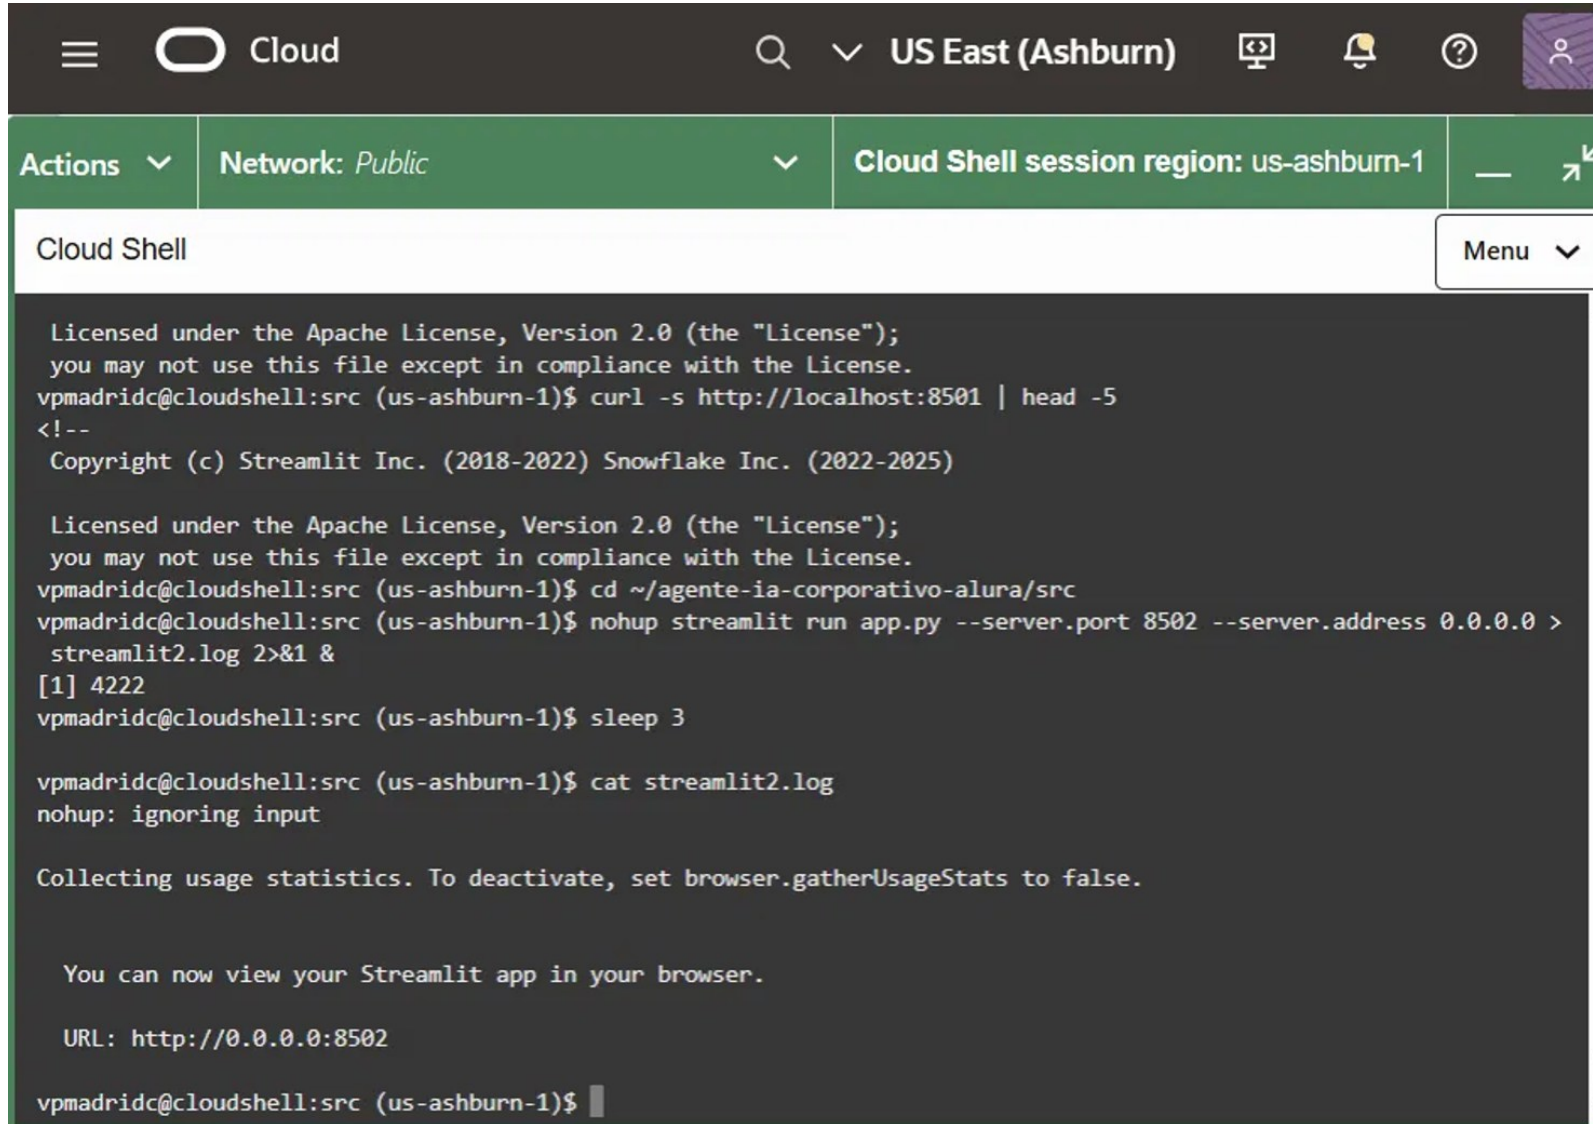

The screenshot shows the OCI Cloud Shell interface. At the top, there's a header bar with a hamburger menu, the 'Cloud' logo, a search icon, a dropdown arrow, the region 'US East (Ashburn)', and icons for a terminal, notifications, help, and a user profile. Below the header, there's a green bar with 'Actions' (dropdown), 'Network: Public' (dropdown), 'Cloud Shell session region: us-ashburn-1', and a close icon. The main area is titled 'Cloud Shell' with a 'Menu' dropdown on the right. The terminal content shows the user 'vpmadridc@cloudshell:src (us-ashburn-1)' running several commands: a curl command to check a local endpoint, a cd command to navigate to a directory, a nohup command to start a Streamlit server on port 8502, a sleep command, and a cat command to view the log. The output includes the Apache License text, the Streamlit version, and the URL to view the app.

```
Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the license.
vpmadridc@cloudshell:src (us-ashburn-1)$ curl -s http://localhost:8501 | head -5
<!--
Copyright (c) Streamlit Inc. (2018-2022) Snowflake Inc. (2022-2025)

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the license.
vpmadridc@cloudshell:src (us-ashburn-1)$ cd ~/agente-ia-corporativo-alura/src
vpmadridc@cloudshell:src (us-ashburn-1)$ nohup streamlit run app.py --server.port 8502 --server.address 0.0.0.0 >
streamlit2.log 2>&1 &
[1] 4222
vpmadridc@cloudshell:src (us-ashburn-1)$ sleep 3

vpmadridc@cloudshell:src (us-ashburn-1)$ cat streamlit2.log
nohup: ignoring input


Collecting usage statistics. To deactivate, set browser.gatherUsageStats to false.

You can now view your Streamlit app in your browser.

URL: http://0.0.0.0:8502

vpmadridc@cloudshell:src (us-ashburn-1)$
```

Confirmación de despliegue en la nube (OCI)

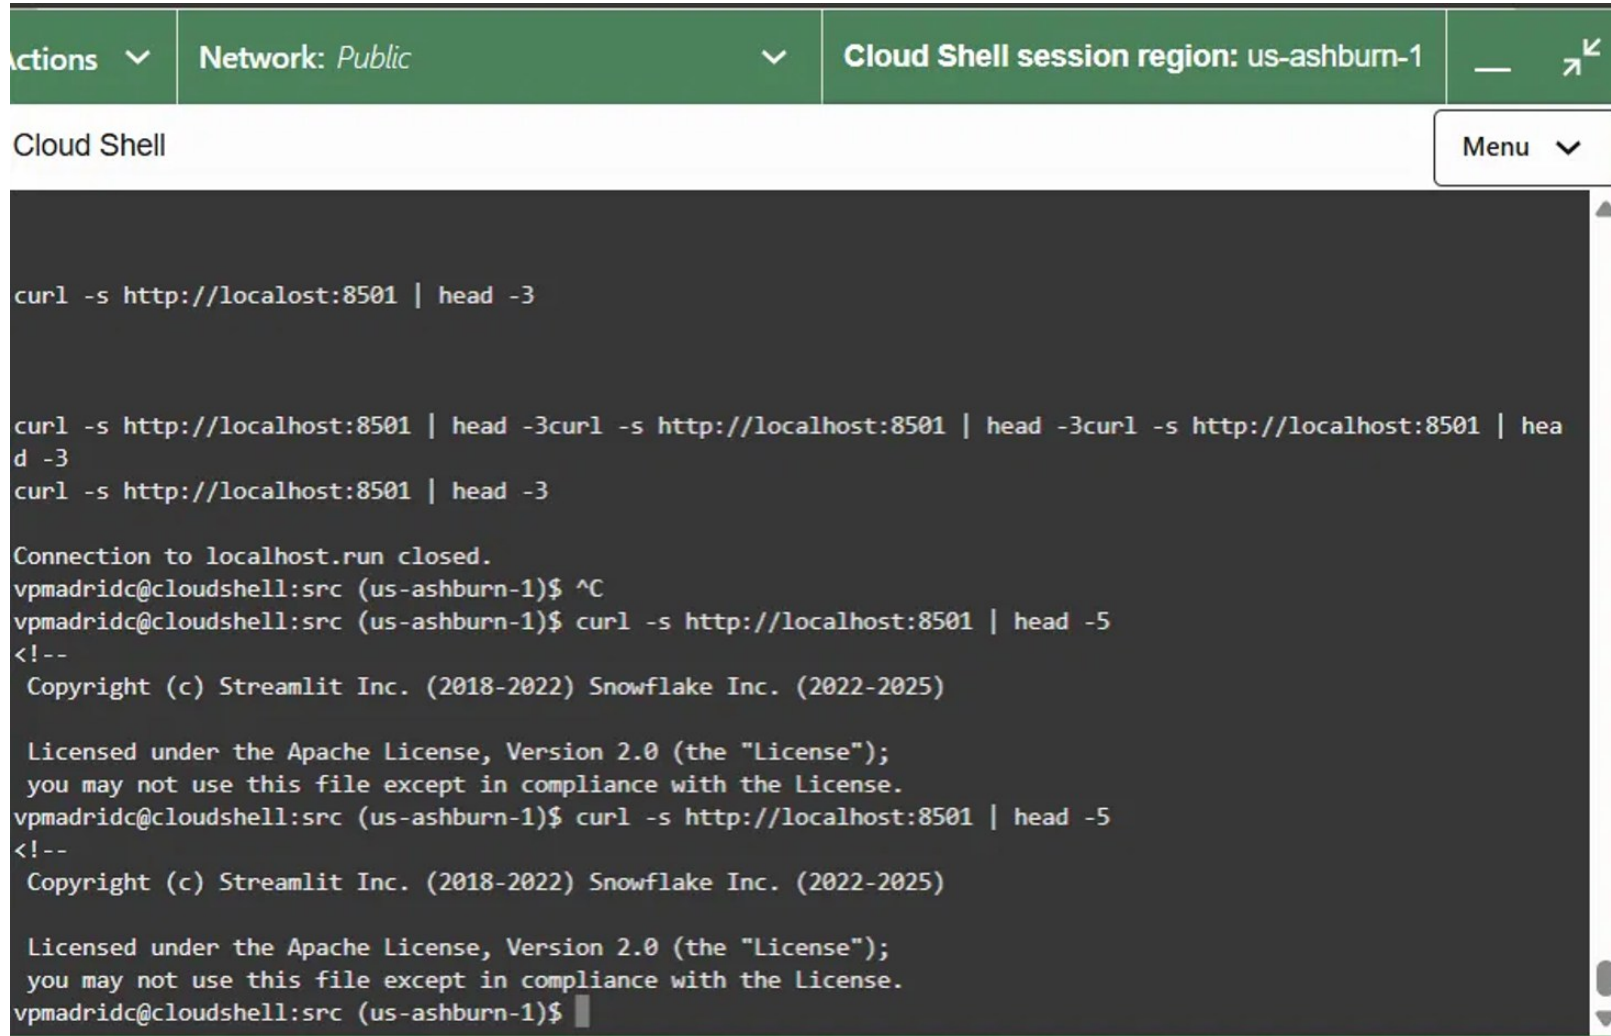

The screenshot shows a Cloud Shell interface with a green header bar. The header contains three sections: 'Actions' with a dropdown arrow, 'Network: Public' with a dropdown arrow, and 'Cloud Shell session region: us-ashburn-1' with a dropdown arrow. To the right of the header is a 'Menu' button with a dropdown arrow. The main terminal area has a dark background and shows the following commands and output:

```
curl -s http://localhost:8501 | head -3

curl -s http://localhost:8501 | head -3curl -s http://localhost:8501 | head -3curl -s http://localhost:8501 | head -3
curl -s http://localhost:8501 | head -3

Connection to localhost.run closed.
vpmadridc@cloudshell:src (us-ashburn-1)$ ^C
vpmadridc@cloudshell:src (us-ashburn-1)$ curl -s http://localhost:8501 | head -5
<!--
  Copyright (c) Streamlit Inc. (2018-2022) Snowflake Inc. (2022-2025)

  Licensed under the Apache License, Version 2.0 (the "License");
  you may not use this file except in compliance with the License.
vpmadridc@cloudshell:src (us-ashburn-1)$ curl -s http://localhost:8501 | head -5
<!--
  Copyright (c) Streamlit Inc. (2018-2022) Snowflake Inc. (2022-2025)

  Licensed under the Apache License, Version 2.0 (the "License");
  you may not use this file except in compliance with the License.
vpmadridc@cloudshell:src (us-ashburn-1)$
```